

Samsung Network Manager



SNM-128S Quick Reference Guide

Before attempting to connect or operate this product, please read these instructions carefully and save this manual for future use.

ENGLISH

SNM-128S Quick Reference Guide

Network Manager software may not run properly if the PC does not meet minimum requirements. Other programs should not run on the same PC where Network Manager is running.

System Requirements

CPU	Core2Duo E4300 or higher	Video Memory	512MB or higher
Main Memory	2GB or higher	Hard Disk Space	80GB or higher
Display Resolution	1024x768 or higher		
OS	Windows XP / Vista		
Others	DirectX 9.0 or higher		

- Supported Products : DVR : SVR-1650E/1640A/1640E/950E
SVR-3200/1680/1660/1645/960/460/945/445
Network Camera : SNC-550, SNP-3300/1000
Network Video Server : SNS-400/100




Samsung Techwin cares for the environment at all product manufacturing stages to preserve the environment, and is taking a number of steps to provide customers with more environment-friendly products. The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

CONTENTS

1. Installation 3
 - 1.1 SNM-128S software installation
2. Setup & Monitoring 3
 - 2.1 Login
 - 2.2 Main Screen Composition
 - 2.3 Add device
 - 2.4 Video Monitoring
 - 2.5 Add Screen Layout

Main Screen Composition


After logging in, user has access to a variety of view panels and panes.

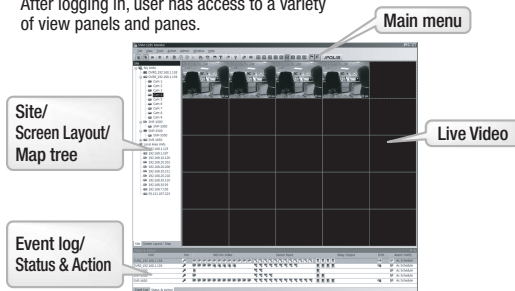

- ▶ **Main menu** : Setup Network Manager, Change the multi-screen channel, The other execution shortcut.
- ▶ **Site/Screen Layout/Map tree**: Display Device and Camera
- ▶ **Live Video** : Display live video from the selected channel(s) of Camera
- ▶ **Event log** : List alarm messages from Device(SNM-128S)
- ▶ **Status & Action** : Display the status of added Device, Relay Output/Execute action (audio data transmission).


Add device

- 1) Click the mouse right button on My Unit, Select [Add Unit]
- 2) Click the [Auto Detect] button on right side
- 3) Select the desired device
- 4) Then the selected device's information is displayed on left side.
- 5) Enter the password
- 6) Check the [Save Password], Select [OK]



Video Monitoring

If devices register on site, the result displays on left site tree list panel of program.

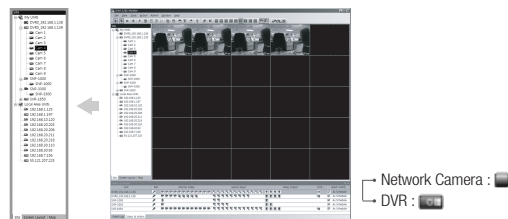

- 1) Connect all channels of a Device at once
 - Click on the Device icon in the site tree list.
 - SNM-128S decides the screen-split mode according to the number of channels of the Device to display video from the channels at once.

1. No Connection



2. No Login



3. Alarm



(Red)

4. Monitor



(Blue)

- 2) Connect a channel at once

- Click on each channel icon under Device icon in the site tree.
- SNM-128S connects the video channel and displays video from the channel
- The connected Device turns on blue icon ()
- The default screen-split mode is quad-split, and user may change the mode as desired among options of 1,4,9,13,16,25,36,49,64
- Full screen monitoring : click the icon () on Menu bar

1. Installation


Install SNM-128S Software

- 1) Select the [Network Manager STD Software Installer] folder on the CD
- 2) Click the on the provided [SNM-128S Setup.exe] file.



SNM-128S

- 3) Click the [I Agree] button



- 4) Click the [Install] button.

- The Default directory is "C:\Program Files\Samsung Techwin\SNM-128S" To install the software in a different directory, click the [Browse] button and choose a different directory.


2. Setup & Monitoring

Login

- 1) Running the software
- 2) Enter the password



User Name: Administrator
Password: 12345



- 3) Control PTZ : Click the mouse right button on live screen, select [PTZ] menu.

- **Pan & Tilt** : Mouse click the desired direction on live screen
- **Zoom** : Right scroll bar control(move the cursor to right side on image)
- **Focus** : Left scroll bar control(move the cursor to left side on image)
- **Preset** : Click the Mouse right button, select [Goto Preset]-[Preset]

Add Screen Layout

- Select desired channels on Site Mode, then display video from the channels at once
- Click the [Save Screen Layout] icon on Menubar
- Enter the name of Screen Layout, Select [OK]
- Select [Screen Layout] tab, and check the screen layout

※ Please refer to [SNM-128S User's Manual] for more information.

SALES NETWORK

SAMSUNG TECHWIN CO., LTD.

145-3, Sangdaewon-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-120, Korea
TEL : +82-31-740-8151-8158 FAX : +82-31-740-8145

SAMSUNG OPTO-ELECTRONICS UK, LTD.

Samsung House, 1000 Hillwood Drive, Hillwood Business Park Chertsey, Surrey KT16 0PS
TEL : +44-1932-45-5308 FAX : +44-1932-45-5325

www.samsungcctv.com
www.samsungipolis.com