

Samsung Network Manager



SNM-64S Quick Reference Guide

Before attempting to connect or operate this product, please read these instructions carefully and save this manual for future use.

ENGLISH

SNM-64S Quick Reference Guide

SNM-64S software may not run properly if the PC does not meet minimum requirements. Other programs should not run on the same PC where SNM-64S is running.

● System Requirements

CPU	Core2Duo E4300 or higher	Video Memory	512MB or higher
Main Memory	2GB or higher	Hard Disk Space	80GB or higher
Display Resolution	1024x768 or higher		
OS	Windows 2000 / XP		
Others	DirectX 9.0 or higher		

- **Supported Products** : DVR : SVR-1650E/1640A/950E/940/450
 Network Camera : SNC-550, SNP-3300/1000
 Network Video Server : SNS-400/100



Samsung Techwin cares for the environment at all product manufacturing stages to preserve the environment, and is taking a number of steps to provide customers with more environment-friendly products. The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

CONTENTS


1. Installation	3
① SNM-64S software installation	
2. Setup & Monitoring	4
● Login	
● Main Screen Composition	
● Add device through 'Wizard' menu	
● Video Monitoring	

- ▶ Main menu : Setup Network Manager
- ▶ Login Information : Display the current user ID and date & time information
- ▶ Site Tree List : Display the current user ID, date and time information
- ▶ Live Video : Display live video from the selected channel(s) of Device
- ▶ Event List : List event messages from Device

● Add device through 'Wizard' menu

Administrator/user may add device, compose screen layout, and edit site tree in a process. Every task of each step can be done through the respective menus of Device Manager, Screen Layout Manager, and Site Manager.


- 1) Click the [Setup] menu and scroll down to the [Wizard]-[Device] option



- 2) Click the [Search] button



- 3) Then the [Device Search] window opens and displays the list of the entire devices on the LAN



- 4) Select a desired device in the list and click the [Add] button. Then the selected device's network information is displayed on the [Device Wizard] window automatically

- 5) Name the device and enter user ID and password to the selected device (The values in bold titles are mandatory to enter). Then click the [Next] button



- 6) Click the on the [combo] button to see the entire list of sites. (Initially, the program shows a site named as Site as default.) Then click the [Next] button




- 7) Check the unit to register the unit. Then click the [Finish] button.

- 8) The registered unit appears in the site tree under the selected site

● Video Monitoring

Once site is configured, the result appears on the Site Tree pane to the left of the program. Each site shows all selected devices and screen layouts.

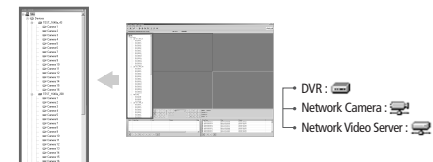

1. Installation

The entire installation process


① SNM-64S software installation

- 1) Select the [SNM-64S Software Installer] folder on the CD

- 2) Click the on the provided [SNM-64S Setup.exe] file



- 3) Click the [I Agree] button

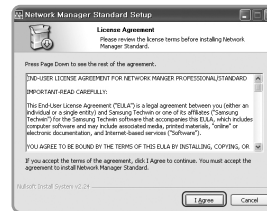

- 4) Click the [Install] button.

The Default directory is 'C:\Program Files\Samsung Techwin\SNM-64S'. To install the software in a different directory, click the [Browse] button and choose a different directory.

- 5) After clicking the [Finish] button, click the [Finish] button again to proceed with installation.



3

- 1) Connect all channels of a Device at once

- ▶ Click on the Device icon () in the site tree.
- ▶ SNM-64S decides the screen-split mode according to the number of channels of the Device to display video from the channels at once.
- ▶ The connected Device turns on a **green light** () in front of the icon. When the connection is closed, the light goes off.

- 2) Connect a channel at a time

- ▶ Click on each channel icon () under Device icon in the site tree.
- ▶ SNM-64S connects the video channel and displays video from the channel.
- ▶ The connected channel turns on a **green light** () in front of the icon. When the connection is closed, the light goes off.
- ▶ The default screen-split mode is quad-split, and user may change the mode as desired among options of 1, 4, 6, 8, 9, 16, 25, 36, 49, and 64.

※ Click on the Full Screen icon ()



3

- 6) Click the [Close] when installation is completed.
- 7) When Network Manager is installed, its shortcut icon appears on the desktop display
- ☐ ※ Once the installation is complete, reboot your PC.

2. Setup & Monitoring

● Login

- 1) Running the software




- 2) Enter the password

User Name : Administrator
 Password : 12345



● Main Screen Composition

After logging in, user has access to a variety of view panels and panes.

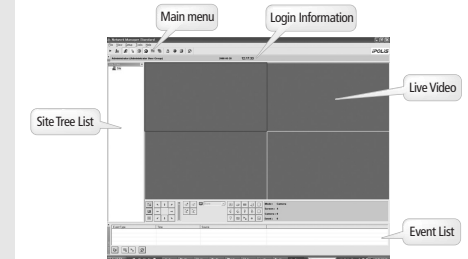

4

- 3) Control PTZ

Click on a PTZ camera in the screen
 User may control PTZ through the PTZ buttons under the Live Video panel



- ▶ Pan/Tilt of selected channel



- ▶ Zoom in/out of selected channel



- ▶ Adjust focus of selected channel



- ▶ Move to preset locations



- ▶ Control PTZ camera moving speed



※ Please refer to [SNM-64S Software User's Guide] for more information.

SALES NETWORK

SAMSUNG TECHWIN CO., LTD.
 145-3, Sangdaewon-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-120, Korea
 TEL : +82-31-740-8151-8158 FAX : +82-31-740-8145

SAMSUNG OPTO-ELECTRONICS UK, LTD.
 Samsung House, 1000 Hillwood Drive, Hillwood Business Park Chertsey, Surrey KT16 0PS
 TEL : +44-1332-45-5308 FAX : +44-1332-45-5325

www.samsungcctv.com
 www.samsungipols.com

8