



BRR-P6410A4E

64CH BLAZE Appliance



Key Features

The BRR-P6410A4E BLAZE Recording Appliance with AI-powered Semantic Search sets the bar for powerful searching using natural language prompts, e.g. “delivery truck” or “person in striped shirt”. BRR-P rack mounted appliances share the same ease of use and reliability as the BRR-X appliances, but add powerful AI hardware. It comes pre-loaded with BLAZE recording licenses (no Software Update Plan required) and is ready to scale as part of a multi-site BLAZE federated organization. Setup is achieved in minutes.

Semantic Search, Fast Deployment, Cloud-driven Scalability

- Semantic Search
- Hardened OS
- Pre-loaded with BLAZE recording licenses
- Secure remote access
- 64 channel capacity
- Up to 160 TB onboard storage
- Software RAID levels: 0, 1, 5, 6
- Supported by BLAZE VMS Desktop Client, Mobile, and Web Client
- Supports Federation via Hanwha Vision Cloud
- Supports Similarity Search
- Supports AI metadata

BRR-P6410A4E

64CH BLAZE Appliance



Specifications

System		
Video Management Software		BLAZE VMS
Licenses		64 x BLAZE Premium License
Available Channels		Up to 64 channels
Recording Rate		Up to 520Mbps
OS Drive Bays		SSD 128GB
Data Drive Bays		SATA 16ea
Data Storage		Up to 160TB
RAID Support		RAID 1, RAID 5, RAID 6
Network Interface		3 x RJ-45 (1Gbps)
Memory		16GB DDR4
AI Card		Yes
Operating System		Hardened OS
Decoding	Video Outputs	Duplicate: 2 x HDMI(4K), Extend: 1 x HDMI(4K), 1 x HDMI(FHD)
	Resolution	Decoding Performance (H.264) - UHD Duplicate Mode: 26CH*8M@15fps, 64CH*2M@15fps, 64CH*640x360@7fps - UHD/FHD Extend Mode: (14CH+14CH)*8M@15fps, (32CH+32CH)*2M@15fps, (32CH+32CH)*640x360@7fps
USB Ports		Front 2 x USB 2.0 Rear 2 x USB 3.0
Audio	Output	1x Audio output
	Audio Communication	2-Way (Audio In: USB Mic)
Keyboard & Mouse		Keyboard, Mouse
Mechanical		
Form Factor		3U rack
Color / Material		Black / Metal
Dimensions (WxHxD)		17.32"(440mm) x 5.20"(132mm) x 22.48"(571.1mm)
Weight		31.3 lbs (14.2kg)
Electrical		
Power Input		100 ~ 240 VAC $\pm$ 10%, 50/60 Hz

Electrical

Power Consumption	283W (965.6 BTU)
-------------------	------------------

Environmental

Operating Temperature	32°F to 104°F(0°C to 40°C)
Operating Humidity	20% to 85% RH (non-condensing)


BRR-P6410A4E

64CH BLAZE Appliance



CAD

Unit: mm [inch]

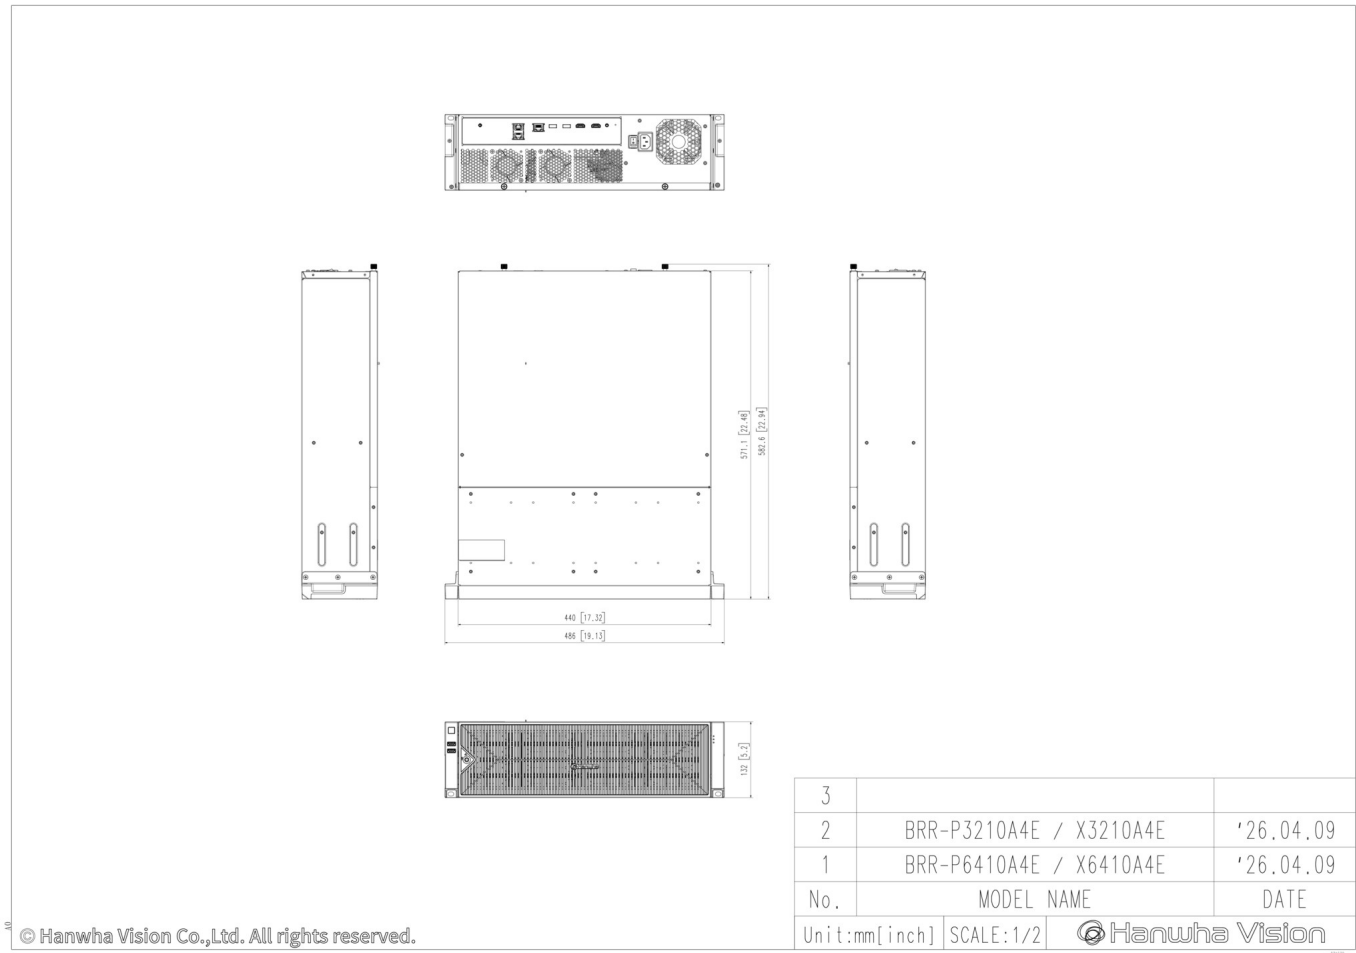

© Hanwha Vision Co.,Ltd. All rights reserved.