

TEST REPORT

This laboratory is accredited by National Radio Research Agency Laboratory and National Voluntary Laboratory Accreditation Program.

The tests reported herein have been performed in accordance with its terms of accreditation.

Test Report No. : LR500112510C
Issue Date : October 13, 2025
Applied Standard : FCC Part 15, Subpart B & ICES-003 (Issue.7)
Trade Name : Hanwha Vision Co., Ltd
Equipment Name : VMS(Video Management Software) Appliance
Model Name : BRR-X6410A2E
Additional Model Name : BRR-X3210A2E
Serial Number : Identification

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory.

This test report is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

Revision history

Revision	Date of issue	Test report No.	Description
0	13.10.2025	LR500112510C	Initial

>>TABLE OF CONTENTS<<

LTA Certification.....	4
General information's	6
1- Brief Information.....	7
2- Test Site Description.....	10
3- Test Procedure	12
4- List of Equipment Used For the Tests.....	15
5- EMISSION	16
5-1 Conducted Emissions	16
5-2 Radiated Emissions (FCC).....	18
Conclusions.....	24
Photograph of the measurements.....	25
Photograph of the EUT	29

LTA Certification –cont.-**Test Performed**

Test started & completed : September 23 - 24, 2025
Location : LTA Co., Ltd.

Test Specification

Purpose of the test : Compliance test to the following standard
Applied standard : FCC Part 15, Subpart B & ICES-003 (Issue.7)
Classification : Class A
Deviations from Standard Test Method : N/A

Test Results

Measurement	Results*	Test method
Conducted Emissions	Complies	ANSI C 63.4 ICES-003 (Issue.7)
Radiated Emissions	Complies	ANSI C 63.4 ICES-003 (Issue.7)

* : The compliance statement is based on nominal value only.

Modification performed by the lab.:

- NONE

Laboratory's Certificate

Project number : 250918-1422
Issue date : October 13, 2025

This test report is issued under the authority of:

The test was supervised by:



Young Kyu Shin, Technical Manager



Jong Chae Kim, Test Engineer

The results in this report apply only to the sample(s) tested.

It is not allowed to copy this report even partly without the allowance of the test laboratory.

LTA Certification –cont.-**Test Performed**

Test started & completed : September 23 - 24, 2025
Location : LTA Co., Ltd.

Test Specification

Purpose of the test : Compliance test to the following standard
Applied standard : FCC Part 15, Subpart B & ICES-003 (Issue.7)
Classification : Class A
Deviations from Standard Test Method : N/A

Test Results

Measurement	Results*	Test method
Conducted Emissions	Complies	ANSI C 63.4 ICES-003 (Issue.7)
Radiated Emissions	Complies	ANSI C 63.4 ICES-003 (Issue.7)

* : The compliance statement is based on nominal value only.

Modification performed by the lab.:

- NONE

Laboratory's Certificate

Project number : 250918-1422
Issue date : October 13, 2025

This test report is issued under the authority of:

The test was supervised by:

Young Kyu Shin, Technical Manager

Jong Chae Kim, Test Engineer

The results in this report apply only to the sample(s) tested.

It is not allowed to copy this report even partly without the allowance of the test laboratory.

General information's

Purpose

This document is based on the Electromagnetic Interference (EMI) tests performed on the “**BRR-X6410A2E**”.

The measurements were performed according to the measurement procedure described in ICES-003 and ANSI C 63.4. The tests were carried out in order to confirm whether the electromagnetic emissions from the EUT (Equipment Under Test), are within the Class A limits defined in ICES-003 and FCC Part 15.

Test Performed

Company name : **LTA Co., Ltd.**

Address : 4, Songju-ro 236beon-gil, Yangji-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do, 17159, Korea

Telephone : +82-31-323-6008

Facsimile : +82-31-323-6010

Measurement uncertainty

Conducted Emissions (0.15 to 30 MHz) : ± 2.81 [dB] (k=2)

Radiated Emissions (30 to 1,000 MHz) : H : ± 4.49 [dB] (k=2) V : ± 4.75 [dB] (k=2)

(1 GHz to 6 GHz) : H : ± 5.73 [dB] (k=2) V : ± 5.72 [dB] (k=2)

(6 GHz to 18 GHz) : H : ± 5.93 [dB] (k=2) V : ± 5.76 [dB] (k=2)

The coverage factor k=2 yields approx. a 95% level of confidence for near-normal distribution typical of most measurement results.

Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
RRA	KOREA		-	RRA accredited Lab.
	U.S.A	KR0049	2027-02-27	
	CANADA		2026-08-05	
VCCI	JAPAN	C-14948	2026-09-10	VCCI registration
		T-12416	2026-09-10	
		R-14483	2026-10-15	
		G-10847	2027-12-13	
KOLAS	KOREA	KT551	2029-10-12	KOLAS accredited Lab.

1- Brief Information

1-1 Test Summary

Parameter	Applied Standard	Status (note 1)
I. Emission		
Conducted Emissions	FCC Part 15.107 / ICES-003 Clause 3.2.1	C
Radiated Emissions	FCC Part 15.109 / ICES-003 Clause 3.2.2	C
Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable * The data in this test report are traceable to the national or international standards.		

Frequency range to be scanned:

0.15 MHz - 30 MHz as conducted measurement

30 MHz to 5th harmonic of the highest frequency or 40 GHz, whichever is lower as radiated measurement.

Bandwidth:

Measured by the CISPR quasi-peak function Bandwidth is 9 kHz in the frequency 0.15 MHz to 30 MHz and 120 kHz in the frequency 30 MHz to 1,000 MHz.

Measured by the Peak function Bandwidth is 1 MHz in the frequency 1 GHz to 40 GHz.

A sample calculation:

COR. F (correction factor)= Antenna factor + Cable loss- Amp.gain- Distance correction

Emission Level= meter reading + COR.F

1-2 Test mode of the EUT

The tests have been conducted with the following operational mode(s) of the EUT.

Operating mode

1-3 Modification

- NONE

1-4 List of EUT and ACCESSORY

EUT				
Equipment Name	Model Name	Serial No.	Manufacturer	Remarks
VMS(Video Management Software) Appliance	BRR-X6410A2E	N/A	HANWHA VISION VIETNAM COMPANY LIMITED	EUT
Mouse	MOKJUO	N/A	Primax Electronics Ltd.	EUT
KeyBoard	K8862	N/A	DWPH	EUT
ACCESSORY				
Equipment Name	Model Name	Serial No.	Manufacturer	Remarks
LCD Monitor #1	P2018H	N/A	TPV Electronics (Fujian) Co., Ltd.	-
LCD Monitor #2	S22E450F	N/A	SANSUI ELECTRIC(CHINA) Co.,Ltd.	-
Notebook Computer	ThinkBook 14 G4 ABA	N/A	Lenovo Information Products (Shen Zhen) Co., Ltd	-
AC/DC Adapter	ADLX65YAC3D	N/A	Acbel Electronic (Wuhan) Co., Ltd.	-
CCTV Camera	LND-6022R	N/A	HANWHA TECHWIN CO.,LTD.	-
PoE Adapter	SFC501G	N/A	Shenzhen Gospell Digital Technology Co.,Ltd	-
USB Memory #1	N/A	N/A	SanDisk	-
USB Memory #1	N/A	N/A	SanDisk	-
HUB	NEXT-TC343LAN	N/A	YCN	-

1-5 Cable List

Cable List					
From		To		Length (m)	Shield
Type	I/O Port	Type	I/O Port		
EUT	AC IN	AC Power Source	AC OUT	1.6	NO
EUT	LAN	PoE Adapter	LAN	3.0	NO
EUT	LAN	Notebook Computer	LAN	3.0	NO
EUT	LAN	HUB	LAN	3.0	NO
EUT	USB	Mouse	USB	1.2	NO
EUT	USB	KeyBoard	USB	1.2	NO
EUT	USB	USB Memory #1	USB	-	-
EUT	USB	USB Memory #2	USB	-	-
EUT	HDMI	LCD Monitor #1	HDMI	1.4	YES
EUT	HDMI	LCD Monitor #2	HDMI	1.6	YES
EUT	AUDIO OUT	Earphone	AUDIO IN	0.8	NO
EUT	Ground	Earth	-	1.2	NO

2- Test Site Description


1-Facility

All the testing facilities are periodically serviced as a daily check for equipment and cables systems, an every 1 year facility check for the facilities and annual calibration for testing equipment according to ISO/IEC 17025. All the testing facilities are used as the same specifications shown below. There are descriptions both for radiated disturbance measurement and conducted disturbance measurement conformed by ANSI C 63.4.


The NSA measurement of the 10 m chamber was performed on January 13, 2025 according to ANSI C 63.4.

The SVSWR measurement of the 10 m chamber was performed on October 15, 2024 according to ANSI C 63.4.


2-1 Conducted Emissions

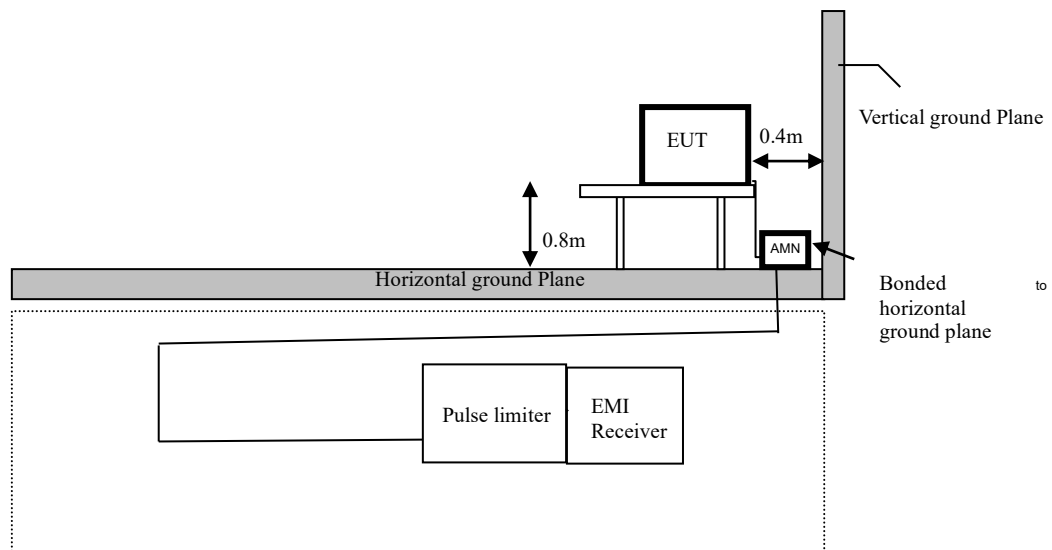

2-2 Radiated Emissions – Below 1 GHz

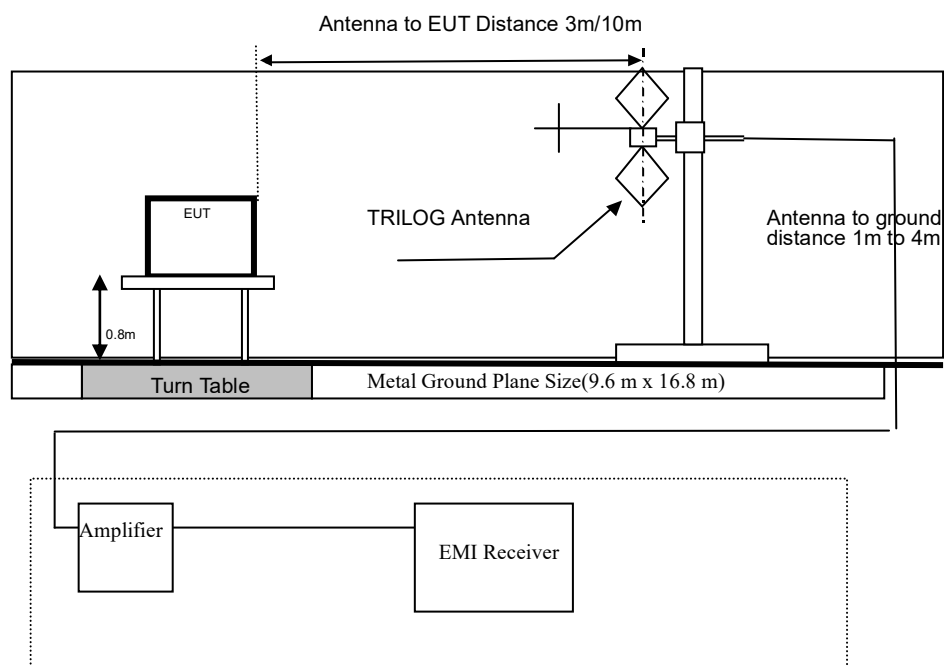

2-3 Radiated Emissions – Above 1 GHz

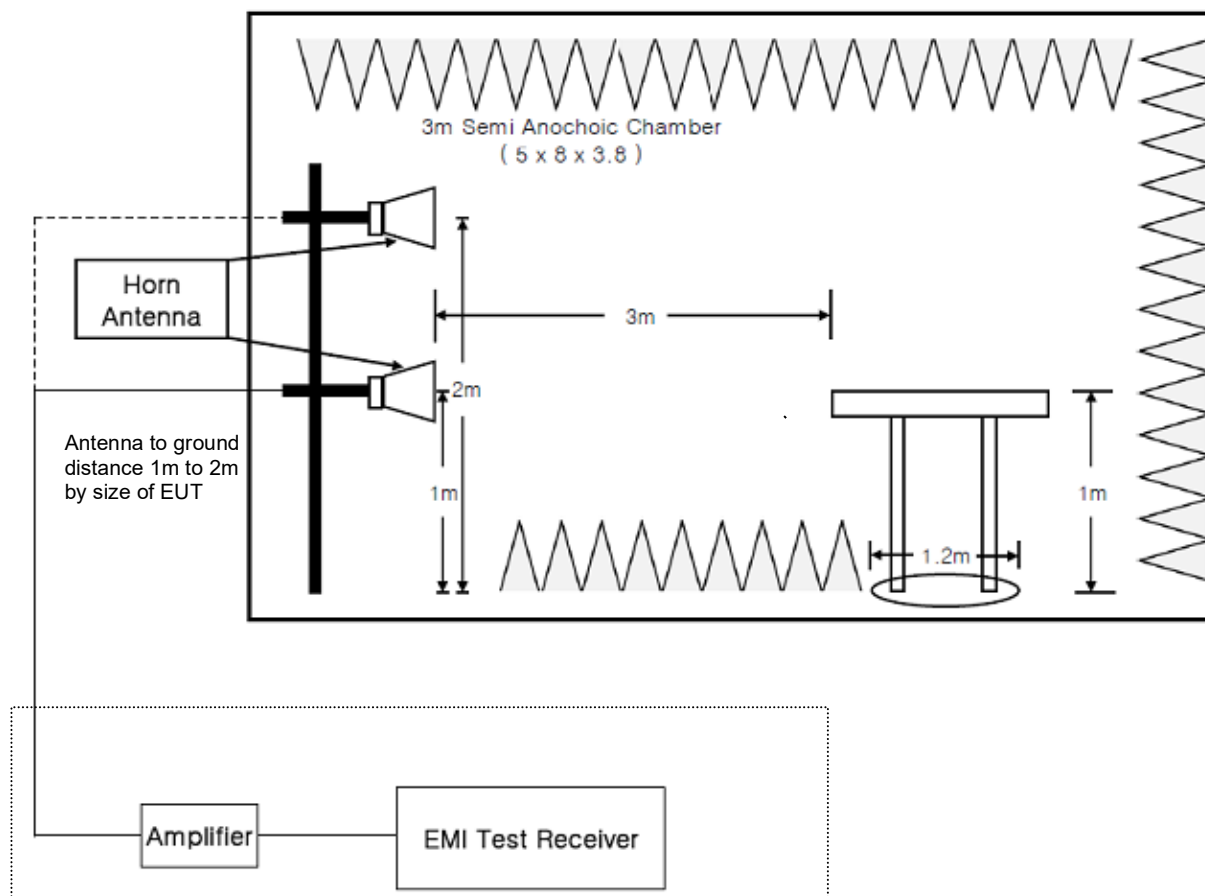

3- Test Procedure

3-1 Conducted Emissions

- The measurement is carried out on an open site with horizontal and metallic ground plane.
- An AMN(Artificial Mains Network) with a nominal impedance ($50\ \Omega$ / $50\ \mu\text{H}$) as defined in ANSI C 63.4, shall be utilized.
- The AMN is grounded on a horizontal metal ground plane.
- Measurement is carried out using an EMI receiver with quasi-peak detectors and average detector.
(Refer to the List of test equipment used for the test.)
- The shortest distance between the EUT and the AMN is 0.8 m.
- The EUT is placed on the non-conducting table with 0.8 m height.
- Refer to "Brief Information"(page 7-9) about details of the EUT and configuration of the cables.
- Measurement is carried out as manual operation.
 - searching the maximum frequency point of the disturbance wave in each frequency range.
 - reading the disturbance level of quasi-peak, average and Line (L) and Neutral (N) in 9 kHz bandwidth by the EMI receiver.
 - calculating the measurement result with the following formula or equation.
(Result = Reading + Cor.F.(LISN Factor + Cable Loss + Pulse Limiter)
(ex) = $13.23\ \text{dB}\mu\text{V} + (9.63\ \text{dB} + 0.01\ \text{dB} + 9.86\ \text{dB})$
 = $32.73\ \text{dB}\mu\text{V}$

3-2 Radiated Emissions – Below 1 GHz

- Test site is met the requirements of ANSI C 63.4 and the distance between the EUT and the antenna is adjusted 3 m or 10 m.
 - The turntable can be rotated 360 degrees.
 - The antenna can be adjusted between 1 m and 4 m in height above the ground.
 - The EUT is placed on the non-conducting table with 0.8 m height on the turntable.
 - Measurements are carried out using an EMI receiver with quasi-peak detectors (120 kHz bandwidth).
 - Refer to the list of test equipment used for the test.
 - The TRILOG antenna are used as wideband antenna.
 - The TRILOG antenna is used in the frequency range of 30 MHz to 1 000 MHz.
 - A variable attenuator is used for verifying amplifier's linearity.
 - Rotating the turntable and adjusting the height of the antenna are carried out by control buttons on the console.
 - Refer to "Brief Information"(page 7-9) about details of the EUT and configuration of the cables.
 - Measurement is carried out by a LTA operator as manual operation.
- searching the worst direction with the maximum level of the disturbance wave in rotating the turntable 360 degrees at each searched frequency point.
- setting the height of the antenna with the maximum level of the disturbance wave from 1 m to 4 m.
- reading the disturbance level by the EMI receiver with quasi-peak detectors (120 kHz bandwidth) according to ANSI C 63.4.
- measuring to vertical and horizontal polarization.
- calculating the measurement result with the following formula or equation:
- (Result = Reading + Cor.F (antenna factor + cable loss – PreAmp Gain)
- (ex) = 50.6 dB μ V/m + (11.08 dB(1/m) + 1.31 dB - 27.32 dB)
- = 35.67 dB μ V/m

3-3 Radiated Emissions – Above 1 GHz

- Test site is met the requirements of ANSI C 63.4 and the distance between the EUT and the antenna is adjusted 3 m.
- The turntable can be rotated 360 degrees.
- The antenna can be adjusted between 1 m and 4 m in height above the ground.
- The EUT is placed on the non-conducting table with 1 m height on the turntable.
- Measurements are carried out using an EMI receiver with peak and average detectors(1 MHz bandwidth).
- Refer to the list of test equipment used for the test.
- The HORN antenna are used as wideband antenna.
- The HORN antenna is used in the frequency range of 1 GHz to 18 GHz.
- A variable attenuator is used for verifying amplifier's linearity.
- Rotating the turntable and adjusting the height of the antenna are carried out by control buttons on the console.
- Refer to "Brief Information"(page 7-9) about details of the EUT and configuration of the cables.
- Measurement is carried out by a LTA operator as manual operation.
 - searching the worst direction with the maximum level of the disturbance wave in rotating the turntable 360 degrees at each searched frequency point.
 - setting the height of the antenna with the maximum level of the disturbance wave from 1 m to 4 m
 - reading the disturbance level by the EMI receiver with peak and average detectors (1 MHz bandwidth) according to ANSI C 63.4.
 - measuring to vertical and horizontal polarization.
 - calculating the measurement result with the following formula or equation:
(Result = Reading + Cor.F (antenna factor + cable loss – PreAmp Gain)
(ex) = 35.9 dBμV/m + (23.92 dB(1/m) + 7.01 dB - 38.33 dB)
 = 28.5 dBμV/m

4- List of Equipment Used For the Tests

Conducted Emissions

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
☒	EMI TEST Receiver	ESR	Rohde & Schwarz	101499	2026.03.05	1 year
☒	Pulse Limiter	ESH3-Z2	Rohde & Schwarz	100710	2026.03.05	1 year
☐	LISN	ESH3-Z6	Rohde & Schwarz	100378	2026.08.18	1 year
☐	LISN	ESH3-Z6	Rohde & Schwarz	101468	2026.08.18	1 year
☒	LISN(main)	ENV216	Rohde & Schwarz	102872	2026.08.18	1 year
☒	LISN(sub)	ENV216	Rohde & Schwarz	101222	2026.08.18	1 year
☒	TEST PROGRAM	e3_ce 20181212a (V9)	AUDIX	-	-	-

Radiated Emissions – Below 1 GHz

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
☒	EMI TEST Receiver	ESC17	Rohde & Schwarz	100772	2026.08.18	1 year
☒	Amplifier	310N	SONOMA INSTRUMENT	240504	2026.03.11	1 year
☒	BILOG Antenna	VULB 9168	SCHWARZBECK	749	2027.03.13	2 year
☒	TEST PROGRAM	e3 20181212a (V9)	AUDIX	-	-	-

Radiated Emissions – Above 1 GHz

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
☒	EMI TEST Receiver	ESU	Rohde & Schwarz	100092	2026.08.18	1 year
☒	Amplifier	8449B	Agilent	3008A02126	2026.03.05	1 year
☒	HORN ANTENNA	3115	ETS	114105	2026.03.24	1 year
☒	TEST PROGRAM	e3 20181212a (V9)	AUDIX	-	-	-

5- EMISSION

5-1 Conducted Emissions

(LINE)



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

Project No. : 250918-1422


Phase : LIVE

Test Mode : Operating

Test Power : AC 120 V / 60 Hz

Temp./ Humi. : 25 'C / 52 % R.H.

Test Engineer : KIM J C

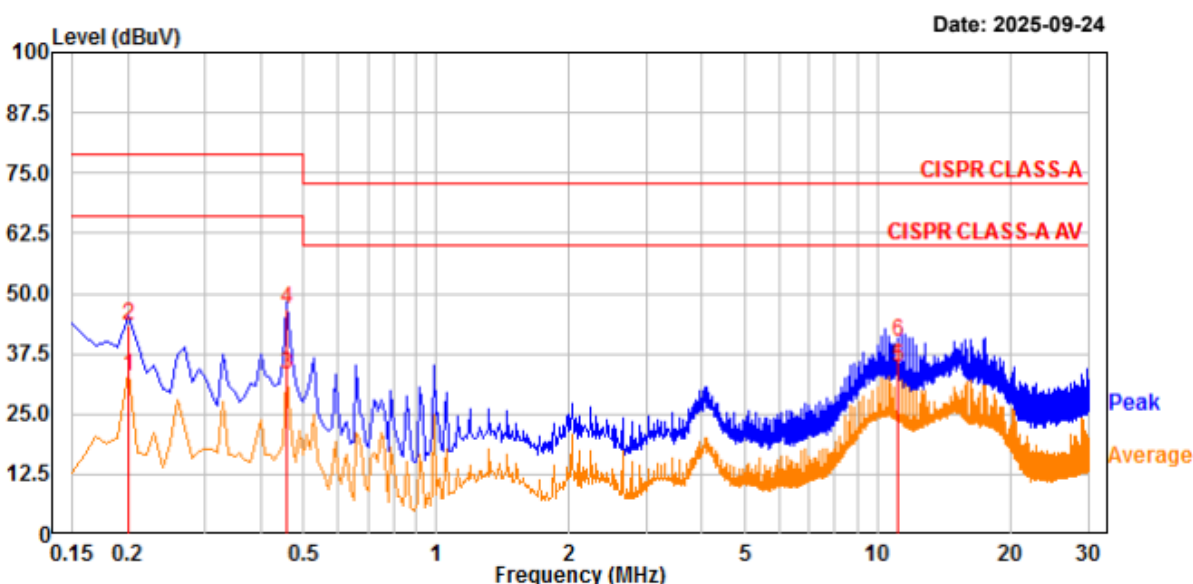

No.	Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB	Phase
2.	0.200	23.74	13.44	19.50	43.24	32.94	79.00	66.00	35.76	33.06	Line
4.	0.460	27.25	13.79	19.51	46.76	33.30	79.00	66.00	32.24	32.70	Line
6.	11.076	20.05	14.84	19.87	39.92	34.71	73.00	60.00	33.08	25.29	Line


Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

(NEUTRAL)



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

Project No.	: 250918-1422	Phase	: NEUTRAL
Test Mode	: Operating	Test Power	: AC 120 V / 60 Hz
Temp./ Humi.	: 25 'C / 52 % R.H.	Test Engineer	: KIM J C

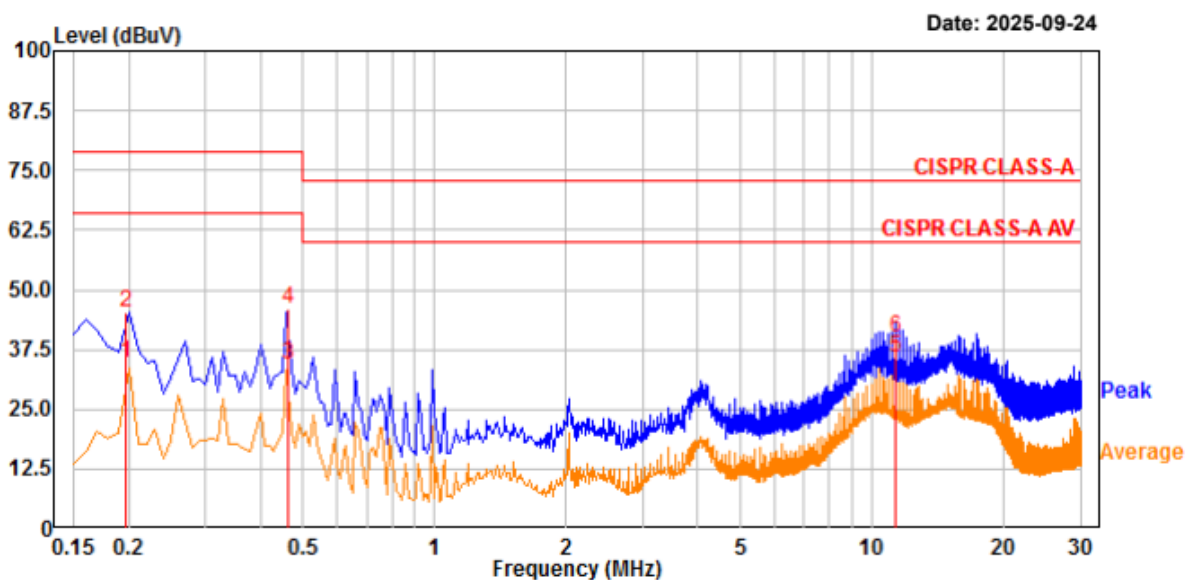

No.	Freq MHz	RD QP dBμV	RD AV dBμV	C.F dB	Result QP dBμV	Result AV dBμV	Limit QP dBμV	Limit AV dBμV	Margin QP dB	Margin AV dB	Phase
2.	0.198	25.81	15.26	19.47	45.28	34.73	79.00	66.00	33.72	31.27	neutral
4.	0.461	26.43	14.68	19.49	45.92	34.17	79.00	66.00	33.08	31.83	neutral
6.	11.299	20.16	16.11	19.86	40.02	35.97	73.00	60.00	32.98	24.03	neutral

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

5-2 Radiated Emissions (FCC)

(Below 1 GHz) / H



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea

Tel : +82-31-3236008,9

Fax : +82-31-3236010

www.ltalab.com


Project No. : 250918-1422

Temp/Humi: 23 'C / 52 % R.H.

Test Mode : Operating

Tested by: KIM J C

Power : AC 120 V / 60 Hz

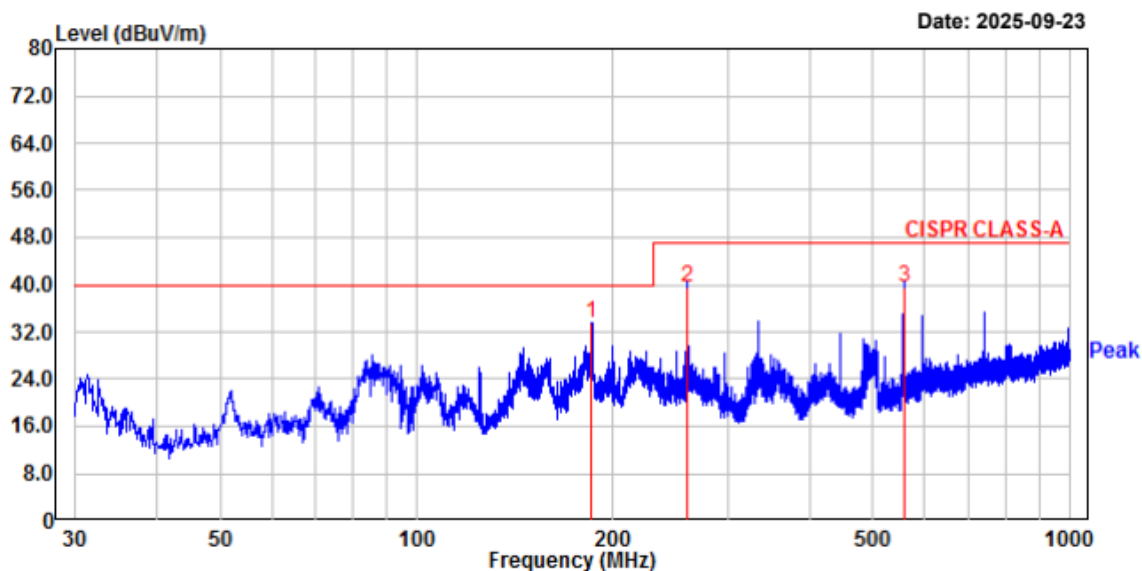

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	185.56	44.65	-11.13	33.52	40.00	6.48	291	77	horizontal
2.	259.89	49.23	-9.66	39.57	47.00	7.43	353	150	horizontal
3.	556.95	41.05	-1.63	39.42	47.00	7.58	164	105	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

(Below 1 GHz) / V



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


Project No. : 250918-1422

Temp/Humi: 23 'C / 52 % R.H.

Test Mode : Operating

Tested by: KIM J C

Power : AC 120 V / 60 Hz

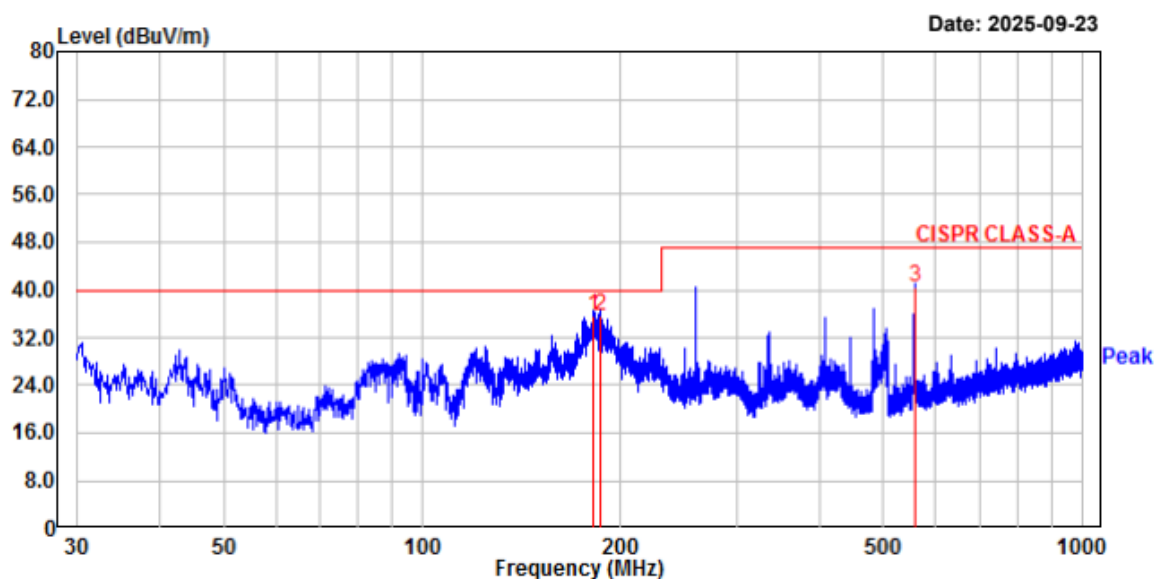

No.	Freq MHz	Reading dBuV	C.F dB	Result QP dBuV/m	Limit dBuV/m	Margin dB	Height cm	Angle deg	Polarity
1.	181.20	46.21	-10.59	35.62	40.00	4.38	137	40	vertical
2.	185.69	46.76	-11.15	35.61	40.00	4.39	109	76	vertical
3.	556.95	41.97	-1.63	40.34	47.00	6.66	154	346	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emissions (IC)

(Below 1 GHz) / H



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


Project No. : 250918-1422

Temp/Humi: 23 'C / 52 % R.H.

Test Mode : Operating

Tested by: KIM J C

Power : AC 120 V / 60 Hz

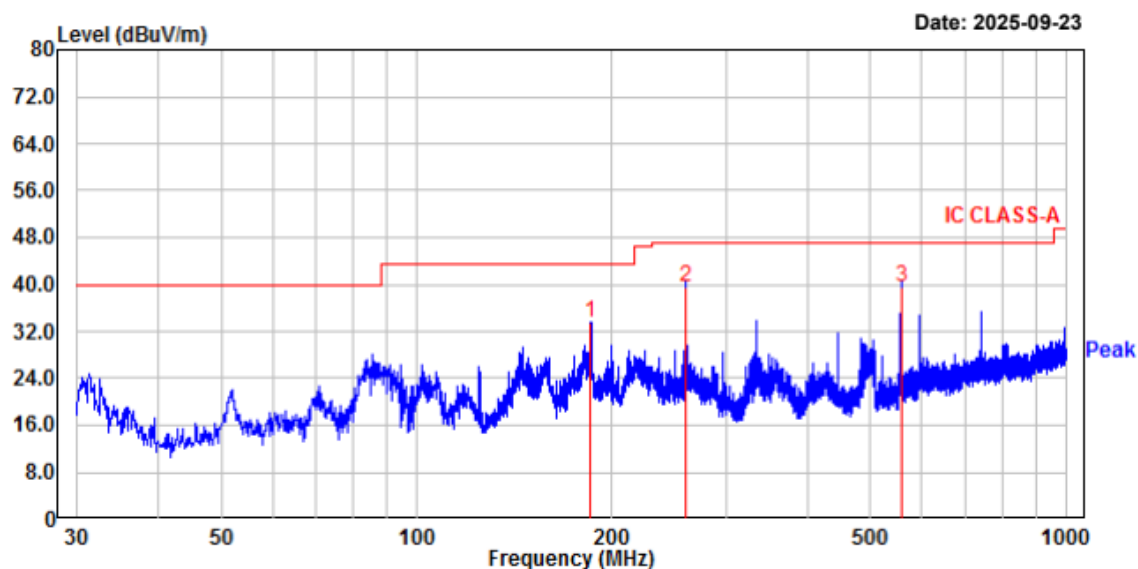

No.	Freq MHz	Reading dBuV	C.F dB	Result QP dBuV/m	Limit dBuV/m	Margin dB	Height cm	Angle deg	Polarity
1.	185.56	44.65	-11.13	33.52	43.50	9.98	291	77	horizontal
2.	259.89	49.23	-9.66	39.57	47.00	7.43	353	150	horizontal
3.	556.95	41.05	-1.63	39.42	47.00	7.58	164	105	horizontal


Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

(Below 1 GHz) / V



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

Project No. : 250918-1422 Temp/Humi: 23 'C / 52 % R.H.
Test Mode : Operating Tested by: KIM J C
Power : AC 120 V / 60 Hz

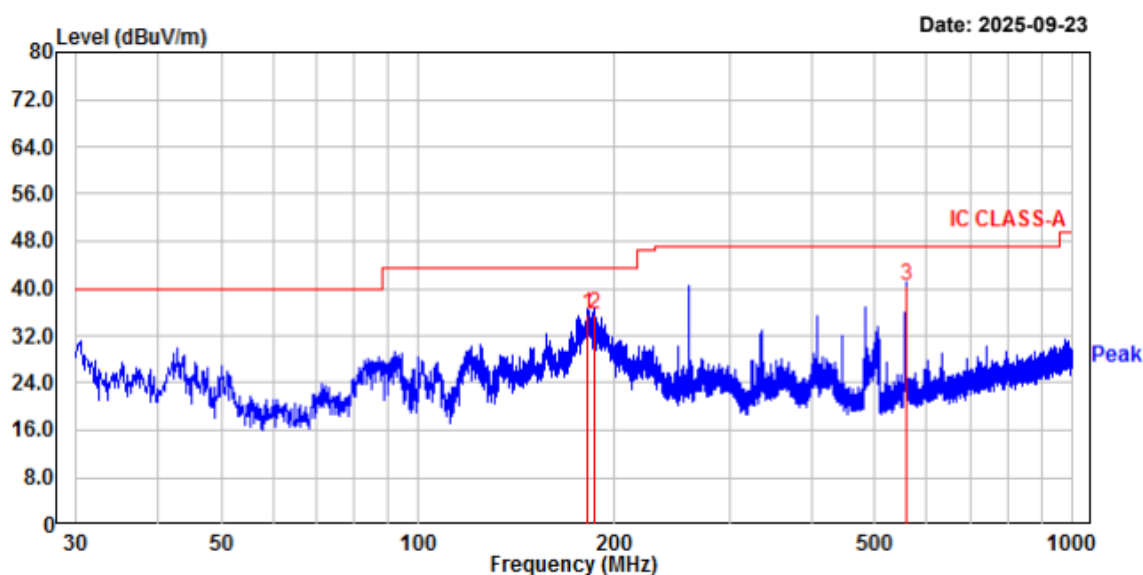

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	181.20	46.21	-10.59	35.62	43.50	7.88	137	40	vertical
2.	185.69	46.76	-11.15	35.61	43.50	7.89	109	76	vertical
3.	556.95	41.97	-1.63	40.34	47.00	6.66	154	346	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Radiated Emissions (FCC / IC)

(Above 1 GHz) / H



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

Project No. : 250918-1422	Temp/Humi: 23 'C / 53 % R.H.
Test Mode : Operating	Tested by: KIM J C
Power : AC 120 V / 60 Hz	Measure distance : 3.8 m

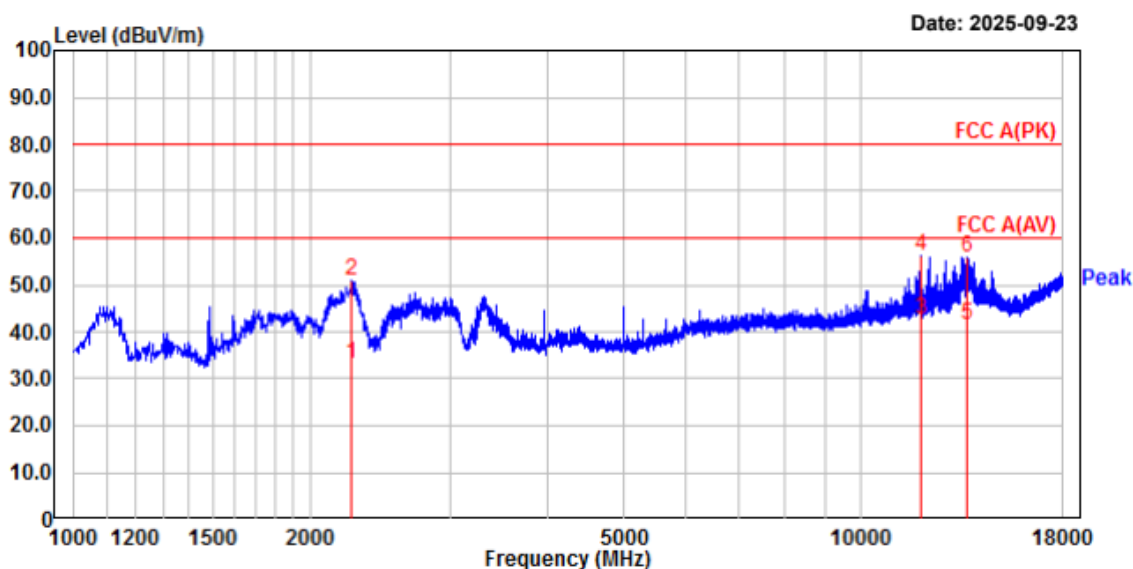

No.	Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin	Height	Angle	Polarity
	MHz	PK	AV	dB	PK	AV	PK	AV	PK	AV	cm	deg	
		dBuV	dBuV		dBuV	dBuV	dBuV	dBuV	dB	dB			
2.	2251.63	54.34	36.71	-3.50	50.84	33.21	80.00	60.00	29.16	26.79	100	17	horizontal
4.	11928.88	44.22	30.59	12.18	56.40	42.77	80.00	60.00	23.60	17.23	100	299	horizontal
6.	13650.13	39.74	25.47	16.13	55.87	41.60	80.00	60.00	24.13	18.40	100	248	horizontal


Remarks: C.F (Correction Factor) = Antenna factor + Cable loss + Measure distance - Preamp gain

(Above 1 GHz) / V



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

Project No. : 250918-1422	Temp/Humi: 23 'C / 53 % R.H.
Test Mode : Operating	Tested by: KIM J C
Power : AC 120 V / 60 Hz	Measure distance : 3.8 m

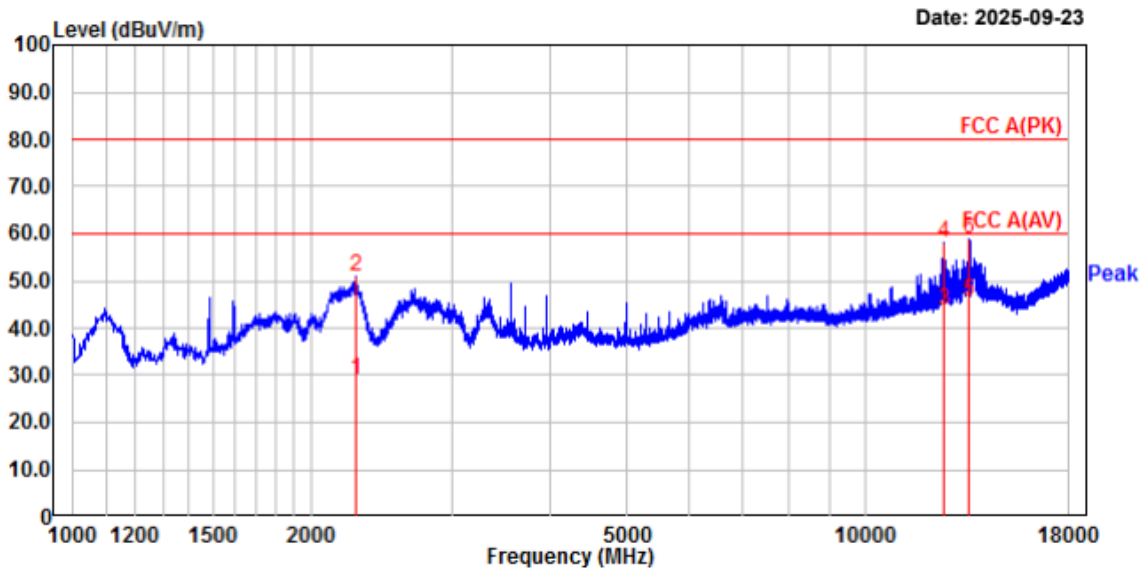

No.	Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin	Height	Angle	Polarity
	MHz	PK	AV	dB	PK	AV	PK	AV	PK	AV	cm	deg	
2.	2272.88	54.56	32.77	-3.60	50.96	29.17	80.00	60.00	29.04	30.83	100	0	vertical
4.	12526.00	45.59	31.22	12.64	58.23	43.86	80.00	60.00	21.77	16.14	100	271	vertical
6.	13484.38	42.82	29.46	16.09	58.91	45.55	80.00	60.00	21.09	14.45	100	254	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss + Measure distance - Preamp gain

Conclusions


Product models "**BRR-X6410A2E**" meets all of the Class A requirements of the FCC Part 15, Subpart B. Limits of radio disturbance characteristics of ITE).

(Refer to Test Specification and Test Results in the "LTA certification", page 4 and 5)



- The highest internal source of an EUT is 3 GHz, the measurement shall be made up to 15 GHz.

Photograph of the measurements


Conducted Emissions

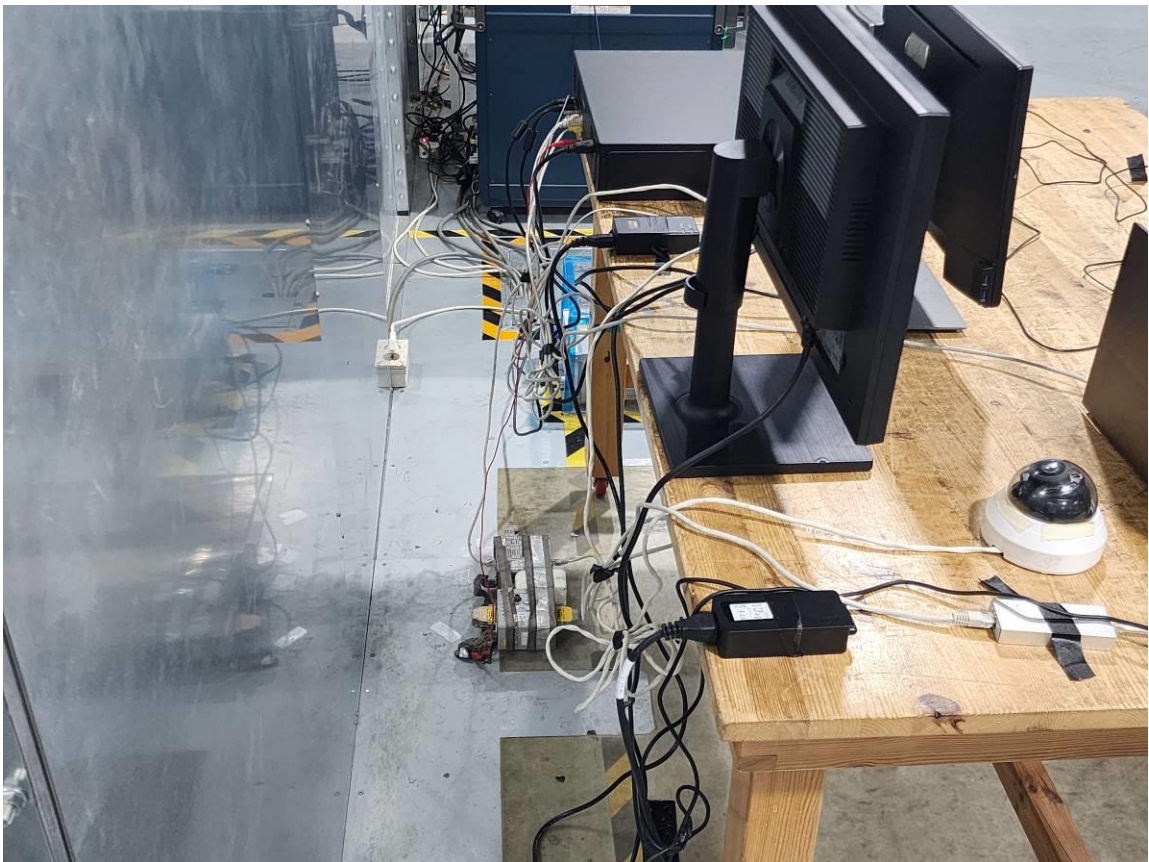

Radiated Emissions - Below 1 GHz

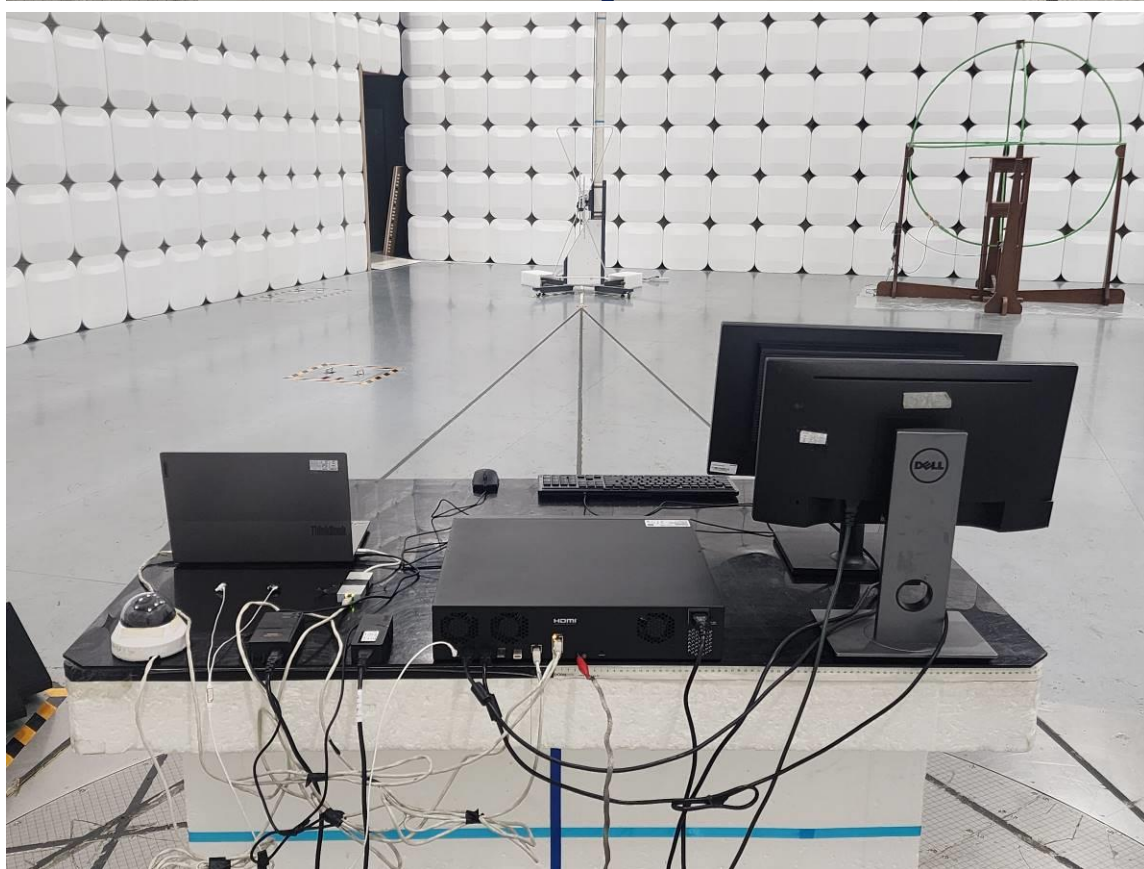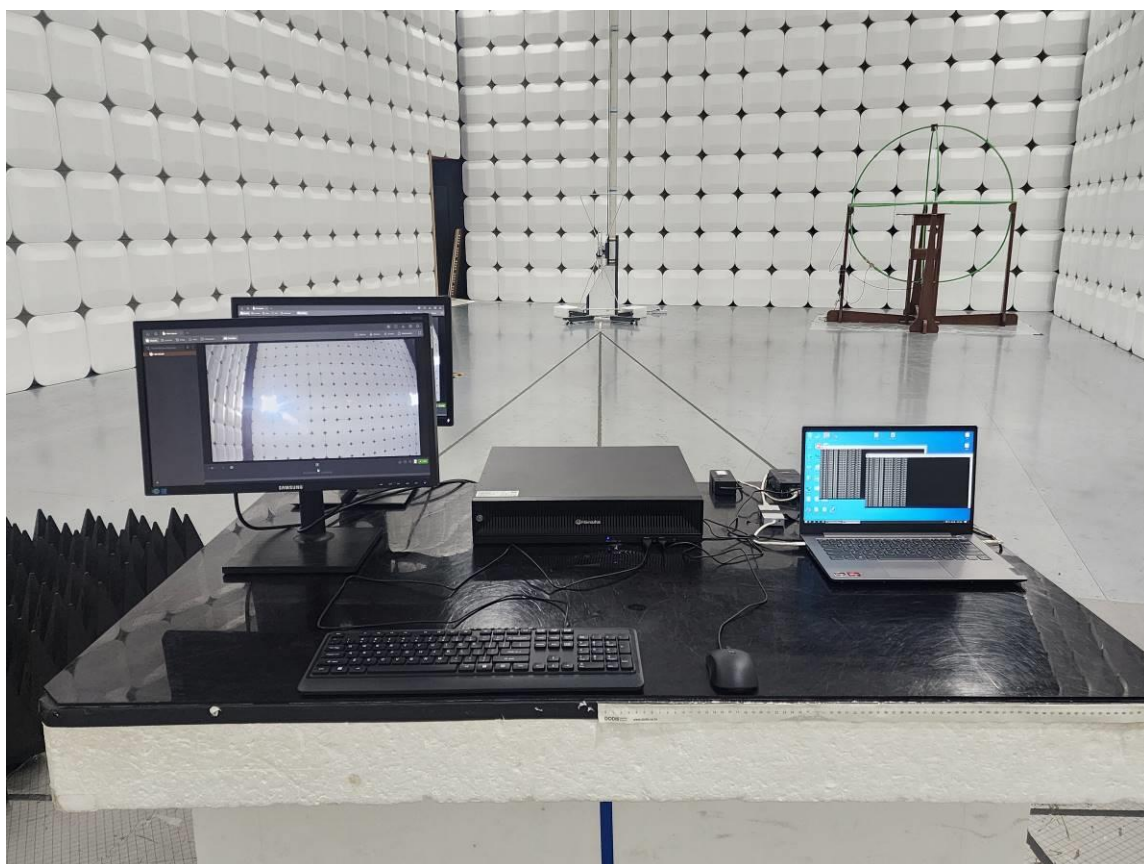

Radiated Emissions - Above 1 GHz

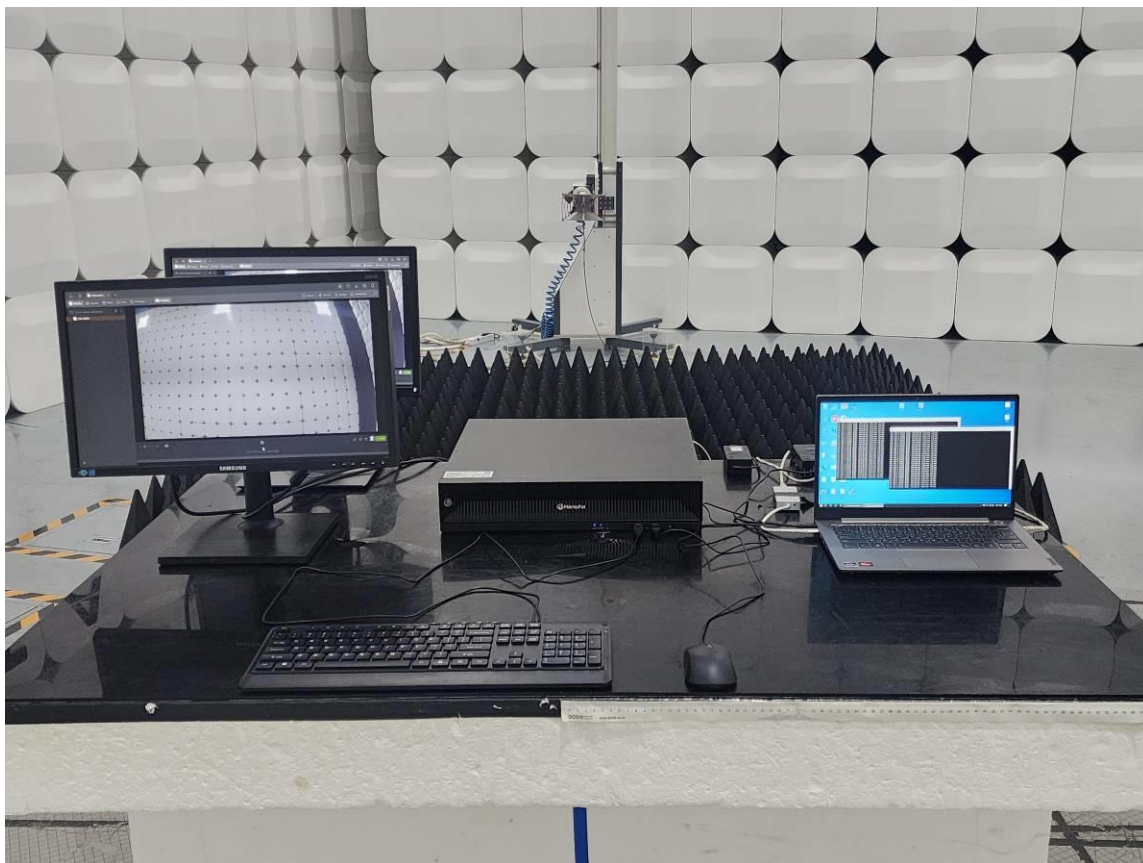

Photograph of the EUT

EUT



EUT

