



EMC TEST REPORT For CE

Test Report No. : KES-E1-17T0169-R2

Date of Issue : Oct. 04, 2018

Product name : CCTV CAMERA

Model/Type No. : HCO-6070RP

Variant Model : -

Applicant : Hanwha Techwin Co., Ltd.

Applicant Address : 6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13488, KOREA

Manufacturer : 1. Hanwha Techwin (Tianjin) Co.,Ltd.
2. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
3. D-TECH CO.,LTD.

Manufacturer Address : 1. No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin,
300385, People's Republic of China
2. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
3. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do,
Korea (Suwon Industrial Complex)

Date of Receipt : Feb, 03, 2017

Test date : Feb, 13, 2017 – Feb, 16, 2017

Test Results : ☒ In Compliance ☐ Not in Compliance

Tested by

Min Sung, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0169-R2
Page (2) of (74)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Feb. 27, 2017	KES-E1-17T0169	Issued
Jun. 26, 2018	KES-E1-17T0169-R1	Re-issue due to manufacturer change
Oct. 04, 2018	KES-E1-17T0169-R2	Reissue due to model name change

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document Jun be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	5
1.2	Variant Model Differences.....	5
1.3	Device Modifications	5
1.4	Equipment Under Test.....	5
1.5	Support Equipments	5
1.6	External I/O Cabling	6
1.7	EUT Operating Mode(s)	6
1.8	Configuration.....	7
1.9	Remarks when standards applied	8
1.10	Calibration Details of Equipment Used for Measurement	8
1.11	Test Facility	8
1.12	Laboratory Accreditations and Listings	8
2.1	Conducted Emissions at Mains Power Ports	11
2.2	Conducted Emissions at Telecommunication Ports	12
2.3	Radiated Electric Field Emissions(Below 1 GHz)	13
2.4	Radiated Electric Field Emissions(Above 1 GHz)	14
2.5	Harmonic Current Emissions	15
2.6	Voltage Fluctuations and Flicker	16
3.0	Criteria for compliance.....	17
3.1	Electrostatic Discharge.....	19
3.2	Radiated Electric Field Immunity	22
3.3	Electrical Fast Transients/Bursts	25
3.4	Surge Transients	27
3.5	Conducted Disturbance	31
3.6	Voltage Dips and Short Interruptions	35
APPENDIX A	– TEST DATA.....	37
	Conducted Emissions at Mains Power Ports.....	37
	Conducted Emissions at Telecommunication Ports	39
	Radiated Electric Field Emissions(Below 1 GHz)	41
	Radiated Electric Field Emissions(Above 1 GHz)	42
	Harmonic Current Emissions and Voltage Fluctuations and Flicker	50
	Test Setup Photos and Configuration	53
	Conducted Voltage Emissions	53
	Conducted Telecommunication Emissions	54
	Radiated Electric Field Emissions(Below 1 GHz)	55
	Radiated Electric Field Emissions(Above 1 GHz)	57
	Harmonic Current Emissions and Voltage Fluctuations and Flicker	59
	Electrostatic Discharge	60
	Radiated Electric Field Immunity	61
	Electrical Fast Transients/Bursts	62
	Surge Transients	64
	Conducted Disturbance	65
	Voltage Dips and Short Interruptions	67
	EUT External Photographs	68
	EUT Internal Photographs	69



1.0 General Product Description

Main Specifications of EUT are:

Video	
Imaging Device	1/2.8" 2M CMOS
Total Pixels	1,945(H) x 1,109(V) 2.16M pixels
Effective Pixels	1,945(H) x 1,097(V) 2.13M pixels
Scanning System	Progressive Scan
Min. Illumination	Color : 0.2Lux (F1.4, 50IRE); 0.11Lux (F1.4, 30IRE) B/W : 0Lux(IR LED on)
S / N Ratio	52dB (AGC off, Weight on)
Video Output	BNC(AHD / TVI / CVI / CVBS Selectable)
Resolution	1920 x 1080
Max. Framerate	30fps @1080p 25fps @1080p
Lens Type	
Focal Length (Zoom Ratio)	2.8 ~ 12mm (4.3x) varifocal
Max. Aperture Ratio	F1.4
Angular Field of View	H : 103.8°(Wide) ~ 32.4°(Tele) / V : 53.7°(Wide) ~ 18.4°(Tele) D : 121.9°(Wide) ~ 37.1°(Tele)
Min. Object Distance	0.5m (1.64ft)
Focus Control	Manual
Lens Type	DC Auto Iris
Mount Type	Board-in type
Auto Back Focus(ABF)	-
Operational	
IR LED	
Viewable length	30m (98.43ft)
On Screen Display	Multi-language Support(16) English, Japanese, Spanish, French, Portuguese, Korean, German, Italian, Russian, Polish, Czech, Romanian, Serbian, Swedish, Danish, Turkish
Camera Title	Off / On (Displayed 15 characters)
Day & Night	Auto (ICR) / Color / B/W
Backlight Compensation	Off / User BLC / HLC
Wide Dynamic Range	120dB
Contrast Enhancement	-
Digital Noise Reduction	SSNR4 (Off / On)
Defog	AUTO / MANUAL / OFF
Digital Image Stabilization	Not support
Motion Detection	Off / On(4 zones)
Privacy Masking	Off / On (4zones rectangle)
Gain Control	Off / Low / Middle / High / Very High
White Balance	ATW / Outdoor / Indoor / Manual / AWC (1,800K° ~ 10,500K°)
LDC (Lens Distortion Correction)	Not support
Electronic Shutter Speed	1sec~ 1/12,000sec
Digital Zoom	Not support
Reverse	Off / H-Rev / V-Rev / HV-Rev
Profile	Basic, Day & Night, Backlight, ITS, Indoor, User
Intelligent Video Analytics	Not support
Alarm	MD output 1
Remote control interface	Coaxial
Protocol	NTSC/PAL : Pelco-C (Coaxitron) AHD : ACP(AHD Coax Protocol)
Video Transmission Distance	500m(5C2V Coaxial Cable)
Environmental	
Operating Temperature / Humidity	-30°C ~ +55°C (-22°F ~ +131°F) / Less than 90% RH * Start up should be done at above -10°C
Ingress Protection	IP66
Vandal Resistance	IK10
Electrical	
Input Voltage/Current	Dual (24VAC±10% & 12VDC±10%)
Power Consumption	Max. 6W
Mechanical	
Color / Material	Dark Gray / Aluminum
Dimension (WxHxD)	280° Ø 78 mm
Weight	922g

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 220 Vac ☐ 230 Vac ☒ 24 Vac ☒ 12 Vdc ☐ PoE
Frequency ☒ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
CCTV CAMERA	HCO-6070RP	-	Hanwha Techwin (Tianjin) Co.,Ltd.	EUT

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
MONITOR	M1950DM	206KCLH81256	LG Electronics Co., Ltd.	-
MONITOR Adapter	PA-1650-64	OE9FA612314103637	LITE-ON TECHNOLOGY CORPORATION	-
Alarm	-	-	-	-



1.6 External I/O Cabling

- AC 24 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
CCTV CAMERA (EUT)	BNC	MONITOR	Component	3.5	S
	2 Pin	Alarm	2 Pin	3.0	U

- DC 12 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
CCTV CAMERA (EUT)	BNC	MONITOR	Component	3.5	S
	2 Pin	Alarm	2 Pin	3.0	U

* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)


Test mode	operating
AC 24 V, DC 12 V	EUT Monitoring

EUT Test operating S/W		
Name	Version	Manufacture Company
-	-	-


1.8 Configuration

■ AC Main
 □ DC Main

- AC 24 V Mode

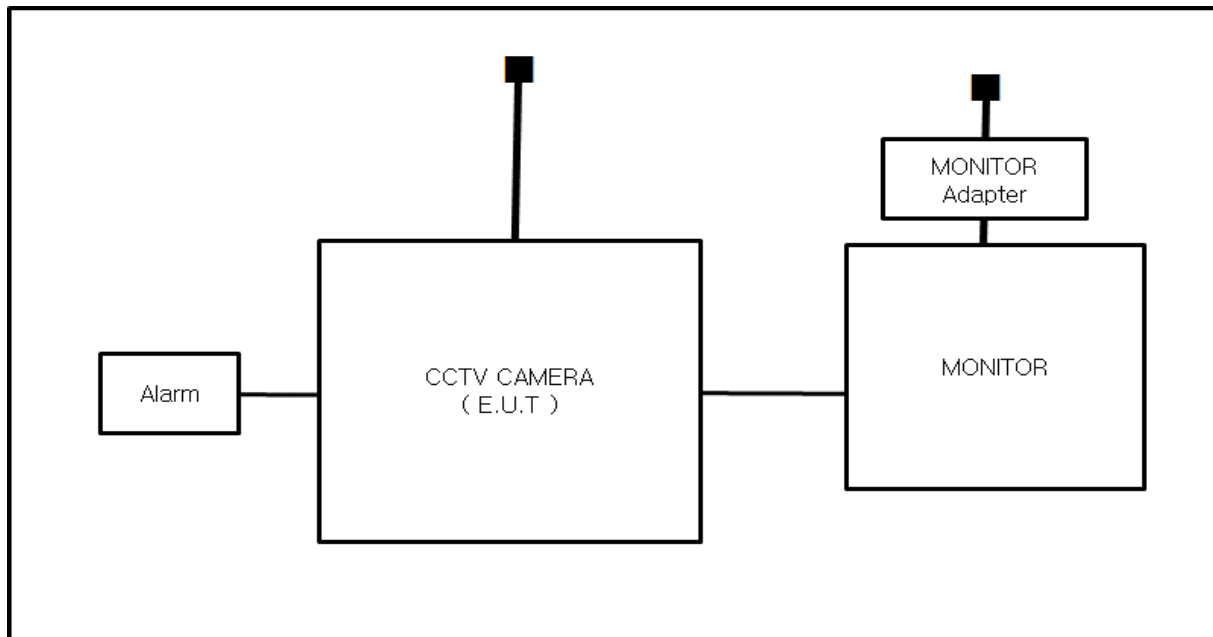

- DC 12 V Mode

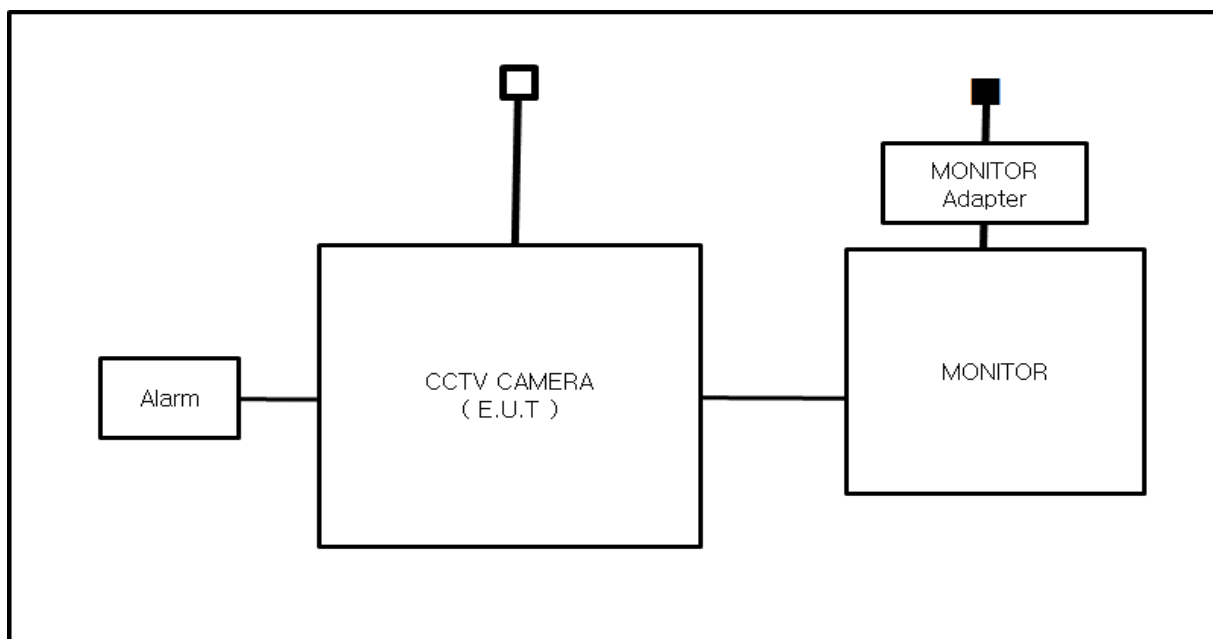

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2012

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Accreditation No
KOREA	RRA	EMI (3 m & 10 m Semi-Aechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Aechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Aechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Aechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Aechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 17 07 01633 001



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547:2009

☒ EN 55032:2012/AC:2013

☒ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☒ EN 50130-4:2011

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



-
- | | | |
|---|----------------------------------|----------------------------------|
| ☐ VCCI V-3 / 2015.04 | ☐ Class A | ☐ Class B |
| ☐ AS/NZS CISPR22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2009 | | |
| ☐ IC Regulation ICES-003 : 2016 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
|
☐ RE- Directive 2014/53/EU | | |
|
☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
|
☐ EN 301 489-3 V1.6.1 | | |
|
☐ EN 301 489-17 V2.2.1 | | |
|
☐ EN 60945:2002 | | |



2.1 Conducted Emissions at Mains Power Ports

Test Date

Feb, 14, 2017

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
☒	LISN	ENV216	R & S	101137	02, 03, 2018
☒	LISN	ENV216	R & S	101786	05, 02, 2017
☒	PULSE LIMITER	ESH3-Z2	R & S	101914	12, 13, 2017
☒	Shield Room #3	-	SEMITEC	-	-
☒	EMI Test S/W	EMC32	R & S	9.12.00	-

Test Conditions

Temperature: 22,9 °C
Relative Humidity: 41,3 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

N/A

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
☐	LISN	ENV216	R & S	101137	02, 03, 2018
☐	LISN	ENV216	R & S	101786	05, 02, 2017
☐	8-Wire ISN CAT3	CAT3 8158	Schwarzbeck Mess	8158-0019	04, 01, 2017
☐	8-Wire ISN CAT5	CAT5 8158	Schwarzbeck Mess	8158-0030	04, 01, 2017
☐	PULSE LIMITER	ESH3-Z2	R & S	101914	12, 13, 2017
☐	Shield Room #3	-	SEMITEC	-	-
☐	EMI Test S/W	EMC32	R & S	9.12.00	-

Test Conditions

Temperature: °C
Relative Humidity: %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

N/A.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Feb, 14, 2017

Test Location

☐ Open Area Test Site #1 ☒ Open Area Test Site #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI TEST Receiver	ESR3	R & S	101781	05, 03, 2017
☒	Trilog-Broadband ANT	VULB 9163	Schwarzbeck	715	04, 14, 2018
☒	Open Area Test Site	-	KES	-	-
☒	Antenna Mast	-	DAEIL EMC	-	-
☒	Turn Table	-	DAEIL EMC	-	-
☒	EMI Test S/W	-	-	-	-

Test Conditions

Temperature: 5,1 °C
Relative Humidity: 45,0 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Feb, 14, 2017

Test Location

Semi Anechoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 07, 2017
☒	EMI Test Receiver	ESU26	R & S	100552	04, 24, 2017
☒	Broadband Coaxial Preamplifier	BBV 9718	Schwarzbeck Mess - Elektronik	9718-246	10, 14, 2017
☒	Semi Anechoic Chamber #2	-	SEMITEC	-	-
☒	Antenna Mast	-	AUDIX	-	-
☒	Turn Table	-	AUDIX	-	-
☒	EMI Test S/W	e3	AUDIX	8.083b	-

Test Conditions

Temperature: 22,9 °C

Relative Humidity: 41,3 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.5 Harmonic Current Emissions

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	AC Source	ACS 500 N	EM TEST	V1024106760	08, 08, 2017
☐	Digital Power Analyzer	DPA 500 N	EM TEST	V1024106759	08, 08, 2017
☐	EMI Test S/W	dpa.control	EM TEST AG	5.4.8.0	-

Test Conditions

Temperature: °C

Relative Humidity: %

Classification of Equipment for Harmonic Current Emissions

- ☐ Class A
- ☐ Class B
- ☐ Class C(Below 25 W)
- ☐ Class C(Above 25 W)
- ☐ Class D

Test Results

The requirements are:

- ☐ PASS
- ☐ NOT PASS
- ☒ NOT APPLICABLE

RemarksN/A : Because the E.U.T power is less than 75 W, limits are not specified.



2.6 Voltage Fluctuations and Flicker

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	AC Source	ACS 500 N	EM test	V1024106760	08, 08, 2017
☐	Digital Power Analyzer	DPA 500 N	EM test	V1024106759	08, 08, 2017
☐	EMI Test S/W	dpa.control	EM TEST AG	5.4.8.0	-

Test Conditions

Temperature: °C

Relative Humidity: %

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

AC 24 V, DC 12 V Mode N/A : Because the E.U.T power is 24 V (ac), 12 V (dc) power, limits are not specified.

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011 +A1:2014 Alarm systems-Part 4: Electromagnetic compatibility Product family standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change,
and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.

For component of CCTV systems, where the status is monitored by observing the TV picture,
then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:

- (a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
- (b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could still be used; and
- (c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test, after the conditioning.

3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Feb, 15, 2017

Test Location

EMS-ESD: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS05X4620	02, 24, 2017
☒	HCP	-	Noise Ken	-	-
☒	VCP	-	Noise Ken	-	-
☒	EMS Test S/W	-	-	-	-

Test Conditions

Temperature: 23,1 °C
Relative Humidity: 40,6 %
Atmospheric Pressure: 101,8 kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge

Discharge Voltage:

Contact ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV	Air ☒ 2 kV ☒ 4 kV ☐ 6 kV ☒ 8 kV ☐ 15 kV	HCP ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV	VCP ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV
---	---	---	---



Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.

Location of Discharge:

Air
Contact

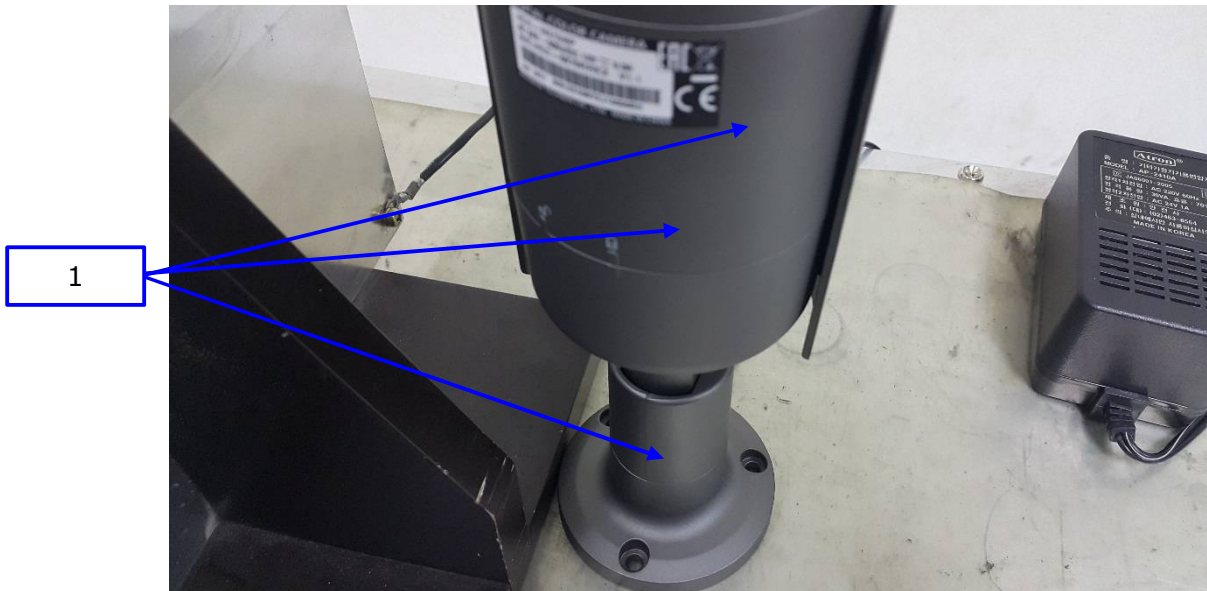



Test Data

- AC 24 V Mode

Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Surface	Contact Discharge	Complied	-

- DC 12 V Mode

Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Surface	Contact Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

3.2 Radiated Electric Field Immunity

Reference Standard

EN 61000-4-3:2006 +A2:2010

Test Date

Feb, 13, 2017

Test Location

EMS-RS: ☐ Semi Anechoic Chamber #1 ☒ Semi Anechoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Signal Generator	ESG-3000A	HP	US37040210	11, 01, 2017
☒	Amplifier	ITA0300-200	Infinitech	-	11, 01, 2017
☒	Amplifier	ITA0750-200	Infinitech	-	11, 01, 2017
☒	Amplifier	ITA1500-100	Infinitech	-	11, 01, 2017
☒	Amplifier	ITA2500-100	Infinitech	-	11, 01, 2017
☒	GPB INTERFACE CONTROL	SYSTEM CONTROL UNIT	Infinitech	-	-
☒	POWER SUPPLY	SYSTEM POWER SUPPLY	Infinitech	-	-
☒	Power Meter	E4419B	Agilent	MY45101506	06, 27, 2017
☒	Average Power Sensor	E9301A	Agilent	-	06, 27, 2017
☒	Average Power Sensor	E9301A	Agilent	MY41495698	11, 17, 2017
☒	Stacked Double Log-Per- Antenna	STPL9128 D	SCHWARZBECK	9128D038	-
☒	Semi Anechoic Chamber #2	-	SEMITEC	-	-
☒	EMS Test S/W	KTI_RS2012	KOREA TECHNOLOGY INSTITUTE CO., LTD	2.1.1	-

Test Conditions

Temperature: 22,6 °C
Relative Humidity: 40,1 %
Atmospheric Pressure: 102,0 kPa



Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0169-R2
Page (24) of (74)

Test Data

- AC 24 V Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

- DC 12 V Mode

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4:2012

Test Date

Feb, 16, 2017

Test Location

EMS-EFT: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ULTRA COMPACT SIMULATOR	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
☒	MOTOR VARIAC	MV2616	EM TEST	V0936105123	06, 27, 2017
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	070925	06, 27, 2017
☒	EMS Test S/W	iec.control	EM TEST	5.0.9.0	-

Test Conditions

Temperature: 22,7 °C
Relative Humidity: 39,8 %
Atmospheric Pressure: 101,3 kPa

Test Specifications

Pulse Amplitude & Polarity: (AC Power Lines)	☐ ± 1.0 kV ☐ ± 4.0 kV	☒ ± 2.0 kV
Pulse Amplitude & Polarity: (Other supply / Signal Lines)	☐ ± 0.5 kV	☒ ± 1.0 kV ☐ ± 2.0 kV
Burst Period:	☒ 300 ms	☐ 2 s
Repetition Rate:	☐ 5 kHz	☒ 100 kHz
Duration of Test Voltage:	☒ ≥ 1 min	
Required Performance Criteria:	☒ Complied	

Test Data

- AC 24 V Mode

☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L - N	Complied	Complied

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
BNC	Complied	Complied
Alarm	Complied	Complied

- DC 12 V Mode

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
	-	-

☒ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L1 – L2	Complied	Complied

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
BNC	Complied	Complied
Alarm	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

☒ PASS Required Performance Criteria

☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014

Test Date

Feb, 16, 2017

Test Location

EMS-Surge: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ULTRA COMPACT SIMULATOR	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
☒	MOTOR VARIAC	MV2616	EM TEST	V0936105123	06, 27, 2017
☐	CDN	CNV 508N1	EM TEST	P1551168979	04, 27, 2017
☒	CDN	CNV 508T5	EM TEST	P1549168422	04, 27, 2017
☒	EMS Test S/W	iec.control	EM TEST	5.0.9.0	-

Test Conditions

Temperature: 22,7 °C
Relative Humidity: 39,8 %
Atmospheric Pressure: 101,3 kPa



Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common mode and 2 ohm for differential mode

Surge Amplitude :

Common Mode

☐ (0,5 / 1,0 / 2,0) kV

Differential Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 surges per angle

Angle:

☒ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

Other supply / Signal Lines

Source Impedance:

42 ohm for common mode

Surge Amplitude:

Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied



Test Data

- AC 24 V Mode

☒ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied
L – PE	-	-
N – PE	-	-

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L1-PE	-	-
L2-PE	-	-

Signal Lines

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
BNC	Complied	Complied
Alarm	Complied	Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0169-R2
Page (30) of (74)

- DC 12 V Mode☐ **Line to Line – Differential Mode**

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L1 – L2	-	-
L1 – PE	-	-
L2 – PE	-	-

☐ **Line to Earth – Common Mode**

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L1-PE	-	-
L2-PE	-	-

Signal Lines☒ **Line to Earth – Common Mode**

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
BNC	Complied	Complied
Alarm	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Feb, 15, 2017

Test Location

EMS-CS: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Continuous Wave Generator	CWS 500N1	EM TEST	V0936105119	08, 08, 2017
☒	6 dB Attenuator	ATT6	EM TEST	1208-34	08, 08, 2017
☒	CDN	CDN-M2/M3N	EM TEST	0909-06	08, 08, 2017
☒	EM Injection Clamp	EM 101	Liithi	35943	02, 03, 2018
☒	EMS Test S/W	icd.control	EM TEST	5.3.7	-

Test Conditions

Temperature: 23,1 °C
Relative Humidity: 40,6 %
Atmospheric Pressure: 101,8 kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0169-R2
Page (32) of (74)

Test Specifications

Frequency range: ☒ 150 kHz to 100 MHz ☐ 150 kHz to 80 MHz

Voltage Level: ☐ 1 Vrms ☐ 3 Vrms
☒ 10 Vrms

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☒ 1 s ☐ 3 s

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.



Test Data

- AC 24 V Mode

☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L - N	CDN (☒ M2, ☐ M3)	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐ M2, ☐ M3)	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
BNC	EM Injection Clamp	Complied
Alarm	EM Injection Clamp	Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-17T0169-R2

Page (34) of (74)

- DC 12 V Mode☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐ M2, ☐ M3)	-

☒ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L1 - L2	CDN (☒ M2, ☐ M3)	Complied

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
BNC	EM Injection Clamp	Complied
Alarm	EM Injection Clamp	Complied

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:

Complied - No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.



3.6 Voltage Dips and Short Interruptions

Reference Standard

EN 61000-4-11:2004

Test Date

Feb, 16, 2017

Test Location

EMS-Voltage dip: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	Ultra Compact Simulator	UCS 500 N5	EM TEST	V0936105120	06, 27, 2017
☒	Motor Variac	MV2616	EM TEST	V0936105123	06, 27, 2017
☒	EMS Test S/W	iec.control	EM TEST AG	5.0.9.0	-

Test Conditions

Temperature: 22,7 °C
Relative Humidity: 39,8 %
Atmospheric Pressure: 101,3 kPa



Test Specifications & Observations/Remarks

- AC 24 V Mode

(Test Voltage : 230V)

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☒ 20 % dip	☒ 250 /5000	<u>Complied</u>
☒ 30 % dip	☒ 25 /500	<u>Complied</u>
☒ 60 % dip	☒ 10 /200	<u>Complied</u>
☒ 100 % dip	☒ 250 /5000	<u>Complied</u>

- Voltage variations

☒ Unom + 10 %	☒ 253 V (ac)	<u>Complied</u>
☒ Unom - 15 %	☒ 195.5 V (ac)	<u>Complied</u>

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

Remarks

PASS Required Performance Criteria.

- The test has been tested using the ac Adapter

APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

- AC 24 V Mode

[HOT]

Common Information

Test Description:	Conducted Emission
Model No.:	HCO-6070RP
Mode	AC 24 V_H
Operator Name:	KES

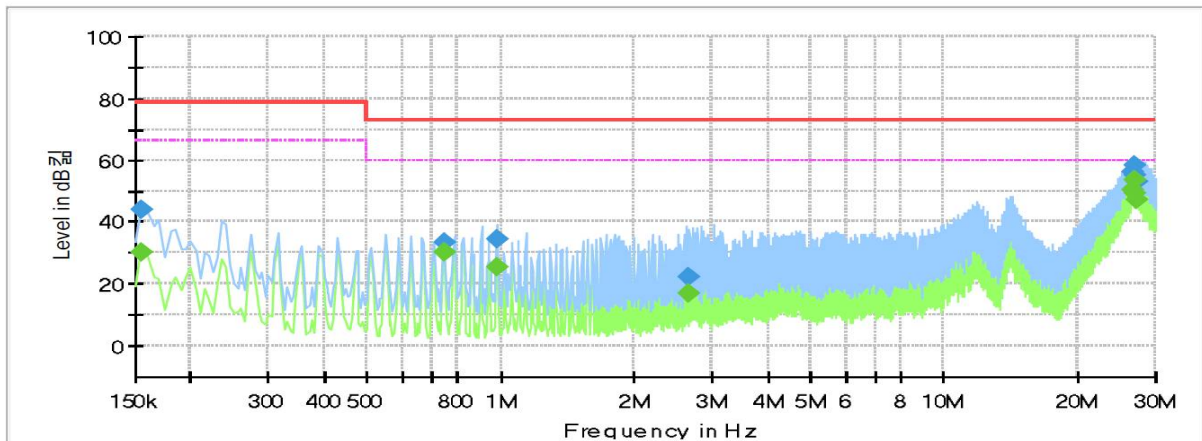

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	43.83	---	79.00	35.17	1000.0	9.000	L1	21.0
0.155000	---	30.12	66.00	35.88	1000.0	9.000	L1	21.0
0.745000	33.29	---	73.00	39.71	1000.0	9.000	L1	20.3
0.745000	---	30.33	60.00	29.67	1000.0	9.000	L1	20.3
0.980000	34.25	---	73.00	38.75	1000.0	9.000	L1	20.2
0.980000	---	25.17	60.00	34.83	1000.0	9.000	L1	20.2
2.665000	22.00	---	73.00	51.00	1000.0	9.000	L1	19.8
2.665000	---	17.07	60.00	42.93	1000.0	9.000	L1	19.8
26.705000	---	50.30	60.00	9.70	1000.0	9.000	L1	20.3
26.705000	55.91	---	73.00	17.09	1000.0	9.000	L1	20.3
26.985000	---	49.15	60.00	10.85	1000.0	9.000	L1	20.3
26.985000	55.10	---	73.00	17.90	1000.0	9.000	L1	20.3
27.025000	---	53.72	60.00	6.28	1000.0	9.000	L1	20.3
27.025000	58.17	---	73.00	14.83	1000.0	9.000	L1	20.3
27.060000	---	47.04	60.00	12.96	1000.0	9.000	L1	20.3
27.060000	53.17	---	73.00	19.83	1000.0	9.000	L1	20.3

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr.

[NEUTRAL]

Common Information

Test Description:	Conducted Emission
Model No.:	HCO-6070RP
Mode	AC 24 V_N
Operator Name:	KES

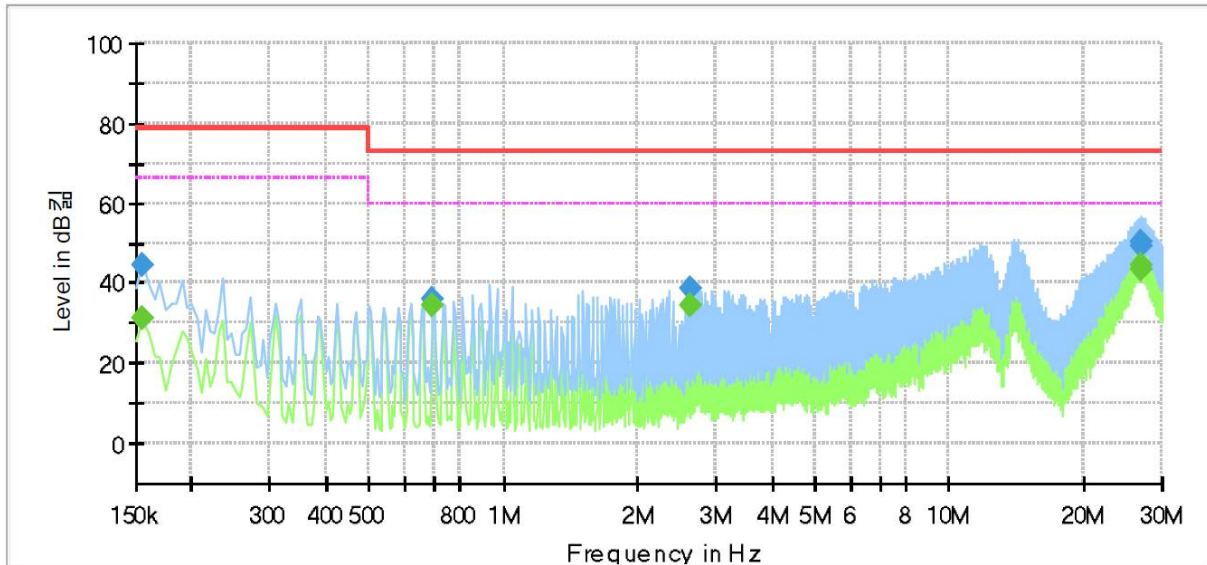

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	31.14	66.00	34.86	1000.0	9.000	N	21.0
0.155000	44.56	---	79.00	34.44	1000.0	9.000	N	21.0
0.695000	---	34.35	60.00	25.65	1000.0	9.000	N	20.4
0.695000	35.93	---	73.00	37.07	1000.0	9.000	N	20.4
2.630000	---	34.48	60.00	25.52	1000.0	9.000	N	19.8
2.630000	38.85	---	73.00	34.15	1000.0	9.000	N	19.8
26.990000	---	44.37	60.00	15.63	1000.0	9.000	N	20.3
26.990000	50.21	---	73.00	22.79	1000.0	9.000	N	20.3
27.030000	---	43.42	60.00	16.58	1000.0	9.000	N	20.3
27.030000	49.43	---	73.00	23.57	1000.0	9.000	N	20.3

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0169-R2
Page (39) of (74)

Conducted Emissions at Telecommunication Ports

[10 Mbps]

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0169-R2
Page (40) of (74)

[100 Mbps]

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.

Radiated Electric Field Emissions(Below 1 GHz)

- AC 24 V Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
130.88	16.43	V	1.01	8.72	2.79	27.94	40.00	12.06
162.35	10.61	H	3.98	8.60	3.18	22.39	40.00	17.61
242.61	10.33	H	3.99	12.39	4.06	26.78	47.00	20.22
297.38	10.18	V	1.02	13.36	4.59	28.13	47.00	18.87
371.24	10.24	V	1.00	14.95	5.08	30.27	47.00	16.73
546.42	9.84	H	4.00	18.21	6.44	34.49	47.00	12.51

* H : Horizontal, V : Vertical

◆ Calculation

Corrected Amplitude [dB μ V] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

- DC 12 V Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
45.52	11.24	V	1.01	13.27	1.62	26.13	40.00	13.87
158.04	10.98	H	3.94	8.44	3.13	22.55	40.00	17.45
207.51	10.84	H	3.99	11.63	3.63	26.10	40.00	13.90
297.03	17.31	V	1.00	13.35	4.59	35.25	47.00	11.75
371.44	10.88	H	3.98	14.95	5.08	30.91	47.00	16.09
545.00	9.86	V	1.03	18.19	6.43	34.48	47.00	12.52

* H : Horizontal, V : Vertical

◆ Calculation


Corrected Amplitude [dB μ V] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

Radiated Electric Field Emissions(Above 1 GHz)

- AC 24 V Mode

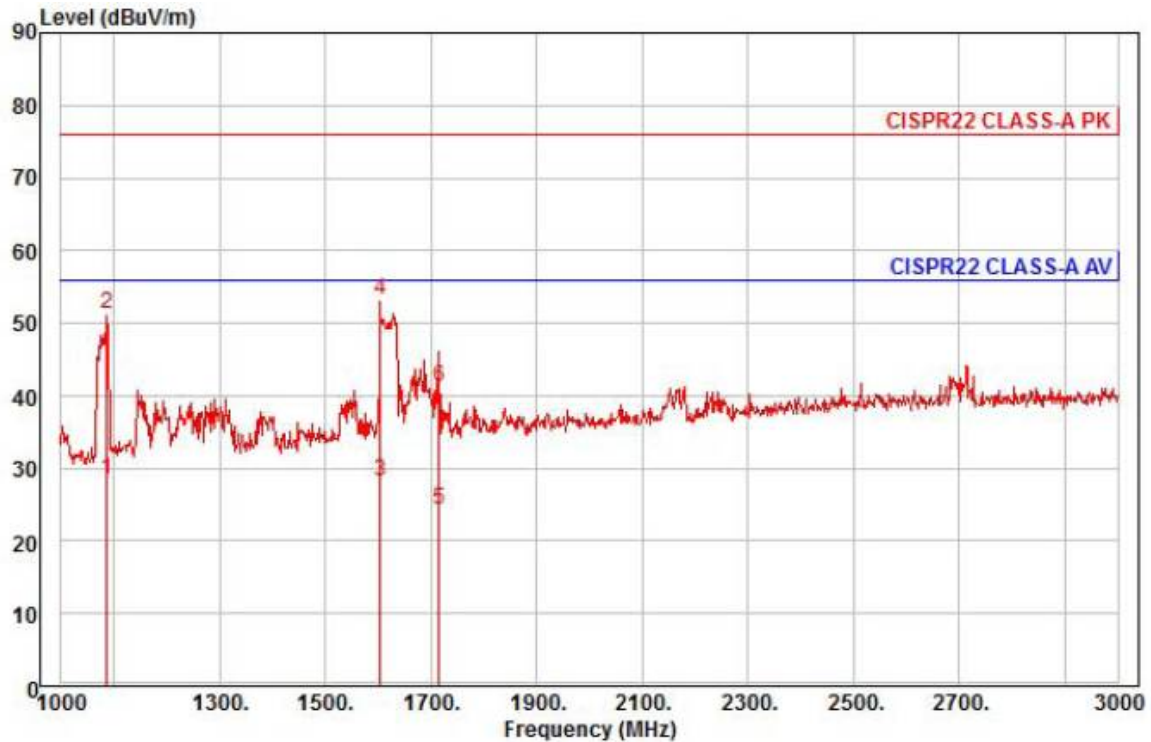

Site : chamber
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : HCO-6070RP
 Mode : AC 24 V
 Memo : 1 ~ 3 GHz


		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1 av	1086.00	37.37	24.25	6.76	39.88	333	56.00	-27.50	horizontal	Average
2	1086.00	60.02	24.25	6.76	39.88	333	76.00	-24.85	horizontal	Peak
3	1604.00	32.75	26.31	8.32	39.23	27	56.00	-27.85	horizontal	Average
4 pp	1604.00	57.71	26.31	8.32	39.23	27	76.00	-22.89	horizontal	Peak
5	1716.00	28.22	26.75	8.61	39.28	15	56.00	-31.70	horizontal	Average
6	1716.00	45.08	26.75	8.61	39.28	15	76.00	-34.84	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
 Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr.

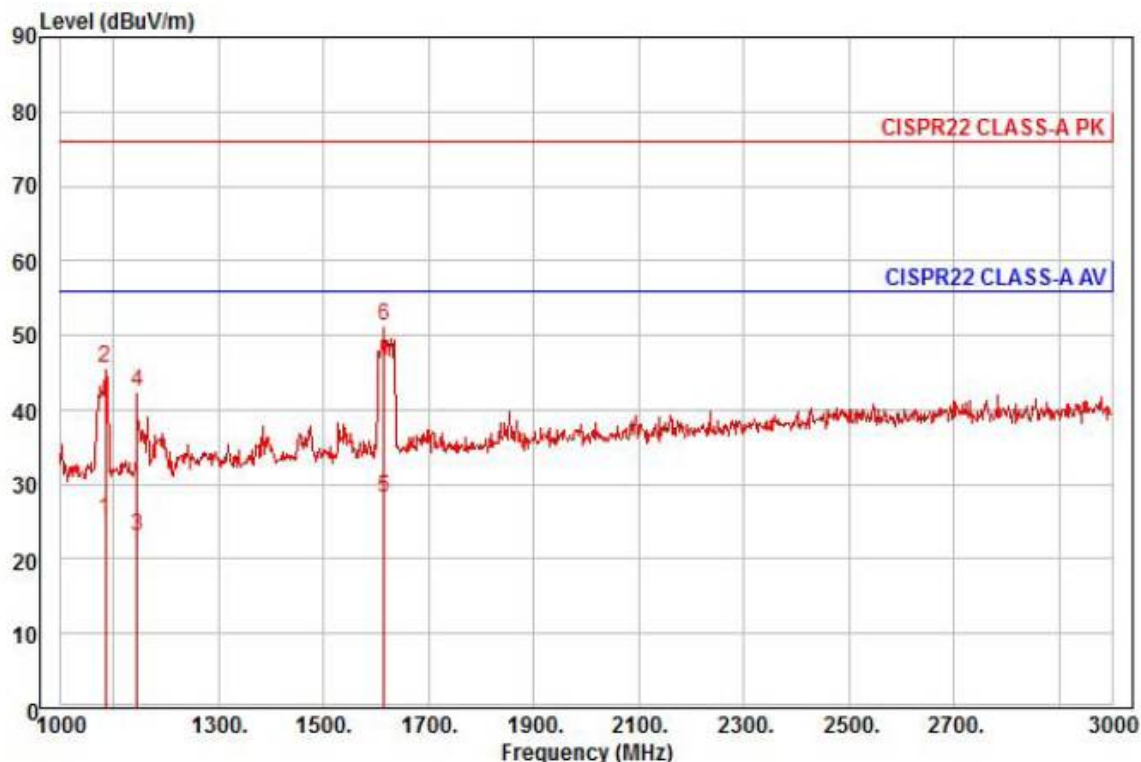


Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HCO-6070RP
Mode : AC 24 V
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1084.00	34.12	24.24	6.76	39.89	353	56.00	-30.77	vertical	Average
2	1084.00	54.54	24.24	6.76	39.89	353	76.00	-30.35	vertical	Peak
3	1146.00	31.27	24.49	6.96	39.74	11	56.00	-33.02	vertical	Average
4	1146.00	50.63	24.49	6.96	39.74	11	76.00	-33.66	vertical	Peak
5 av	1614.00	32.75	26.35	8.35	39.23	2	56.00	-27.78	vertical	Average
6 pp	1614.00	55.71	26.35	8.35	39.23	2	76.00	-24.82	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

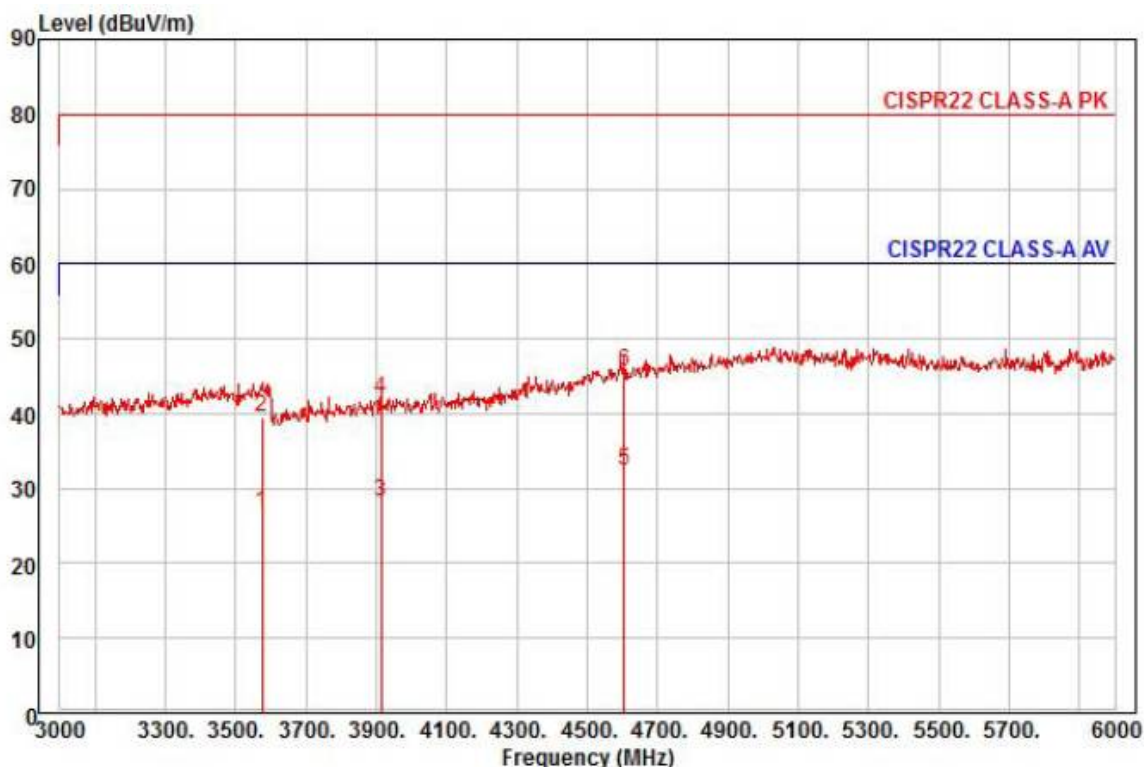

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HCO-6070RP
Mode : AC 24 V
Memo : 3 ~ 6 GHz


	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3576.00	23.40	31.30	12.76	40.85	316	60.00	-33.39	horizontal Average
2	3576.00	36.16	31.30	12.76	40.85	316	80.00	-40.63	horizontal Peak
3	3915.00	23.78	31.87	13.40	40.73	310	60.00	-31.68	horizontal Average
4	3915.00	37.51	31.87	13.40	40.73	310	80.00	-37.95	horizontal Peak
5 pp	4605.00	22.89	35.46	14.67	40.67	3	60.00	-27.65	horizontal Average
6 pk	4605.00	36.26	35.46	14.67	40.67	3	80.00	-34.28	horizontal Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.

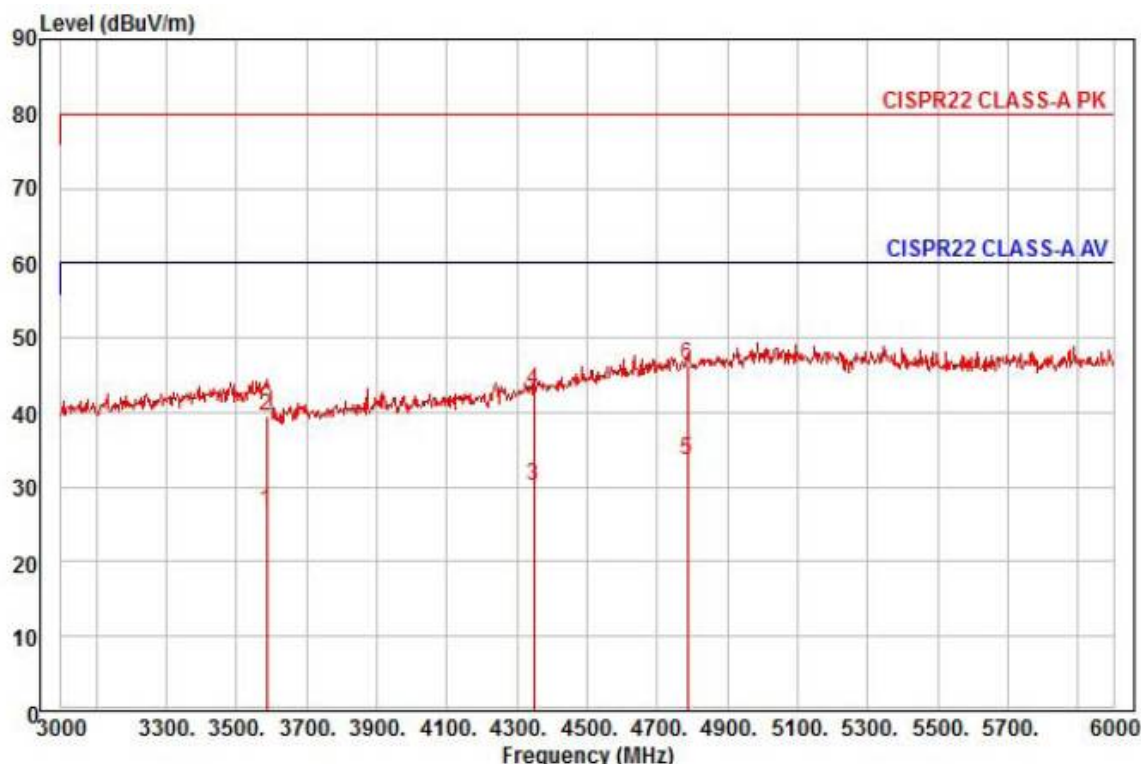

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HCO-6070RP
Mode : AC 24 V
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3585.00	23.50	31.31	12.78	40.85	288	60.00	-33.26	vertical	Average
2	3585.00	36.21	31.31	12.78	40.85	288	80.00	-40.55	vertical	Peak
3	4347.00	22.84	33.99	14.18	40.75	119	60.00	-29.74	vertical	Average
4	4347.00	35.55	33.99	14.18	40.75	119	80.00	-37.03	vertical	Peak
5 pp	4785.00	22.47	36.49	15.06	40.49	113	60.00	-26.47	vertical	Average
6 pk	4785.00	35.39	36.49	15.06	40.49	113	80.00	-33.55	vertical	Peak


◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.

- DC 12 V Mode

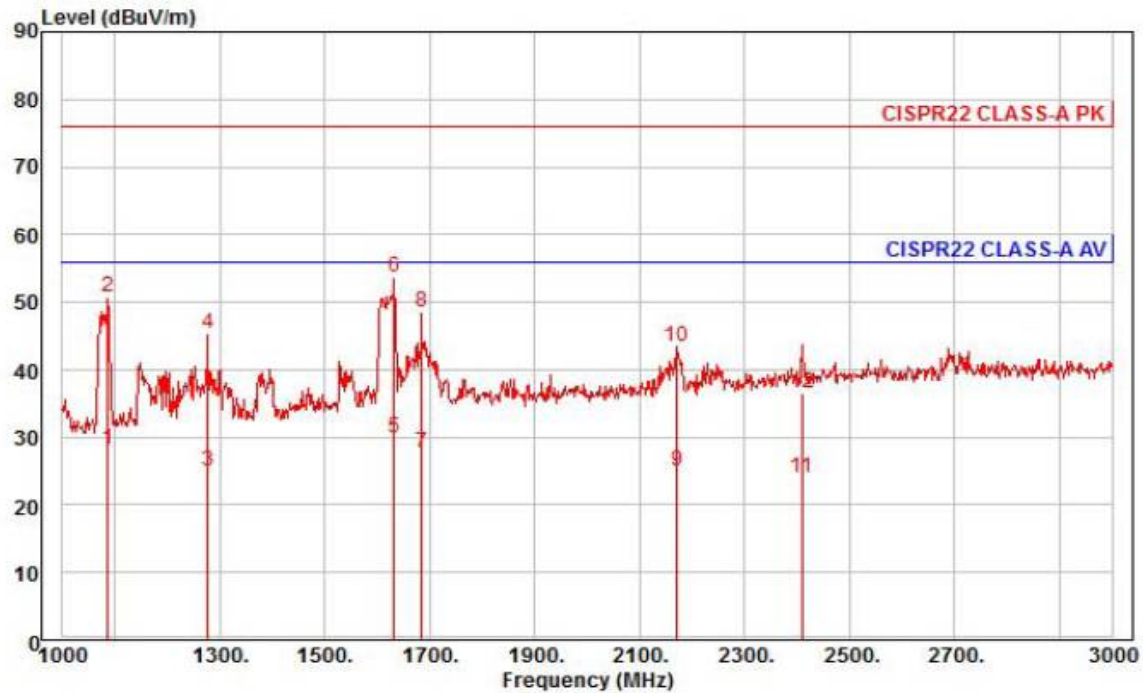

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HCO-6070RP
Mode : DC 12 V
Memo : 1 ~ 3 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1086.00	37.10	24.25	6.76	39.88	336	56.00	-27.77	horizontal	Average
2	1086.00	59.68	24.25	6.76	39.88	336	76.00	-25.19	horizontal	Peak
3	1278.00	31.97	25.01	7.37	39.42	319	56.00	-31.07	horizontal	Average
4	1278.00	52.52	25.01	7.37	39.42	319	76.00	-30.52	horizontal	Peak
5 av	1632.00	34.30	26.42	8.39	39.24	15	56.00	-26.13	horizontal	Average
6 pp	1632.00	58.23	26.42	8.39	39.24	15	76.00	-22.20	horizontal	Peak
7	1684.00	31.72	26.63	8.53	39.26	15	56.00	-28.38	horizontal	Average
8	1684.00	52.58	26.63	8.53	39.26	15	76.00	-27.52	horizontal	Peak
9	2172.00	26.44	28.30	9.74	39.41	319	56.00	-30.93	horizontal	Average
10	2172.00	44.75	28.30	9.74	39.41	319	76.00	-32.62	horizontal	Peak
11	2410.00	24.18	28.88	10.34	39.43	359	56.00	-32.03	horizontal	Average
12	2410.00	36.80	28.88	10.34	39.43	359	76.00	-39.41	horizontal	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.

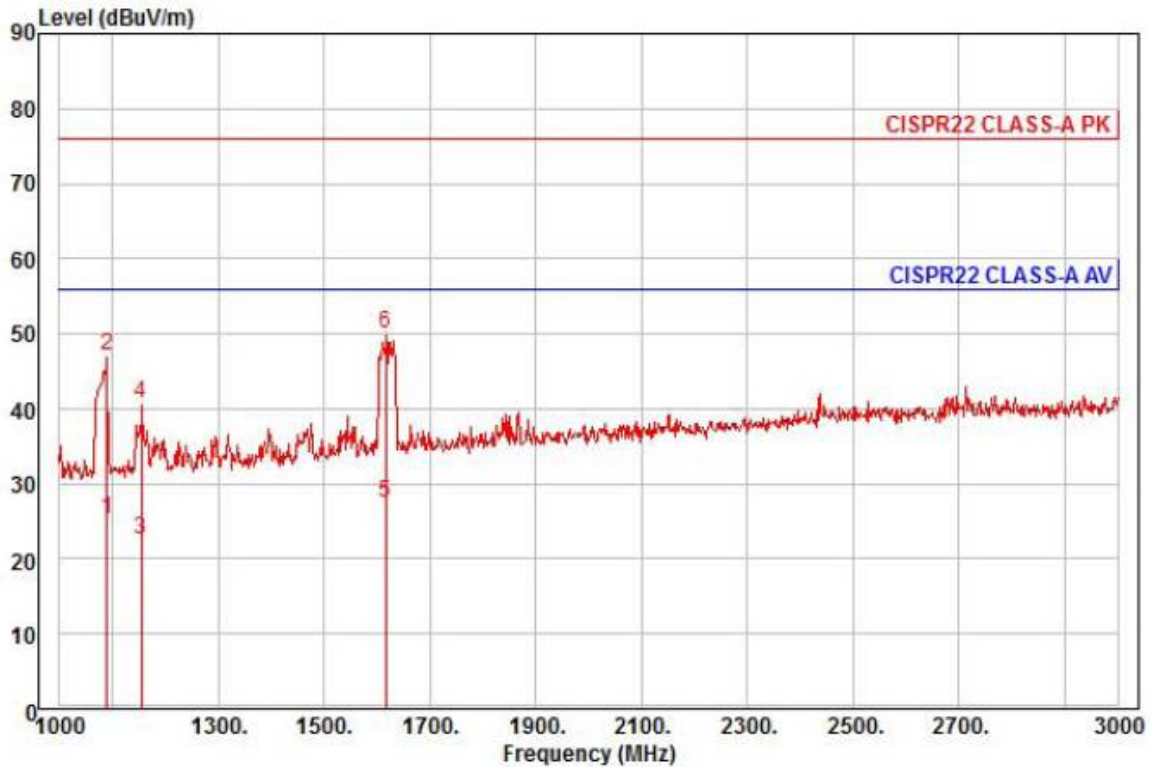

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HCO-6070RP
Mode : DC 12 V
Memo : 1 ~ 3 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1090.00	33.98	24.27	6.78	39.87	331	56.00	-30.84	vertical	Average
2	1090.00	55.97	24.27	6.78	39.87	331	76.00	-28.85	vertical	Peak
3	1154.00	30.85	24.52	6.99	39.72	14	56.00	-33.36	vertical	Average
4	1154.00	48.95	24.52	6.99	39.72	14	76.00	-35.26	vertical	Peak
5 av	1616.00	31.89	26.36	8.35	39.23	20	56.00	-28.63	vertical	Average
6 pp	1616.00	54.58	26.36	8.35	39.23	20	76.00	-25.94	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.

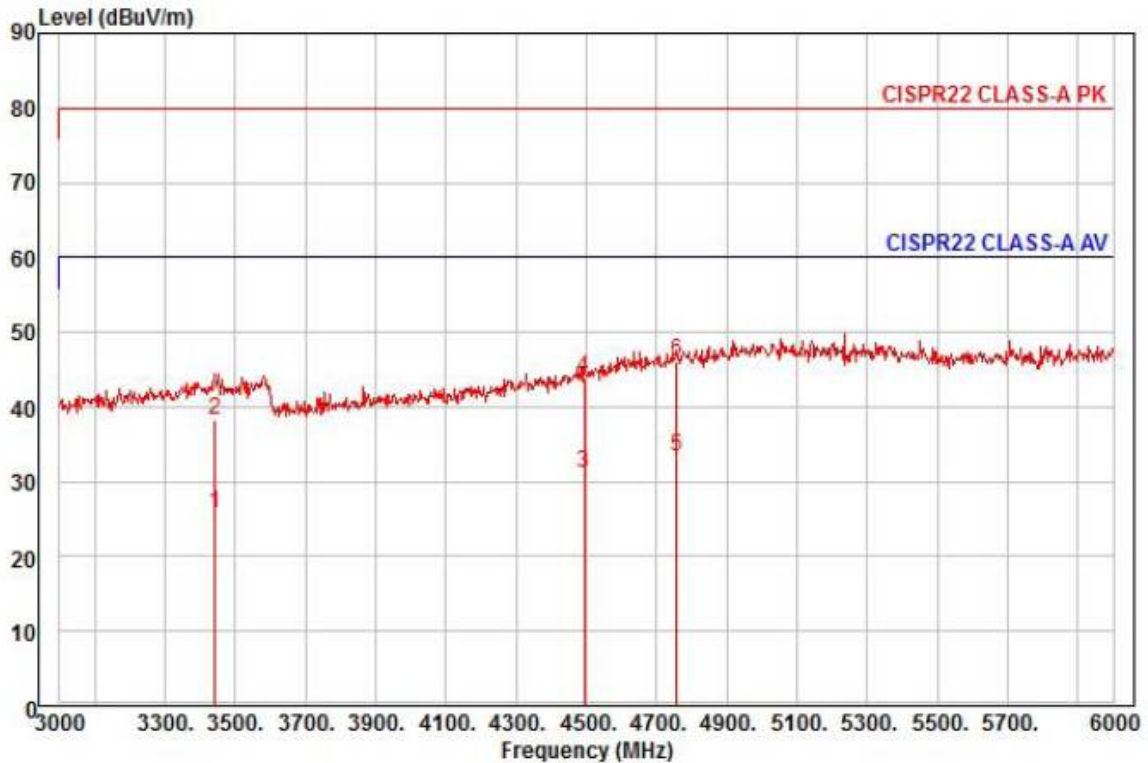

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HCO-6070RP
Mode : DC 12 V
Memo : 3 ~ 6 GHz


	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3441.00	22.88	31.07	12.52	40.79	50	60.00	-34.32	horizontal Average
2	3441.00	35.55	31.07	12.52	40.79	50	80.00	-41.65	horizontal Peak
3	4494.00	22.53	34.83	14.45	40.77	283	60.00	-28.96	horizontal Average
4	4494.00	35.44	34.83	14.45	40.77	283	80.00	-36.05	horizontal Peak
5 pp	4758.00	22.60	36.34	15.01	40.51	214	60.00	-26.56	horizontal Average
6 pk	4758.00	35.38	36.34	15.01	40.51	214	80.00	-33.78	horizontal Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.

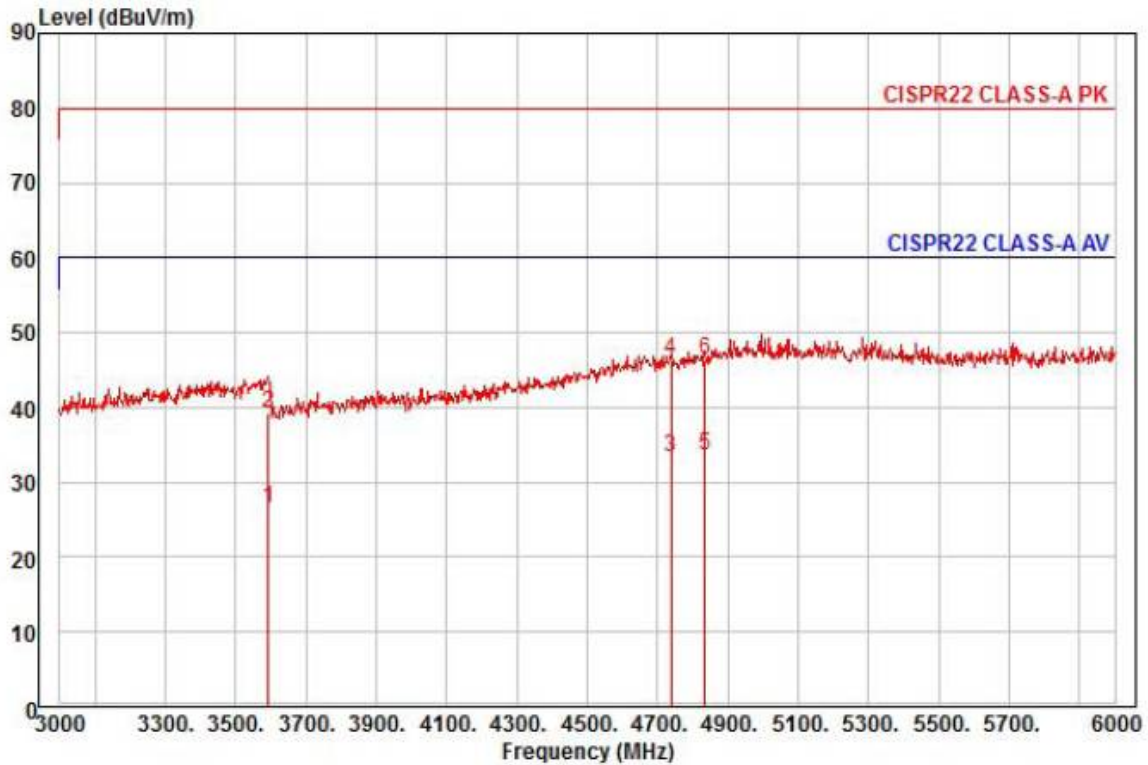

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HCO-6070RP
Mode : DC 12 V
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3594.00	23.24	31.33	12.79	40.85	108	60.00	-33.49	vertical	Average
2	3594.00	35.97	31.33	12.79	40.85	108	80.00	-40.76	vertical	Peak
3	4740.00	22.76	36.24	14.97	40.53	8	60.00	-26.56	vertical	Average
4	4740.00	35.64	36.24	14.97	40.53	8	80.00	-33.68	vertical	Peak
5 pp	4836.00	22.15	36.78	15.14	40.43	219	60.00	-26.36	vertical	Average
6 pk	4836.00	34.95	36.78	15.14	40.43	219	80.00	-33.56	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dBuV] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB]) - Limit Line[dBuV]

Over Limit : Margin Value, Read Level : Reading Value, Ant Factor : Ant Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.



Test Data - Voltage Fluctuations


Maximum Flicker results

	EUT values	Limit	Result
Pst	N/A		
Plt			
dc [%]			
dmax [%]			
Tmax [s]			

Test Setup Photos and Configuration

Conducted Voltage Emissions

- AC 24 V Mode

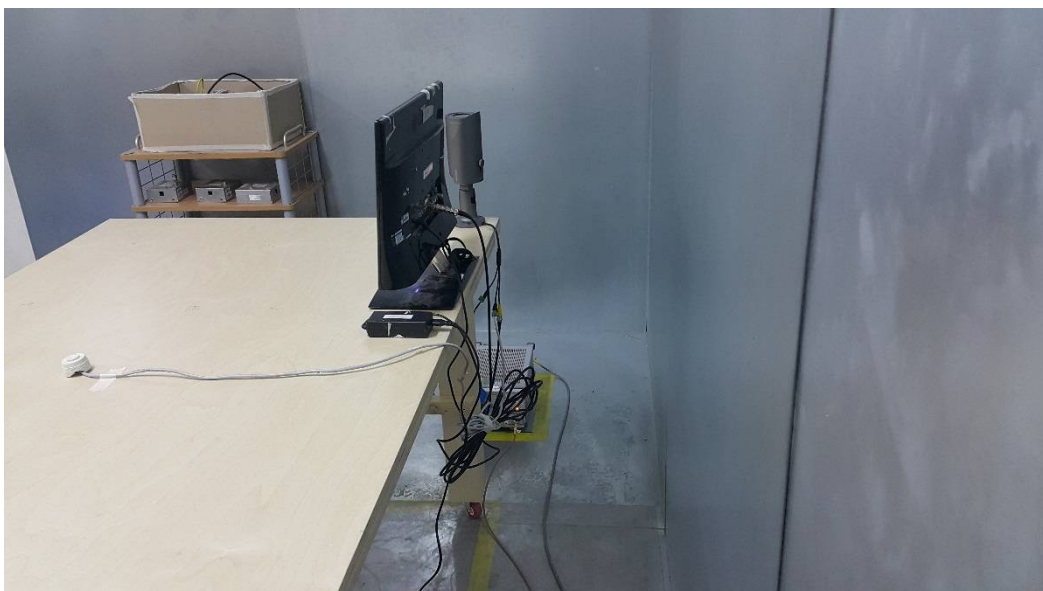

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0169-R2
Page (54) of (74)

Conducted Telecommunication Emissions

N/A

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.

Radiated Electric Field Emissions(Below 1 GHz)

- AC 24 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.


- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.



Radiated Electric Field Emissions(Above 1 GHz)

- AC 24 V Mode

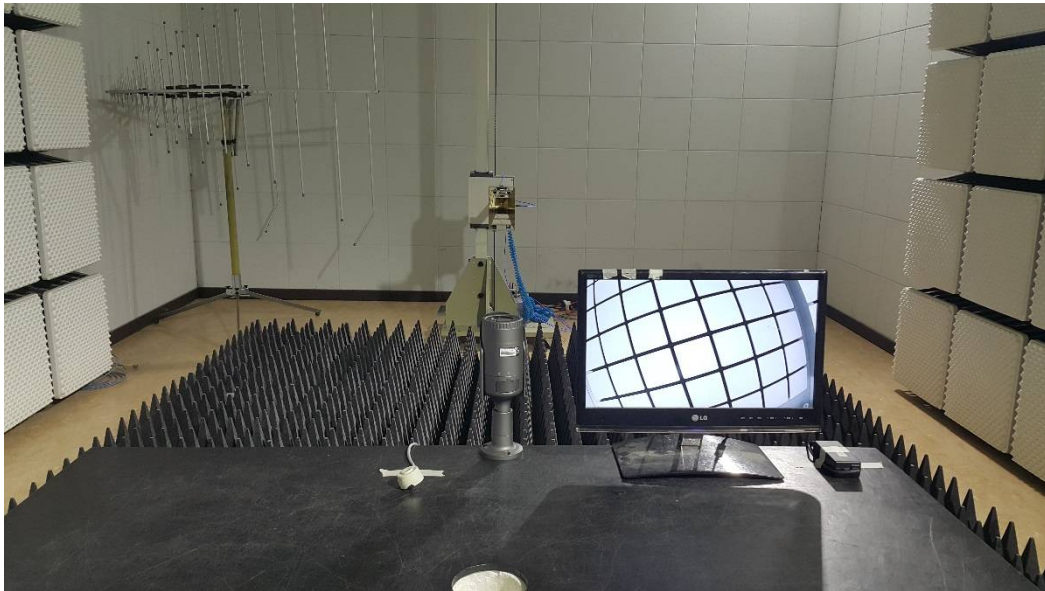

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.

- DC 12 V Mode

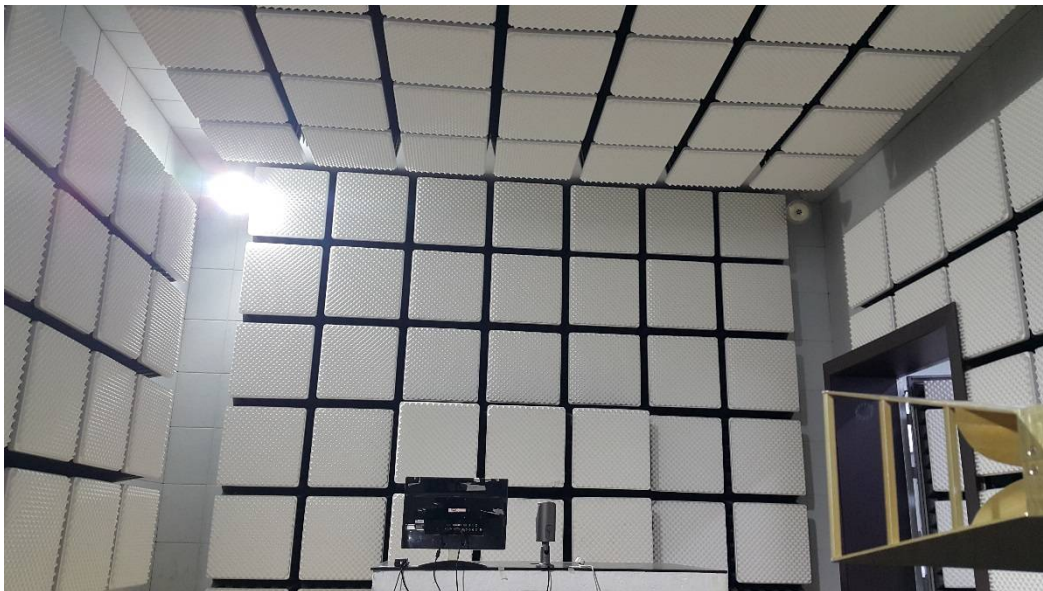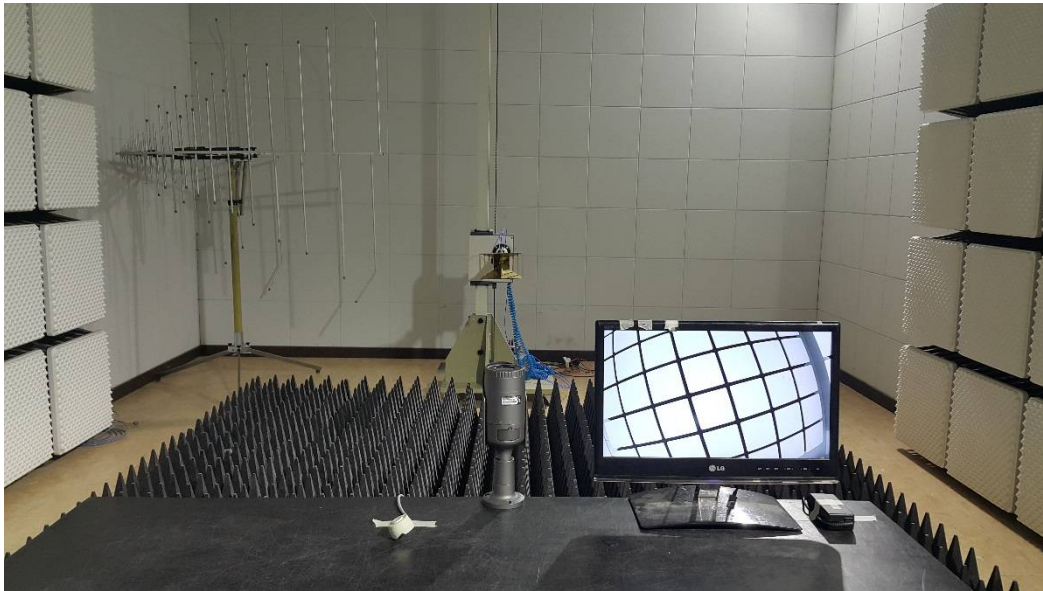

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0169-R2
Page (59) of (74)


Harmonic Current Emissions and Voltage Fluctuations and Flicker

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.

Electrostatic Discharge

- AC 24 V Mode

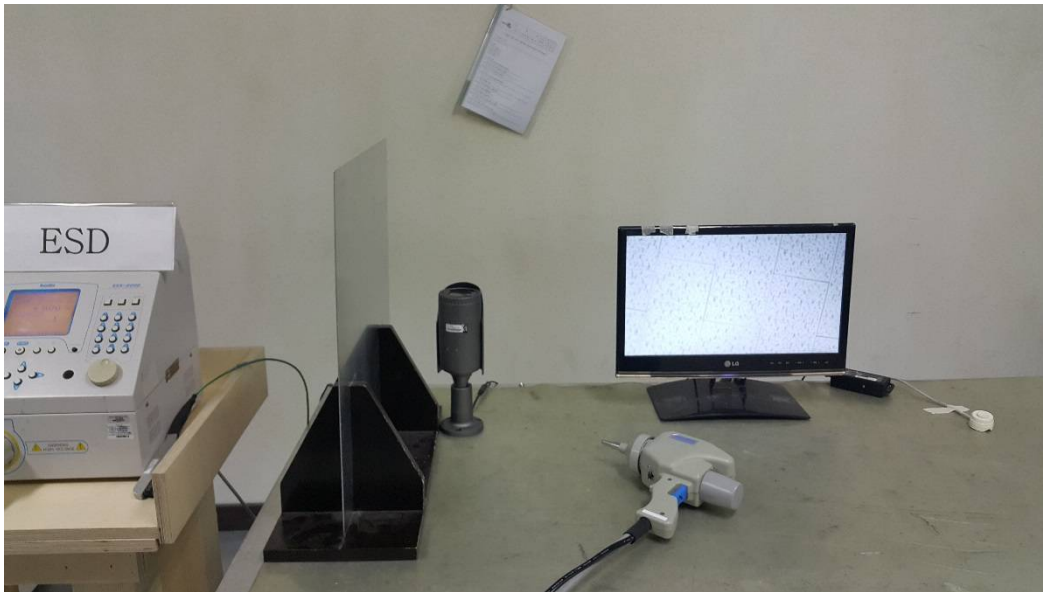

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.

Radiated Electric Field Immunity

- AC 24 V Mode





- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.



Electrical Fast Transients/Bursts

- AC 24 V Mode

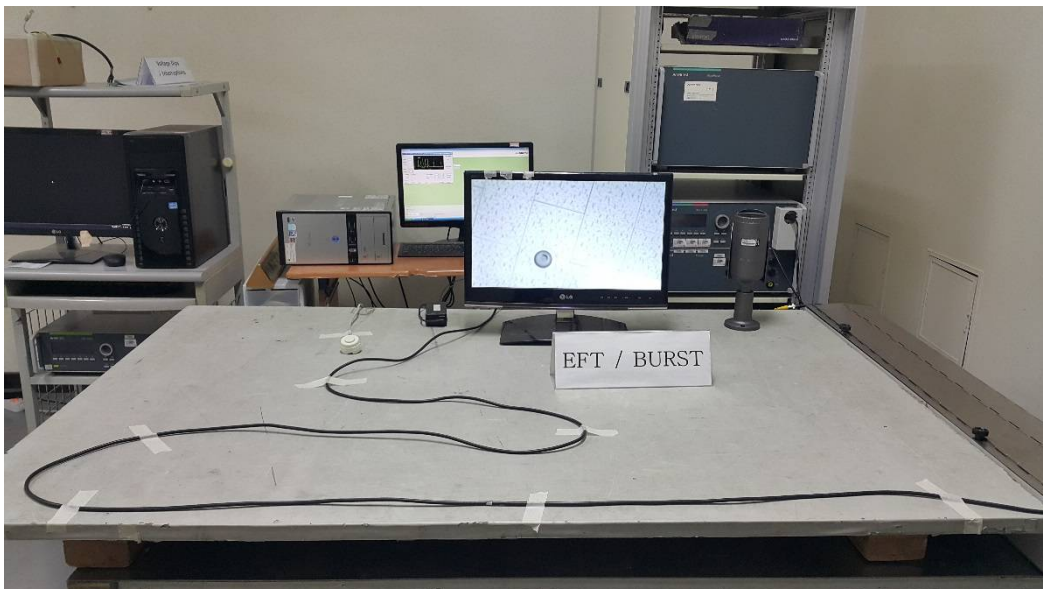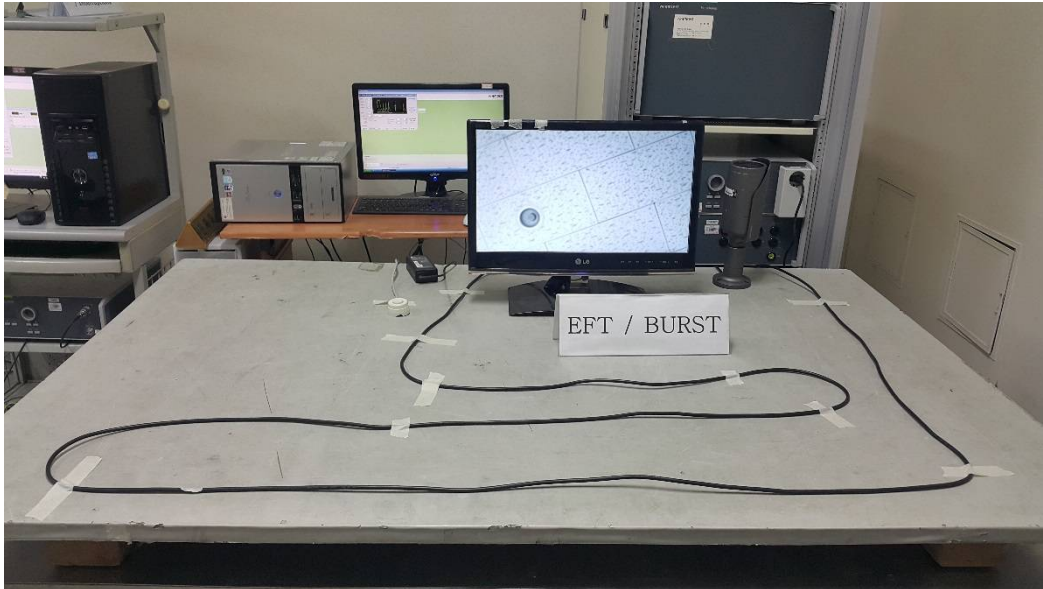

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.


- DC 12 V Mode

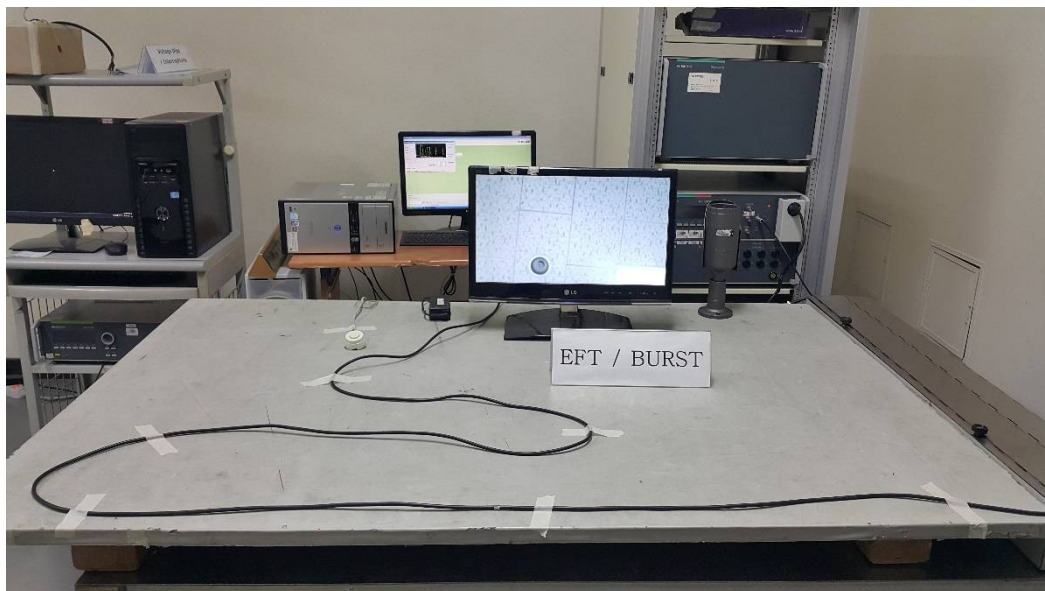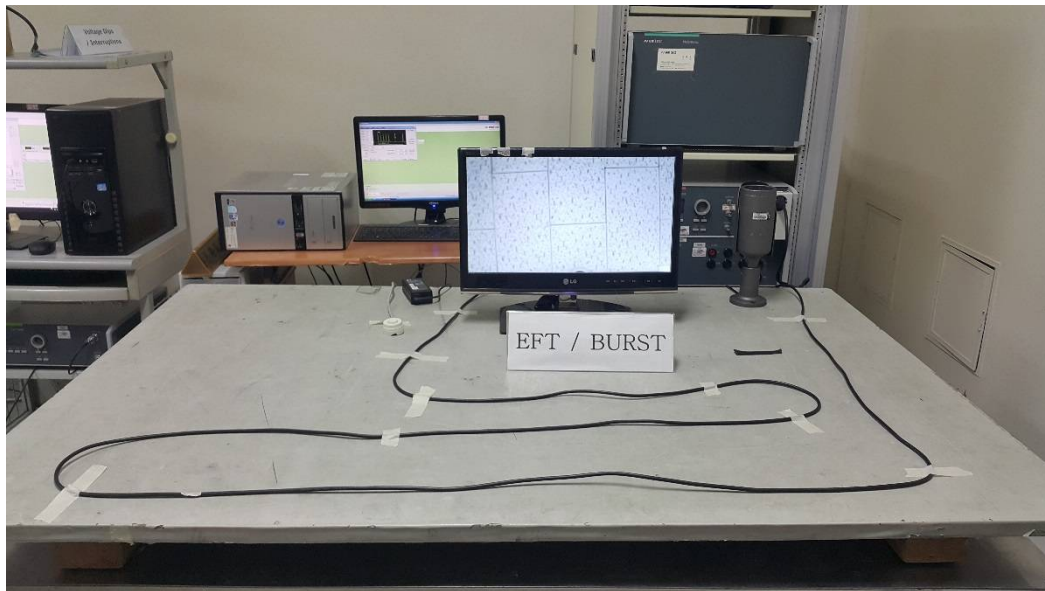

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.

Surge Transients

- AC 24 V Mode

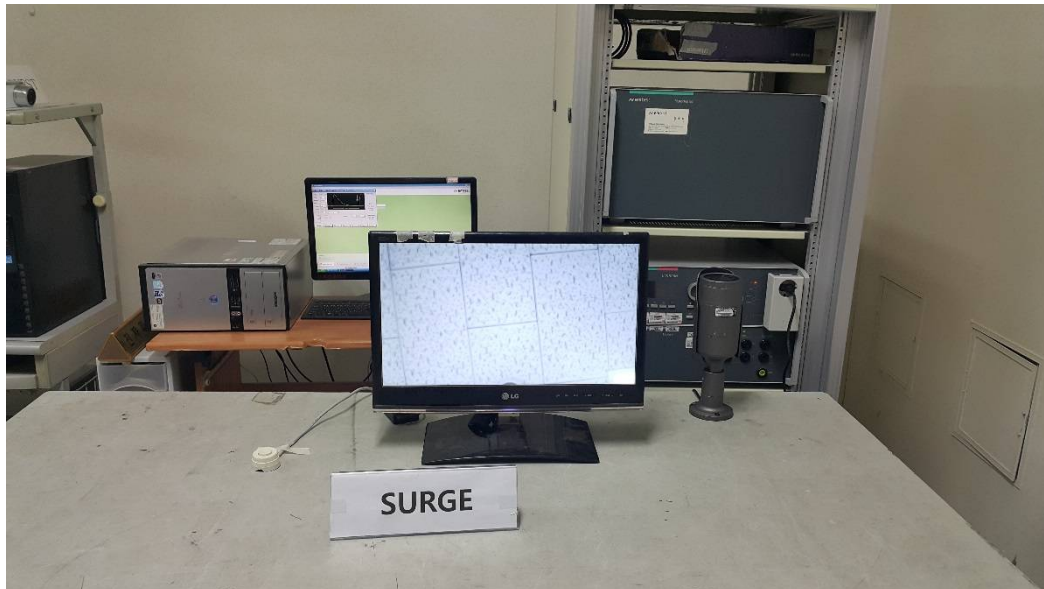


- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.



Conducted Disturbance

- AC 24 V Mode

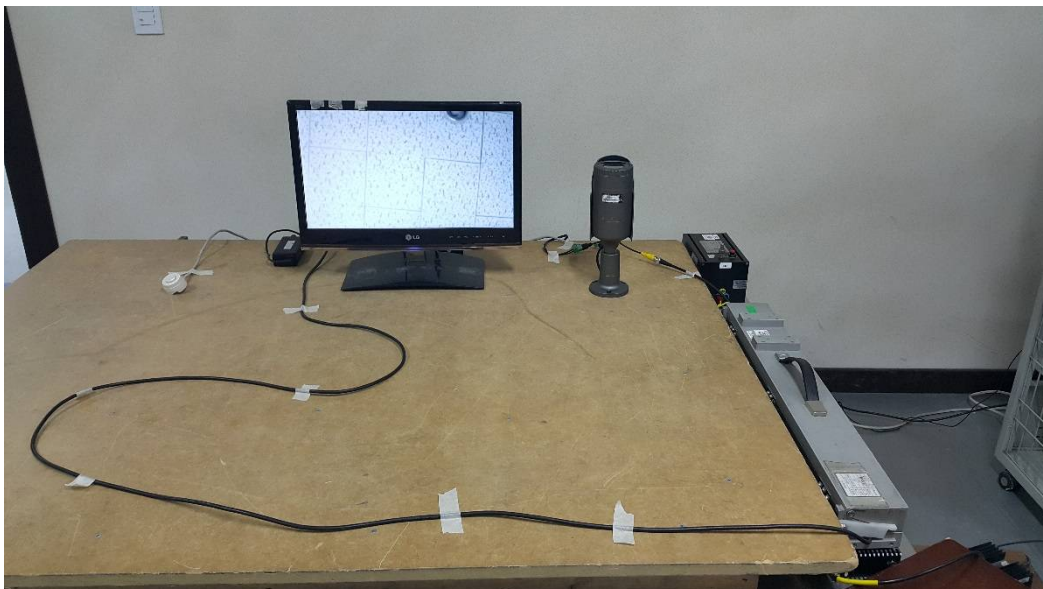

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.


- DC 12 V Mode

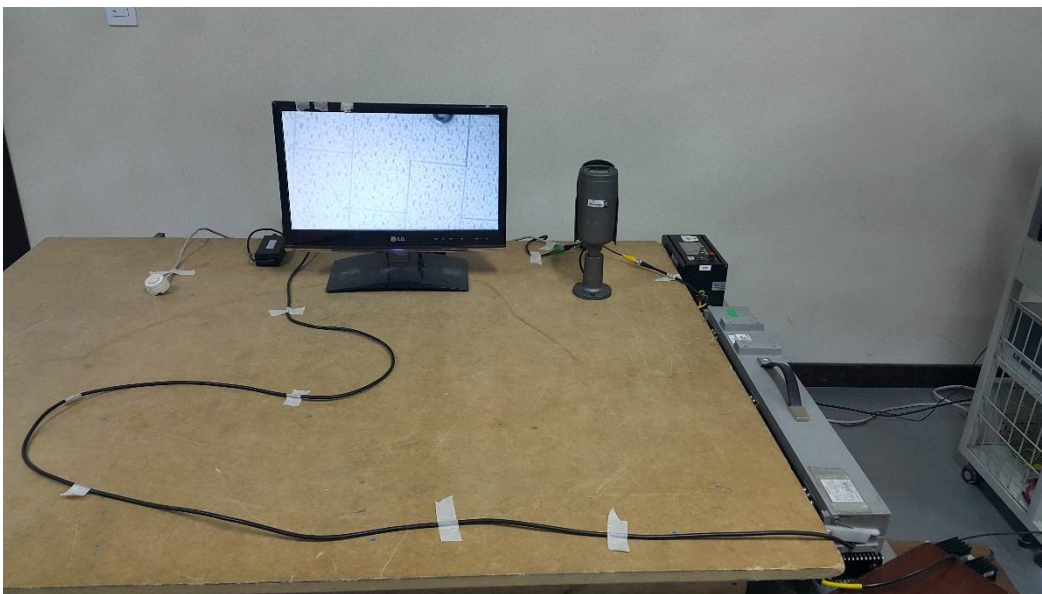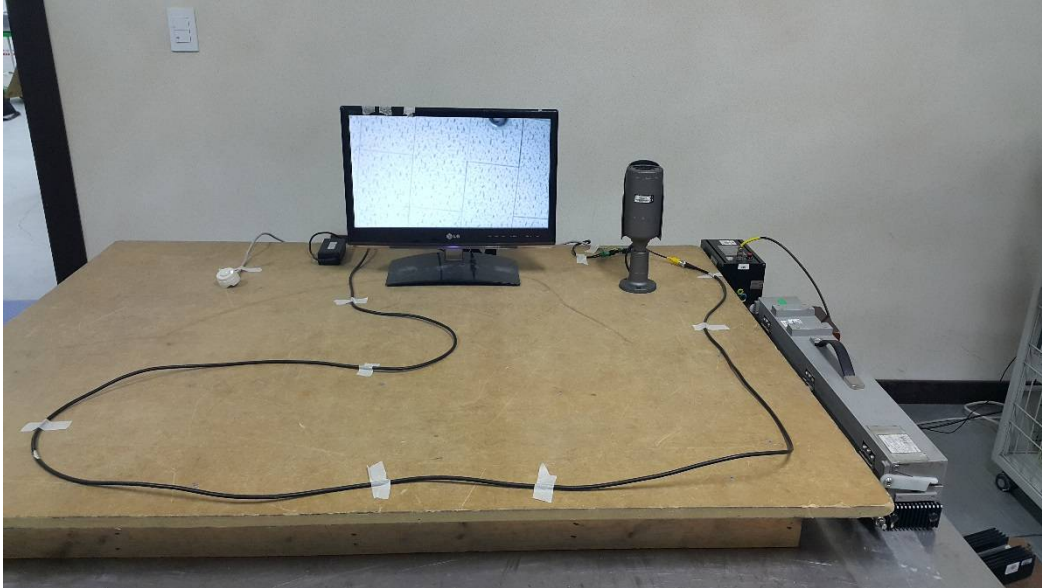

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.

Voltage Dips and Short Interruptions

- AC 24 V Mode

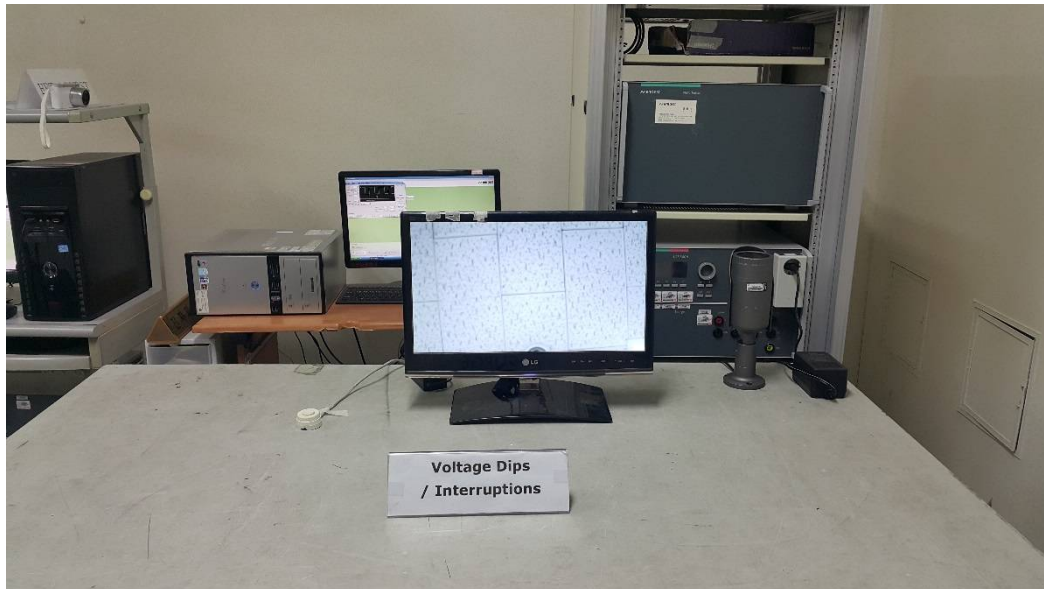

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.


EUT Internal Photographs

(Internal View)




EUT Internal View – Main Board

(Top)

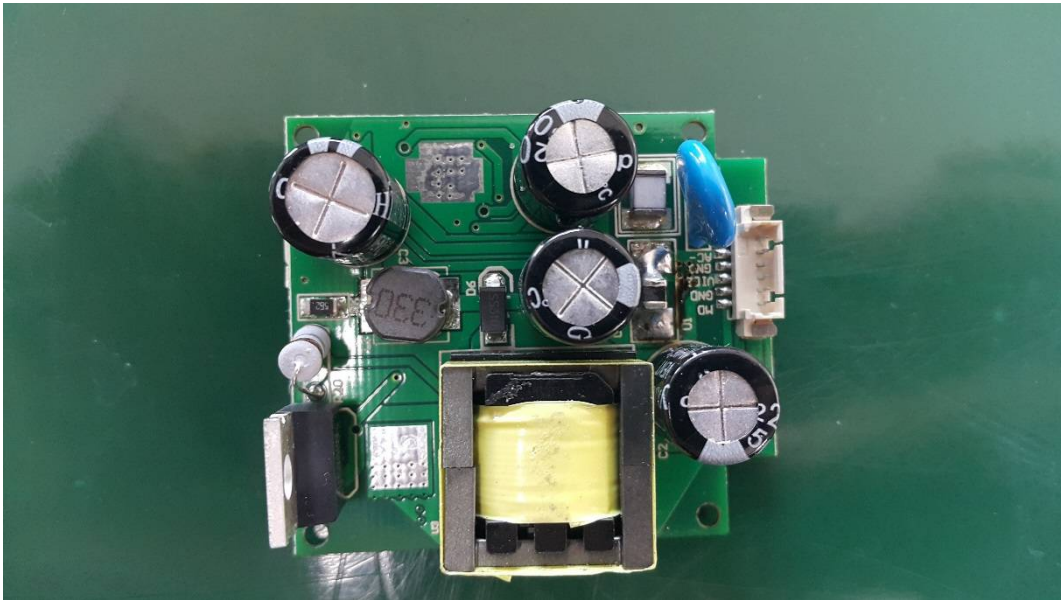


(Bottom)

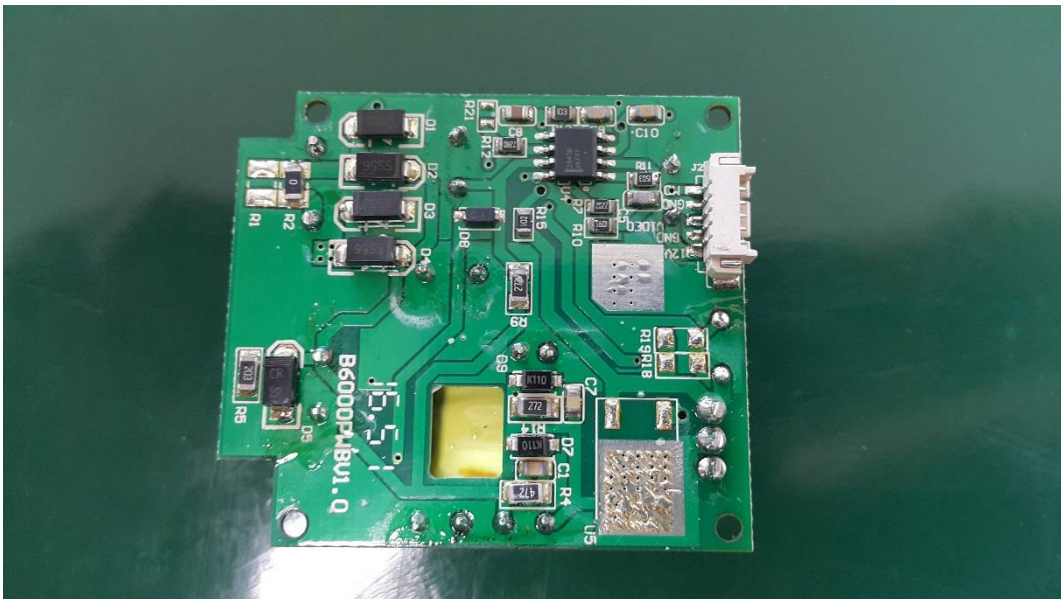


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.

EUT Internal View – Sub Board

(Top)

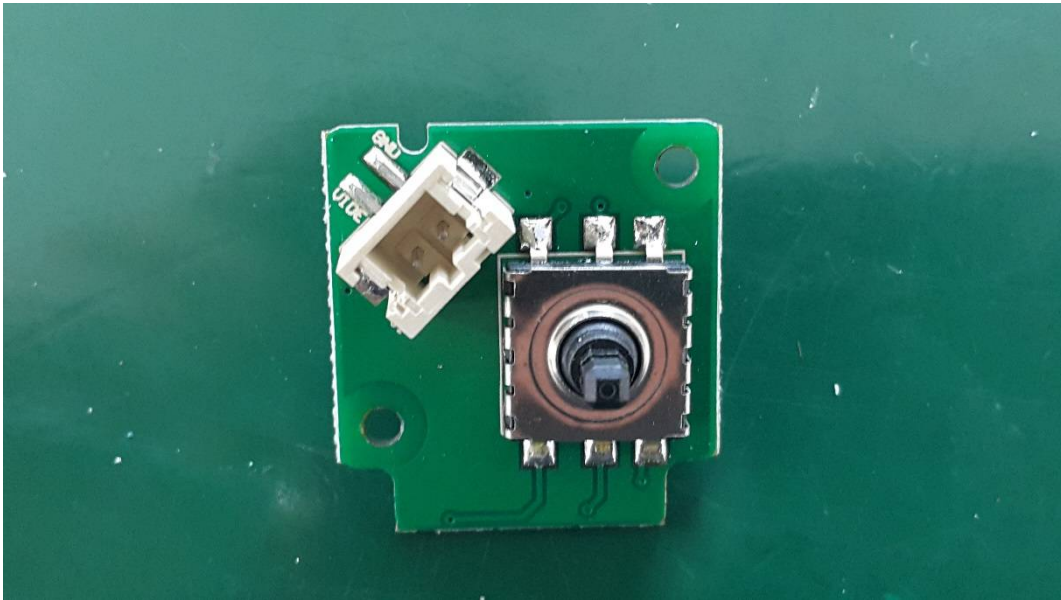


(Bottom)

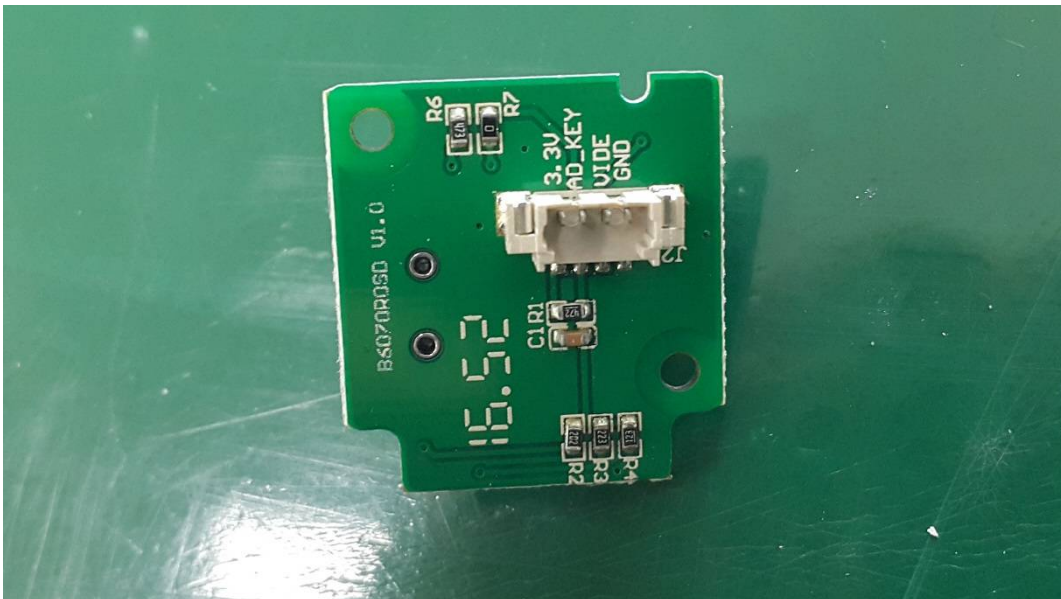

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.

EUT Internal View – Lens Board

(Top)

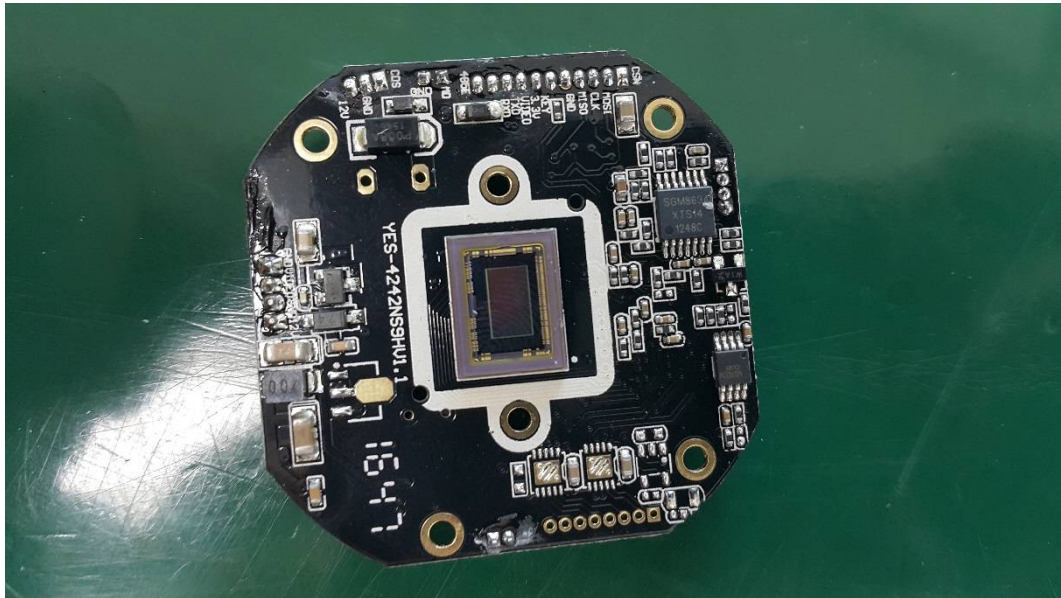

(Bottom)



EUT Internal View – LED Board

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr.

Label and Location



CCTV CAMERA

Model No : HCO-6070RP

Manufacturer : Hanwha Techwin (Tianjin) Co.,Ltd.

Made in Chin

