



EMC TEST REPORT For CE

Test Report No. : KES-E1-17T0579-R2

Date of Issue : May. 15, 2019

Product name : CCTV CAMERA

Model/Type No. : HCZ-6320

Variant Model : HCZ-6320P

Applicant : Hanwha Techwin Co., Ltd.

Applicant Address : 6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13488, KOREA

Manufacturer : 1. HANWHA TECHWIN(TIANJIN) CO., LTD
2. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
3. D-TECH CO.,LTD.

Manufacturer Address : 1. No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin,
300385, People's Republic of China
2. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
3. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do,
Korea (Suwon Industrial Complex)

Date of Receipt : Jul. 31, 2017

Test date : Aug. 14, 2017 ~ Aug. 18, 2017

Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Jun Soo, Jung
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0579-R2
Page (2) of (63)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Aug. 29, 2017	KES-E1-17T0579	Issued
Jun. 27, 2018	KES-E1-17T0579-R1	Re-issue due to manufacturer change
May. 15, 2019	KES-E1-17T0579-R2	Re-issue due to variant model addition

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	5
1.2	Variant Model Differences.....	5
1.3	Device Modifications	5
1.4	Equipment Under Test.....	5
1.5	Support Equipments	5
1.6	External I/O Cabling	6
1.7	E.U.T Operating Mode(s).....	6
1.8	Configuration.....	7
1.9	Remarks when standards applied	8
1.10	Calibration Details of Equipment Used for Measurement.....	8
1.11	Test Facility	8
1.12	Laboratory Accreditations and Listings	8
2.0	Test Regulations.....	9
2.1	Conducted Emissions at Mains Power Ports.....	11
2.2	Conducted Emissions at Telecommunication Ports	12
2.3	Radiated Electric Field Emissions(Below 1 GHz)	13
2.4	Radiated Electric Field Emissions(Above 1 GHz).....	14
2.5	Harmonic Current Emissions.....	15
2.6	Voltage Fluctuations and Flicker	16
3.0	Criteria for compliance.....	17
3.1	Electrostatic Discharge.....	19
3.2	Radiated Electric Field Immunity	23
3.3	Electrical Fast Transients/Bursts	26
3.4	Surge Transients	28
3.5	Conducted Disturbance	31
3.6	Voltage Dips and Short Interruptions	34
APPENDIX A	– TEST DATA.....	36
	Conducted Emissions at Mains Power Ports.....	36
	Conducted Emissions at Telecommunication Ports	38
	Radiated Electric Field Emissions(Below 1 GHz)	40
	Radiated Electric Field Emissions(Above 1 GHz).....	41
	Harmonic Current Emissions and Voltage Fluctuations and Flicker	45
	Test Setup Photos and Configuration	48
	Conducted Voltage Emissions	48
	Conducted Telecommunication Emissions	49
	Radiated Electric Field Emissions(Below 1 GHz)	50
	Radiated Electric Field Emissions(Above 1 GHz).....	51
	Harmonic Current Emissions and Voltage Fluctuations and Flicker	52
	Electrostatic Discharge	53
	Radiated Electric Field Immunity	53
	Electrical Fast Transients/Bursts	54
	Surge Transients.....	55
	Conducted Disturbance	56
	Voltage Dips and Short Interruptions.....	57
	EUT External Photographs	58
	EUT Internal Photographs	59



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EI-17T0579-R2

Page (4) of (63)

1.0 General Product Description

Main Specifications of E.U.T are:

HCZ-6320	
Video	
Imaging Device	1/2.8" 2.38M CMOS
Total Pixels	1952(H) x 1116(V), 2.18M
Effective Pixels	1044(H) x 1104(V), 2.14M
Scanning System	Progressive
Min. Illumination	Color : 0.2 Lux (1/30sec, F1.6, 30IRE), 0.003 Lux(2sec, F1.6, 30IRE) B/W : 0.01 Lux (1/30sec, F1.6, 30IRE), 0.0001 Lux(2sec, F1.6, 30IRE)
S / N Ratio	50dB
Video Out	AHD : 1080p, BNC CVBS : SD, DIP connector type
Lens	
Focal Length (Zoom Ratio)	4.44 ~ 142.6mm(Optical 32X)
Max. Aperture Ratio	F1.6 (Wide) / F4.4 (Tele)
Angular Field of View	H : 62.8°(Wide) ~ 2.23°(Tele) / V : 36.80°(Wide) ~ 1.26°(Tele)
Min. Object Distance	Wide 1.5m, Tele 2m
Focus Control	Auto / Manual / One Push
Lens Type	DC Auto Iris
Mount Type	Board-in type
Preset	
Preset	255ea
Operational	
Camera Title	Off / On (Displayed up to 15 characters)
Day & Night	Auto (ICR) / Color / B/W / External
Backlight Compensation	Off / BLC / HLC / WDR
Wide Dynamic Range	120dB
Contrast Enhancement	SSDR(Off / On)
Digital Noise Reduction	SSNR(2D+3D Noise Filter) (Off / On)
Digital Image Stabilization	Off / On
Defog	Off/Auto/Manual
Motion Detection	Off / On (4ea Rectangle zone)
Privacy Masking	Off / On (12 Zones of Rectangle zone)
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor / Mercury / Sodium
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/33,000sec)
Digital Zoom	16x
Flip / Mirror	Off / On
Intelligent Video Analytics	Detection / Tracking / Fixed Moved / Tampering
Remote Control I/F	RS-485, Coaxial
Protocol	RS-485: Samsung-T/E, Pelco-D/P, Panasonic, Bosch, AD, Vicon, Honeywell Coaxial : ACP (AHD Coax Protocol)
Video Transmission Distance	500m(5C2V Coaxial Cable)
Environmental	
Operating Temperature / Humidity	-10°C ~ +55°C(+14°F ~ +131°F) / Less than 90% RH
Storage Temperature / Humidity	-10°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Ingress Protection	-
Vandal Resistance	-
Electrical	
Input Voltage / Current	DC12V
Power Consumption	Max. 6W
Mechanical	
Color / Material	Dark Gray / Metal
Dimension (WxHxD)	72.0x60.0x137.0mm
Weight	476g

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 230Vac ☐ 100 Vac ☐ 24 Vac ☒ 12 Vdc ☐ PoE
Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Add derivative model for vendor management

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
CCTV CAMERA	HCZ-6320	-	HANWHA TECHWIN (TIANJIN) CO., LTD	E.U.T

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
MONITOR	SMT-2232	C95V67VF900025B	Weihai Daewoo Electronics Co., Ltd.	-
Controller	SPC-1010	C50E67WD601003	SamSung Techwin Co.,Ltd	-
Controller adapter	RS-AB1000	-	Dongguan Jinhua Sheng Power Technology Co.,Ltd	-
DVR	SDH-C74041	-	Hanwha Techwin (Tianjin) Co.,Ltd	-
DVR adapter	FJ-SW1202000U	-	-	-
Mouse	-	-	Hanwha Techwin (Tianjin) Co.,Ltd	-
Remote control	-	-	Hanwha Techwin (Tianjin) Co.,Ltd	-



1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
CCTV CAMERA (E.U.T)	BNC	DVR	BNC	4.0	S
	RJ-45	Controller	2 pin	3.0	U
DVR	USB	Mouse	USB	1.4	U
	HDMI	MONITOR	HDMI	1.7	S
	-	Remote controller	-	-	-


* Unshielded=U, Shielded=S

1.7 E.U.T Operating Mode(s)

Test mode	operating
OP	E.U.T Monitoring

E.U.T Test operating S/W		
Name	Version	Manufacture Company
-	-	-

1.8 Configuration

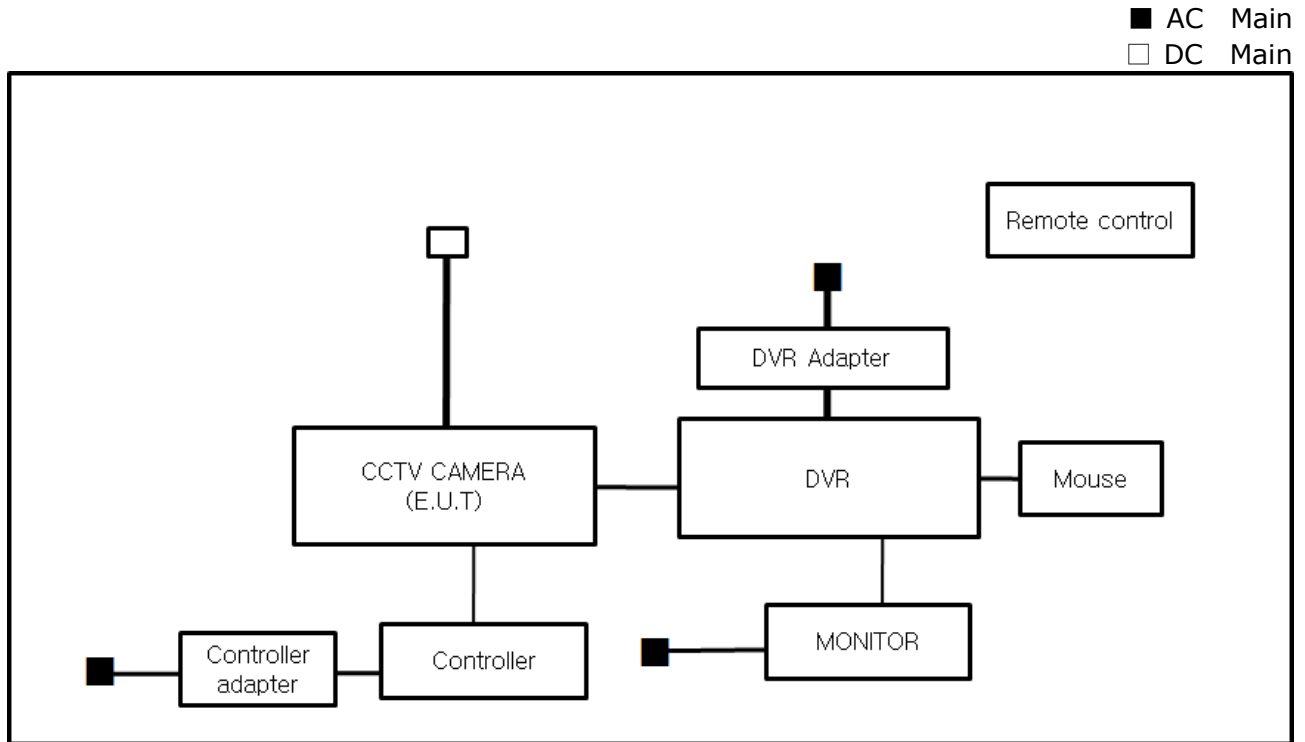

1.9 Remarks when standards applied

- N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2012

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Accreditation No
KOREA	RRA	EMI (3 m & 10 m Semi-Aechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Aechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Aechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Aechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Aechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 17 07 01633



			001
--	--	--	-----

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547:2009

☒ EN 55032:2012/AC:2013

☒ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☒ EN 50130-4:2011

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0579-R2
Page (10) of (63)

-
- | | | |
|---|----------------------------------|----------------------------------|
| ☐ VCCI V-3 / 2015.04 | ☐ Class A | ☐ Class B |
| ☐ AS/NZS CISPR22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2009 | | |
| ☐ IC Regulation ICES-003 : 2016 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
|
☐ RE- Directive 2014/53/EU | | |
|
☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
|
☐ EN 301 489-3 V1.6.1 | | |
|
☐ EN 301 489-17 V2.2.1 | | |
|
☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



2.1 Conducted Emissions at Mains Power Ports

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	EMC32	R & S	9.12.00	-
☐	EMI TEST RECEIVER	ESR3	R & S	101781	04, 27, 2018
☐	LISN	ENV216	R & S	101787	01, 11, 2018
☐	LISN	ESH2-Z5	R & S	100450	04, 27, 2018
☐	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 13, 2017

Test Conditions

Temperature: °C

Relative Humidity: %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

N/A



2.2 Conducted Emissions at Telecommunication Ports

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	EMC32	R & S	9.12.00	-
☐	EMI TEST RECEIVER	ESR3	R & S	101783	04, 27, 2018
☐	LISN	ENV216	R & S	101137	02, 03, 2018
☐	LISN	ENV216	R & S	101786	04, 27, 2018
☐	PULSE LIMITER	ESH3-Z2	R & S	101914	12, 13, 2017
☐	8-WIRE ISN CAT3	CAT3 8158	SCHWARZBECK	8158-0019	03, 29, 2018
☐	8-WIRE ISN CAT5	CAT5 8158	SCHWARZBECK	8158-0030	03, 29, 2018
☐	8-WIRE ISN CAT6	NTFM 8158	SCHWARZBECK	8158-0029	08, 11, 2017

Test Conditions

Temperature: °C
Relative Humidity: %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

N/A



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Aug. 14, 2017

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SAC #4(10 m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 18, 2018
☒	AMPLIFIER	SCU 01	R & S	100603	12, 13, 2017
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	716	11, 28, 2018

Test Conditions

Temperature: 24,5 °C
Relative Humidity: 57,2 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Aug. 17, 2017

Test Location

SEMI ANECHOIC CHAMBER #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	e3	AUDIX	8.083b	-
☒	EMI TEST RECEIVER	ESU26	R & S	100552	04, 19, 2018
☒	PREAMPLIFIER	8449B	AGILENT	3008A01729	05, 31, 2018
☐	ATTENUATOR	8491A	HP	35496	03, 24, 2018
☒	LOG-PERIODIC ANTENNA	STLP 9149	SCHWARZBECK	9149-255	05, 17, 2018

Test Conditions

Temperature: 23,1 °C

Relative Humidity: 49,6 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.5 Harmonic Current Emissions

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	dpa.control	EM TEST	5.4.11.0	-
☐	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	08, 07, 2018
☐	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	08, 07, 2018

Test Conditions

Relative Humidity: °C
 %

Classification of Equipment for Harmonic Current Emissions

- ☐ Class A
- ☐ Class B
- ☐ Class C(Below 25 W)
- ☐ Class C(Above 25 W)
- ☐ Class D

Test Results

The requirements are:

- ☐ PASS
- ☐ NOT PASS
- ☒ NOT APPLICABLE

Remarks

-

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011 Alarm systems-Part 4: Electromagnetic compatibility Product family
standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change,
and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.

For component of CCTV systems, where the status is monitored by observing the TV picture,
then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:

- (a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
- (b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could still be used; and
- (c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test, after the conditioning.



3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Aug. 18, 2017

Test Location

EMS-ESD: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMS Test S/W	-	-	-	-
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS01Z0454	10, 14, 2017
☒	HCP	-	KES	-	-
☒	VCP	-	KES	-	-

Test Conditions

Temperature: 23,6 °C
Relative Humidity: 51,7 %
Atmospheric Pressure: 99,0 kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0579-R2
Page (20) of (63)

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge

Discharge Voltage:	Contact	Air	HCP	VCP
	☐ 2 kV	☒ 2 kV	☐ 2 kV	☐ 2 kV
	☐ 4 kV	☒ 4 kV	☐ 4 kV	☐ 4 kV
	☒ 6 kV	☐ 6 kV	☒ 6 kV	☒ 6 kV
	☐ 8 kV	☒ 8 kV	☐ 8 kV	☐ 8 kV
	☐ 15 kV	☐ 15 kV	☐ 15 kV	☐ 15 kV




Notes: HCP: Horizontal coupling plane

VCP: Vertical coupling plane

Required Performance Criteria: ☒ Complied

Location of Discharge:

Air
Contact

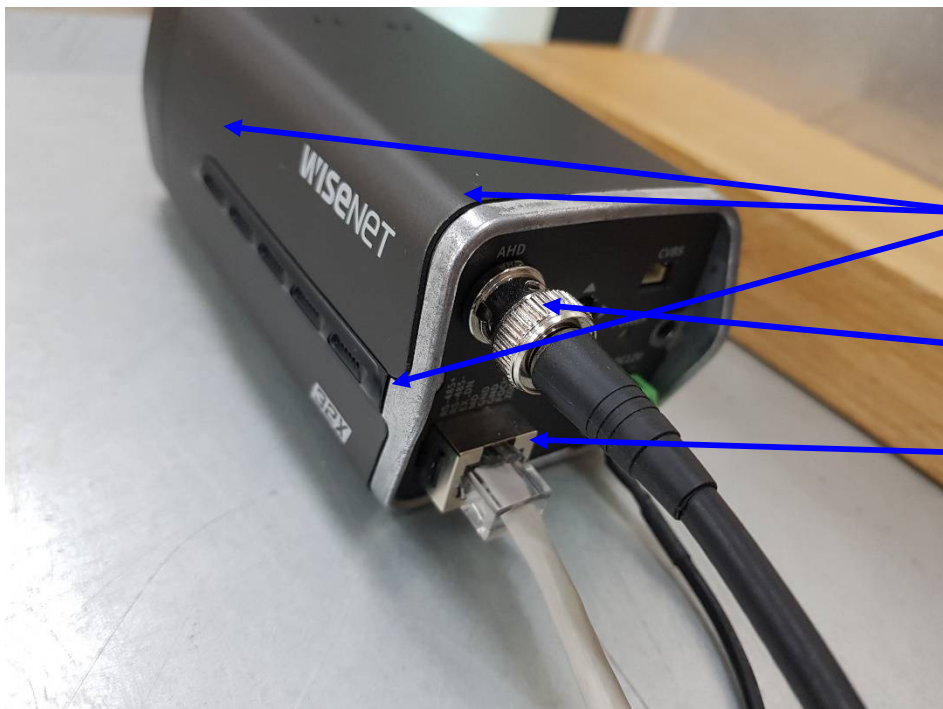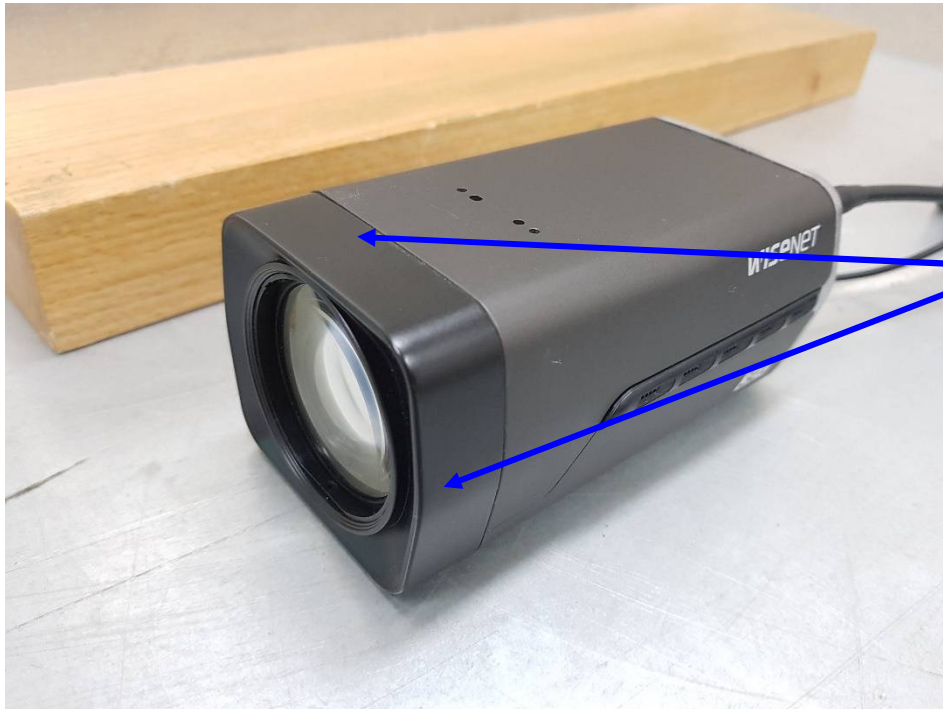

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0579-R2
Page (22) of (63)

Test Data**Indirect Discharge**

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Enclosure	Contact Discharge	Complied	-
2	BNC	Contact Discharge	Complied	-
3	RJ-45	Contact Discharge	Complied	-

Note: "Blank" = Not performed

Observations:
Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.



3.2 Radiated Electric Field Immunity

Reference Standard

EN 61000-4-3:2006 +A2:2010

Test Date

Aug. 16, 2017

Test Location

EMS-RS: ☐ SEMI ANECHOIC CHAMBER #2 ☒ SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	EMC32	R & S	10.10.02	-
☒	SIGNAL GENERATOR	SMB 100A	R & S	177586	08, 07, 2018
☒	BROADBAND AMPLIFIER	BBA100	R & S	101239	08, 07, 2018
☒	BROADBAND AMPLIFIER	100S1G6M1	AR	579931	08, 07, 2018
☒	POWER METER	NRP2	R & S	103475	08, 07, 2018
☒	AVG POWER SENSOR	NRP-Z91	R & S	102526	08, 07, 2018
☒	AVG POWER SENSOR	NRP-Z91	R & S	102527	08, 07, 2018
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
☒	DIRECTIONAL COUPLER	KYDC-D1070-DX40	KY TELECOM	KY150001	08, 07, 2018
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM, INC	781	05, 02, 2019

Test Conditions

Temperature: 24,2 °C
Relative Humidity: 52,9 %
Atmospheric Pressure: 99,1 kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-17T0579-R2

Page (24) of (63)

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☒ 1 s ☐ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0579-R2
Page (25) of (63)

Test Data

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4:2012

Test Date

Aug. 17, 2017

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 28, 2017
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 28, 2017
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	11, 28, 2017
☒	CDN	CNV 508N1	EM TEST	P1610176296	11, 29, 2017

Test Conditions

Temperature: 25,4 °C
Relative Humidity: 53,0 %
Atmospheric Pressure: 98,8 kPa

Test Specifications

Pulse Amplitude & Polarity:
(AC Power Lines) ☐ ± 1.0 kV ☒ ± 2.0 kV
☐ ± 4.0 kV

Pulse Amplitude & Polarity:
(Other supply / Signal Lines) ☐ ± 0.5 kV ☒ ± 1.0 kV
☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☐ 5 klz ☒ 100 klz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0579-R2
Page (27) of (63)

Test Data

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L1 – L2	Complied	Complied

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
BNC	Complied	Complied
RJ-45	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.



3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014

Test Date

Aug. 17, 2017

Test Location

EMS-Surge: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 28, 2017
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 28, 2017
☒	CDN	CNV 508N1	EM TEST	P1610176296	11, 29, 2017

Test Conditions

Temperature: 25,4 °C
Relative Humidity: 53,0 %
Atmospheric Pressure: 98,8 kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0579-R2
Page (29) of (63)

Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common mode and 2 ohm for differential mode

Surge Amplitude :

Common Mode

☐ (0,5 / 1,0 / 2,0) kV

Differential Mode

☐ (0,5 / 1,0) kV

Number of Surges:

☐ 5 surges per angle

Angle:

☐ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☐ Positive & Negative

Repetition Rate:

☐ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☐ Complied

Other supply / Signal Lines

Source Impedance: 42 ohm for common mode

Surge Amplitude:

Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-17T0579-R2

Page (30) of (63)

Test Data☐ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Signal Lines☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
BNC	Complied	Complied
RJ-45	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

RemarksPASS Required Performance Criteria.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Aug. 18, 2017

Test Location

EMS-CS: Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	5.3.11	-
☒	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	11, 28, 2017
☒	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 28, 2017
☒	CDN	CDN M016	TESEQ	43694	11, 28, 2017
☐	CDN	CDN M016	TESEQ	43697	11, 28, 2017
☐	CDN	CDN T800	TESEQ	42800	11, 28, 2017
☒	EM CLAMP	KEMZ 801A	TESEQ	44099	11, 30, 2017

Test Conditions

Temperature: 24,5 °C
Relative Humidity: 52,6 %
Atmospheric Pressure: 99,0 kPa



Test Specifications

- Frequency range: ☒ 150 kHz to 100 MHz ☐ 150 kHz to 80 MHz
- Voltage Level: ☐ 1 Vrms ☐ 3 Vrms
☒ 10 Vrms
- Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)
- Frequency step: ☒ 1 % step
- Dwell Time: ☒ 1 s ☐ 3 s
- Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-17T0579-R2

Page (33) of (63)

Test Data☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐ M2, ☐ M3)	-

☒ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L1 - L2	CDN (☒ M2, ☐ M3)	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
BNC	EM Injection Clamp	Complied
RJ-45	CDN T800	Complied

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:

Complied - No degradation of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**PASS Required Performance Criteria.



3.6 Voltage Dips and Short Interruptions

Reference Standard

EN 61000-4-11:2004

Test Date

N/A

Test Location

EMS-Voltage dip: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☐	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 28, 2017
☐	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 28, 2017
☐	CDN	CNV 508N1	EM TEST	P1610176296	11, 29, 2017

Test Conditions

Temperature: °C
Relative Humidity: %
Atmospheric Pressure: kPa



Test Specifications & Observations/Remarks

(Test Voltage : 50 Hz)

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☐ 20 % dip	☐ 250 / 5 000	<u>N/A</u>
☐ 30 % dip	☐ 25 / 500	<u>N/A</u>
☐ 60 % dip	☐ 10 / 200	<u>N/A</u>
☐ 100 % dip	☐ 250 / 5 000	<u>N/A</u>

- Voltage variations

☐ Unom + 10 %	☐ 253.0 V (ac)	<u>N/A</u>
☐ Unom - 15 %	☐ 195.5 V (ac)	<u>N/A</u>

Observations:
Complied – No degradation of function

Test Results

- ☐ PASS Required Performance Criteria
- ☐ NOT PASS Required Performance Criteria
- ☐ NOT APPLICABLE

Remarks

N/A



APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

N/A



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0579-R2
Page (37) of (63)

[NEUTRAL]

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0579-R2
Page (38) of (63)

Conducted Emissions at Telecommunication Ports

[10 Mbps]

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0579-R2
Page (39) of (63)

[100 Mbps]

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-17T0579-R2

Page (40) of (63)

Radiated Electric Field Emissions(Below 1 GHz)

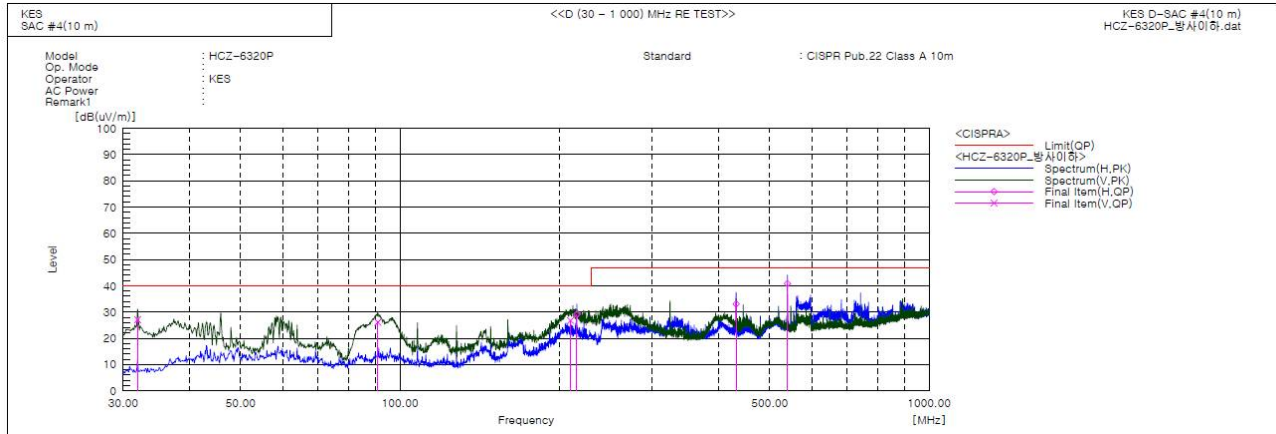

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	31.940	V	59.1	-32.0	27.1	40.0	12.9	150.0	316.0	
2	90.868	V	56.2	-30.1	26.1	40.0	13.9	150.0	77.0	
3	210.062	V	53.3	-26.5	26.8	40.0	13.2	141.0	201.0	
4	215.998	H	55.5	-26.4	29.1	40.0	10.9	400.0	355.0	
5	432.065	H	52.5	-19.4	33.1	47.0	13.9	200.0	350.0	
6	539.996	H	56.8	-16.0	40.8	47.0	6.2	231.0	264.0	

◆ Calculation

Result(QP) [dB(uV/m)] = (Reading(QP)[dB(uV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(uV/m)] - Result(QP) [dB(uV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0579-R2
Page (41) of (63)

Radiated Electric Field Emissions(Above 1 GHz)

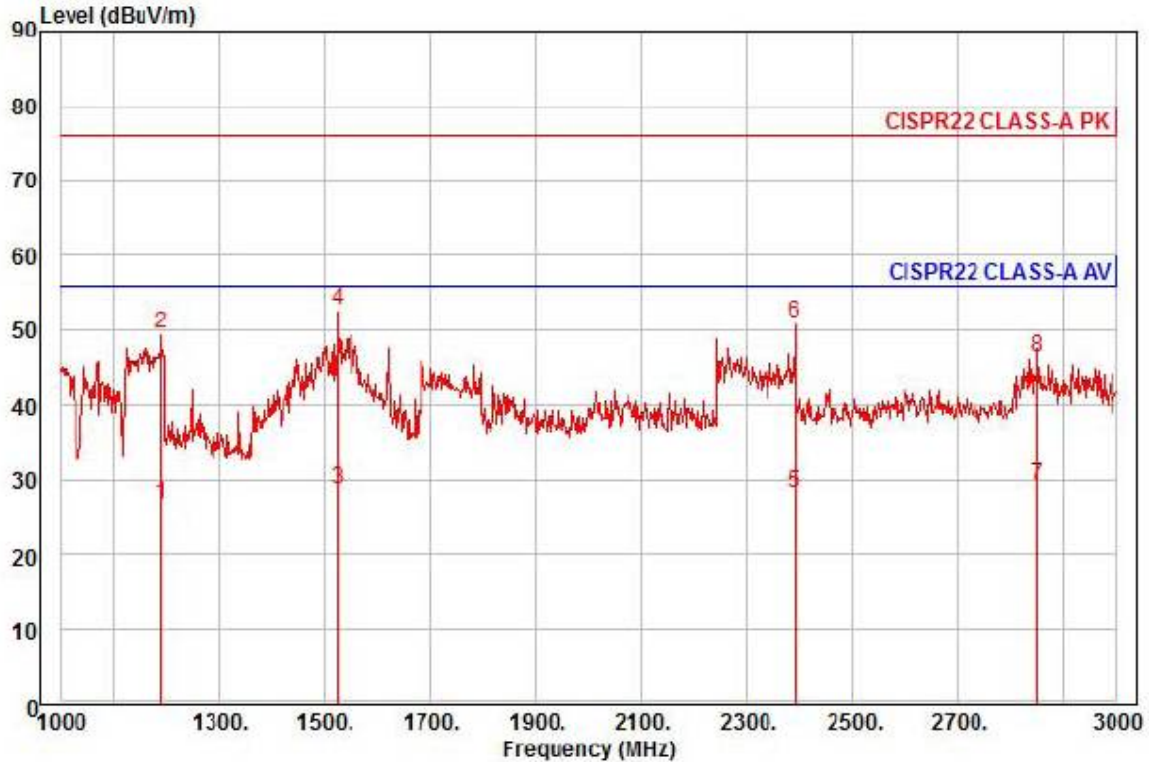

Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HCZ-6320P
Mode :
Memo :

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1190.00	32.37	23.08	7.25	35.89	54	56.00	-29.19	horizontal	Average
2	1190.00	55.16	23.08	7.25	35.89	54	76.00	-26.40	horizontal	Peak
3	1524.00	31.97	24.12	8.29	35.59	26	56.00	-27.21	horizontal	Average
4 pp	1524.00	56.02	24.12	8.29	35.59	26	76.00	-23.16	horizontal	Peak
5	2392.00	25.65	27.20	10.58	35.32	46	56.00	-27.89	horizontal	Average
6	2392.00	48.58	27.20	10.58	35.32	46	76.00	-24.96	horizontal	Peak
7 av	2850.00	23.76	29.08	11.74	35.50	354	56.00	-26.92	horizontal	Average
8	2850.00	40.93	29.08	11.74	35.50	354	76.00	-29.75	horizontal	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0579-R2
Page (42) of (63)

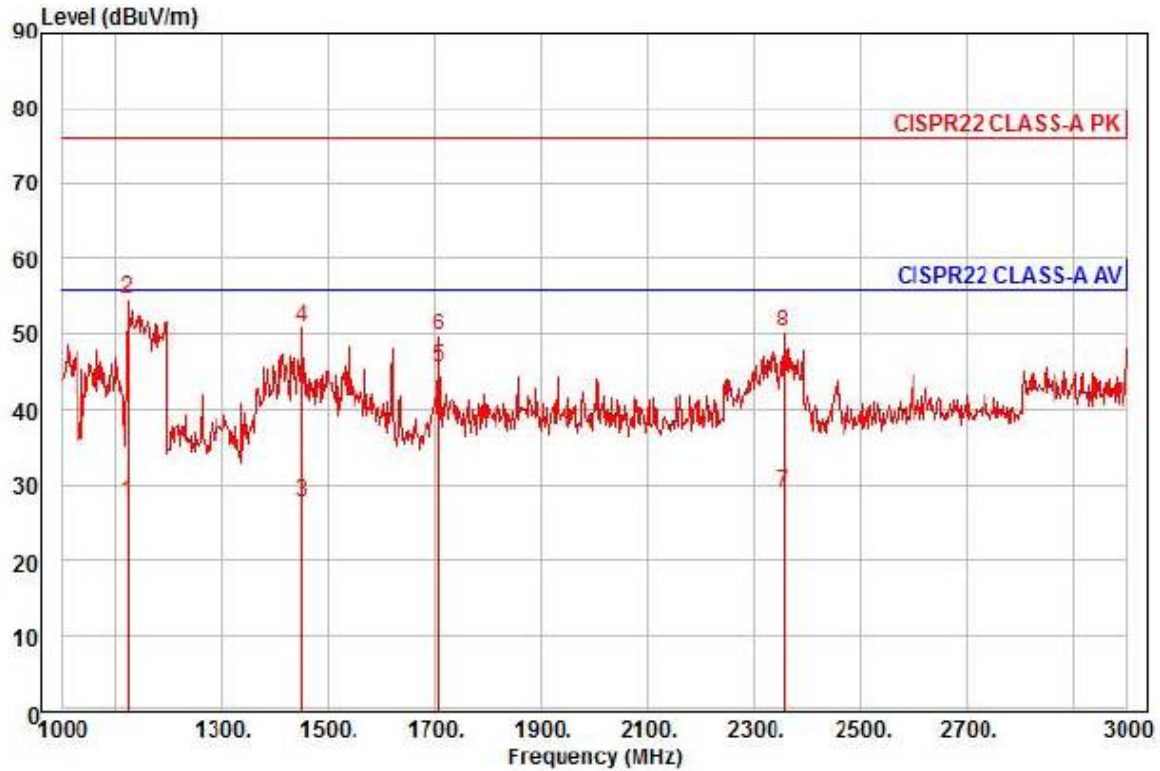

Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HCZ-6320P
Mode :
Memo :

		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1122.00	33.82	22.87	7.03	35.95	13	56.00	-28.23	vertical	Average
2 pk	1122.00	60.65	22.87	7.03	35.95	13	76.00	-21.40	vertical	Peak
3	1452.00	31.45	23.87	8.08	35.66	16	56.00	-28.26	vertical	Average
4	1452.00	54.64	23.87	8.08	35.66	16	76.00	-25.07	vertical	Peak
5 pp	1708.00	47.29	24.85	8.82	35.43	176	56.00	-10.47	vertical	Average
6	1708.00	51.55	24.85	8.82	35.43	176	76.00	-26.21	vertical	Peak
7	2358.00	26.64	27.10	10.50	35.31	35	56.00	-27.07	vertical	Average
8	2358.00	47.97	27.10	10.50	35.31	35	76.00	-25.74	vertical	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0579-R2
Page (43) of (63)

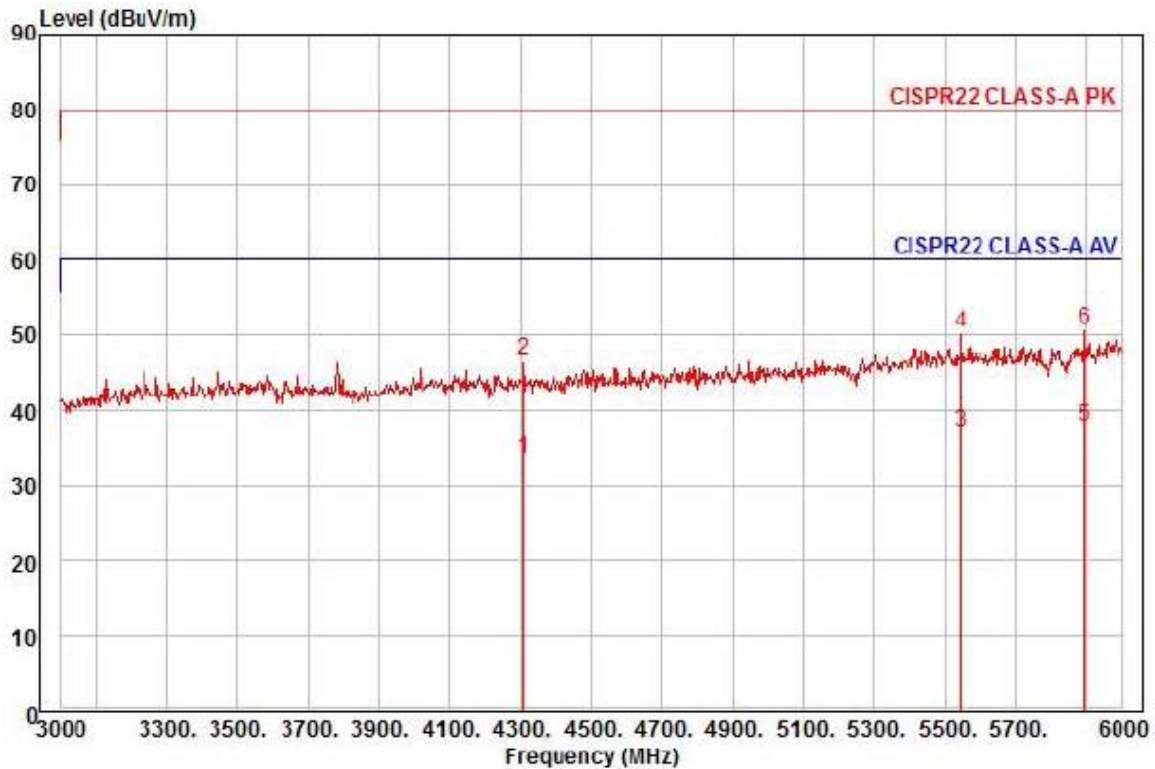

Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HCZ-6320P
Mode :
Memo :

		Read	Ant	Cable	Preamp	TPos	Limit	Over		
	Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	4308.00	22.06	32.41	14.62	35.39	136	60.00	-26.30	horizontal	Average
2	4308.00	34.88	32.41	14.62	35.39	136	80.00	-33.48	horizontal	Peak
3	5544.00	20.66	35.44	16.68	35.66	287	60.00	-22.88	horizontal	Average
4	5544.00	33.90	35.44	16.68	35.66	287	80.00	-29.64	horizontal	Peak
5 pp	5895.00	20.18	35.96	17.33	35.68	223	60.00	-22.21	horizontal	Average
6 pk	5895.00	33.05	35.96	17.33	35.68	223	80.00	-29.34	horizontal	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0579-R2
Page (44) of (63)

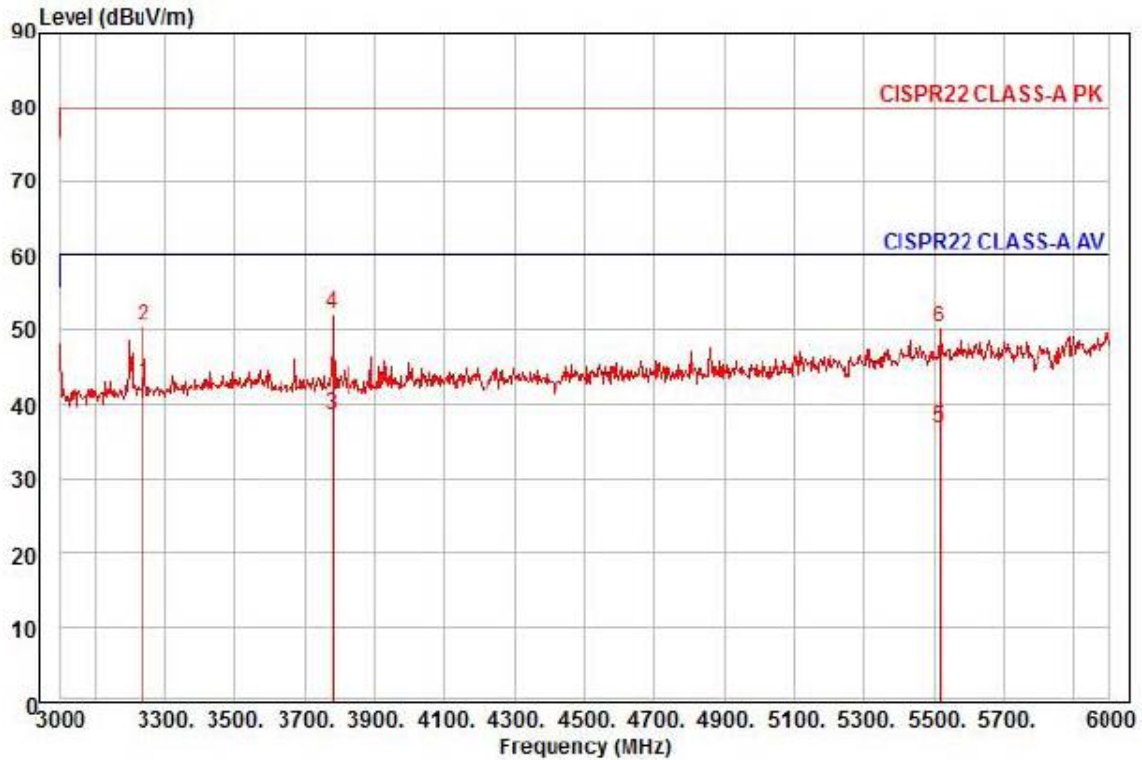

Site : chamber
Condition: CISPR22 CLASS-A PK 3m STLP9149(RRA CAL 2017-05-18) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : HCZ-6320P
Mode :
Memo :


		Read Freq	Ant Level Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark	
		MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	pp	3240.00	35.25	30.42	12.73	35.49	190	60.00	-17.09	vertical	Average
2		3240.00	42.85	30.42	12.73	35.49	190	80.00	-29.49	vertical	Peak
3		3780.00	28.45	31.91	13.60	35.34	193	60.00	-21.38	vertical	Average
4	pk	3780.00	42.03	31.91	13.60	35.34	193	80.00	-27.80	vertical	Peak
5		5517.00	20.52	35.40	16.64	35.66	351	60.00	-23.10	vertical	Average
6		5517.00	33.82	35.40	16.64	35.66	351	80.00	-29.80	vertical	Peak

◆ Calculation

Over Limit [dB] = (Read Level[dB μ V] + Ant Factor[dB/m] + Cable Loss [dB] - Preamp Factor [dB])
- Limit Line[dB μ V]

Over Limit : Margin, Read Level : Reading value, Ant Factor : ANT Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0579-R2
Page (47) of (63)

Test Data - Voltage Fluctuations**Maximum Flicker results**

	EUT values	Limit	Result
Pst	N/A		
Plt			
dc [%]			
dmax [%]			
Tmax [s]			

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0579-R2
Page (48) of (63)

Test Setup Photos and Configuration

Conducted Voltage Emissions

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0579-R2
Page (49) of (63)


Conducted Telecommunication Emissions

N/A

N/A


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

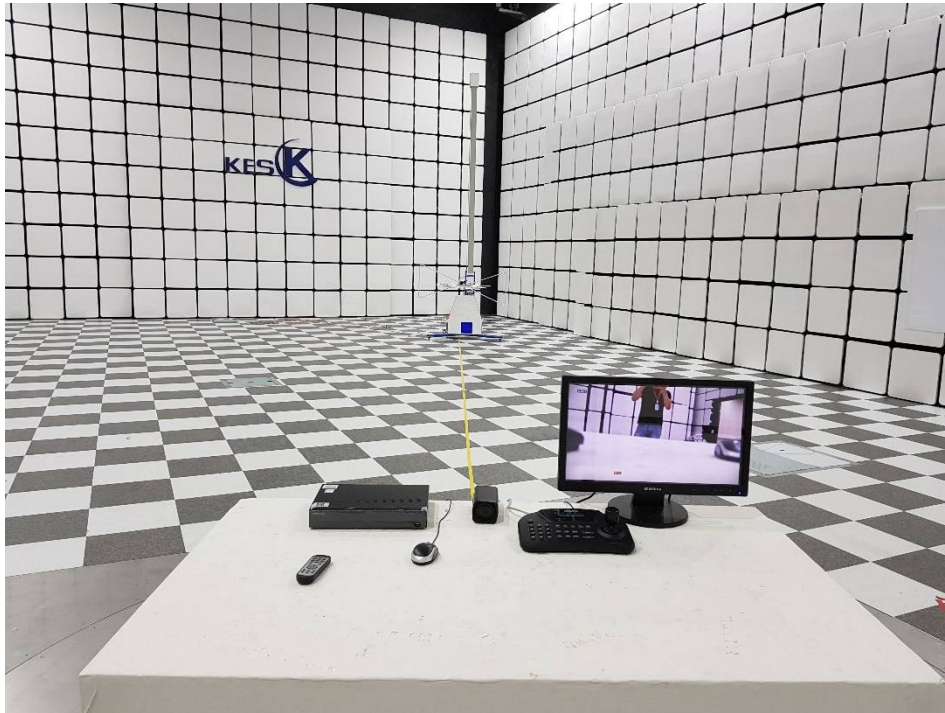

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

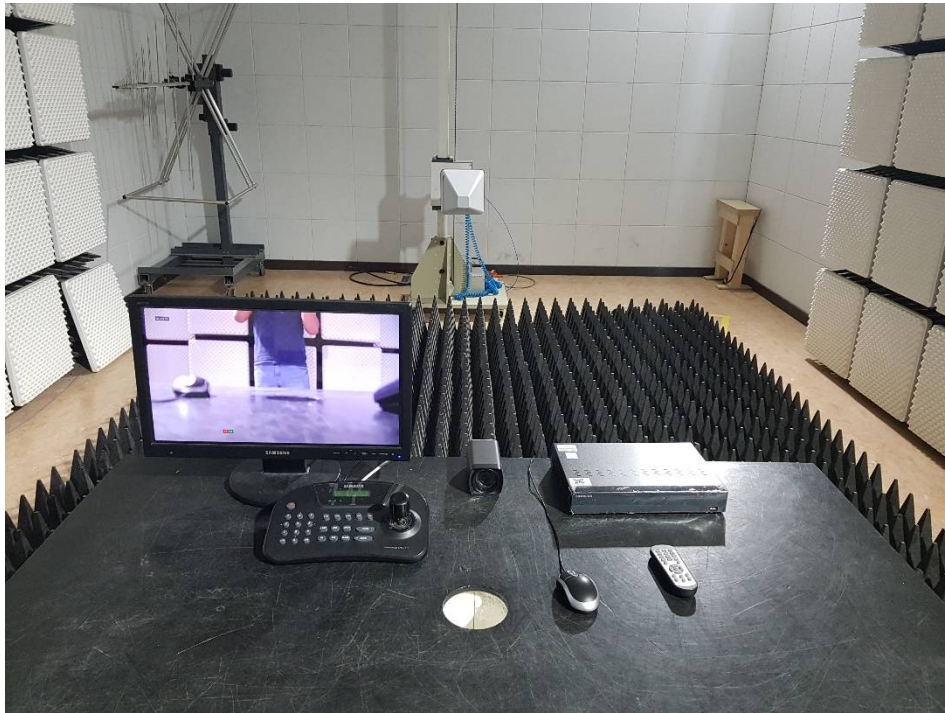

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0579-R2
Page (52) of (63)

Harmonic Current Emissions and Voltage Fluctuations and Flicker


N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Electrostatic Discharge



Radiated Electric Field Immunity

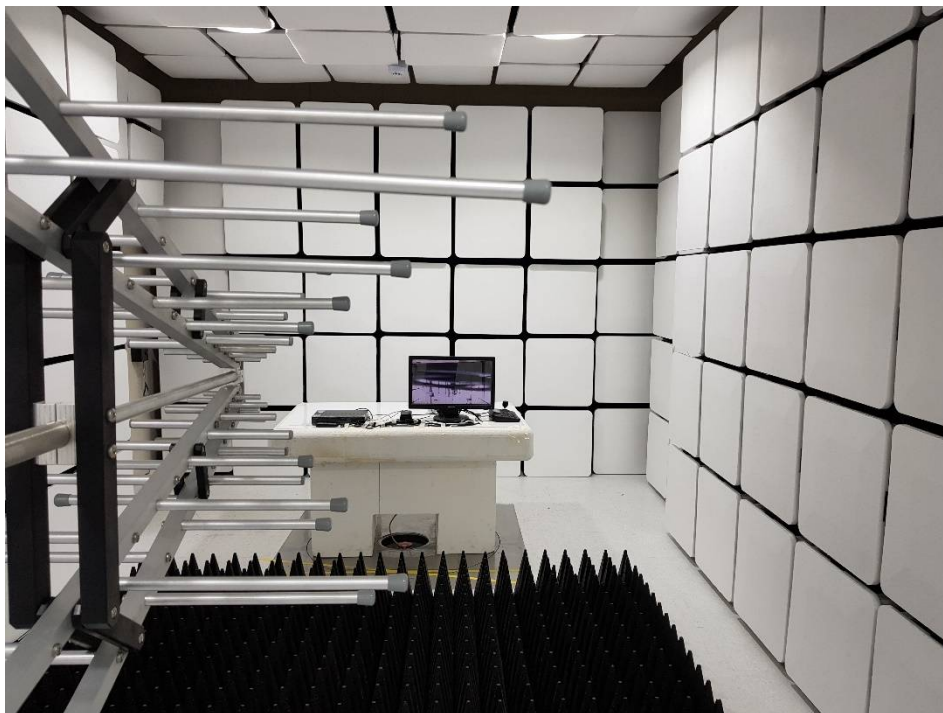

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Electrical Fast Transients/Bursts




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Surge Transients



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Conducted Disturbance

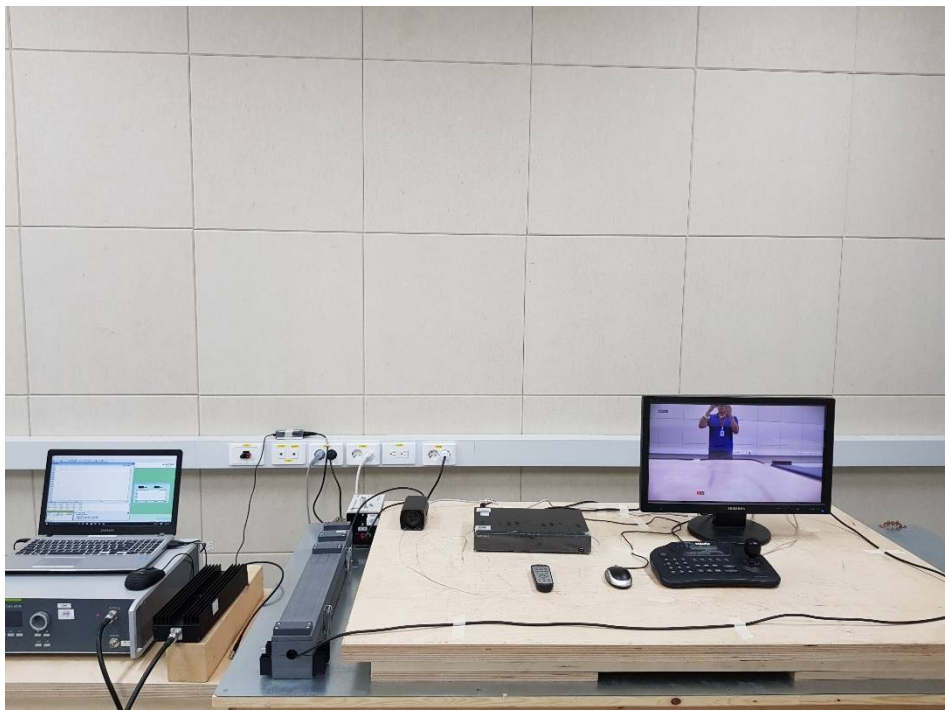

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-17T0579-R2
Page (57) of (63)

Voltage Dips and Short Interruptions

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal Photographs


(Internal View)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – board 1

(Top)

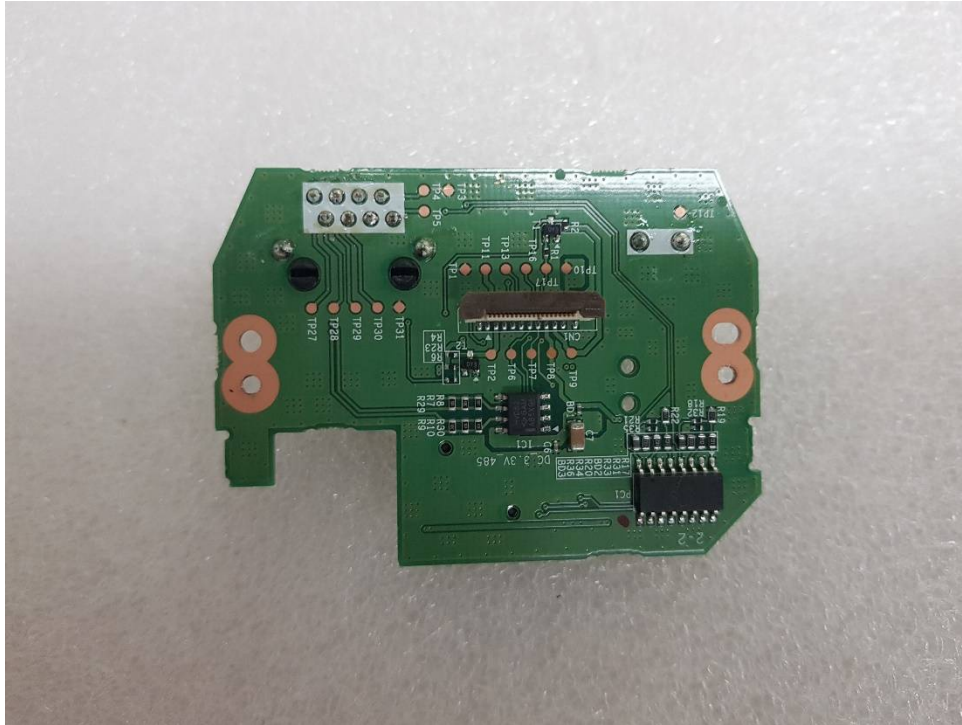

(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – board 2

(Top)




(Bottom)

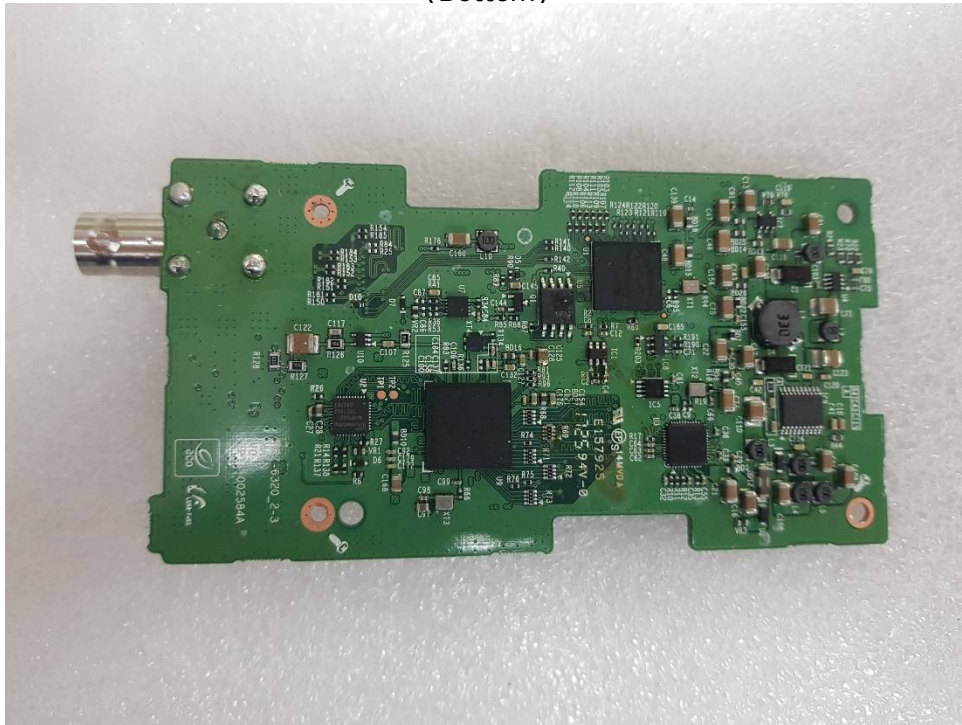


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – board 3

(Top)

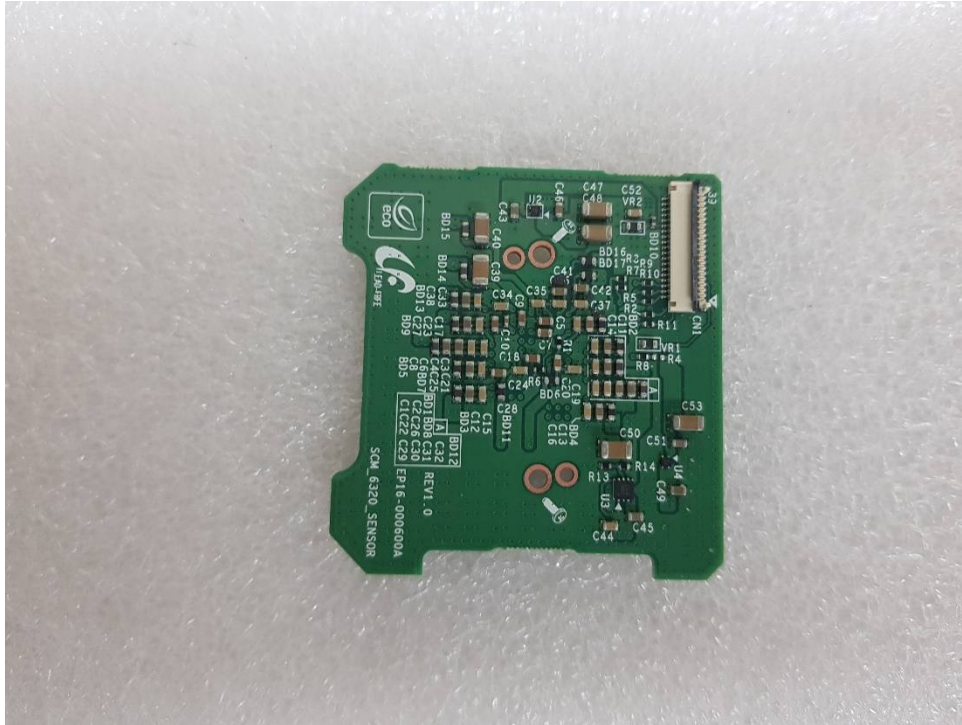

(Bottom)

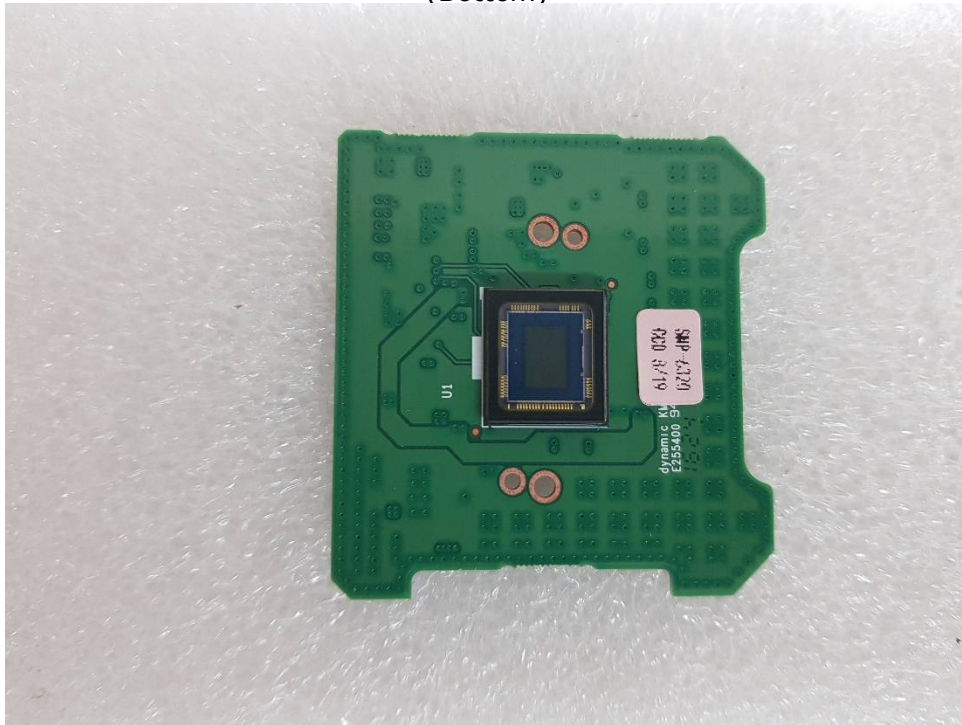

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

Label and Location



CCTV CAMERA

Model No : HCZ-6320

Manufacturer : HANWHA TECHWIN(TIANJIN)CO., LTD

Made in China

