



EMC TEST REPORT For CE

Test Report No. : KES-EM-21T0314-R2
Date of Issue : Feb. 24, 2023
Product name : DVR
Model/Type No. : HRX-435
Variant Model : -
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Apr. 09, 2021
Test date : Apr. 20, 2021 ~ Apr. 23, 2021
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Seon Ho, Choi
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0314-R2
Page (2) of (57)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
May. 03, 2021	KES-EM-21T0314	Issued
Jan. 06, 2023	KES-EM-21T0314-R1	Test Regulations update.
Feb. 24, 2023	KES-EM-21T0314-R2	Change the Applicant and manufacturer at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	6
1.2	Variant Model Differences.....	6
1.3	Device Modifications	6
1.4	Equipment Under Test.....	6
1.5	System Configuration	6
1.6	Support Equipments	7
1.7	External I/O Cabling	8
1.8	EUT Operating Mode(s)	8
1.9	Configuration.....	9
1.10	Remarks when standards applied	10
1.11	Calibration Details of Equipment Used for Measurement	10
1.12	Test Facility	10
1.13	Laboratory Accreditations and Listings	10
2.0	Test Regulations.....	11
2.1	Conducted Emissions at Mains Power Ports	13
2.2	Conducted Emissions at Telecommunication Ports	14
2.3	Radiated Electric Field Emissions(Below 1 GHz)	15
2.4	Radiated Electric Field Emissions(Above 1 GHz)	16
2.5	Harmonic Current Emissions	17
2.6	Voltage Fluctuations and Flicker	18
3.0	Criteria for compliance	19
3.1	Electrostatic Discharge.....	21
3.2	Radiated Electric Field Immunity	25
3.3	Electrical Fast Transients/Bursts	28
3.4	Surge Transients	30
3.5	Conducted Disturbance	33
3.6	Voltage Dips and Short Interruptions	35
APPENDIX A – TEST DATA.....		37
Conducted Emissions at Mains Power Ports.....		37
Conducted Emissions at Telecommunication Ports		39
Radiated Electric Field Emissions(Below 1 GHz)		40
Radiated Electric Field Emissions(Above 1 GHz).....		41
Harmonic Current Emissions and Voltage Fluctuations and Flicker		42
Test Setup Photos and Configuration		45
Conducted Emissions at Mains Power Ports.....		45
Conducted Emissions at Telecommunication Ports		46
Radiated Electric Field Emissions(Below 1 GHz)		47
Radiated Electric Field Emissions(Above 1 GHz).....		48
Harmonic Current Emissions and Voltage Fluctuations and Flicker		49
Electrostatic Discharge		50
Radiated Electric Field Immunity		50
Electrical Fast Transients/Bursts		51
Surge Transients.....		51
Conducted Disturbance.....		52
Voltage Dips and Short Interruptions.....		52
EUT External Photographs		53
EUT Internal Photographs		54



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0314-R2
Page (4) of (57)

1.0 General Product Description

Main Specifications of EUT are:

Display		
Analog camera	Inputs	4CH(1Vp-p 75ohm, BNC)
	Signal Type	AHD(8MP, 5MP, 4MP, 1080p, 720p)
Network camera	Inputs	HDTVI(8MP, 5MP, 4MP, 1080p, 720p) Max. 6CH
	Resolution	8MP ~ CIF
	Protocols	SUNAPI(Wisenet), ONVIF
Live	Local Display	HDMI: 3840 x 2160, 1920x1080, 1280x720 VGA: 1920x1080, 1280x720
	Multi Screen Display	[Local monitor] 1 / 2H / 2V / 3V / 4 / 6(1+5) / 6(3x2) / Auto sequence [Web] 1 / 4
	Resolution	[Analog Camera(NTSC/PAL)] - 8MP(15/12fps), 5MP(20/12fps), 4MP(30/25fps), 2MP(30/25fps), 1MP(30/25fps), 960H(or 720H)(30/25fps) * per CH [Network Camera] - Typ. 2MP(120fps)
Performance		
Operating System	Embedded	Linux
Record	Compression	H.265, H.264, MJPEG
	Record Rate(Analog)	Analog Camera(NTSC/PAL) (Main Stream) 8MP 8/8fps CH, 5M 12/12fps CH, 4M 15/12fps CH, 2M 30/25fps CH, 720p 30/25fps/CH, SD 30/25fps/CH (Sub Stream) 720p or higher : 640x360 full fps/CH, SD signal : upto SD full fps/CH * The maximum recording frame rate depends on the frame rate of the input camera.
	Recording Bandwidth	Max. 25Mbps
	Resolution	8MP ~ CIF
	Mode	Manual, Schedule (Continuous/Event), Event(Pre/Post), Dual Track
Event	Event Trigger	Alarm Input Analog Camera : Video Loss, Motion Detection, Tampering Network Camera : Camera Event (Sensor, MD, Video analytics), VA event (Tampering, Enter / Exit, Passing, Virtual- line, (Dis)Appear, Face Detection, Audio detection), Defocus camera event
	Event Action	E-mail, PTZ preset, Alarm out, Buzzer, Monitor out
Search & Play	Playback Bandwidth	Max. 32Mbps (6CH simultaneously)
	Resolution	8MP ~ CIF
	Playback Control	Fast Forward/Backward (x2,x4,x8,x16,x32,x64, x128, x256) Slow Forward/Backward (x1/2,x1/4,x1/8) ※Move one step up/down
Storage	Supported HDD	Up to 6TB
	HDD Slot	SATA Zee(Max 12TB)
Backup	File backup	BU, EXE(Include Player), AVI(Webviewer only)
	Function	Max. 6 CH play, Date-time/title display
Network		
Protocol		TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), PPPoE, SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)
DDNS		Wisenet DDNS
Transmission speed		Analog Camera(NTSC/PAL) (Main Stream) 8MP 8/8fps CH, 5M 12/12fps CH, 4M 15/12fps CH, 2M 30/25fps CH, 720p 30/25fps/CH, SD 30/25fps/CH, 720p 30/25fps/CH, SD 30/25fps/CH (Sub Stream) 720p or higher : 640x360 full fps/CH, SD signal : upto SD full fps/CH * The maximum recording frame rate depends on the frame rate of the input camera.
Audio	Input/Output	4 Line in / 1 Line out
	Compression	G.711 (N/W Cam G.711, 726)
	Audio Communication	2-Way
Max Remote Users		Search(3), Live Unicast(10), Multicast(20)
Security		IP address filtering, User access log, 802.1x Authentication, Encryption (ID/PW, Recording, Transmission, Backup) Device Certificate(Hanwha Techwin Root CA)
Web viewer	Supported OS	Window 10, Mac OS X (10.15 or above)
	Supported browser	Google Chrome 88 or above, MS Edge 88 or above, Safari 13 or above *support Plug-in free Web
Viewer Software		SSM, Webviewer, Smart Viewer, Wisenet mobile Support SDK/CGI(SUNAPI) for integration to 3rd party VMS

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0314-R2

Page (5) of (57)

Functions		
Camera Setup	Register	Auto, Manual
	Item	None
PTZ	Control	Via GUI, Webviewer, SSM, SmartViewer, Wisenet Mobile Viewer, System Controller
	Preset	300 presets
Smart phone	Support Model	iOS, Android
	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)
	Control	Live(4ch) : Multi-Profile Support Playback(4Ch Multi Playback, Max 2MP) Event push
	Max. Remote Users	Search(3), Live Unicast(10)
Coaxial Control		CVBS(Pelco-C)/AHD/CVI/TVI
Interface		
Front	Indicator	LED(Status indicator) : Power(1), HDD Action(1), Alarm(1), Record(1), Network(1), Backup(1)
Storage		None
Reset		Switch(1EA)
HDD Key Lock		None
HDMI		1EA
VGA		1EA
BNC		4CH In / 1CH Out(Spot Output)
DP		None
e-SATA		None
Audio		Out(1EA, RCA, Line)
Ethernet		RJ-45(10/100 BASE-T)
Alarm		In 4EA, Out 2EA - Relay Out1(NO/NC/COM) - Relay Out2(NO/COM)
USB		2EA(Front/Rear USB2.0)
GPS		None
WiFi		None
Serial(Protocols)		RS-485/422 (Samsung-T/Pelco-D/Pelco-p) * for PTZ
Power inlet		1EA DC Input Jack
System		
Log	Log List	Max. 20,000 (System Log, Event Log each)
Language		English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai
Environmental		
Operating Temperature		0°C to +40°C(+32°F to +104°F)
Operating Humidity		20% ~ 85% RH
Certification		UL, CE, FCC, KC
Electrical		
Power Input		DC12V
Power Consumption		Max. 40W (6T HDD 2ea)
PoE Budget		None
Mechanical		
Color / Material		Black / Metal
Dimension (WxHxD)		370.0x 44.0 x 320mm(14.57" x 1.73" x 12.6")
Weight		Approx. 2.4Kg (2TB HDD 1ea)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 230 V, 50 Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
DVR	HRX-435	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT

1.5 System Configuration

Description	Model Number	Serial Number	Manufacturer	Remarks
Mouse	MOKJUO	-	Primax Electronics Ltd.	-
HDD	ST2000VX003	Z52B1P7Q	SEAGATE	2 TB
DVR Adaptor	KPL-048-VI	-	Channel Well Techonolohgy (Guangzhou) Co.,Ltd.	-

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0314-R2

Page (7) of (57)

1.6 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Camera	HCD-7030RA	-	HANWHA VISION VIETNAM COMPANY LIMITED	
Camera Adaptor	MC12D-1200500	-	Shen zhen MaCable Technology co.,ltd	
Notebook	ProBook4430s	-	HP	-
Notebook Adapter	SeriesPPP0009H	-	CHICONY POWER TECHNOLOGY (SUZHOU) CO.,LTD,	-
Alarm IN	-	-	-	-
Alarm OUT	-	-	-	-
Monitor1	SMT-2232	C95V67VF900025B	Weiha Daewoo Electronics Co., Ltd.	-
Monitor2	HSTND-7041-L	6CM6020YQQ	HP Inc.	-
Monitor3	S24E370DL	0NTWHTPH200179Y	Samsung Electronics Co., Ltd.	
Monitor3 Adaptor	HP14300	-	Haneulcomplus Co., Ltd.	-
iPad	A1432	DQXJWFHDF193	APPLE .Inc	-
Speaker	BR1000A CUVE	-	Britz	-
Controller	SPC-1010	C50E67WG10100F	SamSung Techwin Co.,Ltd.	-
Controller Adaptor	RS-AB1000	-	Dongguan Jinhuasheng Power Technology Co.,Ltd.	-
USB Memory	-	-	Sandisk	32 GB

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.7 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
DVR (EUT)	NETWORK	Notebook	RJ-45	3.5	U
	ALARM OUT	Alarm OUT	Alarm IN	3.0	U
	ALARM IN	Alarm IN	Alarm OUT	3.0	U
	RS485	Controller	2 PIN	3.0	U
	Audio OUT	Speaker	Audio IN	1.4	U
	Audio IN	Smartphone	Audio OUT	1.6	U
	USB	USB Memory	USB	-	-
	VIDEO IN	Camera	BNC	3.0	S
	SPOT	Monitor1	BNC	3.0	S
	VGA OUT	Monitor2	D-sub	1.6	U
	HDMI	Monitor3	HDMI	1.5	S
	USB	Mouse (EUT)	USB	1.8	U

* Unshielded=U, Shielded=S


1.8 EUT Operating Mode(s)

Test Mode	operating
Operation	the test was conducted while checking the camera video output from the laptop and making sure that they operate normally while performing a ping test.

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd

1.9 Configuration

■ AC Main
 □ DC Main

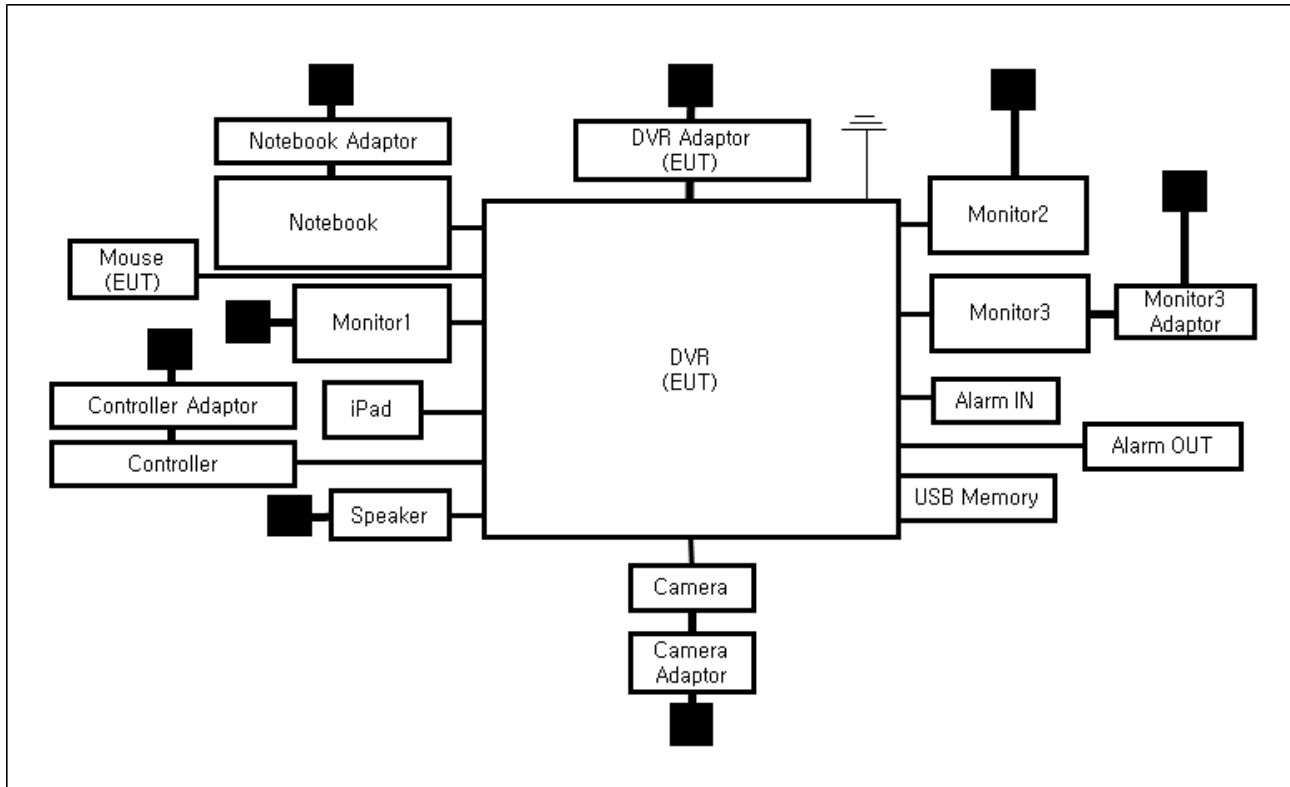

1.10 Remarks when standards applied

N/A

1.11 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.12 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.13 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547:2009

☒ EN 55032:2015+A11:2020

☒ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

☐ EN 61326-1:2013

☒ **EMC – Regulations 2016/1091**

☒ BS EN 55032:2015+A11:2020

☒ BS EN 50130-4:2011

☒ BS EN 61000-3-2:2014

☒ BS EN 61000-3-3:2013



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0314-R2
Page (12) of (57)

-
- | | | |
|---|----------------------------------|----------------------------------|
| ☐ VCCI-CISPR 32:2016 | ☐ Class A | ☐ Class B |
| ☐ AS/NZS CISPR32:2015 | ☐ Class A | ☐ Class B |
| ☐ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2017 | ☐ Class A | ☐ Class B |
| ☐ IC Regulation Issue 7 | | |
| ☐ CAN/CSA CISPR 32:17 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2017 | ☐ Class A | ☐ Class B |
| ☐ RE- Directive 2014/53/EU | | |
| ☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
| ☐ EN 301 489-3 V1.6.1 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
| ☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



2.1 Conducted Emissions at Mains Power Ports

Test Date

Apr. 20, 2021

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	01, 15, 2022
☒	LISN	ENV216	R & S	101787	12, 29, 2021
☒	LISN	ESH2-Z5	R & S	100450	12, 29, 2021
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 29, 2021

Test Conditions

Temperature: (23,6 ± 0,1) °C

Relative Humidity: (45,4 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0314-R2

Page (14) of (57)

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Apr. 20, 2021

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	01, 15, 2022
☒	LISN	ENV216	R & S	101787	12, 29, 2021
☒	LISN	ESH2-Z5	R & S	100450	12, 29, 2021
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 29, 2021
☒	8-WIRE ISN CAT3,5	ENY81	R & S	100174	12, 30, 2021
☐	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	12, 30, 2021
☐	CDN	CDNS502A	TESEQ	40431	12, 29, 2021

Test Conditions

Temperature: (23,6 ± 0,2) °C

Relative Humidity: (45,4 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Apr. 20, 2021

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2022
☒	AMPLIFIER	SCU 01	R & S	100603	11, 25, 2021
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
☒	ATTENUATOR	8491A	HP	32173	03, 10, 2022

Test Conditions

Temperature: (24,3 ± 0,3) °C

Relative Humidity: (46,0 ± 0,1) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Apr. 20, 2021

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 05, 2021
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	04, 07, 2022
☐	ATTENUATOR	8491A	HP	35496	03, 10, 2022
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 11, 2022

Test Conditions

Temperature: (24,4 ± 0,5) °C

Relative Humidity: (46,0 ± 0,2) % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.5 Harmonic Current Emissions

Test Date

Apr. 23, 2021

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	net.control	EM TEST	2.1.4	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2022
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: (24,0 ± 0,1) °C

Relative Humidity: (45,7 ± 0,1) % R.H.

Classification of Equipment for Harmonic Current Emissions

- ☒ Class A
☐ Class B
☐ Class C(Below 25 W)
☐ Class C(Above 25 W)
☐ Class D

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.6 Voltage Fluctuations and Flicker

Test Date

Apr. 23, 2021

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	net.control	EM TEST	2.1.4	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2022
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: (24,0 ± 0,5) °C
Relative Humidity: (45,7 ± 0,3) % R.H.

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:
EN 50130-4:2011 Alarm systems-Part 4: Electromagnetic compatibility Product family
standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such
Flickering of indicators occurs at a field strength of 3 V/m.
For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

- (a) there is no permanent damage or change to EUT
(e.g. no corruption of memory or changes to programmable setting etc.)
- (b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used;
and
- (c) there is no observable deterioration of the picture at 1 V/m.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change,
and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.
For component of CCTV systems, where the status is monitored by observing the TV picture,
then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:
(a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
(b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could
still be used; and
(c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the conditioning is permissible, providing that there is no
residual
change in the EUT or any change in outputs, which could be interpreted by associated
equipment
as a change. The EUT shall meet the acceptance criteria for the functional test, after the
conditioning.

3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Apr. 23, 2021

Test Location

EMS-ESD: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS01Z0454	02, 01, 2022
☒	HCP	-	KES	-	-
☒	VCP	-	Noise Ken	-	-

Test Conditions

Temperature: (23,9 ± 0,1) °C
Relative Humidity: (45,4 ± 0,0) % R.H.
Atmospheric Pressure: (100,3 ± 0,0) kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge

Discharge Voltage:	Contact ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV	Air ☒ 2 kV ☒ 4 kV ☐ 6 kV ☒ 8 kV ☐ 15 kV	HCP ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV	VCP ☐ 2 kV ☐ 4 kV ☒ 6 kV ☐ 8 kV ☐ 15 kV
--------------------	---	---	---	---



Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane


Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Location of Discharge:

Air
Contact

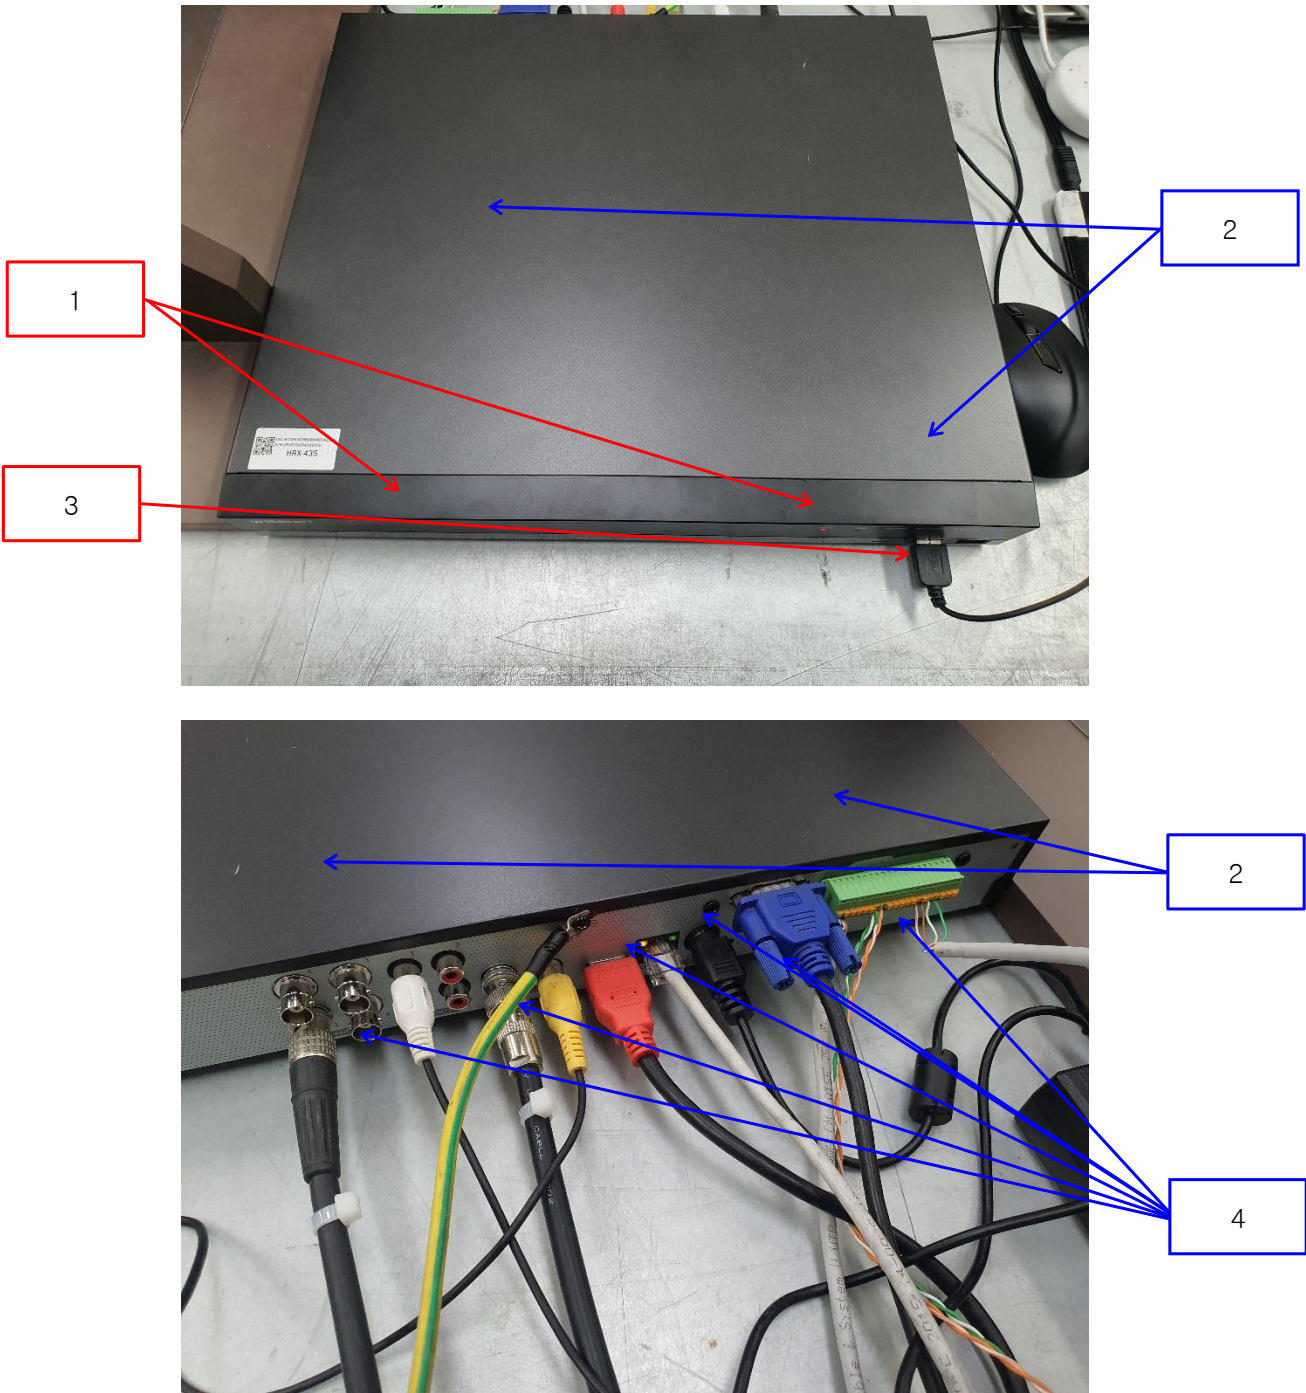

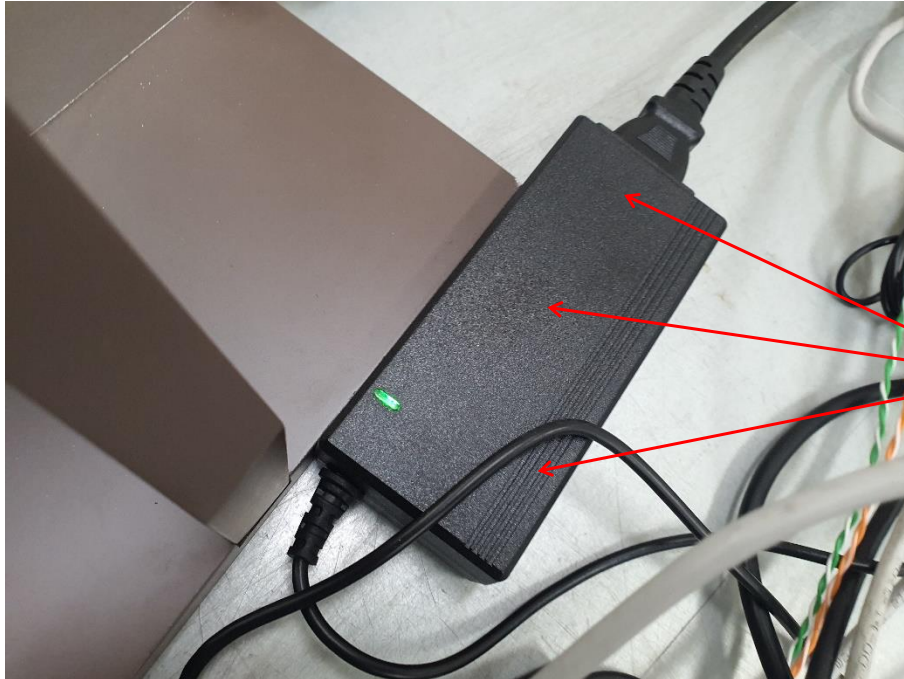

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0314-R2

Page (24) of (57)

Test Data

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Enclosure	Air Discharge	Complied	-
2	Enclosure (Conductor)	Contact Discharge	Complied	-
3	Around the Port	Air Discharge	Complied	-
4	Around the Port (Conductor)	Contact Discharge	Complied	-
5	Camera	Air Discharge	Complied	-
6	Mouse	Air Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

RemarksPASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

3.2 Radiated Electric Field Immunity

Reference Standard

EN 61000-4-3:2006 +A2:2010

Test Date

Apr. 22, 2021

Test Location

EMS-RS: ☐ SEMI ANECHOIC CHAMBER #2☒ SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	EMC32	R & S	9.12.00	-
☒	SIGNAL GENERATOR	SMB 100A	Rohde & Schwarz	108252	08, 05, 2021
☒	HIGH POWER DUAL AMP	SSA532	SUNGSAN	SSA532-001	-
☒	POWER METER	E4419B	Agilent	GB40203000	04, 01, 2022
☒	CW POWER SENSOR	E4412A	Agilent	US38488240	04, 01, 2022
☒	CW POWER SENSOR	E4412A	Agilent	MY41501662	04, 01, 2022
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 11, 2022

Test Conditions

Temperature: (24,6 ± 0,6) °C
Relative Humidity: (45,8 ± 0,4) % R.H.
Atmospheric Pressure: (100,4 ± 0,0) kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0314-R2

Page (26) of (57)

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0314-R2

Page (27) of (57)

Test Data

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

RemarksPASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4:2012

Test Date

Apr. 23, 2021

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 26, 2021
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 26, 2021
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	11, 26, 2021

Test Conditions

Temperature: (24,8 ± 0,2) °C
Relative Humidity: (45,9 ± 0,2) % R.H.
Atmospheric Pressure: (100,2 ± 0,0) kPa

Test Specifications

Pulse Amplitude & Polarity: ☐ ± 1.0 kV ☒ ± 2.0 kV
(AC Power Lines) ☐ ± 4.0 kV

Pulse Amplitude & Polarity: ☐ ± 0.5 kV ☒ ± 1.0 kV
(Other supply / Signal Lines) ☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☐ 5 kHz ☒ 100 kHz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ Complied

Test Data

☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L	Complied	Complied
N	Complied	Complied
PE	Complied	Complied
L – N	Complied	Complied
L – PE	Complied	Complied
N – PE	Complied	Complied
L – N – PE	Complied	Complied

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
ALARM IN	Complied	Complied
ALARM OUT	Complied	Complied
RS485	Complied	Complied
NETWORK	Complied	Complied
VIDEO IN	Complied	Complied
SPOT	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0314-R2

Page (30) of (57)

3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014

Test Date

Apr. 23, 2021

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 26, 2021
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 26, 2021
☒	CDN	CNV 508N1	EM TEST	P1610176296	11, 27, 2021

Test Conditions

Temperature: (23,9 ± 0,2) °C
Relative Humidity: (45,4 ± 0,2) % R.H.
Atmospheric Pressure: (100,3 ± 0,0) kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0314-R2

Page (31) of (57)

Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common Mode and 2 ohm for differential Mode

Surge Amplitude :

Common Mode

☒ (0,5 / 1,0 / 2,0) kV

Differential Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 surges per angle

Angle:

☒ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☒ Positive & Negative

Repetition Rate:

☐ 1 surge per min ☒ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

Other supply / Signal Lines

Source Impedance:

42 ohm for common Mode

Surge Amplitude:

Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☐ 1 surge per min ☒ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0314-R2

Page (32) of (57)

Test Data☒ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – PE	Complied	Complied
N – PE	Complied	Complied

Signal Lines☒ Line to Earth – Common Mode

Mode of Application	Coupling Method	Observations	
		(+) Surge (kV)	(-) Surge (kV)
NETWORK	CDN	Complied	Complied
	LINE	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

RemarksPASS Required Performance Criteria

3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Apr. 21, 2021

Test Location

EMS-CS: Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	5.3.11	-
☒	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	11, 25, 2021
☒	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 25, 2021
☒	CDN	CDN M016	TESEQ	43694	11, 25, 2021
☒	CDN	CDN M016	TESEQ	43697	11, 25, 2021
☒	CDN	CDN T8RJ45	EM TEST	0909-09	08, 05, 2021
☒	EM CLAMP	KEMZ 801A	TESEQ	44099	11, 26, 2021

Test Conditions

Temperature: (23,4 ± 0,6) °C
Relative Humidity: (45,5 ± 0,5) % R.H.
Atmospheric Pressure: (100,5 ± 0,0) kPa

Test Specifications

Frequency range: ☒ 150 kHz to 100 MHz ☐ 150 kHz to 80 MHz

Voltage Level: ☐ 1 Vrms ☐ 3 Vrms
☒ 10 Vrms

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Data☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L – N – PE	CDN	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
ALARM IN	Complied	Complied
ALARM OUT	Complied	Complied
RS485	Complied	Complied
NETWORK	CDN	Complied
VIDEO IN	Complied	Complied
SPOT	Complied	Complied

Notes: CDN = Coupling Decoupling Network

"blank" = Not performed

Observations:

Complied – No degradation of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**PASS Required Performance Criteria



3.6 Voltage Dips and Short Interruptions

Reference Standard

EN 61000-4-11:2004

Test Date

Apr. 23, 2021

Test Location

EMS-Voltage dip: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 26, 2021
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 26, 2021

Test Conditions

Temperature: (23,9 ± 0,1) °C
Relative Humidity: (45,4 ± 0,1) % R.H.
Atmospheric Pressure: (100,3 ± 0,0) kPa

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0314-R2
Page (36) of (57)

Test Specifications & Observations/Remarks**- Voltage Dips and Short Interruptions**

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☒ 20 % dip	☒ 250 / 5 000	<u>Complied</u>
☒ 30 % dip	☒ 25 / 500	<u>Complied</u>
☒ 60 % dip	☒ 10 / 200	<u>Complied</u>
☒ 100 % dip	☒ 250 / 5 000	<u>Degradation</u>

- Voltage variations

☒ Unom + 10 %	☒ 253.0 V (ac)	<u>Complied</u>
☒ Unom - 15 %	☒ 195.5 V (ac)	<u>Complied</u>

Observations:

Complied – No degradation of function

Degradation - See "Remarks "

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

Remarks

During the test(100%, 250cycle), EUT was turned off but after the test, it was recovered by no operator's intervention.


APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

Common Information

Test Description:	Conducted Emission
Model No.:	HRX-435
Phase:	H
Mode:	230 V 50 Hz
Operator Name:	KES

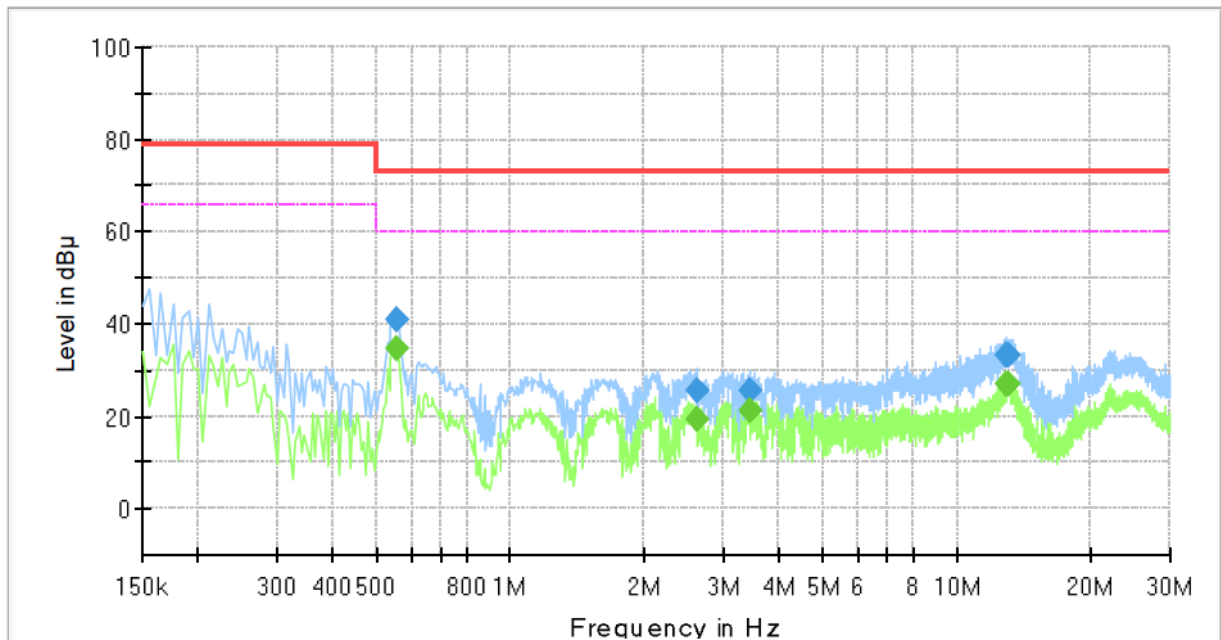


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.555000	---	34.70	60.00	25.30	1000.0	9.000	L1	19.8
0.555000	41.02	---	73.00	31.98	1000.0	9.000	L1	19.8
2.625000	---	19.54	60.00	40.46	1000.0	9.000	L1	20.2
2.625000	25.53	---	73.00	47.47	1000.0	9.000	L1	20.2
3.435000	---	21.29	60.00	38.71	1000.0	9.000	L1	20.0
3.435000	25.68	---	73.00	47.32	1000.0	9.000	L1	20.0
12.975000	---	27.03	60.00	32.97	1000.0	9.000	L1	20.0
12.975000	33.07	---	73.00	39.93	1000.0	9.000	L1	20.0
12.990000	---	27.18	60.00	32.82	1000.0	9.000	L1	20.0
12.990000	33.24	---	73.00	39.76	1000.0	9.000	L1	20.0

[NEUTRAL]

Common Information

Test Description:	Conducted Emission
Model No.:	HRX-435
Phase:	N
Mode:	230 V 50 Hz
Operator Name:	KES

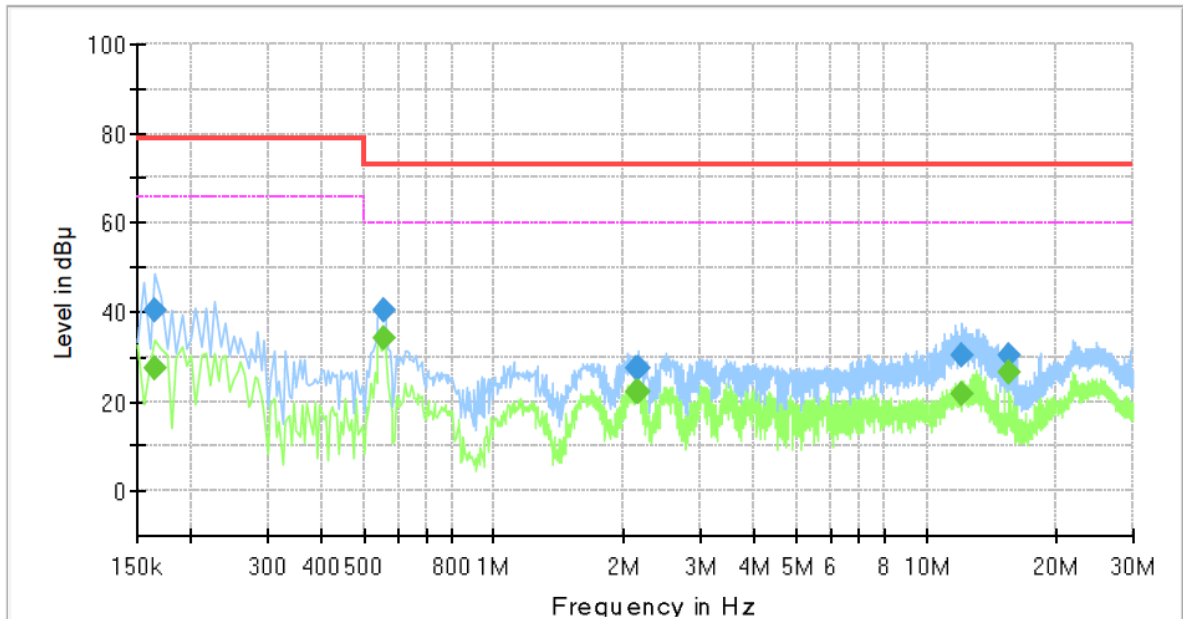

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.165000	---	27.45	66.00	38.55	1000.0	9.000	N	19.4
0.165000	40.58	---	79.00	38.42	1000.0	9.000	N	19.4
0.555000	---	34.23	60.00	25.77	1000.0	9.000	N	19.8
0.555000	40.48	---	73.00	32.52	1000.0	9.000	N	19.8
2.135000	---	22.34	60.00	37.66	1000.0	9.000	N	20.3
2.135000	27.55	---	73.00	45.45	1000.0	9.000	N	20.3
2.160000	---	22.00	60.00	38.00	1000.0	9.000	N	20.3
2.160000	27.47	---	73.00	45.53	1000.0	9.000	N	20.3
12.125000	---	21.91	60.00	38.09	1000.0	9.000	N	20.0
12.125000	30.18	---	73.00	42.82	1000.0	9.000	N	20.0
15.435000	---	26.47	60.00	33.53	1000.0	9.000	N	19.9
15.435000	30.18	---	73.00	42.82	1000.0	9.000	N	19.9

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


The authenticity of the test report, contact kes@kes.co.kr

Conducted Emissions at Telecommunication Ports

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	HRX-435
Mode :	230 V 50 Hz
Speed :	100 Mbps
Operator Name:	KES

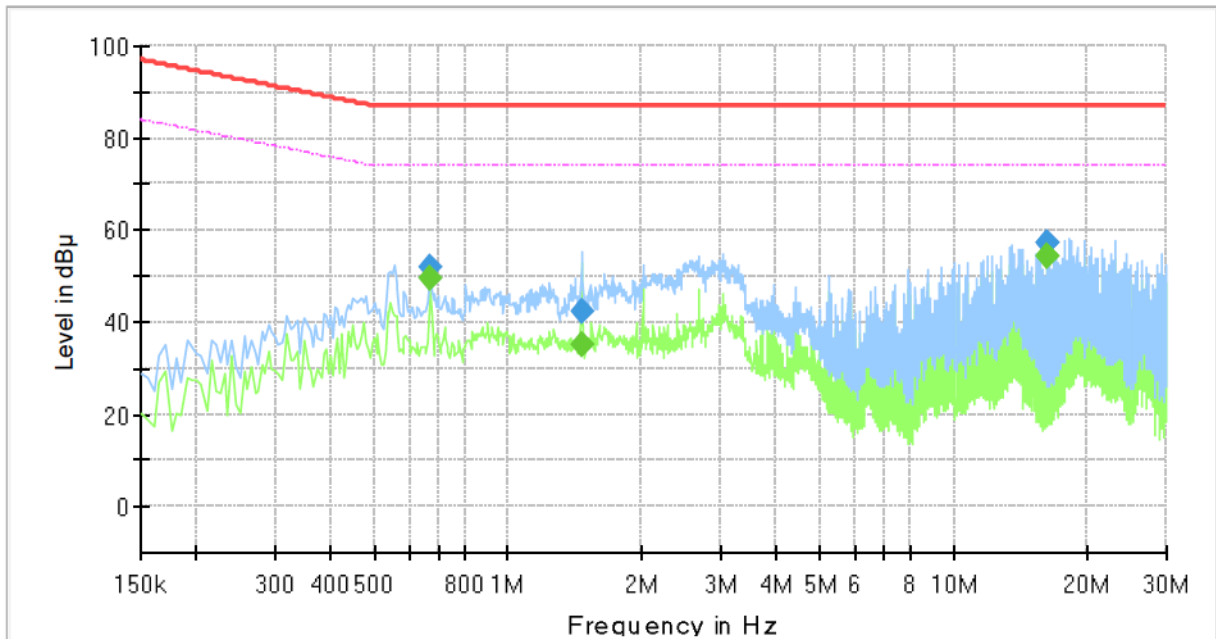

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.670000	---	49.54	74.00	24.46	1000.0	9.000	Single Line	19.9
0.670000	51.95	---	87.00	35.05	1000.0	9.000	Single Line	19.9
1.465000	---	35.35	74.00	38.65	1000.0	9.000	Single Line	20.1
1.465000	42.56	---	87.00	44.44	1000.0	9.000	Single Line	20.1
16.225000	---	54.37	74.00	19.63	1000.0	9.000	Single Line	19.7
16.225000	57.34	---	87.00	29.66	1000.0	9.000	Single Line	19.7
16.230000	---	54.21	74.00	19.79	1000.0	9.000	Single Line	19.7
16.230000	57.38	---	87.00	29.62	1000.0	9.000	Single Line	19.7

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0314-R2
Page (40) of (57)

Radiated Electric Field Emissions(Below 1 GHz)

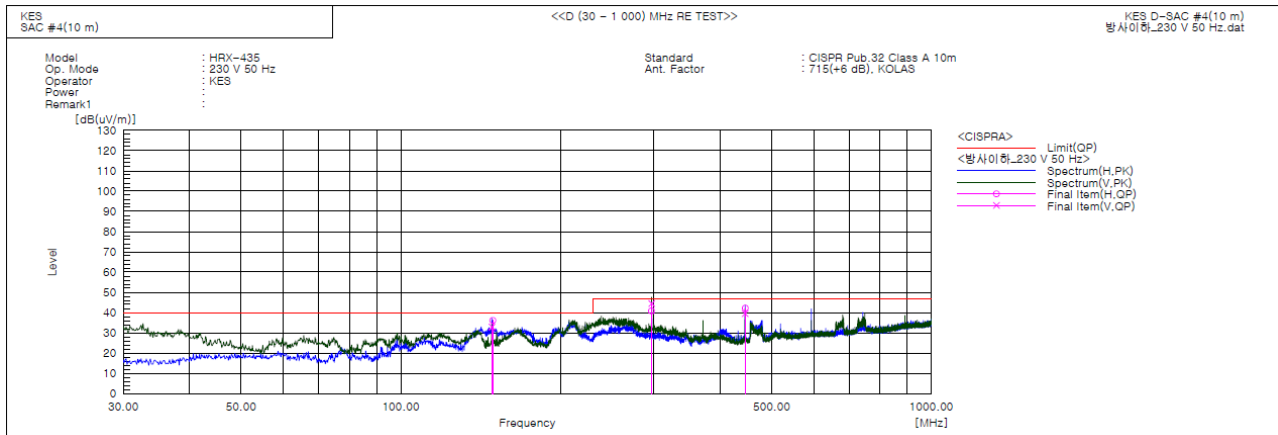

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	148.461	V	58.0	-25.1	32.9	40.0	7.1	103.0	315.0	
2	149.111	H	61.2	-25.1	36.1	40.0	3.9	301.0	157.0	
3	296.815	H	58.8	-18.0	40.8	47.0	6.2	371.0	47.0	
4	296.993	V	62.5	-18.0	44.5	47.0	2.5	118.0	27.0	
5	445.524	V	52.8	-13.3	39.5	47.0	7.5	194.0	196.0	
6	445.987	H	55.4	-13.2	42.2	47.0	4.8	400.0	277.0	

◆ Calculation – SEMI ANECHOIC CHAMBER #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0314-R2

Page (41) of (57)

Radiated Electric Field Emissions(Above 1 GHz)

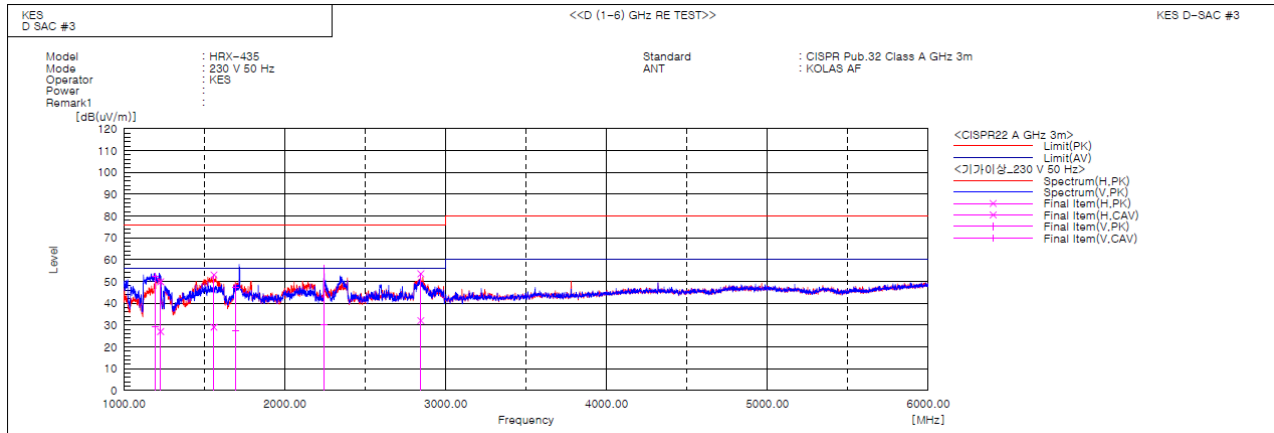

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1195.405	V	60.6	37.8	-8.4	52.2	29.4	76.0	56.0	23.8	26.6	100.0	64.7	
2	1228.308	H	58.1	35.3	-8.2	49.9	27.1	76.0	56.0	26.1	28.9	100.0	284.0	
3	1559.862	H	58.6	34.6	-5.6	53.0	29.0	76.0	56.0	23.0	27.0	100.0	38.2	
4	1694.295	V	51.3	31.7	-4.2	47.1	27.5	76.0	56.0	28.9	28.5	100.0	19.0	
5	2244.890	V	56.5	30.9	-0.5	56.0	30.4	76.0	56.0	20.0	25.6	100.0	331.1	
6	2845.682	H	51.1	29.7	2.4	53.5	32.1	76.0	56.0	22.5	23.9	100.0	0.6	

◆ Calculation

Result(PK/CAV) [dB(uV/m)] = (Reading(PK/CAV)[dB(uV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(uV/m)] - Result(PK/CAV) [dB(uV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



Harmonic Current Emissions and Voltage Fluctuations and Flicker

Average harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.052			
2	0.004	0.360	1.080	n/a
3	0.045	1.975	2.300	PASS
4	0.003	0.790	0.430	n/a
5	0.044	3.883	1.140	PASS
6	0.005	1.616	0.300	n/a
7	0.043	5.642	0.770	PASS
8	0.004	1.539	0.230	n/a
9	0.043	10.747	0.400	PASS
10	0.003	1.707	0.184	n/a
11	0.042	12.634	0.330	PASS
12	0.003	2.171	0.153	n/a
13	0.040	18.985	0.210	PASS
14	0.003	2.580	0.131	n/a
15	0.038	25.255	0.150	PASS
16	0.003	2.828	0.115	n/a
17	0.036	27.149	0.132	PASS
18	0.003	3.125	0.102	n/a
19	0.034	28.705	0.118	PASS
20	0.003	3.195	0.092	n/a
21	0.032	19.648	0.161	PASS
22	0.003	3.600	0.084	n/a
23	0.030	20.113	0.147	PASS
24	0.003	3.625	0.077	n/a
25	0.027	20.161	0.135	PASS
26	0.002	3.526	0.071	n/a
27	0.025	19.869	0.125	PASS
28	0.003	3.858	0.066	n/a
29	0.023	19.391	0.116	PASS
30	0.002	3.622	0.061	n/a
31	0.020	18.353	0.109	PASS
32	0.002	3.653	0.058	n/a
33	0.018	17.290	0.102	PASS
34	0.002	3.578	0.054	n/a
35	0.015	16.054	0.096	PASS
36	0.002	3.017	0.051	n/a
37	0.013	14.360	0.091	PASS
38	0.002	3.170	0.048	n/a
39	0.011	12.904	0.087	PASS
40	0.001	2.607	0.046	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.



Test Data - Harmonics (continued)

Maximum harmonic current results				
Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.054			
2	0.004	0.277	1.620	n/a
3	0.046	1.341	3.450	PASS
4	0.004	0.604	0.645	n/a
5	0.045	2.649	1.710	PASS
6	0.006	1.243	0.450	PASS
7	0.044	3.846	1.155	PASS
8	0.004	1.195	0.345	n/a
9	0.044	7.301	0.600	PASS
10	0.004	1.312	0.276	n/a
11	0.042	8.569	0.495	PASS
12	0.004	1.671	0.230	n/a
13	0.041	12.870	0.315	PASS
14	0.004	1.964	0.197	n/a
15	0.039	17.121	0.225	PASS
16	0.004	2.168	0.173	n/a
17	0.037	18.482	0.199	PASS
18	0.004	2.423	0.153	n/a
19	0.035	19.425	0.178	PASS
20	0.003	2.466	0.138	n/a
21	0.032	19.918	0.161	PASS
22	0.003	2.723	0.125	n/a
23	0.030	20.385	0.147	PASS
24	0.003	2.767	0.115	n/a
25	0.028	20.397	0.135	PASS
26	0.003	2.711	0.106	n/a
27	0.025	20.083	0.125	PASS
28	0.003	2.972	0.099	n/a
29	0.023	19.567	0.116	PASS
30	0.003	2.764	0.092	n/a
31	0.020	18.544	0.109	PASS
32	0.002	2.780	0.086	n/a
33	0.018	17.494	0.102	PASS
34	0.002	2.734	0.081	n/a
35	0.016	16.204	0.096	PASS
36	0.002	2.301	0.077	n/a
37	0.013	14.501	0.091	PASS
38	0.002	2.451	0.073	n/a
39	0.011	13.047	0.087	PASS
40	0.001	2.047	0.069	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0314-R2

Page (44) of (57)

Test Data - Voltage Fluctuations

Maximum Flicker results

Flicker Measurements					
	Plt	Max Pst	Max Dc	Max Dmax	Max Tmax
Line 1:	0.028	0.028	0	< 0.2	0
Limits:	0.65	1	3.3	4	0.5
Results:	PASS	PASS	PASS	PASS	PASS

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Emissions at Telecommunication Ports



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

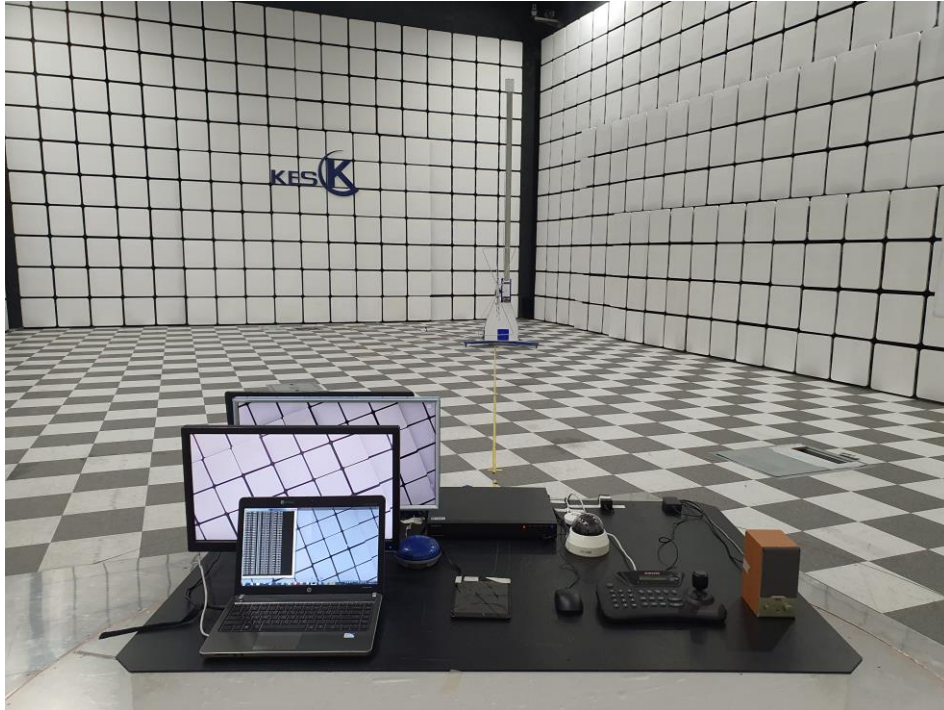

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Harmonic Current Emissions and Voltage Fluctuations and Flicker



Electrostatic Discharge



Radiated Electric Field Immunity



Electrical Fast Transients/Bursts



Surge Transients



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Disturbance



Voltage Dips and Short Interruptions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal Photographs


(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 1

(Top)

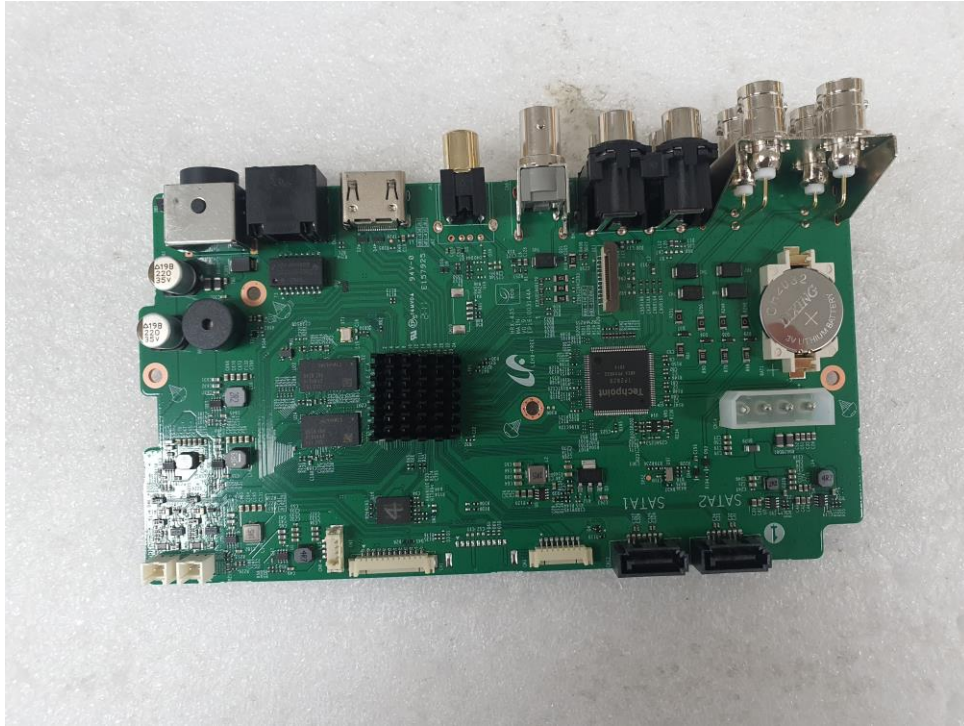


(Bottom)

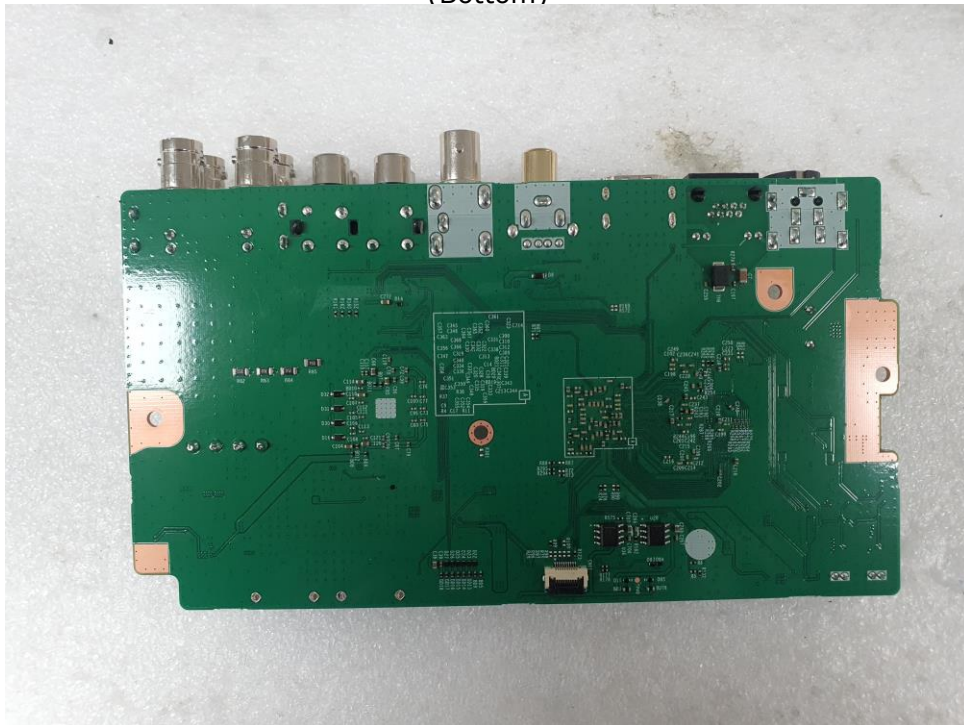


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 2

(Top)

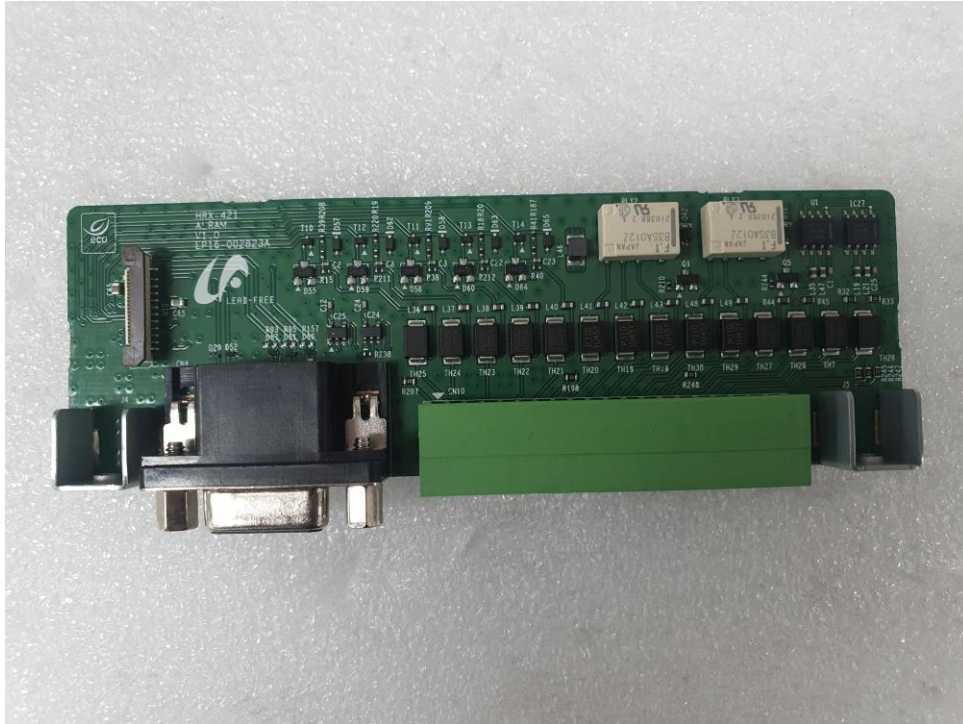

(Bottom)

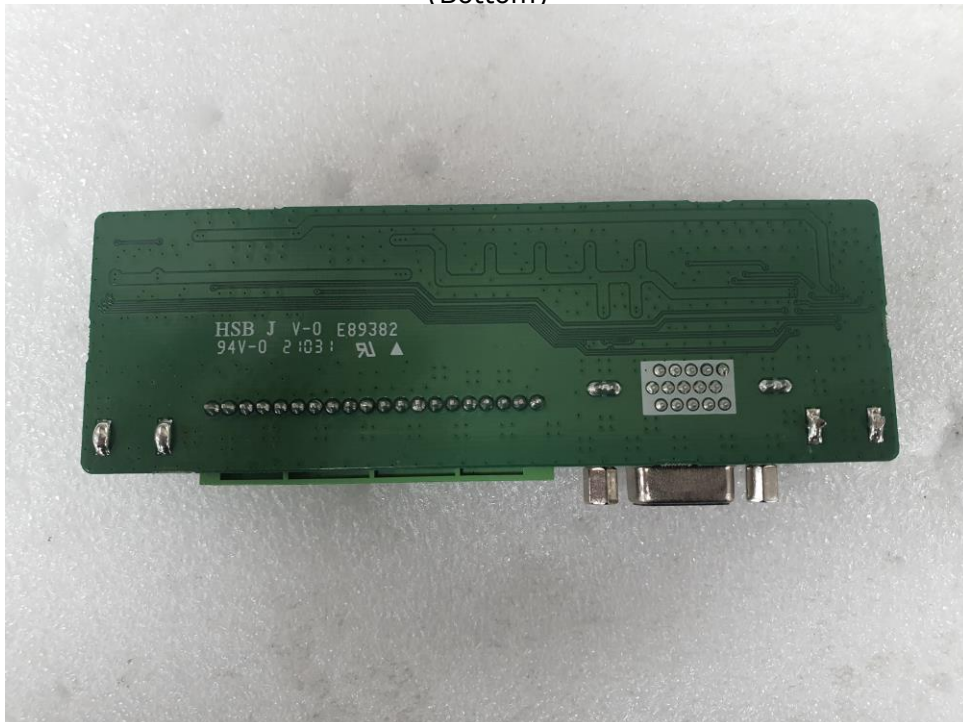

Label and Location



DVR

Model No : HRX-435

Manufacturer : HANWHA VISION VIETNAM COMPANY LIMITED.

Made in Vietnam

