



EMC TEST REPORT

Test Report No. : KES-E1-18T0346

Date of Issue : Jun. 25, 2018

Product name : NETWORK CAMERA

Model/Type No. : PNM-9000VQ

Variant Mode : -

Applicant : Hanwha Techwin Co., Ltd.

Applicant Address : 6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13488, KOREA

Manufacturer : 1. Hanwha Techwin (Tianjin) Co.,Ltd.
2. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
3. D-TECH CO.,LTD.

Manufacturer Address : 1. No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin,
300385, People's Republic of China
2. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
3. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do,
Korea (Suwon Industrial Complex)

Equipment authorization : **Supply's Declaration of Conformity**

Date of Receipt : Jun. 08, 2018

Test date : Jun. 09, 2018

Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Kang Hyeon, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KOLAS.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-18T0346
Page (2) of (28)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Jun. 25, 2018	KES-E1-18T0346	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document Jul be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	7
1.6	External I/O Cabling	8
1.7	EUT Operating Mode(s)	8
1.8	Configuration	9
1.9	Remarks when standards applied	10
1.10	Calibration Details of Equipment Used for Measurement	10
1.11	Test Facility	10
1.12	Laboratory Accreditations and Listings	10
2.0	Test Regulations.....	11
2.1	Conducted Emissions at Mains Power Ports	13
2.2	Radiated Electric Field Emissions(Below 1 GHz)	14
2.3	Radiated Electric Field Emissions(Above 1 GHz)	15
APPENDIX A – TEST DATA.....		16
Conducted Emissions at Mains Power Ports.....		16
Radiated Electric Field Emissions(Below 1 GHz)		18
Radiated Electric Field Emissions(Above 1 GHz)		19
Test Setup Photos and Configuration		20
Conducted Voltage Emissions		20
Radiated Electric Field Emissions(Below 1 GHz)		21
Radiated Electric Field Emissions(Above 1 GHz)		22
EUT External Photographs		23
EUT Internal Photographs		24



1.0 General Product Description

Main Specifications of EUT are:

	PNM-9000VQ
Video	
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation
Operational	
Camera Title	Off / On (Displayed up to 85 characters) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution
Day & Night	Auto (Electrical) / Color / B/W
Backlight Compensation	Off / BLC / HLC(Masking/Dimming), WDR
Wide Dynamic Range	150dB(2MP), 120dB(5MP)
Contrast Enhancement	SSDR (Off / On)
Digital Noise Reduction	SSNR5 (2D+3D Noise Filter) (Off / On)
Digital Image Stabilization	Off / On
Defog	Off / Auto / Manual
Motion Detection	Off/ On(8ea, 8point Polygonal zones)
Privacy Masking	Off / On (32ea, polygonal zones) - Color : Grey/Green/Red/Blue/Black/White - Mosaic
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor((included Mercury & Sodium)
Contrast	level adjustment
LDC	On/Off (5 levels with Min/Max)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec)
Digital Zoom	24X

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-18T0346
Page (5) of (28)

Flip / Mirror	Flip : On/Off Mirror : On/Off Hallway view : 90°/270°
Video Analytics	Tampering, Loitering, Directional Detection, Fog&Dust Detection, Virtual Line, Enter/Exit, Appear / Disappear, Face Detection, Motion Detection
Alarm Triggers	Motion Detection, Video Analytics, Network Disconnect
Alarm events	File upload via FTP, E-Mail Notification via E-Mail local storage(SD/SDHC/SDXC) or NAS recording at Event Triggers External output
Pixel Counter	Support
Network	
Video Compression Format	H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High , Motion JPEG
Resolution	[2MP] 1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240 [5MP] 2560 x 1920, 2560 x 1440, 1920 x 1080, 1600 x 1200, 1280 x 1024, 1280 x 960 1280 x 720, 1024 x 768, 800 x 600, 720 x 576, 720 x 480, 640 x 480, 320 x 240
Max. Framerate	H.265/H.264 : 2M Max. 60fps, 5M 30fps at all resolutions Motion JPEG : Max. 30fps
Smart Codec	Manual Mode (area-based : 5EA)
WiseStream II	Support
Video Quality Adjustment	H.264/H.265 : Target Bitrate Level Control MJPEG : Target Bitrate Level Control

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-18T0346
Page (6) of (28)

Bitrate Control Method	H.264/H.265 : CBR or VBR MJPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication (EAP-TLS, EAP-LEAP)
Streaming Method	Unicast / Multicast
Max. User Access	20 users at Unicast Mode

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 230 Vac ☒ 120 Vac ☐ 24 Vac ☐ 12 Vdc ☐ PoE

Frequency ☐ 50 Hz ☒ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	PNM-9000VQ	-	Hanwha Techwin (Tianjin) Co.,Ltd	EUT
POE Adaptor	PT-PSE109GBRO-A	PT1817220025	PROCET	-

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Notebook	ProBook4430s	-	HP	-
Notebook Adaptor	SeriesPPP0009H	-	CHICONY POWER TECHNOLOGY (SUZHOU) CO.,LTD,	-
5M LENS Module	SLA-5M3700Q	-	Hanwha Techwin (Tianjin) Co.,Ltd	1EA
5M LENS Module	SLA-5M4600Q	-	Hanwha Techwin (Tianjin) Co.,Ltd	1EA
5M LENS Module	SLA-5M7000Q	-	Hanwha Techwin (Tianjin) Co.,Ltd	2EA



1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45	POE Adaptor	RJ-45	4.0	U
	-	5M LENS Module	-	-	-
	-	5M LENS Module	-	-	-
	-	5M LENS Module	-	-	-
Notebook	RJ-45	POE Adaptor	RJ-45	4.0	U


* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)

Test mode	operating
POE	EUT Monitoring, Ping Test

EUT Test operating S/W		
Name	Version	Manufacture Company
WebViewer	-	Hanwha Techwin Co., Ltd.

1.8 Configuration

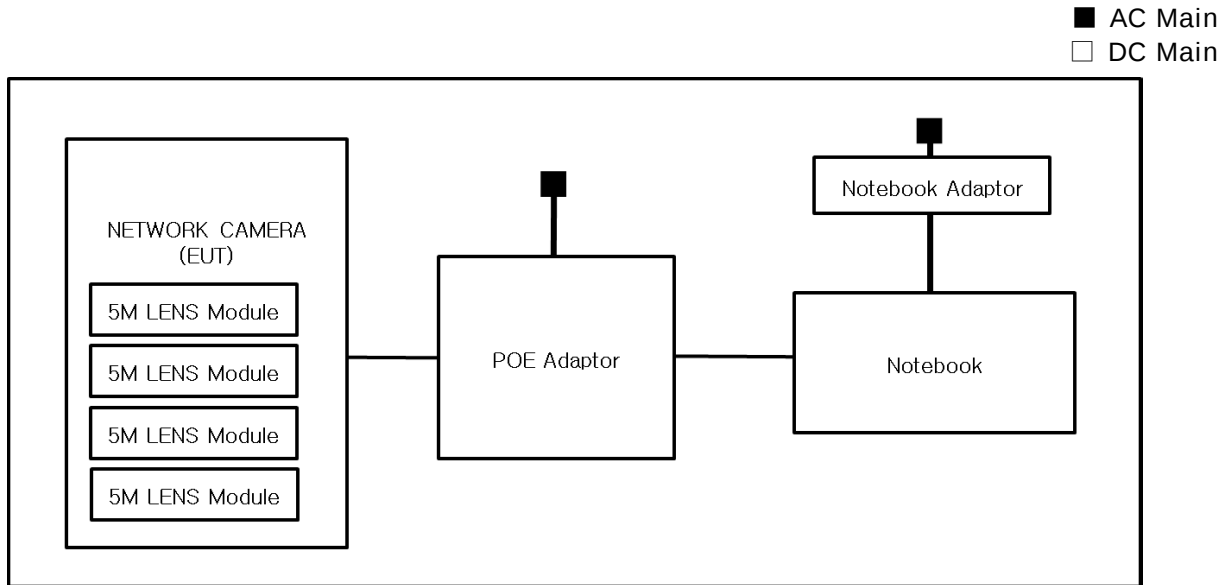

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2012

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Aechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Aechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Aechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Aechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Aechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 17 07 01633 001

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55032:2015

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



☐ **VCCI V-3 / 2015.04**

☐ Class A

☐ Class B

☐ **AS/NZS:2013**

☐ Class A

☐ Class B

☒ **47 CFR Part 15, Subpart B**

☐ CISPR 22:2009 +A1:2010

☐ Class A

☐ Class B

☒ ANSI C63.4-2014

☒ Class A

☐ Class B

☒ **IC Regulation ICES-003 : 2016**

☐ CAN/CSA CISPR 22-10

☐ Class A

☐ Class B

☒ ANSI C63.4-2014

☒ Class A

☐ Class B

☐ **RE- Directive 2014/53/EU**

☐ EN 301 489-1 V1.9.2

- ☐ Equipment for fixed use
- ☐ Equipment for vehicular use
- ☐ Equipment for portable use

☐ EN 301 489-3 V1.6.1

☐ EN 301 489-17 V2.2.1

☐ EN 60945:2002



2.1 Conducted Emissions at Mains Power Ports

Test Date

Jun. 09, 2018

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	04, 25, 2019
☒	LISN	ENV216	R & S	101137	01, 31, 2019
☒	LISN	ENV216	R & S	101786	04, 25, 2019

Test Conditions

Temperature: 22,9 °C
Relative Humidity: 48,7 % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Jun. 09, 2018

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10 m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 11, 2019
☒	AMPLIFIER	SCU 01	R & S	100603	11, 27, 2018
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	714	11, 28, 2018

Test Conditions

Temperature: 25,2 °C
Relative Humidity: 57,8 % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.3 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Jun. 09, 2018

Test Location

SEMI ANECHOIC CHAMBER #4(10 m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 11, 2019
☒	PREAMPLIFIER	8449B	AGILENT	3008A01742	01, 11, 2019
☐	ATTENUATOR	8491A	HP	35496	03, 21, 2019
☒	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	09, 04, 2019

Test ConditionsTemperature: 25,2 °C
Relative Humidity: 57,8 % R.H.**Frequency Range of Measurement**

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.




APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

HOT LINE

Common Information

Test Description: Conducted Emission
Model No.: PNM-9000VQ
Mode: FCC
Operator Name: KES

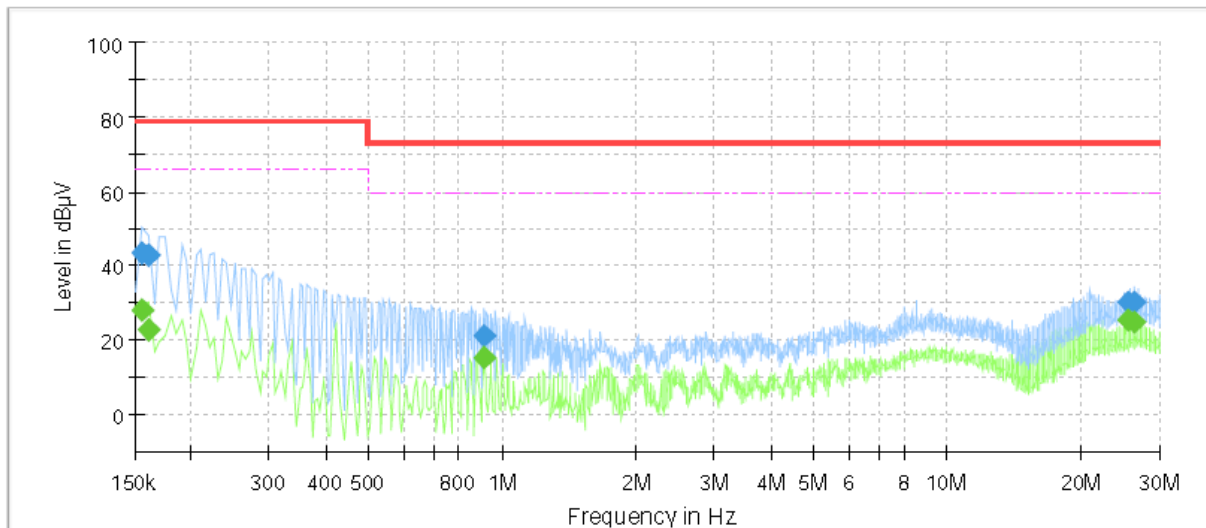


Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	28.16	66.00	37.84	1000.0	9.000	L1	9.6
0.155000	43.25	---	79.00	35.75	1000.0	9.000	L1	9.6
0.160000	---	22.90	66.00	43.10	1000.0	9.000	L1	9.6
0.160000	42.86	---	79.00	36.14	1000.0	9.000	L1	9.6
0.910000	---	15.42	60.00	44.58	1000.0	9.000	L1	10.0
0.910000	21.23	---	73.00	51.77	1000.0	9.000	L1	10.0
25.550000	---	25.17	60.00	34.83	1000.0	9.000	L1	10.2
25.550000	30.22	---	73.00	42.78	1000.0	9.000	L1	10.2
26.340000	---	24.90	60.00	35.10	1000.0	9.000	L1	10.2
26.340000	30.02	---	73.00	42.98	1000.0	9.000	L1	10.2

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	PNM-9000VQ
Mode	FCC
Operator Name:	KES

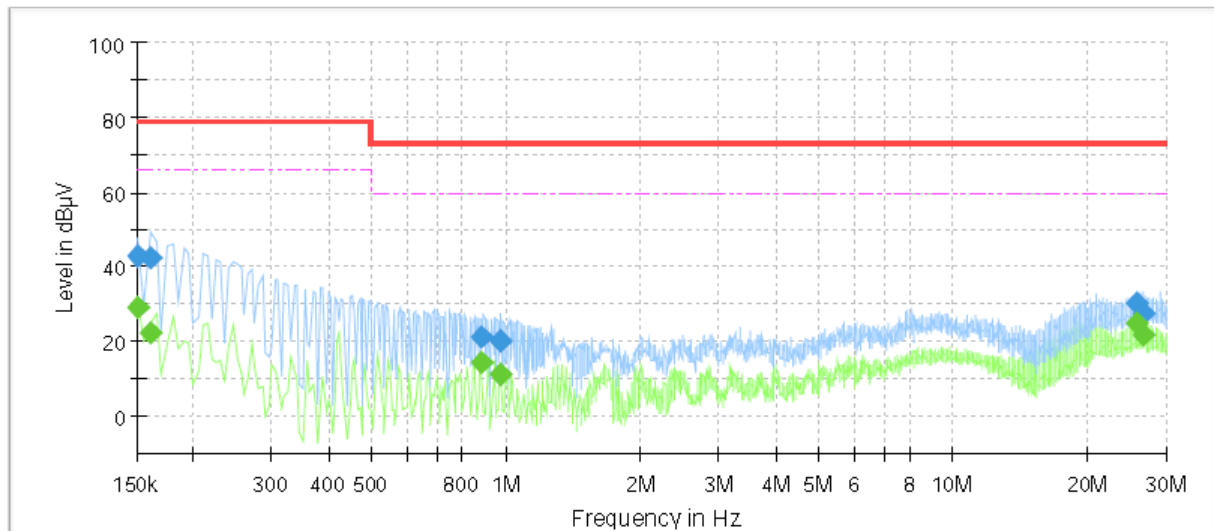

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	---	29.03	66.00	36.97	1000.0	9.000	N	9.6
0.150000	42.98	---	79.00	36.02	1000.0	9.000	N	9.6
0.160000	---	22.52	66.00	43.48	1000.0	9.000	N	9.6
0.160000	42.19	---	79.00	36.81	1000.0	9.000	N	9.6
0.880000	---	14.59	60.00	45.41	1000.0	9.000	N	9.9
0.880000	21.08	---	73.00	51.92	1000.0	9.000	N	9.9
0.975000	---	11.36	60.00	48.64	1000.0	9.000	N	10.0
0.975000	19.97	---	73.00	53.03	1000.0	9.000	N	10.0
25.845000	---	25.00	60.00	35.00	1000.0	9.000	N	10.2
25.845000	30.14	---	73.00	42.86	1000.0	9.000	N	10.2
26.720000	---	21.89	60.00	38.11	1000.0	9.000	N	10.2
26.720000	27.68	---	73.00	45.32	1000.0	9.000	N	10.2

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]


QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))



Radiated Electric Field Emissions(Below 1 GHz)

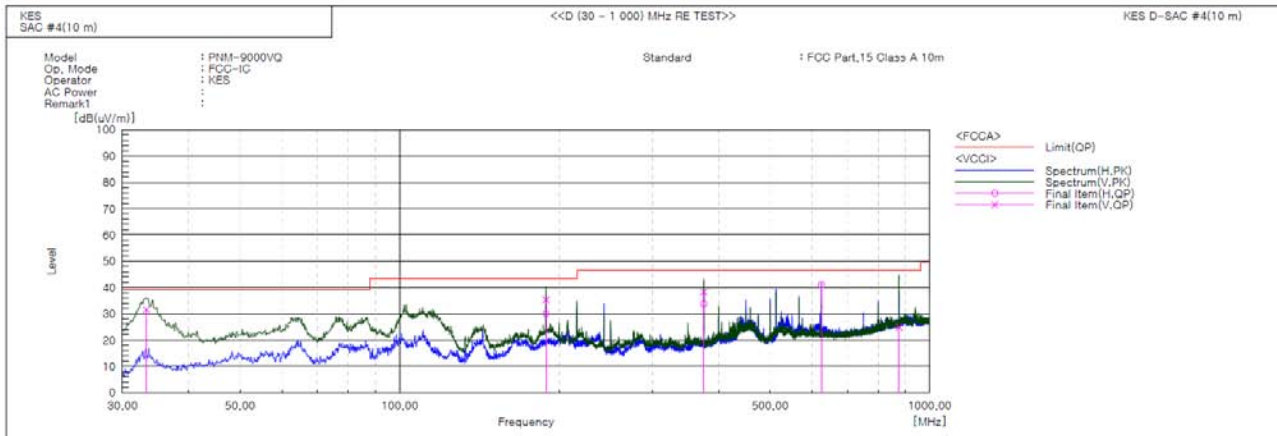

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	33.274	V	64.2	-32.6	31.6	39.0	7.4	150.0	30.0	
2	188.959	H	58.8	-28.8	30.0	43.5	13.5	400.0	192.0	
3	188.959	V	64.1	-28.8	35.3	43.5	8.2	100.0	26.0	
4	374.956	H	56.2	-22.4	33.8	46.5	12.7	200.0	95.0	
5	374.956	V	60.7	-22.4	38.3	46.5	8.2	100.0	204.0	
6	625.095	H	56.7	-15.6	41.1	46.5	5.4	100.0	206.0	
7	875.113	V	36.8	-11.9	24.9	46.5	21.6	150.0	121.0	

◆ Calculation – SAC #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)]

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-18T0346
Page (19) of (28)

Radiated Electric Field Emissions(Above 1 GHz)

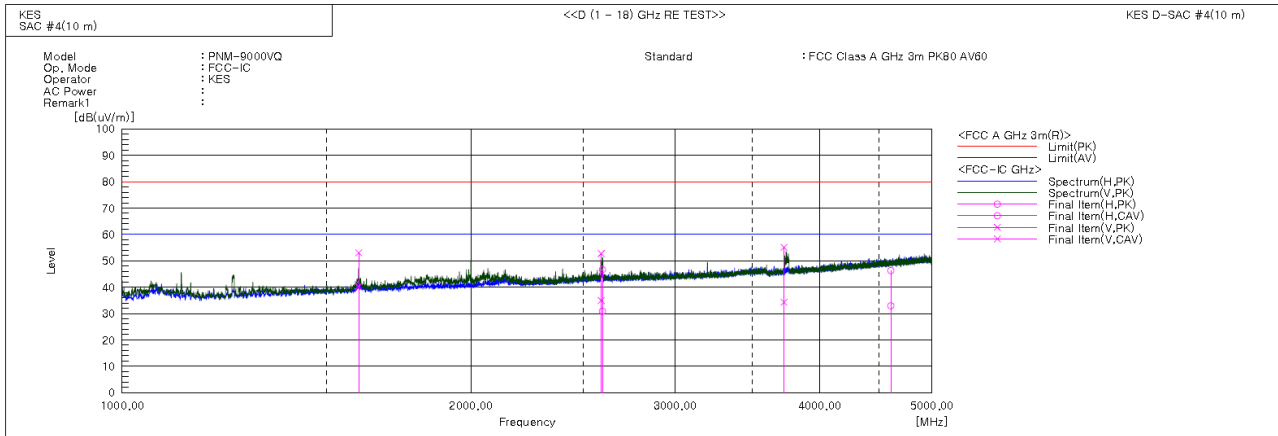

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1600.020	V	55.3	42.6	-2.3	53.0	40.3	80.0	60.0	27.0	19.7	136.0	91.0	
2	2597.285	H	44.2	28.3	2.5	46.7	30.8	80.0	60.0	33.3	29.2	177.0	356.0	
3	2590.625	V	50.4	32.5	2.4	52.8	34.9	80.0	60.0	27.2	25.1	100.0	21.0	
4	3725.865	V	48.7	27.9	6.4	55.1	34.3	80.0	60.0	24.9	25.7	154.0	76.0	
5	4607.135	H	36.3	23.0	10.0	46.3	33.0	80.0	60.0	33.7	27.0	359.0	93.0	

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)]

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



Test Setup Photos and Configuration

Conducted Voltage Emissions




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Below 1 GHz)

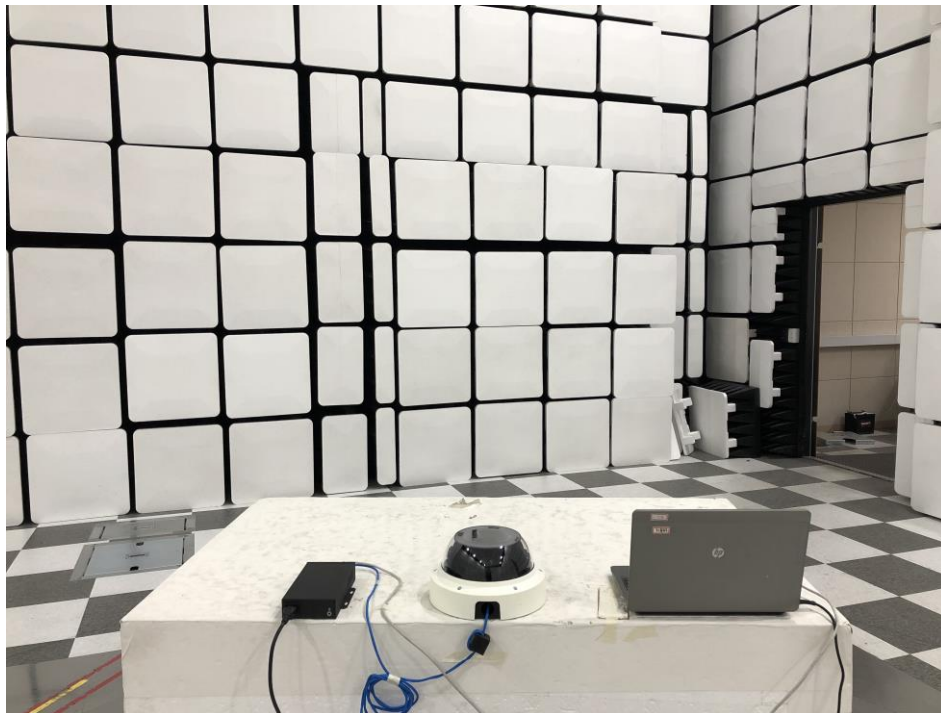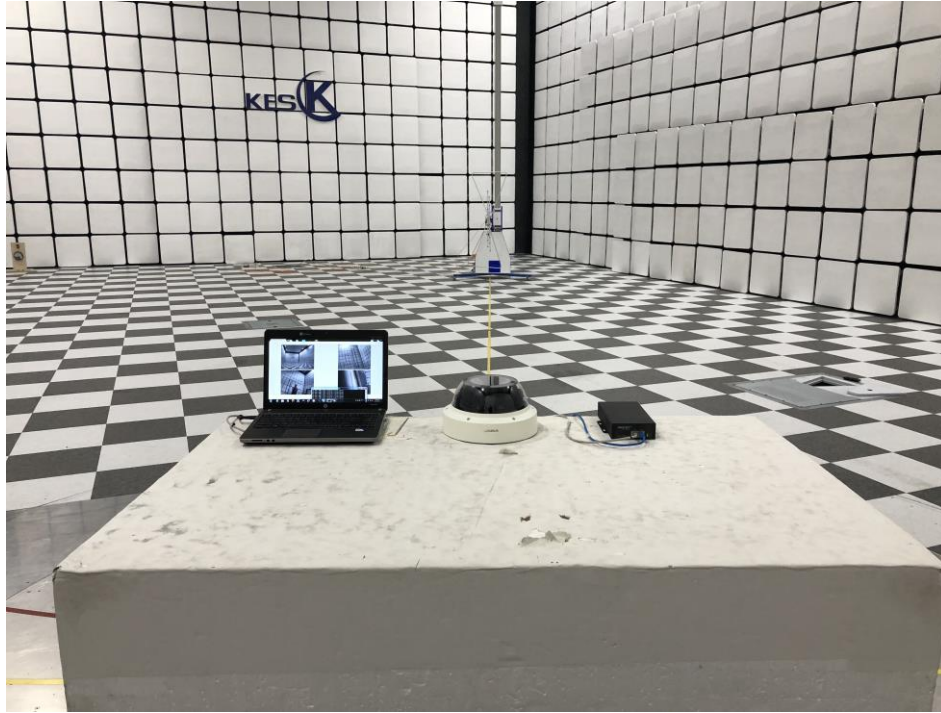

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Above 1 GHz)

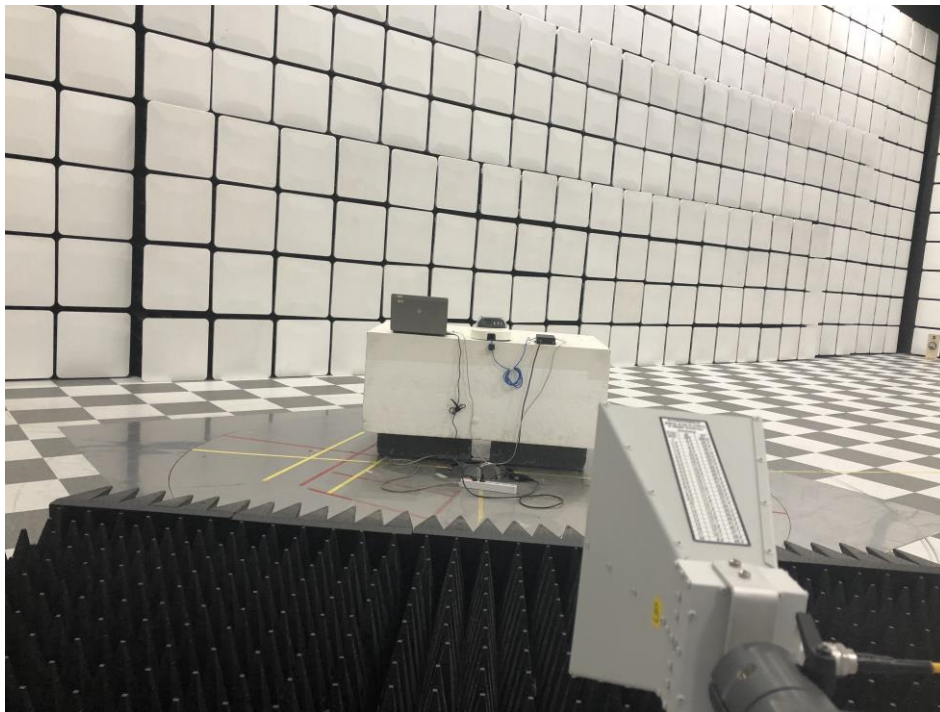

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT External Photographs

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal Photographs


(Internal View)

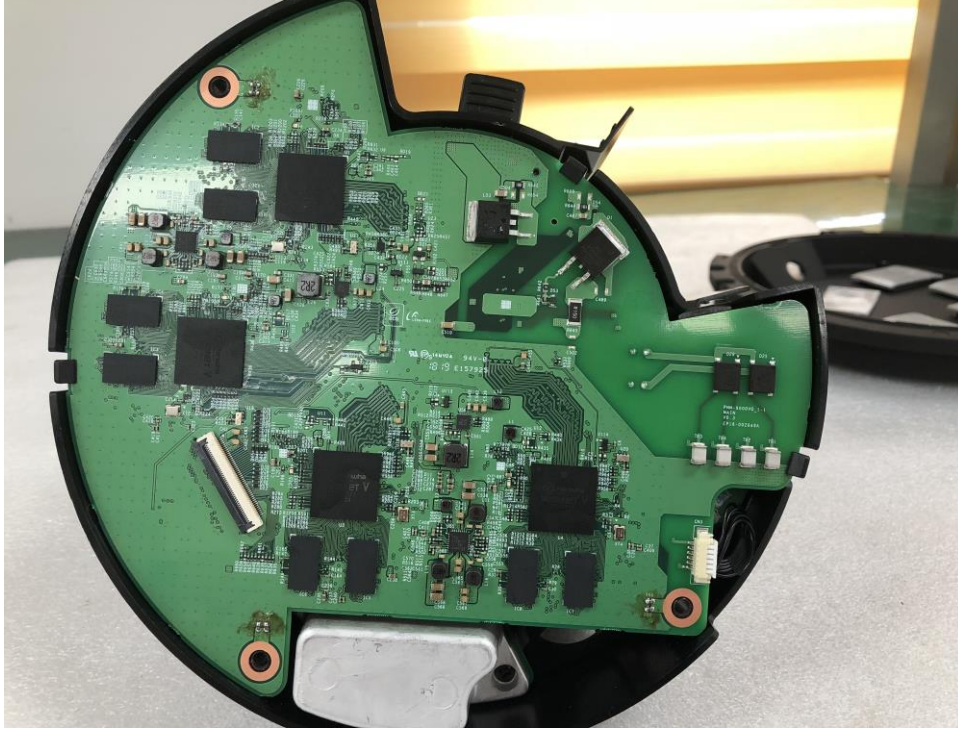


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Board 1

(Top)

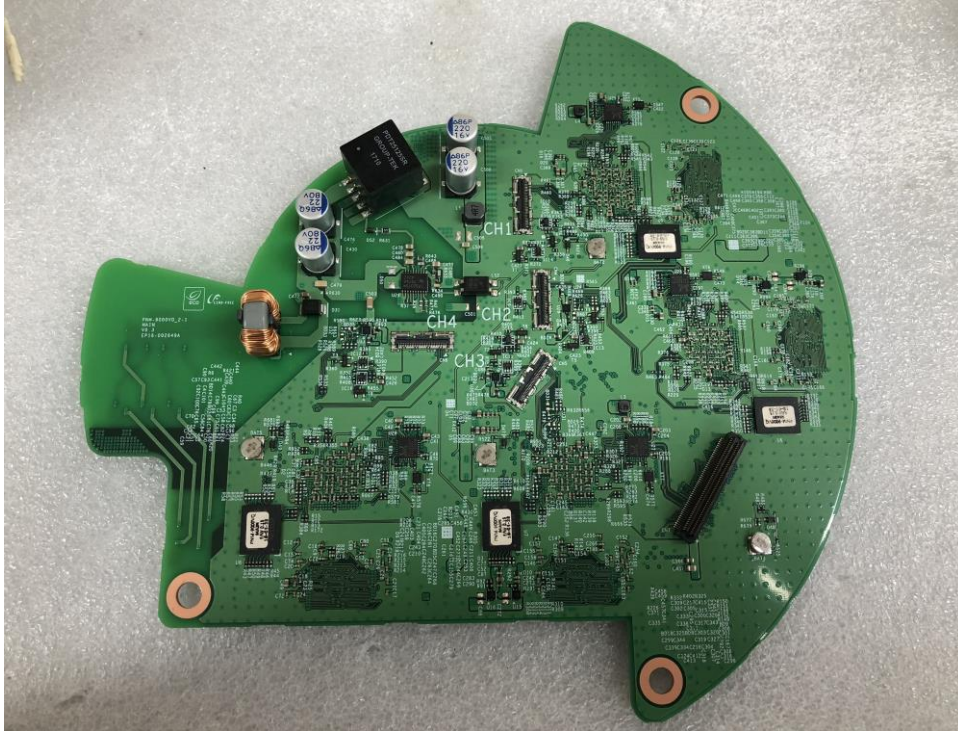


(Bottom)

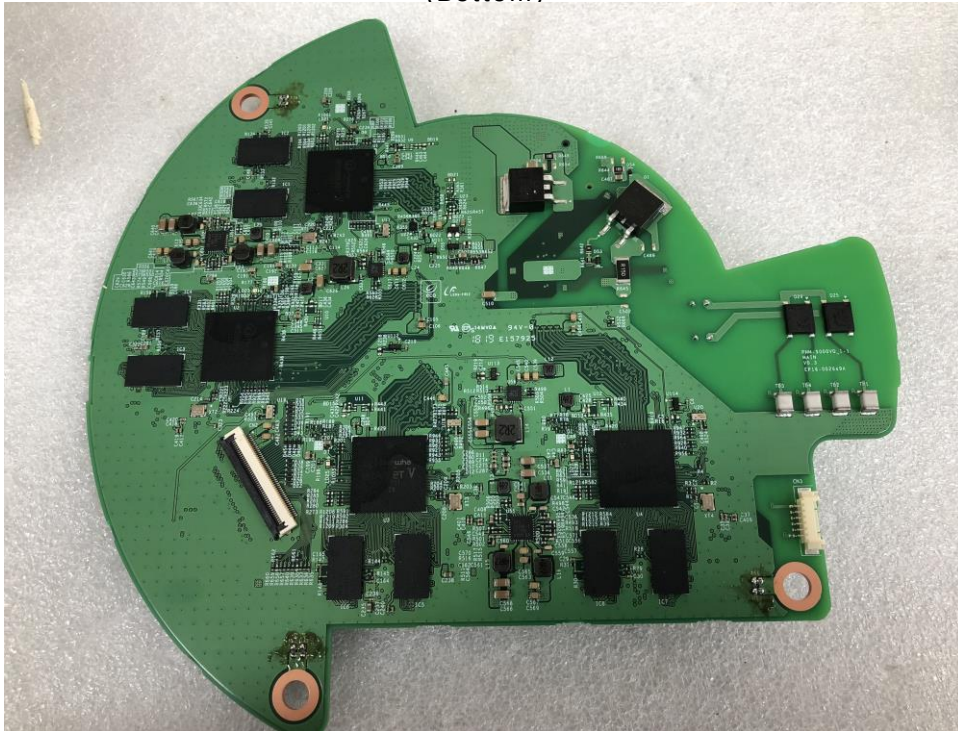


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Board 2

(Top)

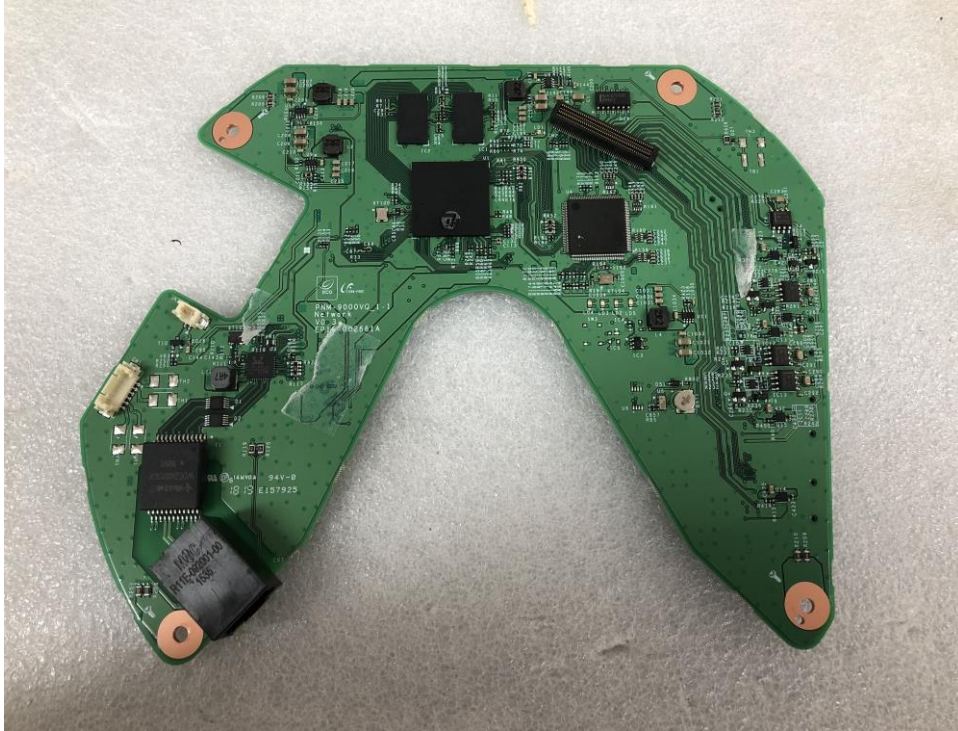

(Bottom)

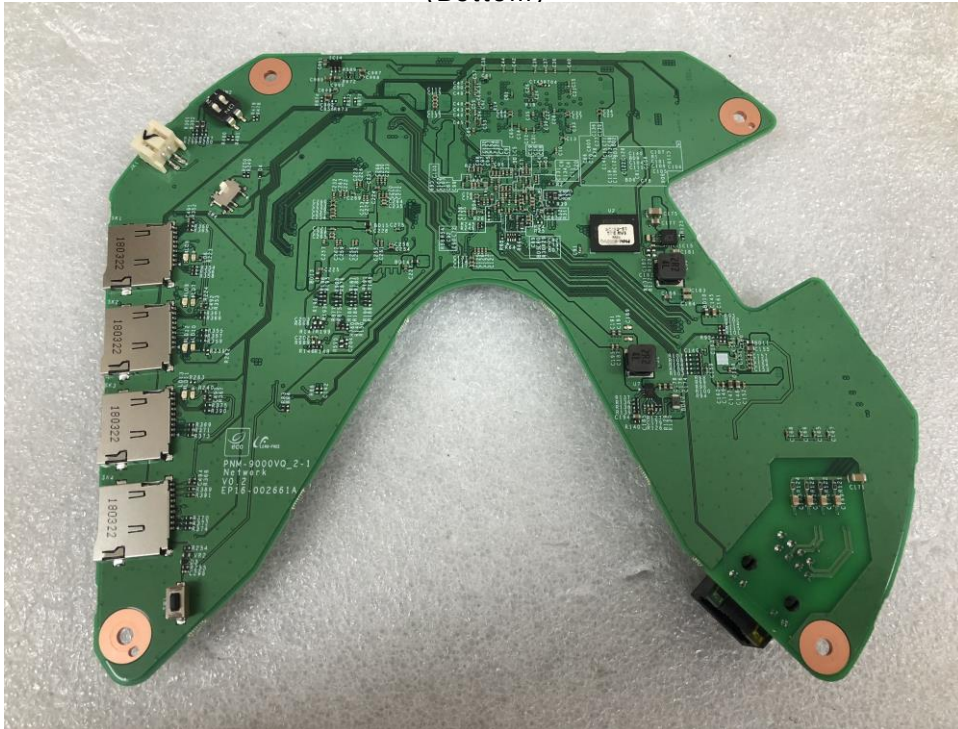

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Board 3

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Label Photographs



This device complies with part 15 of the FCC Rules. Operation in subject to the following two conditions: (1) This device Sep not cause harmful interference, and (2) this device must accept any interference received, including interference that Sep cause undesired operation.

CAN ICES-3(A) / NMB-3(A)