

TEST REPORT



Report No. : KES-EM-23T0982

Page 1 / 59

KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,
Gyeonggi-do, 14057, Korea

Tel : +82-31-425-6200, Fax : +82-31-425-6200

1. Client

Applicant : Hanwha Vision Co., Ltd

Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do,
Republic of Korea

2. Sample Description

Product name : NETWORK CAMERA

Model/Type No. : QNE-C9013RL

Variant Model : -

Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.

Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended Area, Nam Son Ward,
Bac Ninh City, Bac Ninh Province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do, Korea

3. Date of Receipt : Nov. 10, 2023

4. Test date : Nov. 12, 2023 ~ Nov. 15, 2023

5. Date of Issue : Nov. 24, 2023

6. Test Results : In Compliance

Tested by

Dong Hyun, Won
EMC Test Engineer

Reviewed by

Dong Il, Lee
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Nov. 24, 2023	KES-EM-23T0982	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences	7
1.3	Device Modifications	7
1.4	Equipment Under Test	7
1.5	Support Equipments	7
1.6	External I/O Cabling.....	8
1.7	EUT Operating Mode(s).....	8
1.8	Configuration	9
1.9	Remarks when standards applied	10
1.10	Calibration Details of Equipment Used for Measurement	10
1.11	Test Facility	10
1.12	Laboratory Accreditations and Listings	10
2.0	Test Regulations	11
2.1	Conducted Emissions at Mains Power Ports.....	12
2.2	Conducted Emissions at Telecommunication Ports.....	13
2.3	Radiated Electric Field Emissions(Below 1 GHz).....	14
2.4	Radiated Electric Field Emissions(Above 1 GHz)	15
2.5	Harmonic Current Emissions	16
2.6	Voltage Fluctuations and Flicker.....	17
3.0	Criteria for compliance.....	18
3.1	Electrostatic Discharge	20
3.2	Radiated Electric Field Immunity	24
3.3	Electrical Fast Transients/Bursts	27
3.4	Surge Transients.....	29
3.5	Conducted Disturbance	32
3.6	Voltage Dips and Short Interruptions	35
	APPENDIX A – TEST DATA	37
	Conducted Emissions at Mains Power Ports	37
	Conducted Emissions at Telecommunication Ports	39
	Radiated Electric Field Emissions(Below 1 GHz)	40
	Radiated Electric Field Emissions(Above 1 GHz).....	41
	Harmonic Current Emissions and Voltage Fluctuations and Flicker	42
	Test Setup Photos and Configuration.....	45
	Conducted Emissions at Mains Power Ports	45
	Conducted Emissions at Telecommunication Ports	46
	Radiated Electric Field Emissions(Below 1 GHz)	47
	Radiated Electric Field Emissions(Above 1 GHz).....	48
	Harmonic Current Emissions and Voltage Fluctuations and Flicker	49
	Electrostatic Discharge.....	50
	Radiated Electric Field Immunity.....	50
	Electrical Fast Transients/Bursts	51
	Surge Transients	51
	Conducted Disturbance.....	52
	Voltage Dips and Short Interruptions.....	52
	EUT External Photographs.....	53
	EUT Internal Photographs.....	54

1.0 General Product Description

Main Specifications of EUT are:

Video	
Imaging Device	1/2.8" CMOS
Resolution	3840x2160, 3328x1872, 3072x1728, 2592x1944, 2688x1520, 1920x1080, 1600x1200, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264: Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max. 30fps(@8MP Max. 5fps)
NETD	None
Pixel Size	None
Min. Illumination	Color: 0.03Lux (F1.6, 1/30sec) BW: 0.003Lux (F1.6, 1/30sec, 30IRE), 0Lux(IR LED on) (TBD)
Video Out	None
Video Transmission Distance	None
Lens	
Focal Length (Zoom Ratio)	3.0mm fixed focal
Max. Aperture Ratio	F1.6
Angular Field of View	H: 108°/ V: 59°/ D: 127°
Min. Object Distance	0.5m (1.64ft)
Focus Control	Fixed
Lens Type	Fixed IRIS
Mount Type	M12
Optional Lens	None
Pan / Tilt / Rotate	
Pan / Tilt / Rotate Range	0°~350° / 0°~75° / 0°~360°
Pan Range	None
Pan Speed	None
Tilt Range	None
Tilt Speed	None
Rotate Range	None
Sequence	None
Preset Accuracy	None
Operational	
Camera Title	Displayed up to 85 characters
Direction Indicator	None
Day & Night	Auto(ICR)
Backlight Compensation	BLC, WDR, SDDR
Wide Dynamic Range	120dB
Digital Noise Reduction	SSNRV, WiseNRⅡ(Based on AI engine)
Digital Image Stabilization	None
Defog	None
Motion Detection	8ea, 8point Polygonal zones
Privacy Masking	32ea, 4point quadrangle zones
Gain Control	Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC	Support
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (1/5~1/20,000sec)
Digital PTZ	Support
Video Rotation	Flip, Mirror, Hallway view(90°/270°)
Analytics	Classified object type: Person/Vehicle Attributes: Vehicle(Type:car/bus/truck/motorcycle/bicycle) Support DetectionShot
	Analytics events based on AI engine - Motion detection*, Object detection, Virtual line*(Crossing/Direction), Virtual area*(Loitering/Intrusion/Enter/Exit)
	Analytics events - Defocus detection, Tampering, Virtual area(Appear/Disappear)
	* Some of the video analytics only works with people and vehicle detection
Business Intelligence	Based on AI engine: People counting, Vehicle counting, Queue management, Heatmap

Report No. : KES-EM-23T0982

Serial Interface	None
Alarm I/O	None
Alarm Triggers	Analytics, Network disconnect
Alarm Events	When alarm trigger occurred - File upload(image) : e-mail/FTP - Notification : e-mail - Recording : SD/SDHC/SDXC or NAS recording at event triggers - Handover(PTZ preset, Send message by HTTP/HTTPS/TCP)
Audio Streaming	None
Audio In	None
Audio Out	None
Light Type	Dual light (White warm light, IR)
Light Viewable Length	None
IR Viewable Length	White LED : 30m(98.42ft) (TBD) IR : 30m(98.42ft) (TBD)
IR Illuminator (Optional)	None
IR Radiation angle	None
IR LED	None
IR Wavelength	long-life 850 nm IR LED
IR Operation	None
Water Removal	None
Auto Tracking	None
Coaxial Protocol	None
Color Palettes	None
Radiometry	
Temperature Detect Range	None
Temperature Accuracy	None
Temperature Detection	None
Additional	None
Network	
Ethernet	RJ-45(10/100BASE-T)
Video Compression	H.265/H.264: Main/High, MJPEG
Audio Compression	None
Smart Codec	Manual(Sea area), WiseStreamIII(Based on AI engine)
Video Quality Adjustment	H.264/H.265: Target bitrate level control MJPEG: Quality Level control
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(20 users) / Multicast Multiple streaming(Up to 5 profiles)
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, CDP, SRTP (TCP, UDP Unicast), MQTT
SIP support (VoIP, Peer-to-peer)	None
Security	None
Application Programming Interface	ONVIF Profile S/G/T/M SUNAPI(HTTP API)
Security	
OS / Firmware Protect	Secure boot, Signed firmware, Firmware encryption
User authentication	Digest Authentication, Prevent brute-force attack
Network authentication	802.1X Authentication(EAP-TLS, EAP-LEAP, EAP-PEAP MSCHAPv2)
Secure Communication	HTTPS, SRTP, WSS(Websocket secure)
Access Control	Access control based on IP address
Data Protect	Authentication information encryption, ZIP compression encryption
Audit	User Access/System/Event log management
Device ID	Device Certificate(Hanwha Private Root CA)
Secure Storage	SDcard partition encrypt
Security Certificate	None
General	
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	None
Edge Storage	Micro SD/SDHC/SDXC 1slot 256GB
Memory	2GB RAM, 1GB Flash

KES-QP16-F01(00-23-01-01)

KES Co., Ltd.

The authenticity of the test report, contact kes@kes.co.kr

Report No. : KES-EM-23T0982

Environmental & Electrical	
Operating Temperature / Humidity	-40°C~-+60°C(-40°F~-+140°F) / 0~95% RH * Start up should be done at above -30°C Humidity control /w Air vapor control
Storage Temperature / Humidity	-50°C~-+60°C(-58°F~-+140°F) / 0~95% RH
Certification	IP66, IP67, IK10
Input Voltage	PoE(IEEE802.3af, Class3)
Power Consumption	PoE: Max 0.0W, typical 0.0W (TBD)
Mechanical	
Color / Material	White / Aluminum (TBD)
RAL Code	RAL9003
Product Dimensions / Weight	ø140.0x99.6mm(ø5.51x3.92"), 000g(000 lb) (TBD)
Compatible Conduit hole / Gangbox	Conduit hole : None Gangbox : Single, Double, 4" Octagon
Hanging Mount (Dome)	SBP-140HMMW
Skin Cover	None
Skin Cover (Dome)	None
Weather Cap (Dome)	None
Power Module	None
Backbox	SBV-140BW
Certifications & Standards	
Network	None
EMC	FCC 47 CFR 15 Subpart B Class A ICES-3(A)/NMB-3(A) CE/UKCA - EN 55032 Class A, EN 50130-4, EN 61000-3-2, EN 61000-3-3 VCCI CISPR 32 Class A RCM AS/NZS CISPR 32 Class A
Safety	UL 62368-1, CAN/CSA C22.2 NO. 62368-1 IEC/EN 62471
Environment	IEC/EN 63000 IEC/EN 60529 IP66/IP67, IEC/EN 62262 IK10
Video	None
DORI (EN62676-4 standard)	
Detect (25PPM/ 8PPF)	31.4m(103.01ft)
Observe (63PPM/ 19PPF)	12.6m(41.33ft)
Recognize (125PPM/ 38PPF)	6.3m(20.66ft)
Identify (250PPM/ 76PPF)	3.1m(10.17ft)
LPR/ANPR/MMCR	
Speed Description	None
Speed limit	None
Min. Forward Distance	None
Max. Forward Distance	None
Max. Horizontal Angle	None
Max. Vertical Angle	None
Horizontal Offset	None
Camera Height	None
Lane Coverage	None
Vehicle Recognition	None
Available Countries	None
Wisenet Road AI LPR/ANPR/MMCR	
Solution	None
Speed Description	None
Lane Coverage	None
Speed limit	None
Min. Forward Distance	None
Max. Forward Distance	None
Max. Horizontal Angle	None
Max. Vertical Angle	None
Horizontal Offset	None
Camera Height	None
Vehicle Recognition	None
Available Countries	None
Ver	
Ver	202311

KES-QP16-F01(00-23-01-01)

KES Co., Ltd.

The authenticity of the test report, contact kes@kes.co.kr

1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ PoE

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	QNE-C9013RL	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
PoE Adapter	POE29U-1AT(PL)	-	Phihong Technology Co., Ltd.	-
Notebook	LG15N54	506NZGK000615	LG Electronics Inc.	-
Notebook Adapter	PA-1650-43(65W)	OF58U63849302Y609	LG Electronics Inc.	-
Micro SD Card	-	-	Transcend	8 GB

1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45 (PoE)	PoE Adapter	RJ-45	3.8	U
	Micro SD Card Slot	Micro SD Card	Micro SD Card Slot	-	-
Notebook	RJ-45 (LAN)	PoE Adapter	RJ-45	1.5	U
	DC Jack	Notebook Adapter	DC Jack	2.0	U


* Unshielded = U, Shielded = S

1.7 EUT Operating Mode(s)

Test mode	operating
Operating	1. Run the Web Viewer on your laptop and check the camera video output 2. PingTest from your laptop to check the network status 3. After the test, the Micro SD Card storage file was checked. And Checked that the LED lights up.

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd

1.8 Configuration

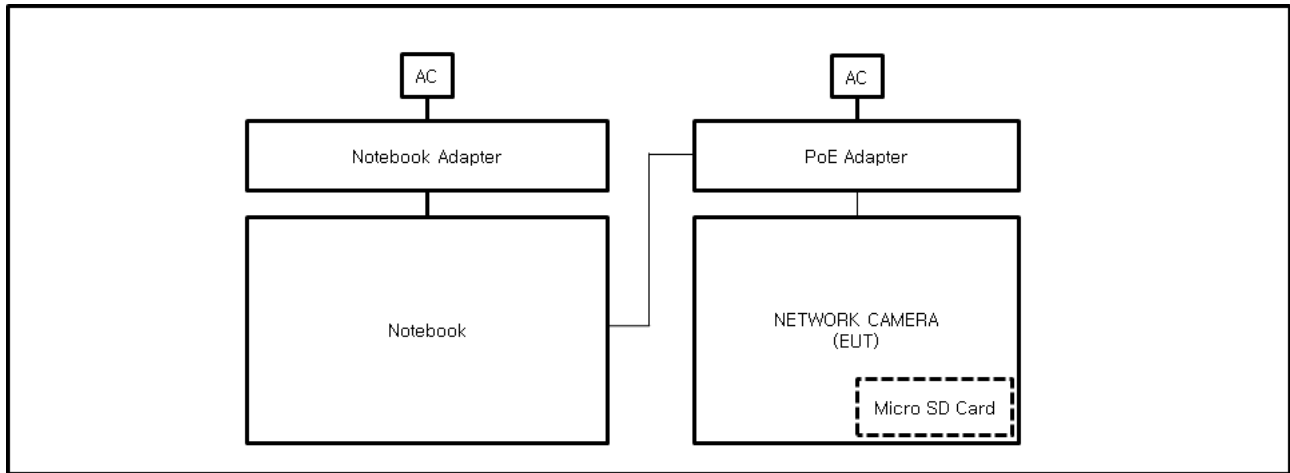

1.9 Remarks when standards applied

The PoE port is regarded as a wired communication network port and power-related ports are not tested.

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011/A1:2014

☒ **EMC –Regulations 2016**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011/A1:2014

2.1 Conducted Emissions at Mains Power Ports

Test Date

N/A

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	EMC32	R & S	9.12.00	-
☐	EMI TEST RECEIVER	ESR3	R & S	101783	11, 08, 2024
☐	LISN	ENV216	R & S	101787	11, 08, 2024
☐	LISN	ESH2-Z5	R & S	100450	11, 08, 2024
☐	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 08, 2024

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

RemarksRefer to 'Remarks when standards applied'.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Nov. 12, 2023

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	11, 08, 2024
☒	LISN	ENV216	R & S	101787	11, 08, 2024
☒	LISN	ESH2-Z5	R & S	100450	11, 08, 2024
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 08, 2024
☐	8-WIRE ISN CAT3	CAT3 8158	SCHWARZBECK	8158-0019	03, 07, 2024
☒	8-WIRE ISN CAT5	CAT5 8158	SCHWARZBECK	8158-0030	03, 07, 2024
☐	8-WIRE ISN CAT6	NTFM 8158	SCHWARZBECK	8158-0029	03, 07, 2024

Test Conditions

Temperature: (22,5 ± 0,1) °C

Relative Humidity: (47,0 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Nov. 13, 2023

Test Location☐ OPEN AREA TEST SITE #2☒ SEMI ANECHOIC CHAMBER #4(10 m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	03, 21, 2024
☒	AMPLIFIER	SCU 01	R & S	100603	11, 08, 2024
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	11, 17, 2024
☒	ATTENUATOR	8491A	HP	32173	03, 03, 2024

Test Conditions

Temperature: (22,1 ± 0,1) °C

Relative Humidity: (46,2 ± 0,1) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Nov. 14, 2023

Test Location

SEMI ANECHOIC CHAMBER #5

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	ES10/RE	TOYO Corporation	2022.01.000	-
☒	EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	03, 21, 2024
☒	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	11, 03, 2024
☒	PREAMPLIFIER	8449B	HP	3008A00538	05, 31, 2024
☒	ATTENUATOR	8491B	HP	23094	03, 21, 2024

Test Conditions

Temperature: (23,4 ± 0,1) °C

Relative Humidity: (48,1 ± 0,1) % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

2.5 Harmonic Current Emissions

Test Date

N/A

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	net.control	EM TEST	2.1.4	-
☐	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	03, 27, 2024
☐	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: °C

Relative Humidity: % R.H.

Classification of Equipment for Harmonic Current Emissions

- ☐ Class A
☐ Class B
☐ Class C(Below 25 W)
☐ Class C(Above 25 W)
☐ Class D

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

RemarksRefer to 'Remarks when standards applied'.

2.6 Voltage Fluctuations and Flicker

Test Date

N/A

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	net.control	EM TEST	2.1.4	-
☐	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	03, 27, 2024
☐	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: °C

Relative Humidity: % R.H.

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

RemarksRefer to 'Remarks when standards applied'.

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011/A1:2014 Alarm systems-Part 4: Electromagnetic compatibility Product family standard:
Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

- (a) there is no permanent damage or change to EUT
(e.g. no corruption of memory or changes to programmable setting etc.)
- (b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and
- (c) there is no observable deterioration of the picture at 1 V/m.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change, and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.

For component of CCTV systems, where the status is monitored by observing the TV picture, then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:

- (a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
- (b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could still be used; and
- (c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change. The EUT shall meet the acceptance criteria for the functional test, after the conditioning.

3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Nov. 12, 2023

Test Location

EMS-ESD: Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS05X4620	03, 06, 2024
☒	HCP	-	Noise Ken	-	-
☒	VCP	-	Noise Ken	-	-

Test Conditions

Temperature: (22,6 ± 0,1) °C
 Relative Humidity: (46,6 ± 0,1) % R.H.
 Atmospheric Pressure: (100,3 ± 0,1) kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative



Number of Discharge: 10 at all locations for Air discharge
 10 at all locations for Contact discharge


Discharge Voltage:	Contact	Air	HCP	VCP
	☐ 2 kV	☒ 2 kV	☐ 2 kV	☐ 2 kV
	☐ 4 kV	☒ 4 kV	☐ 4 kV	☐ 4 kV
	☒ 6 kV	☐ 6 kV	☒ 6 kV	☒ 6 kV
	☐ 8 kV	☒ 8 kV	☐ 8 kV	☐ 8 kV
	☐ 15 kV	☐ 15 kV	☐ 15 kV	☐ 15 kV

Notes: HCP: Horizontal coupling plane
 VCP: Vertical coupling plane

Required Performance Criteria: ☒ Complied

Location of Discharge:

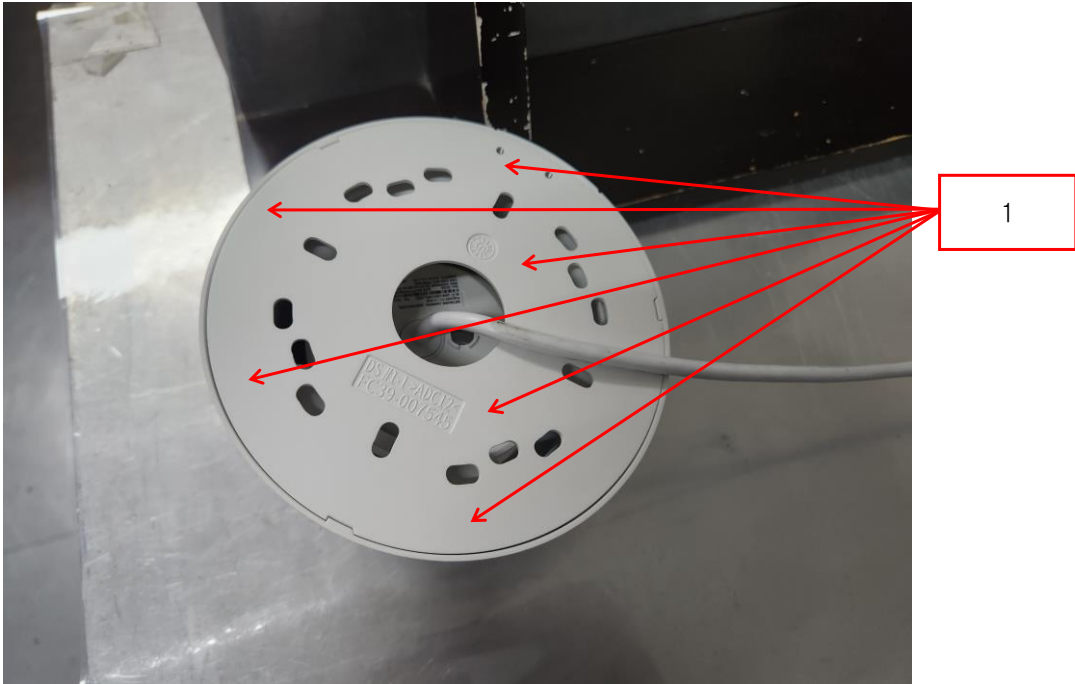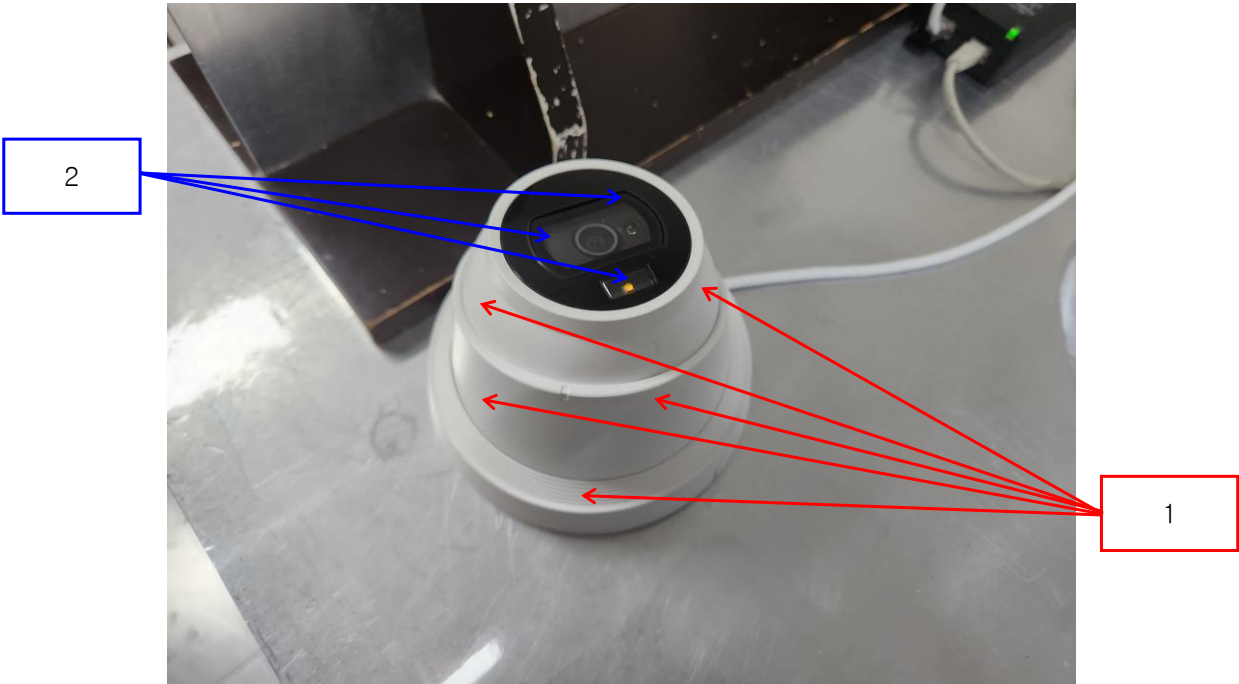

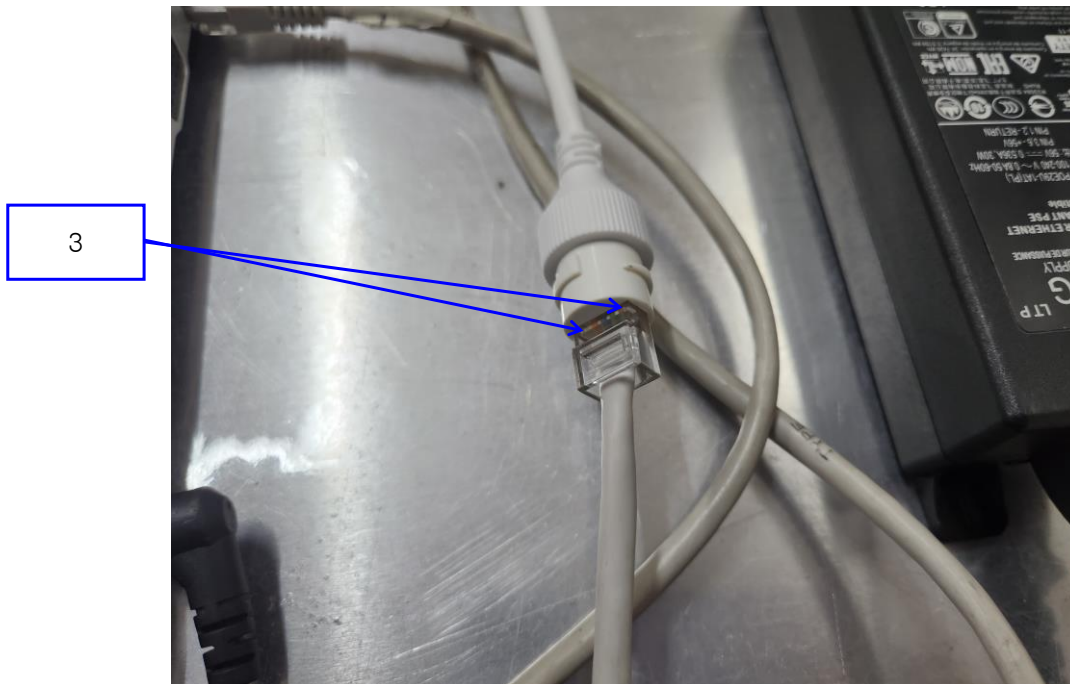

Test Data**Indirect Discharge**

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Enclosure	Contact Discharge	Complied	-
2	Lens	Air Discharge	Complied	-
3	Port	Air Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

3.2 Radiated Electric Field Immunity

Reference Standard

EN IEC 61000-4-3:2020

Test Date

Nov. 15, 2023

Test Location

EMS-RS: ☐ SEMI ANECHOIC CHAMBER #2 ☒ SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	EMC32	R & S	10.10.02	-
☒	SIGNAL GENERATOR	SMB 100A	Rohde & Schwarz	108252	07, 31, 2024
☒	HIGH POWER DUAL AMP	SSA532	SUNGSAN	SSA532-001	-
☒	POWER METER	E4419B	Agilent	GB40203000	03, 21, 2024
☒	AVERAGE POWER SENSOR	E9301A	Agilent	MY52170007	03, 21, 2024
☒	AVERAGE POWER SENSOR	E9301A	Agilent	MY41498669	03, 21, 2024
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 06, 2024

Test Conditions

Temperature: (22,0 ± 0,2) °C
 Relative Humidity: (46,1 ± 0,1) % R.H.
 Atmospheric Pressure: (100,4 ± 0,1) kPa

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

Test Data

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4:2012

Test Date

Nov. 12, 2023

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 09, 2024
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 09, 2024
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	11, 10, 2024

Test Conditions

Temperature: (21,7 ± 0,1) °C
 Relative Humidity: (45,5 ± 0,1) % R.H.
 Atmospheric Pressure: (100,8 ± 0,1) kPa

Test Specifications

Pulse Amplitude & Polarity:
 (AC Power Lines) ☐ ± 1.0 kV ☐ ± 2.0 kV
☐ ± 4.0 kV

Pulse Amplitude & Polarity:
 (Other supply / Signal Lines) ☐ ± 0.5 kV ☒ ± 1.0 kV
☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☐ 5 klz ☒ 100 klz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ Complied

Test Data

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45 (PoE)	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

☒ PASS Required Performance Criteria

☐ NOT PASS Required Performance Criteria

Remarks

- PASS Required Performance Criteria

- Refer to 'Remarks when standards applied'.

3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014+A1:2017

Test Date

Nov. 12, 2023

Test Location

EMS-Surge: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 09, 2024
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 09, 2024
☒	CDN	CNV 508N1	EM TEST	P1610176296	11, 10, 2024

Test Conditions

Temperature: (21,7 ± 0,1) °C
Relative Humidity: (45,5 ± 0,1) % R.H.
Atmospheric Pressure: (100,8 ± 0,1) kPa

Test Specifications**AC Power Lines**

Source Impedance: 12 ohm for common Mode and 2 ohm for differential Mode

Surge Amplitude :
Common Mode
☐ (0,5 / 1,0 / 2,0) kV
Differential Mode
☐ (0,5 / 1,0) kVNumber of Surges: ☐ 5 surges per angleAngle: ☐ 0°, 90°, 180°, 270° (input a.c. power port)Polarity: ☐ Positive & NegativeRepetition Rate: ☐ 1 surge per min ☐ 1 surge per 30 sec.Required Performance Criteria: ☐ Complied**Other supply / Signal Lines**

Source Impedance: 42 ohm for common Mode

Surge Amplitude:
Common Mode
☒ (0,5 / 1,0) kVNumber of Surges: ☒ 5 SurgesPolarity: ☒ Positive & NegativeRepetition Rate: ☒ 1 surge per min ☐ 1 surge per 30 sec.Required Performance Criteria: ☒ Complied

Test Data☐ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Signal Lines☒ Line to Earth – Common Mode

Mode of Application	Coupling Method	Observations	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45 (PoE)	CDN	Complied	Complied
	LINE	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**- PASS Required Performance Criteria- Refer to 'Remarks when standards applied'.

3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Nov. 13, 2023

Test Location

EMS-CS: Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	5.3.12	-
☒	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	11, 08, 2024
☒	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 08, 2024
☒	CDN	CDN M016	TESEQ	43694	11, 08, 2024
☒	CDN	CDN M016	TESEQ	43697	11, 08, 2024
☐	CDN	CDN T800	TESEQ	42800	11, 08, 2024
☒	CDN	CDN T8RJ45	EM TEST	0909-09	07, 31, 2024

Test Conditions

Temperature: (22,5 ± 0,2) °C
Relative Humidity: (46,9 ± 0,1) % R.H.
Atmospheric Pressure: (100,8 ± 0,1) kPa

Test Specifications

Frequency range:

☒ 150 kHz to 100 MHz

☐ 150 kHz to 80 MHz

Voltage Level:

☐ 1 Vrms

☐ 3 Vrms

☒ 10 Vrms

Modulation:

☒ AM, 80 %, 1 kHz sine wave

☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step:

☒ 1 % step

Dwell Time:

☐ 1 s

☒ 3 s

Required Performance Criteria:

☒ Complied

Test Data☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45 (PoE)	CDN	Complied

Notes: CDN = Coupling Decoupling Network
 "blank" = Not performed

Observations:

Complied – No degradation of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**- PASS Required Performance Criteria- Refer to 'Remarks when standards applied'.

3.6 Voltage Dips and Short Interruptions

Reference Standard

EN IEC 61000-4-11:2020

Test Date

N/A

Test Location

EMS-Voltage dip: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☐	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 09, 2024
☐	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 09, 2024

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Atmospheric Pressure:

kPa

Test Specifications & Observations/Remarks**- Voltage Dips and Short Interruptions**

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☐ 20 % dip	☐ 250 / 5 000	<u>N/A</u>
☐ 30 % dip	☐ 25 / 500	<u>N/A</u>
☐ 60 % dip	☐ 10 / 200	<u>N/A</u>
☐ 100 % dip	☐ 250 / 5 000	<u>N/A</u>

- Voltage variations

☐ Unom + 10 %	☐ 253.0 V (ac)	<u>N/A</u>
☐ Unom - 15 %	☐ 195.5 V (ac)	<u>N/A</u>

Observations:

Complied – No degradation of function

Degradation - See "Remarks "

Test Results

- ☐ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☒ NOT APPLICABLE

RemarksN/A : Refer to 'Remarks when standards applied'.

APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

N/A

[NEUTRAL]

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

Conducted Emissions at Telecommunication Ports

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
 Model No.: QNE-C9013RL
 Mode :
 Speed : 100 Mbps
 Operator Name: KES

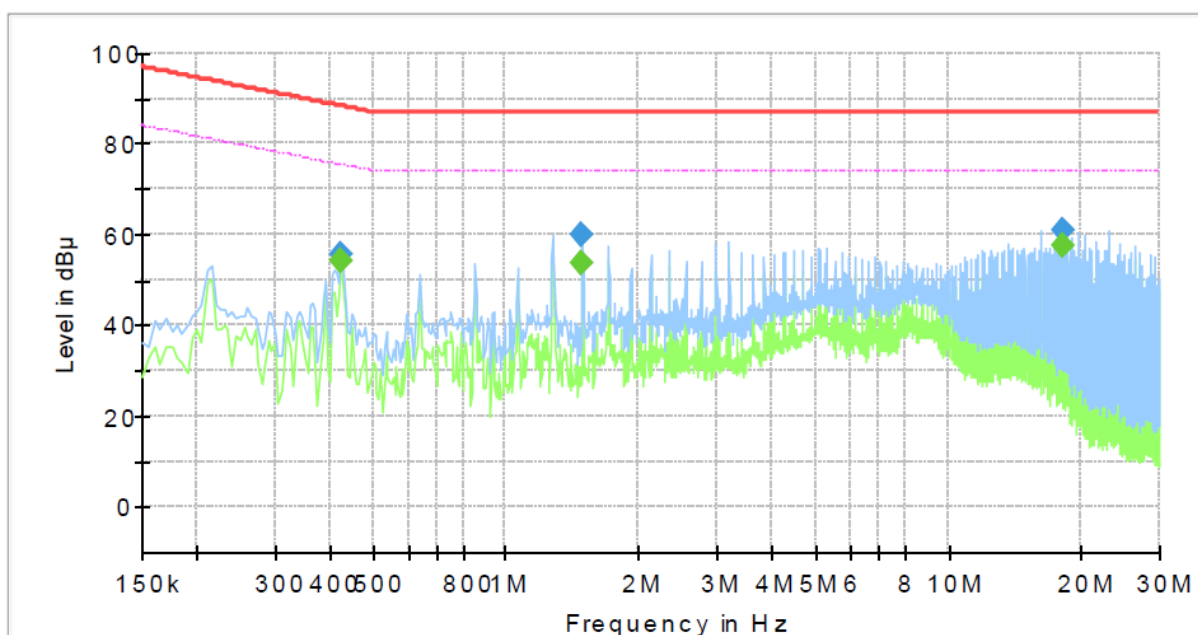

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.425000	---	54.31	75.35	21.04	1000.0	9.000	Single Line	19.2
0.425000	55.64	---	88.35	32.71	1000.0	9.000	Single Line	19.2
1.490000	---	53.85	74.00	20.15	1000.0	9.000	Single Line	19.1
1.490000	59.81	---	87.00	27.19	1000.0	9.000	Single Line	19.1
18.245000	---	57.36	74.00	16.64	1000.0	9.000	Single Line	19.6
18.245000	61.07	---	87.00	25.93	1000.0	9.000	Single Line	19.6


◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

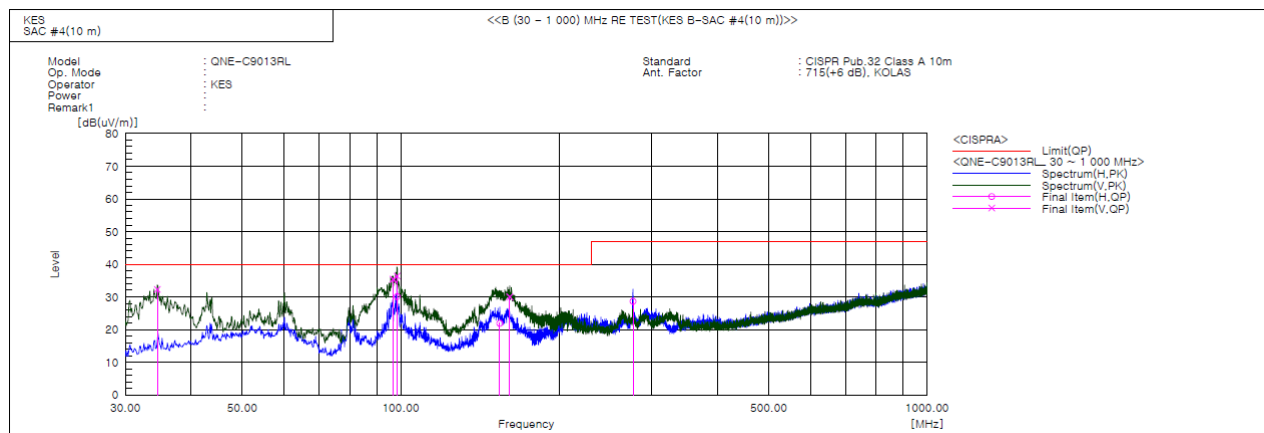Radiated Electric Field Emissions(Below 1 GHz)**Final Result**

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	34.486	V	57.2	-24.9	32.3	40.0	7.7	100.0	322.0	
2	96.688	V	57.9	-22.5	35.4	40.0	4.6	112.0	17.0	
3	98.432	H	52.5	-22.4	30.1	40.0	9.9	392.0	203.0	
4	98.434	V	58.8	-22.4	36.4	40.0	3.6	155.0	75.0	
5	154.281	H	46.9	-25.0	21.9	40.0	18.1	286.0	206.0	
6	161.071	V	54.7	-24.7	30.0	40.0	10.0	149.0	199.0	
7	276.259	H	46.8	-18.2	28.6	47.0	18.4	400.0	251.0	

◆ Calculation


Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

Radiated Electric Field Emissions(Above 1 GHz)

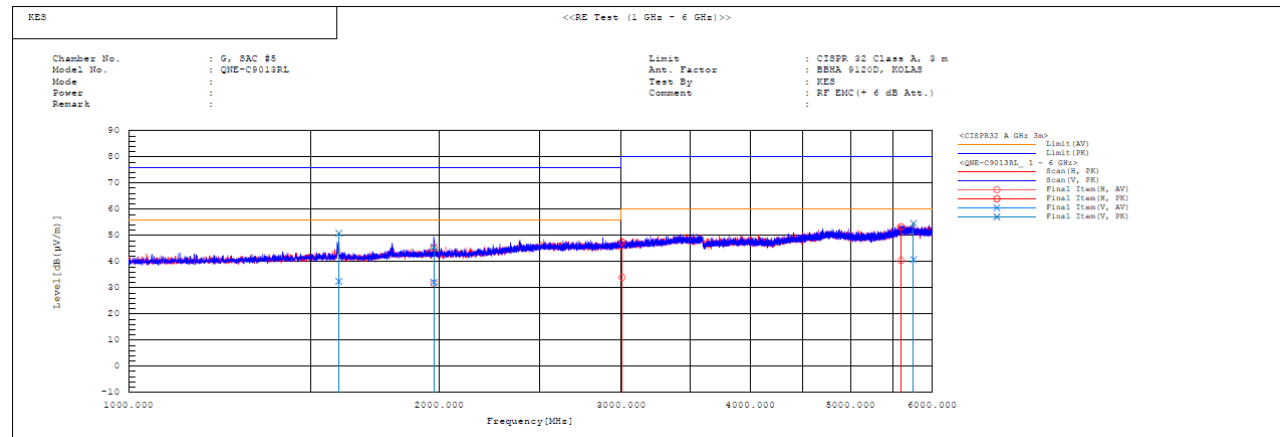

Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]	Remark
1	1599.273	V	31.4	49.8	1.0	32.4	50.8	56.0	76.0	23.6	25.2	100.0	202.9	
2	1975.860	H	29.2	42.8	2.5	31.7	45.3	56.0	76.0	24.3	30.7	100.0	139.7	
3	1975.893	V	29.6	43.0	2.5	32.1	45.5	56.0	76.0	23.9	30.5	100.0	143.6	
4	3005.689	H	27.7	41.2	6.3	34.0	47.5	60.0	80.0	26.0	32.5	100.0	200.7	
5	5596.810	H	27.0	39.9	13.4	40.4	53.3	60.0	80.0	19.6	26.7	100.0	0.1	
6	5755.809	V	27.2	41.0	13.6	40.8	54.6	60.0	80.0	19.2	25.4	100.0	78.9	

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

Average harmonic current results

Hn	Ieff [A]	% of Limit	Limit [A]	Result
		N/A		

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.

Maximum harmonic current results

Hn	Ieff [A]	% of Limit	Limit [A]	Result
		N/A		

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.

Test Data - Voltage Fluctuations

Maximum Flicker results

Flicker Measurements					
	Plt	Max Pst	Max Dc	Max Dmax	Max Tmax
Line 1:	N/A				
Limits:					
Results:					

Test Setup Photos and Configuration



Conducted Emissions at Mains Power Ports

N/A


Conducted Emissions at Telecommunication Ports



Radiated Electric Field Emissions(Below 1 GHz)

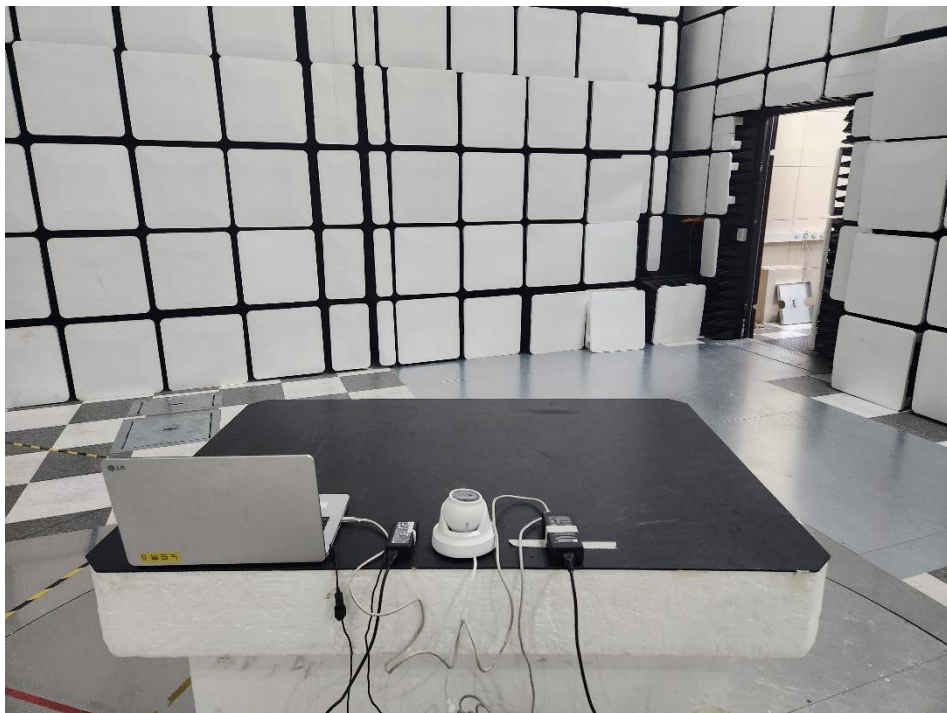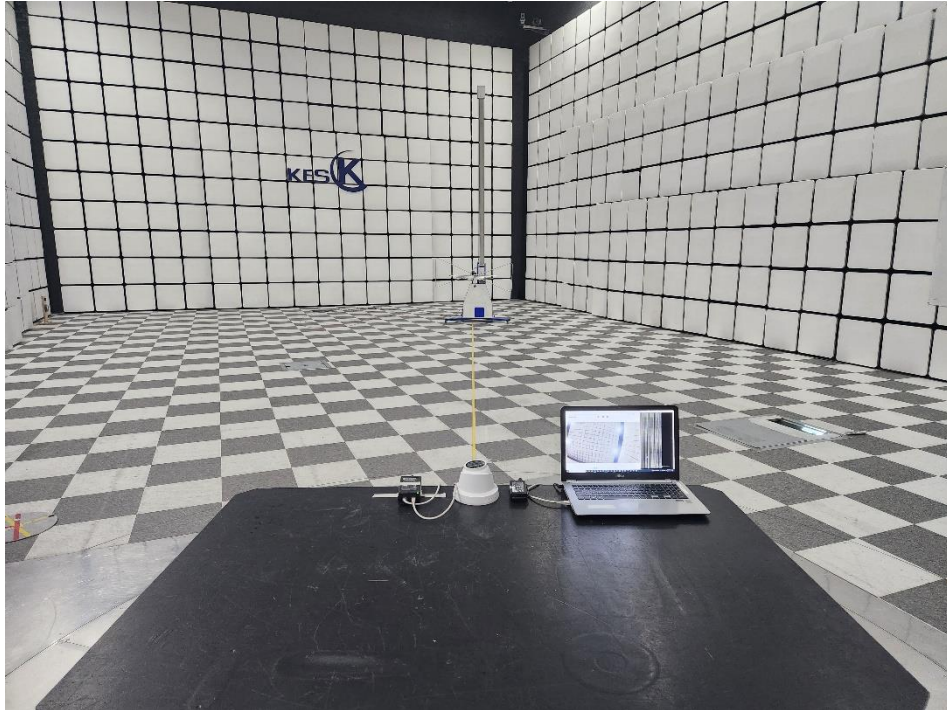

Radiated Electric Field Emissions(Above 1 GHz)

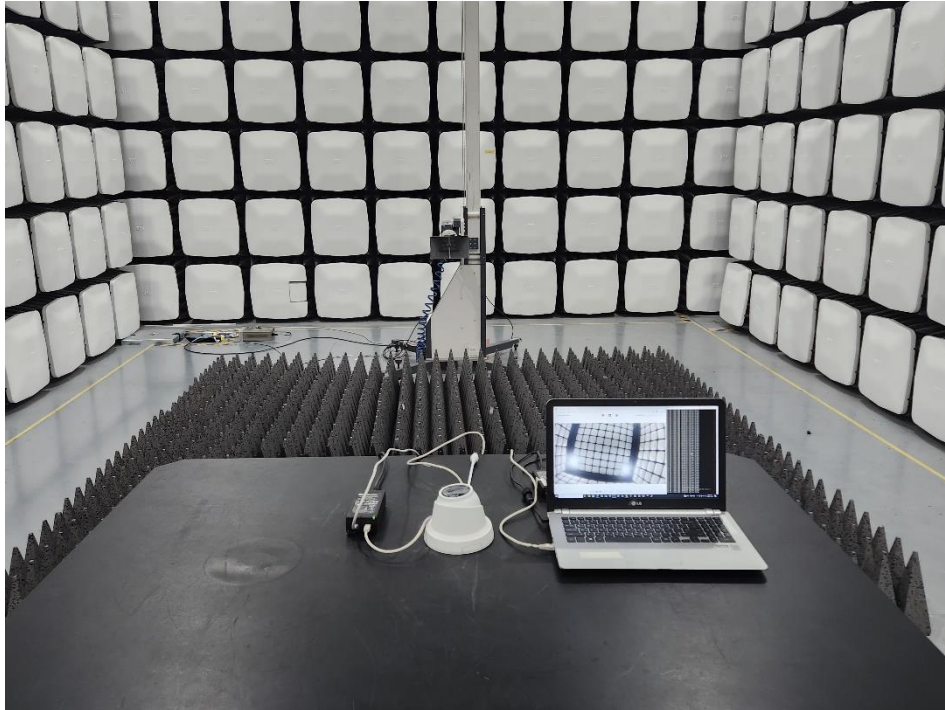

Harmonic Current Emissions and Voltage Fluctuations and Flicker

N/A


Electrostatic Discharge



Radiated Electric Field Immunity



Electrical Fast Transients/Bursts

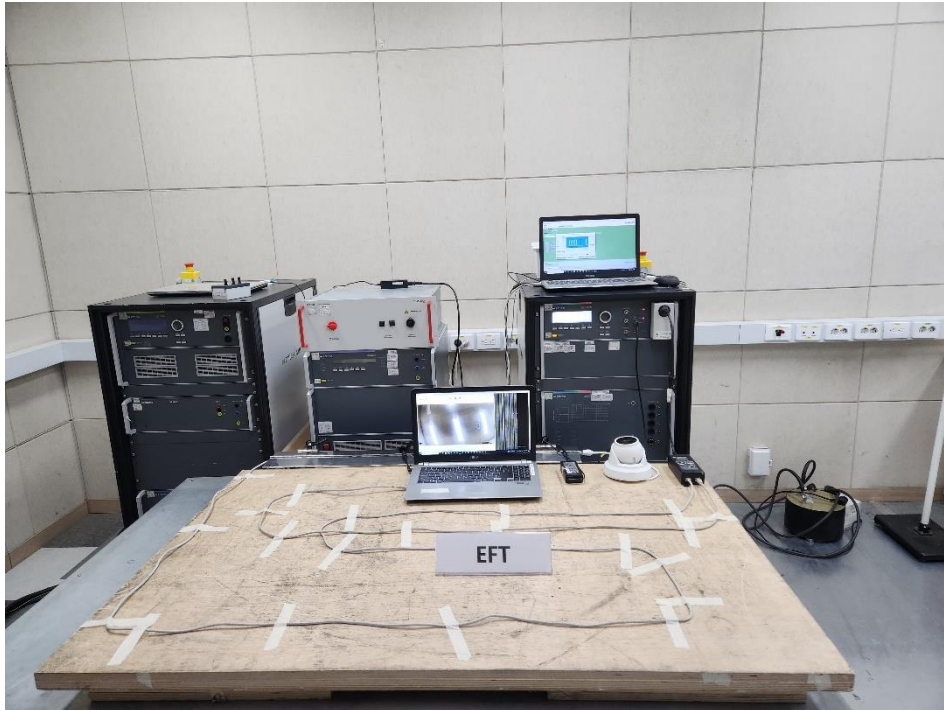

Surge Transients



Conducted Disturbance



Voltage Dips and Short Interruptions

N/A

EUT External Photographs

(Top)




(Bottom)




EUT Internal Photographs

(Internal View)

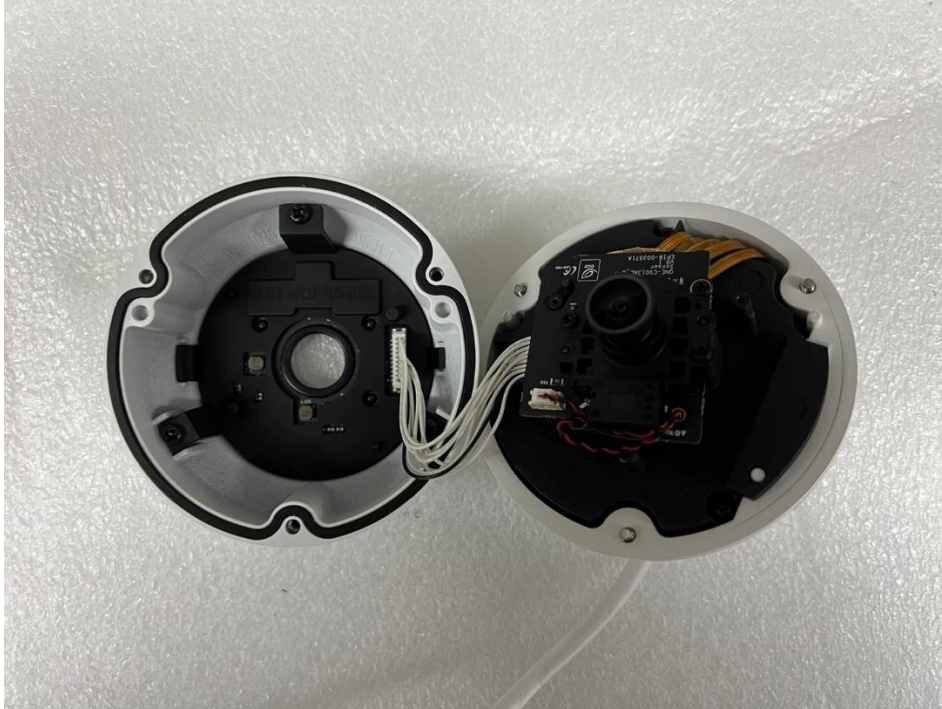

EUT Internal View – Board 1

(Top)

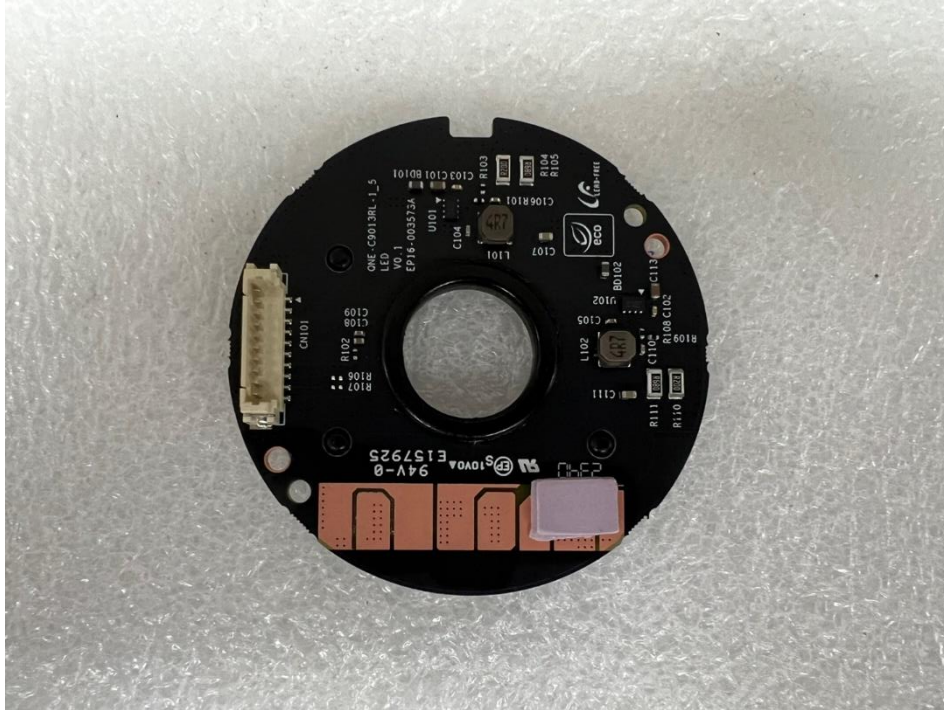


(Bottom)




EUT Internal View – Board 2

(Top)

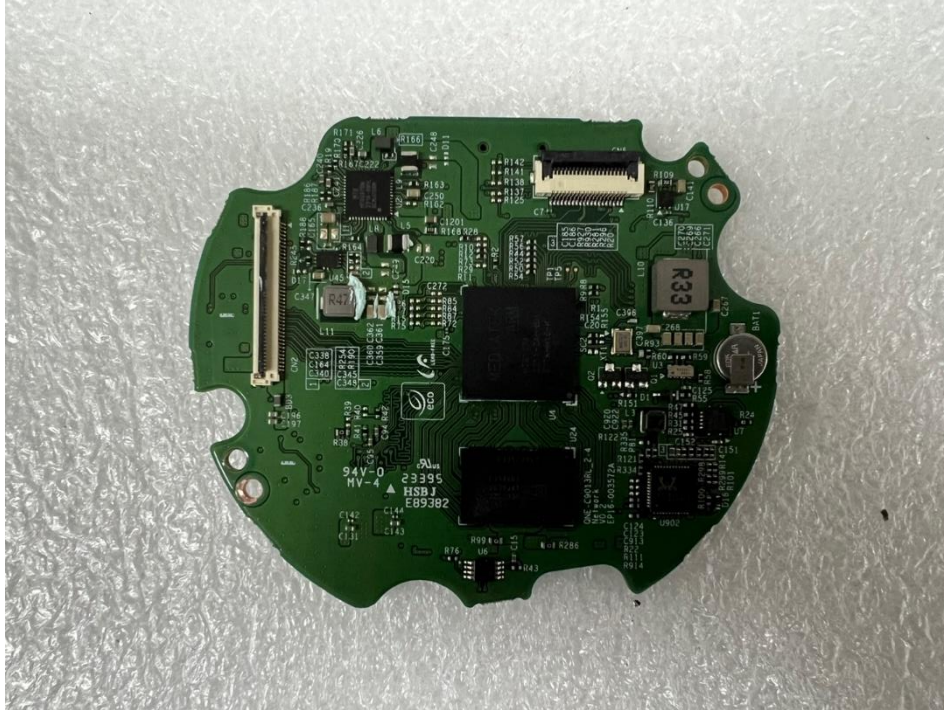


(Bottom)

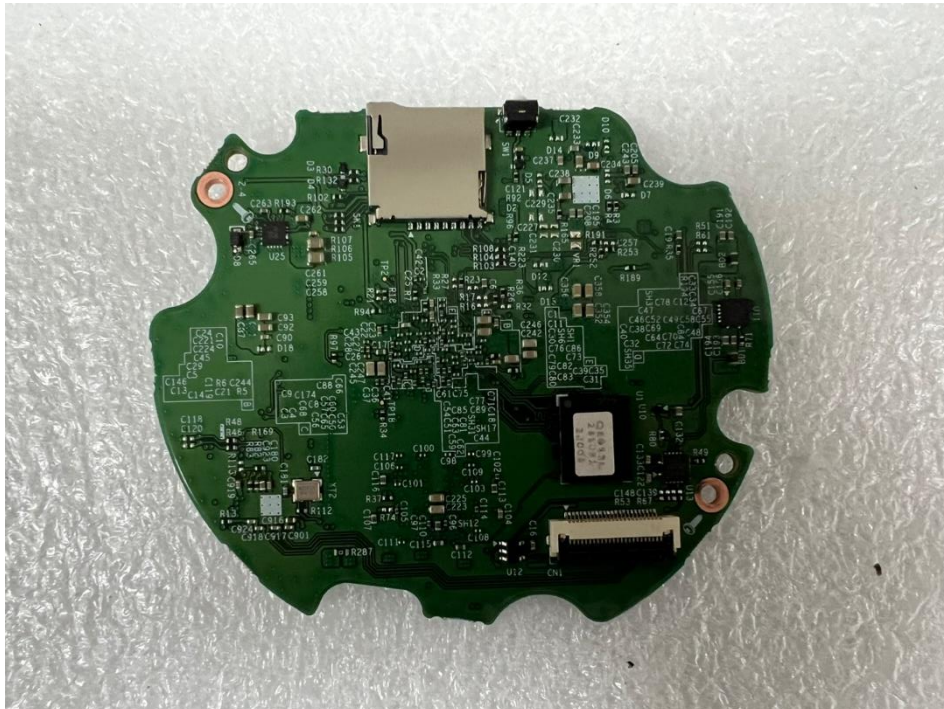


EUT Internal View – Board 3

(Top)

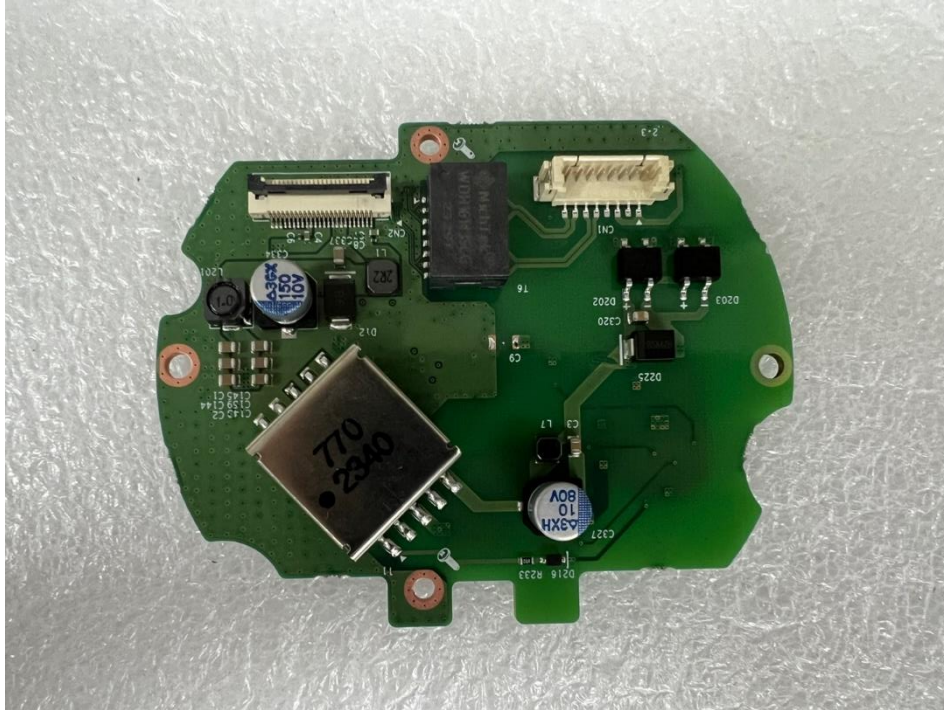

(Bottom)

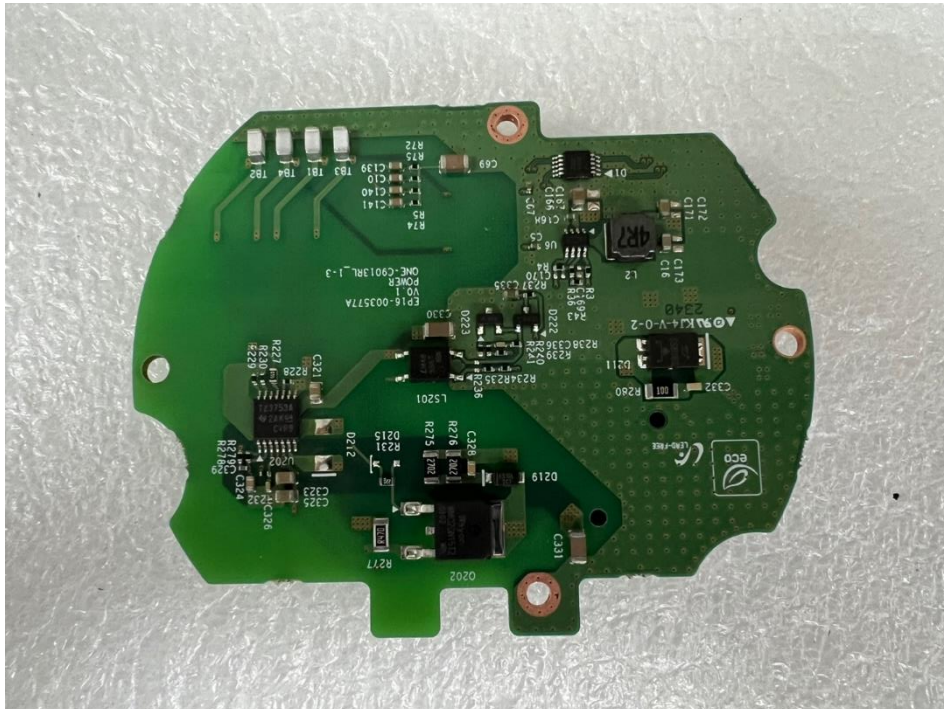


EUT Internal View – Board 4


(Top)



(Bottom)

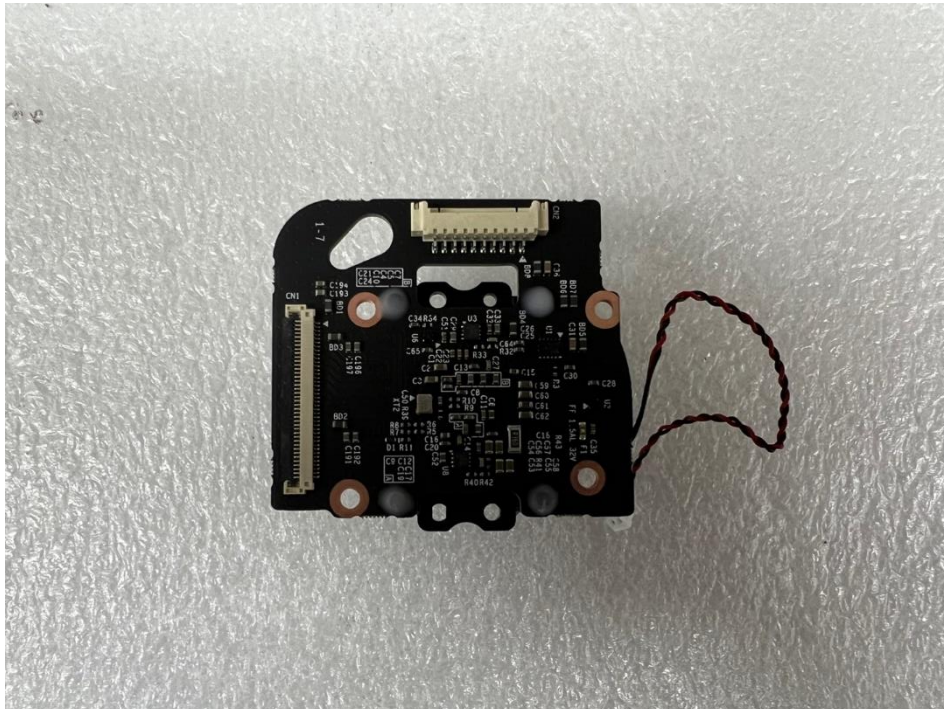

Label and Location

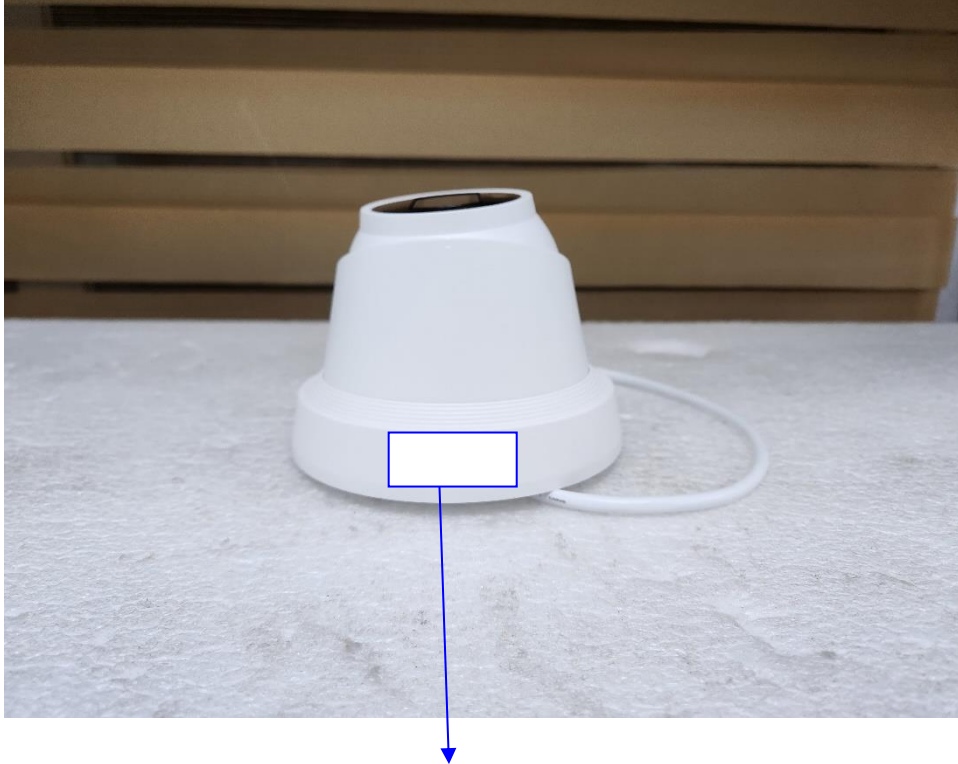**NETWORK CAMERA**

Model No : QNE-C9013RL

Manufacturer : HANVHA VISION VIETNAM COMPANY LIMITED

Made in Vietnam

