



EMC TEST REPORT For CE

Test Report No. : KES-E1-17T0695
Date of Issue : Nov. 03, 2017
Product name : NETWORK CAMERA
Model/Type No. : SNO-L6083RP
Variant Model : -
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 1204, Changwon-daero, Seongsan-gu Changwon-si,
Gyeongsangnam-do, Korea
Manufacturer : Hanwha Techwin (Tianjin) Co.,Ltd.
Manufacturer Address : No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA,
Tianjin, 300385, People's Republic of China
Date of Receipt : Sep. 01, 2017
Test date : Sep. 04, 2017 ~ Sep. 05, 2017
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Young Suk, Song
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KOLAS.

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0695
Page (2) of (60)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Nov. 03, 2017	KES-E1-17T0695	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document Jun be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	6
1.2	Variant Model Differences.....	6
1.3	Device Modifications	6
1.4	Equipment Under Test.....	6
1.5	Support Equipments	6
1.6	External I/O Cabling	7
1.7	E.U.T Operating Mode(s)	7
1.8	Configuration.....	8
1.9	Remarks when standards applied	9
1.10	Calibration Details of Equipment Used for Measurement	9
1.11	Test Facility	9
1.12	Laboratory Accreditations and Listings	9
2.0	Test Regulations.....	10
2.1	Conducted Emissions at Mains Power Ports	12
2.2	Conducted Emissions at Telecommunication Ports	13
2.3	Radiated Electric Field Emissions(Below 1 GHz)	14
2.4	Radiated Electric Field Emissions(Above 1 GHz)	15
2.5	Harmonic Current Emissions.....	16
2.6	Voltage Fluctuations and Flicker	17
3.0	Criteria for compliance.....	18
3.1	Electrostatic Discharge.....	20
3.2	Radiated Electric Field Immunity	24
3.3	Electrical Fast Transients/Bursts	27
3.4	Surge Transients	29
3.5	Conducted Disturbance	32
3.6	Voltage Dips and Short Interruptions	34
APPENDIX A	– TEST DATA.....	36
	Conducted Emissions at Mains Power Ports.....	36
	Conducted Emissions at Telecommunication Ports	38
	Radiated Electric Field Emissions(Below 1 GHz)	40
	Radiated Electric Field Emissions(Above 1 GHz)	41
	Harmonic Current Emissions and Voltage Fluctuations and Flicker	42
	Test Setup Photos and Configuration	45
	Conducted Voltage Emissions	45
	Conducted Telecommunication Emissions	46
	Radiated Electric Field Emissions(Below 1 GHz)	47
	Radiated Electric Field Emissions(Above 1 GHz)	48
	Harmonic Current Emissions and Voltage Fluctuations and Flicker	49
	Electrostatic Discharge	50
	Radiated Electric Field Immunity	50
	Electrical Fast Transients/Bursts	51
	Surge Transients	51
	Conducted Disturbance	52
	Voltage Dips and Short Interruptions	52
	EUT External Photographs	53
	EUT Internal Photographs	54



1.0 General Product Description

Main Specifications of E.U.T are:

Imaging Device	1/2.9" 2.19M CMOS
Total Pixels	2,000(H) x 1,121(V)
Effective Pixels	1,984(H) x 1,105(V)
Scanning System	Progressive
Min. Illumination	Color: 0.3Lux(1/30sec, F1.8, 50IRE), 0.005Lux(2sec, 50IRE) Color: 0.1Lux(1/30sec, F1.8, 30IRE) B/W : 0 Lux (IR LED on)
Focal Length (Zoom Ratio)	3.6mm
Max. Aperture Ratio	F1.8
Angular Field of View	H: 86.5°, V: 47.8°, D: 101.2° (±5%)
Min. Object Distance	0.5m
Lens Type	Fixed
Mount Type	Board type
IR Viewable Length	15m
Camera Title	Off / On (Displayed up to 15 characters)
Day & Night	True Day & Night
Backlight Compensation	Off / BLC
Contrast Enhancement	SSDR(SamsungSuperDynamicRange) (Off / On)
Digital Noise Reduction	SSNR(Off / On)
Motion Detection	Off / On (4ea rectangler zones)
Privacy Masking	Off / On (6ea rectangler zones)
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC(Lens distortion control)	On/Off (5 levels with Min/Max)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker
Flip / Mirror	Flip / Mirror / Hallway view
Intelligent Video Analytics	Motion Detection with metadata, Tampering
Alarm Triggers	Motiondetection, Tampering Detection, SD card error
Alarm Events	FileuploadviaFTPandE-Mail LocalstoragerecordingatEvent NotificationviaE-Mail
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.264, MJPEG
Resolution	1920x1080 / 1280x960 / 1280x720 / 1024x768 / 800x600 / 720x576 / 640x480 / 320x240
Max. Framerate	H.264:Max30fpsatallresolutions MJPEG:Max1fpsat1920x1080/1280x1024/1280x720/1024x768,Max.15fpsatotherres olution
Video Quality Ajustment	H.264:TargetBitrateLevelControl MJPEG:QualityLevelControl
Bitrate control method	H.264:CBRorVBR MJPEG:VBR
Streaming Capability	Multiple Streaming(Up to 3 Profiles)
Audio I/O	Line-in
Audio Compression Format	G.711u-law/G.726Selectable G.726(ADPCM)8KHz, G.7118KHz G.726:16Kbps, 24Kbps, 32Kbps, 40Kbps
Audio Communication	Uni-directional
IP	IPv4, IPv6

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0695
Page (5) of (60)

Protocol	TCP/IP,UDP/IP,RTP(UDP),RTP(TCP),RTCP,RTSP,NTP,HTTP,HTTPS,SSL,DHCP,PPPoE,FTP,SMTP,ICMP,IGMP,SNMPv1/v2c/v3(MIB-2),ARP,DNS,DDNS,QoS,PIM-SM,UPnP,Bonjour
Security	HTTPS(SSL)LoginAuthentication DigestLoginAuthentication IPAddressFiltering UseraccessLog 802.1XAuthentication
Streaming Method	Unicast / Multicast
Max. User Access	6 users at Unicast Mode
Edge storage	MicroSD/SDHCMax32G,NAS (MotionimagesrecordedinthelSDmemorycardcanbedownloaded) (ManualrecordingatLocalPC)
Application Programming Interface	ONVIFProfileS,G SUNAPI(HTTPAPI)
Webpage Language	English,French,German,Spanish,Italian,Chinese,Korean, Russian,Japanese,Swedish,Denish,Portuguese,Turkish,Polish,Czech,Rumanian,Serbian,Dutch,Croatia,Hungary,Greek,Finnish,Norwegian
Web Viewer	SupportedOS:WindowsXP/VISTA/7/8/8.1,MACOSX10.7~10.10 SupportedBrowser:MicrosoftInternetExplorer(Ver.8~11),MozillaFirefox(Ver.9~35), Google Chrome (Ver. 15~40), Apple Safari (Ver. 8.0.2(Mac OS X 10.10), 8.0.2(Mac OS X 10.9), 6.0.2 (Mac OS X 10.8, 10.7 only), 5.1.7) * Mac OS X only
Central Management Software	SmartViewer
Operating Temperature / Humidity	-30°C ~ +55°C / Less than 90% RH
Storage Temperature / Humidity	-30°C~+60°C(-22°F~+140°F)/ Less than 90% RH
Ingress Protection	IP66
Input Voltage / Current	PoE
Power Consumption	Max. 7.0W
Color / Material	Dark gray / Plastic
Dimension (WxHxD)	Φ58.6mm x 86mm(선월드 제외)
Weight	300g

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 230Vac ☐ 100 Vac ☐ 24 Vac ☐ 12 Vdc ☒ PoE
Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	SNO-L6083RP	-	Hanwha Techwin (Tianjin) Co.,Ltd	E.U.T

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
PoE Adaptor	GS728TPP	-	NETGEAR, INC.	-
Notebook	X56K	HN11N5151FJ0045 W	Hansung computer co., ltd.	-
Notebook Adaptor	A12-120P1A	F180271552011758	CHICONY POWER TECHNOLOGY CO.,LTD.	-
Micro SD Card	-	-	SanDisk	-
MIC	CMK-303	-	CAMAC	-



1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	RJ-45(PoE)	PoE Adaptor	RJ-45(PoE)	4.0	U
	Micro SD Slot	Micro SD Card	Micro SD Slot	-	-
	3.5 mm	MIC	3.5 mm	1.7	U
PoE Adaptor	RJ-45(Data)	Notebook	RJ-45(Data)	3.0	U


* Unshielded=U, Shielded=S

1.7 E.U.T Operating Mode(s)

Test mode	operating
PoE	E.U.T Monitoring, Ping test

E.U.T Test operating S/W		
Name	Version	Manufacture Company
-	-	-

1.8 Configuration

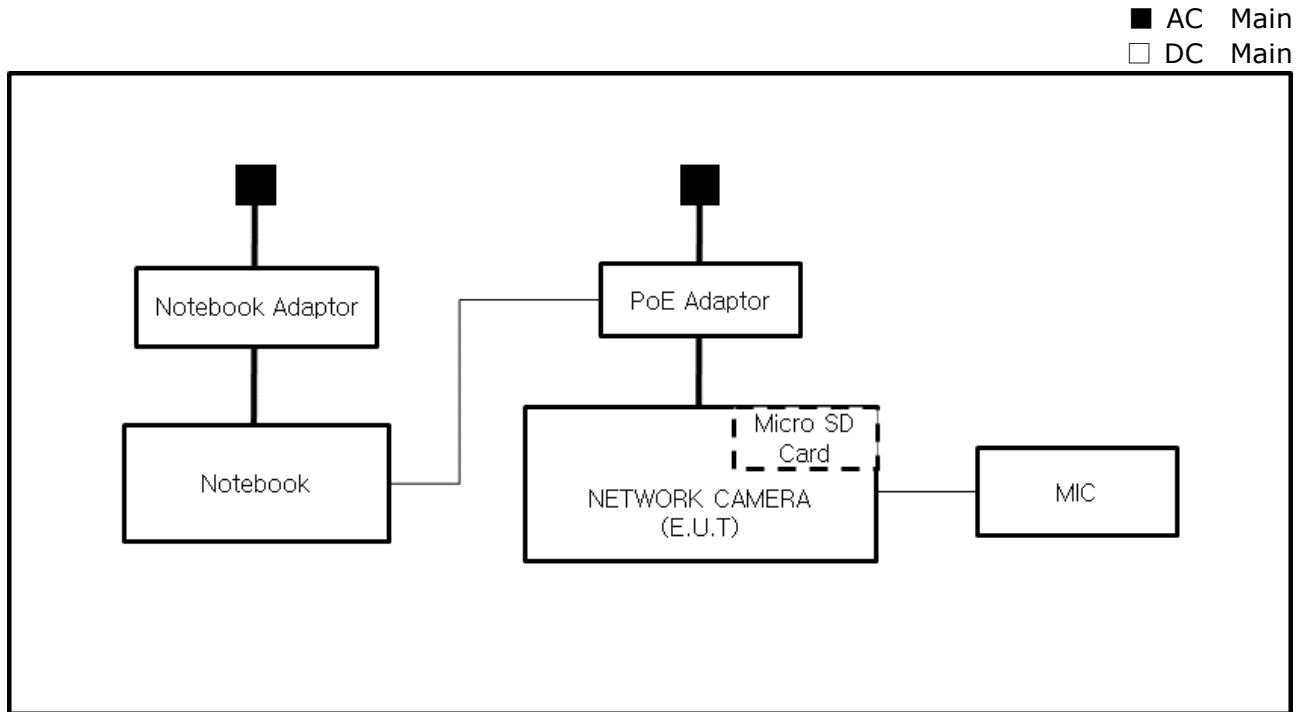

1.9 Remarks when standards applied

- N/A


1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeoju-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 32.

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
KOREA	MSIP	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
Canada	IC	3 & 10 meter Open Area Test Sites and one conducted site	 4769B-1
Europe	CE	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	
International	KOLAS	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547:2009

☒ EN 55032:2012/AC:2013

☒ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☒ EN 50130-4:2011

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0695
Page (11) of (60)

-
- | | | |
|---|----------------------------------|----------------------------------|
| ☐ VCCI V-3 / 2015.04 | ☐ Class A | ☐ Class B |
| ☐ AS/NZS CISPR22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2009 | | |
| ☐ IC Regulation ICES-003 : 2016 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
|
☐ RE- Directive 2014/53/EU | | |
|
☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
|
☐ EN 301 489-3 V1.6.1 | | |
|
☐ EN 301 489-17 V2.2.1 | | |
|
☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



2.1 Conducted Emissions at Mains Power Ports

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	EMC32	R & S	9.12.00	-
☐	EMI TEST RECEIVER	ESR3	R & S	101781	04, 27, 2018
☐	LISN	ENV216	R & S	101787	01, 11, 2018
☐	LISN	ESH2-Z5	R & S	100450	04, 27, 2018
☐	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 13, 2017

Test Conditions

Temperature: °C

Relative Humidity: %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

N/A



2.2 Conducted Emissions at Telecommunication Ports

Test Date

Sep. 04, 2017

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101781	04, 27, 2018
☒	LISN	ENV216	R & S	101787	01, 11, 2018
☒	LISN	ESH2-Z5	R & S	100450	04, 27, 2018
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 13, 2017
☒	8-WIRE ISN CAT3,5	ENY81	R & S	100174	01, 11, 2018
☐	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	01, 11, 2018

Test Conditions

Temperature: 24,2 °C
Relative Humidity: 47,1 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Sep. 04, 2017

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SAC #4(10 m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 18, 2018
☒	AMPLIFIER	SCU 01	R & S	100603	12, 13, 2017
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	716	11, 28, 2018

Test Conditions

Temperature: 24,5 °C
Relative Humidity: 53,9 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Sep. 04, 2017

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 07, 2018
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	05, 31, 2018
☐	ATTENUATOR	8491A	HP	32173	03, 24, 2018
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 02, 2019

Test Conditions

Temperature: 24,0 °C
Relative Humidity: 50,5 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.5 Harmonic Current Emissions

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	dpa.control	EM TEST	5.4.11.0	-
☐	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	08, 09, 2018(H) 08, 08, 2018(F)
☐	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Relative Humidity: °C
 %

Classification of Equipment for Harmonic Current Emissions

- ☐ Class A
- ☐ Class B
- ☐ Class C(Below 25 W)
- ☐ Class C(Above 25 W)
- ☐ Class D

Test Results

The requirements are:

- ☐ PASS
- ☐ NOT PASS
- ☒ NOT APPLICABLE

Remarks

- N/A

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011 Alarm systems-Part 4: Electromagnetic compatibility Product family
standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or any
change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or any
change in outputs, which could be interpreted by associated equipment as a change,
and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.

For component of CCTV systems, where the status is monitored by observing the TV picture,
then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:

- (a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
- (b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could
still be used; and
- (c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the conditioning is permissible, providing that there is no residual
change in the EUT or any change in outputs, which could be interpreted by associated equipment
as a change. The EUT shall meet the acceptance criteria for the functional test, after the conditioning.



3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Sep. 05, 2017

Test Location

EMS-ESD: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	-	-	-	-
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS01Z0454	10, 14, 2017
☒	HCP	-	KES	-	-
☒	VCP	-	KES	-	-

Test Conditions

Temperature: 24,4 °C
Relative Humidity: 51,2 %
Atmospheric Pressure: 99,4 kPa



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0695
Page (21) of (60)

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge

Discharge Voltage:	Contact	Air	HCP	VCP
	☐ 2 kV	☒ 2 kV	☐ 2 kV	☐ 2 kV
	☐ 4 kV	☒ 4 kV	☐ 4 kV	☐ 4 kV
	☒ 6 kV	☐ 6 kV	☒ 6 kV	☒ 6 kV
	☐ 8 kV	☒ 8 kV	☐ 8 kV	☐ 8 kV
	☐ 15 kV	☐ 15 kV	☐ 15 kV	☐ 15 kV

Notes: HCP: Horizontal coupling plane

VCP: Vertical coupling plane

Required Performance Criteria: ☒ Complied

Location of Discharge:

Air
Contact



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0695
Page (23) of (60)

Test Data**Indirect Discharge**

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Surface	Contact Discharge	Complied	-
2	Screw	Contact Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



3.2 Radiated Electric Field Immunity

Reference Standard

EN 61000-4-3:2006 +A2:2010

Test Date

Sep. 05, 2017

Test Location

EMS-RS: ☐ SEMI ANECHOIC CHAMBER #2 ☒ SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	EMC32	R & S	10.10.02	-
☒	SIGNAL GENERATOR	SMB 100A	R & S	177586	08, 07, 2018
☒	BROADBAND AMPLIFIER	BBA100	R & S	101239	08, 07, 2018
☒	BROADBAND AMPLIFIER	100S1G6M1	AR	579931	08, 07, 2018
☒	POWER METER	NRP2	R & S	103475	08, 07, 2018
☒	AVG POWER SENSOR	NRP-Z91	R & S	102526	08, 07, 2018
☒	AVG POWER SENSOR	NRP-Z91	R & S	102527	08, 07, 2018
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
☒	DIRECTIONAL COUPLER	KYDC-D1070-DX40	KY TELECOM	KY150001	08, 07, 2018
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM, INC	781	05, 02, 2019

Test Conditions

Temperature: 24,3 °C
Relative Humidity: 52,2 %
Atmospheric Pressure: 99,1 kPa



Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☒ 1 s ☐ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0695
Page (26) of (60)

Test Data

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4:2012

Test Date

Sep. 05, 2017

Test Location

EMS-EFT: Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.3.9	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N5T	EM TEST	P1317117973	02, 08, 2018
☒	MOTOR VARIAC	MV2616	EM TEST	V0936105123	02, 08, 2018
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	070925	06, 26, 2018

Test ConditionsTemperature: 22,8 °C
Relative Humidity: 50,9 %
Atmospheric Pressure: 99,6 kPa**Test Specifications**

Pulse Amplitude & Polarity: (AC Power Lines)	☐ ± 1.0 kV ☐ ± 4.0 kV	☐ ± 2.0 kV
Pulse Amplitude & Polarity: (Other supply / Signal Lines)	☐ ± 0.5 kV ☐ ± 2.0 kV	☒ ± 1.0 kV
Burst Period:	☒ 300 ms	☐ 2 s
Repetition Rate:	☐ 5 kHz	☒ 100 kHz
Duration of Test Voltage:	☒ ≥ 1 min	
Required Performance Criteria:	☒ Complied	



Test Data

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45(PoE)	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.



3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014

Test Date

Sep. 05, 2017

Test Location

EMS-Surge: Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.3.9	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N5T	EM TEST	P1317117973	02, 08, 2018
☒	MOTOR VARIAC	MV2616	EM TEST	V0936105123	02, 08, 2018
☒	CDN	CNV 508N1	EM TEST	P1551168979	04, 26, 2018

Test Conditions

Temperature: 22,8 °C
Relative Humidity: 50,9 %
Atmospheric Pressure: 99,6 kPa



Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common mode and 2 ohm for differential mode

Surge Amplitude :

Common Mode

☐ (0,5 / 1,0 / 2,0) kV

Differential Mode

☐ (0,5 / 1,0) kV

Number of Surges:

☐ 5 surges per angle

Angle:

☐ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☐ Positive & Negative

Repetition Rate:

☐ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☐ Complied

Other supply / Signal Lines

Source Impedance: 42 ohm for common mode

Surge Amplitude:

Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0695
Page (31) of (60)

Test Data

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Signal Lines

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
RJ-45(PoE)	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

☒ PASS Required Performance Criteria

☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Sep. 04, 2017

Test Location

EMS-CS: Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	5.3.11	-
☒	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	11, 28, 2017
☒	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 28, 2017
☒	CDN	CDN M016	TESEQ	43694	11, 28, 2017
☐	CDN	CDN M016	TESEQ	43697	11, 28, 2017
☒	CDN	CDN T800	TESEQ	42800	11, 28, 2017
☐	EM CLAMP	KEMZ 801A	TESEQ	44099	11, 30, 2017

Test Conditions

Temperature: 23,8 °C
Relative Humidity: 47,5 %
Atmospheric Pressure: 100,2 kPa

Test Specifications

Frequency range: ☒ 150 kHz to 100 MHz ☐ 150 kHz to 80 MHz

Voltage Level: ☐ 1 Vrms ☐ 3 Vrms
☒ 10 Vrms

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☒ 1 s ☐ 3 s

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



Test Data

☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐ M2, ☐ M3)	-

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	CDN (☐ M2, ☐ M3)	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45(PoE)	CDN	Complied

Notes: CDN = Coupling Decoupling Network

“blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.



3.6 Voltage Dips and Short Interruptions

Reference Standard

EN 61000-4-11:2004

Test Date

N/A

Test Location

EMS-Voltage dip: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMS Test S/W	iec.control	EM TEST	5.3.9	-
☐	ULTRA COMPACT SIMULATOR	UCS 500N5T	EM TEST	P1317117973	02, 08, 2018
☐	MOTOR VARIAC	MV2616	EM TEST	V0936105123	02, 08, 2018

Test Conditions

Temperature: °C
Relative Humidity: %
Atmospheric Pressure: kPa



Test Specifications & Observations/Remarks

(Test Voltage :)

Test Level	Duration [in period/ms (50 Hz)]	Results
☐ 20 % dip	☐ 250 / 5 000	_____
☐ 30 % dip	☐ 25 / 500	_____
☐ 60 % dip	☐ 10 / 200	_____
☐ 100 % dip	☐ 250 / 5 000	_____

- Voltage variations

☐ Unom + 10 %	☐ 253.0 V (ac)	_____
☐ Unom - 15 %	☐ 195.5 V (ac)	_____

Observations:

Complied – No degradation of function

Test Results

- ☐ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☒ NOT APPLICABLE

Remarks

N/A



APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

N/A



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0695
Page (37) of (60)

[NEUTRAL]

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Conducted Emissions at Telecommunication Ports

[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	SNO-L6083RP
Mode	10 Mbps
Operator Name:	KES

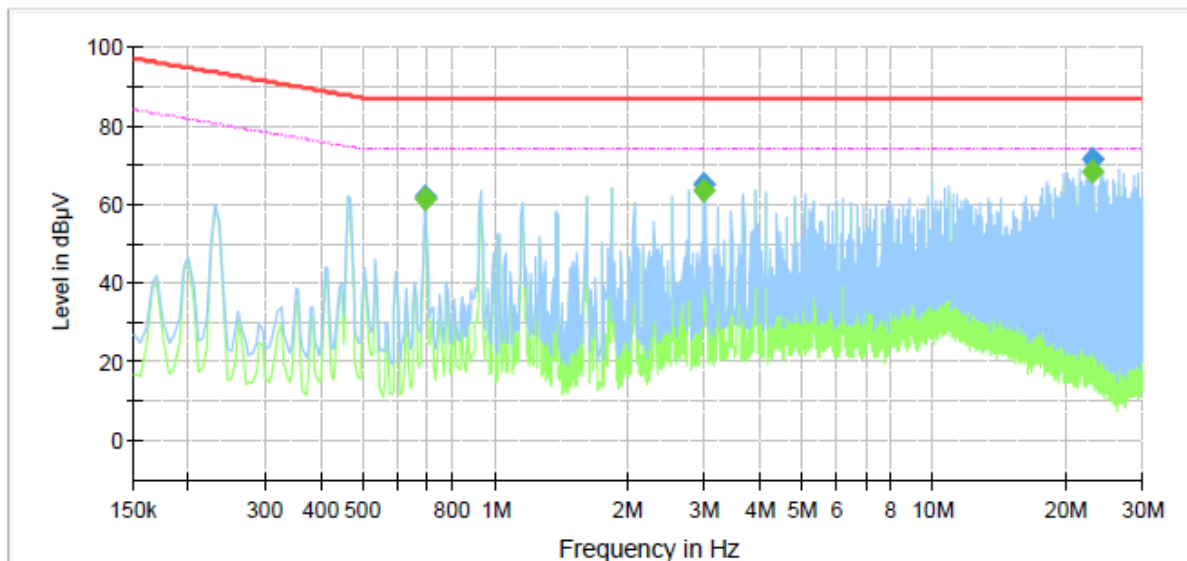


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.695000	---	61.13	74.00	12.87	1000.0	9.000	Single Line	19.8
0.695000	61.96	---	87.00	25.04	1000.0	9.000	Single Line	19.8
3.005000	---	63.56	74.00	10.44	1000.0	9.000	Single Line	19.9
3.005000	65.06	---	87.00	21.94	1000.0	9.000	Single Line	19.9
23.130000	---	68.03	74.00	5.97	1000.0	9.000	Single Line	20.4
23.130000	71.39	---	87.00	15.61	1000.0	9.000	Single Line	20.4

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	SNO-L6083RP
Mode	100 Mbps
Operator Name:	KES

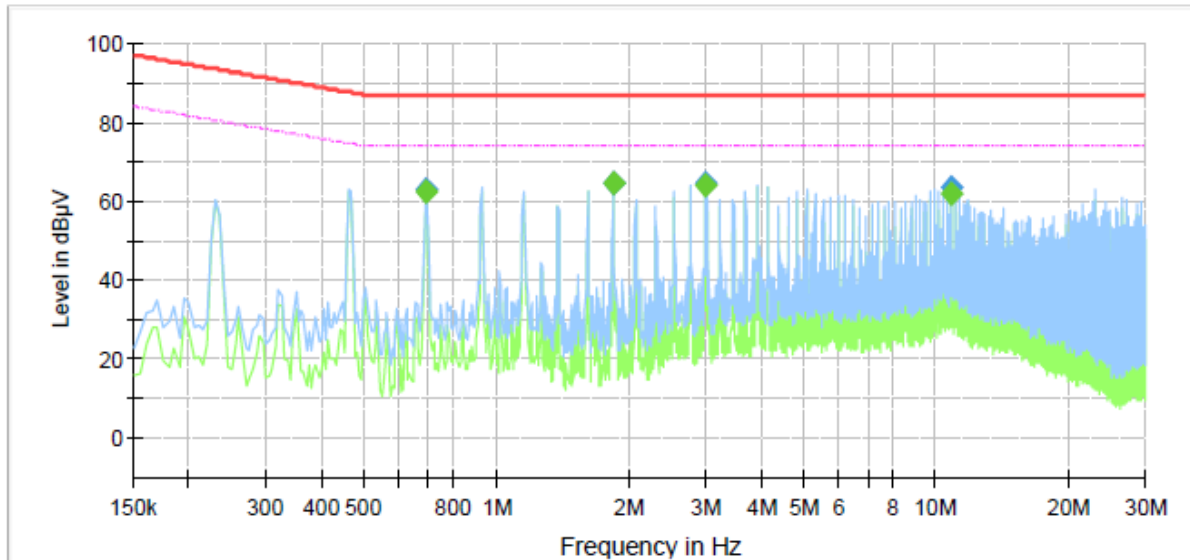

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.695000	---	62.19	74.00	11.81	1000.0	9.000	Single Line	20.1
0.695000	63.00	---	87.00	24.00	1000.0	9.000	Single Line	20.1
1.850000	---	64.47	74.00	9.53	1000.0	9.000	Single Line	20.3
1.850000	64.71	---	87.00	22.29	1000.0	9.000	Single Line	20.3
3.005000	---	63.84	74.00	10.16	1000.0	9.000	Single Line	20.2
3.005000	64.71	---	87.00	22.29	1000.0	9.000	Single Line	20.2
10.865000	---	61.99	74.00	12.01	1000.0	9.000	Single Line	20.1
10.865000	63.77	---	87.00	23.23	1000.0	9.000	Single Line	20.1

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]


QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))



Radiated Electric Field Emissions(Below 1 GHz)

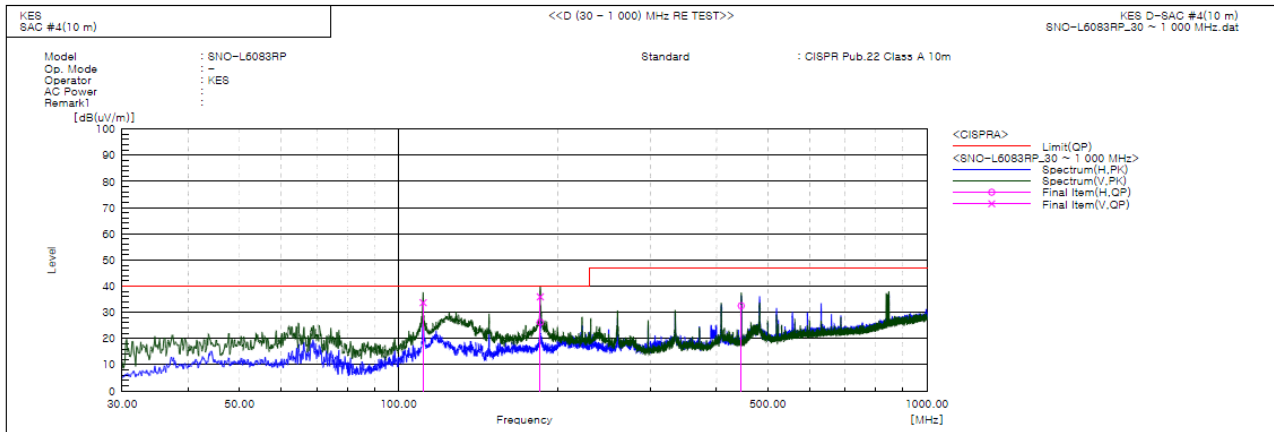

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	111.359	V	63.1	-29.4	33.7	40.0	6.3	100.0	307.0	
2	185.564	H	54.8	-28.6	26.2	40.0	13.8	400.0	345.0	
3	185.564	V	64.5	-28.6	35.9	40.0	4.1	100.0	336.0	
4	445.524	H	51.6	-19.1	32.5	47.0	14.5	297.0	166.0	

◆ Calculation

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value




KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0695
Page (41) of (60)

Radiated Electric Field Emissions(Above 1 GHz)

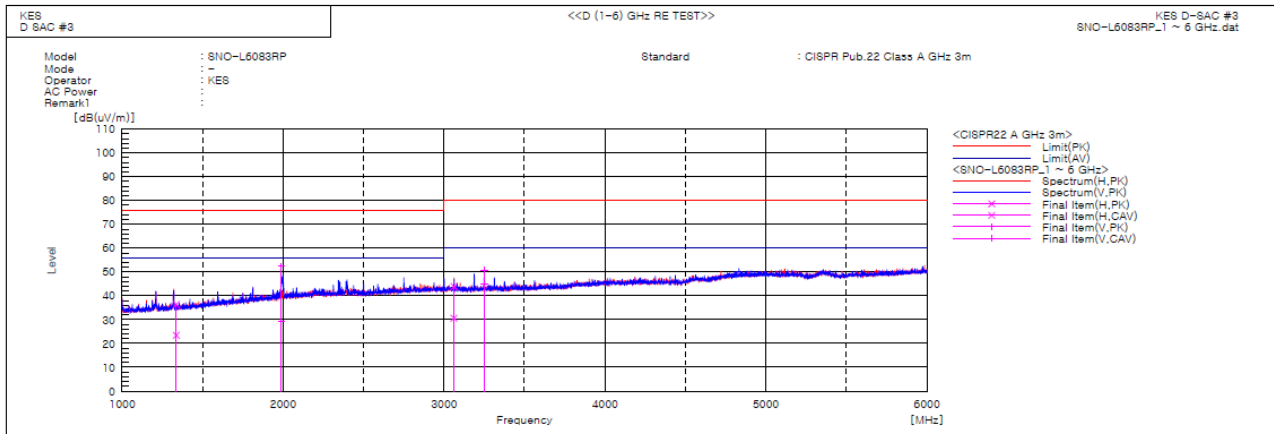

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1336.317	H	43.9	30.9	-7.5	36.4	23.4	76.0	56.0	39.6	32.6	100.0	219.8	
2	1989.832	V	54.1	30.7	-1.7	52.4	29.0	76.0	56.0	23.6	27.0	100.0	17.5	
3	3061.210	H	41.4	28.1	2.5	43.9	30.6	80.0	60.0	36.1	29.4	100.0	204.0	
4	3250.200	V	47.8	42.2	2.9	50.7	45.1	80.0	60.0	29.3	14.9	100.0	200.3	

◆ Calculation - SAC #3

Result(PK/CAV) [dB(μ V/m)] = (Reading(PK/CAV)[dB(μ V)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μ V/m)] - Result(PK/CAV) [dB(μ V/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



Test Data - Voltage Fluctuations

Maximum Flicker results

	EUT values	Limit	Result
Pst	N/A		
Plt			
dc [%]			
dmax [%]			
Tmax [s]			



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0695
Page (45) of (60)

Test Setup Photos and Configuration

Conducted Voltage Emissions

N/A


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Conducted Telecommunication Emissions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Below 1 GHz)

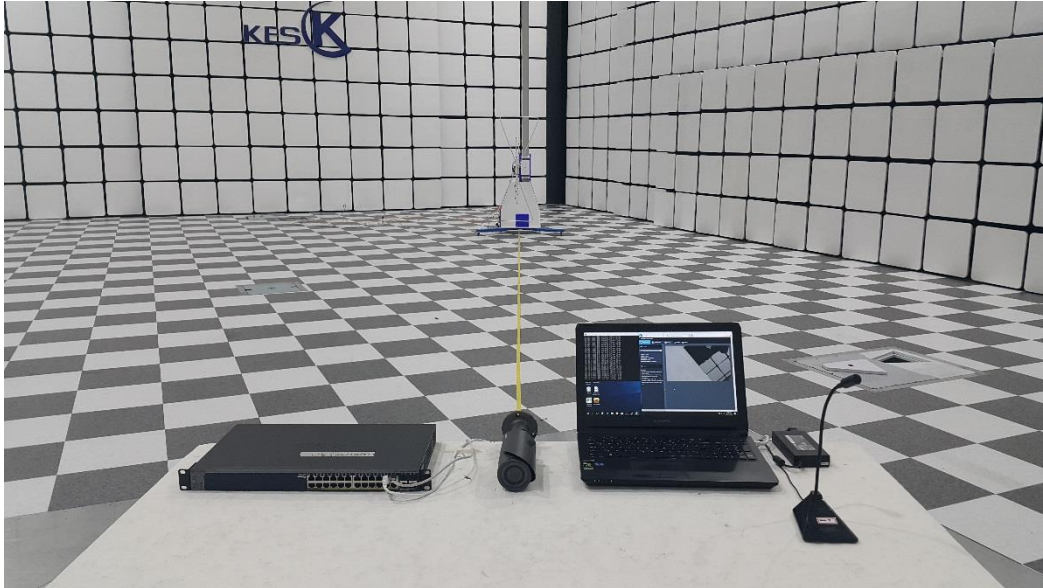

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Above 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-17T0695
Page (49) of (60)

Harmonic Current Emissions and Voltage Fluctuations and Flicker


N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Electrostatic Discharge



Radiated Electric Field Immunity

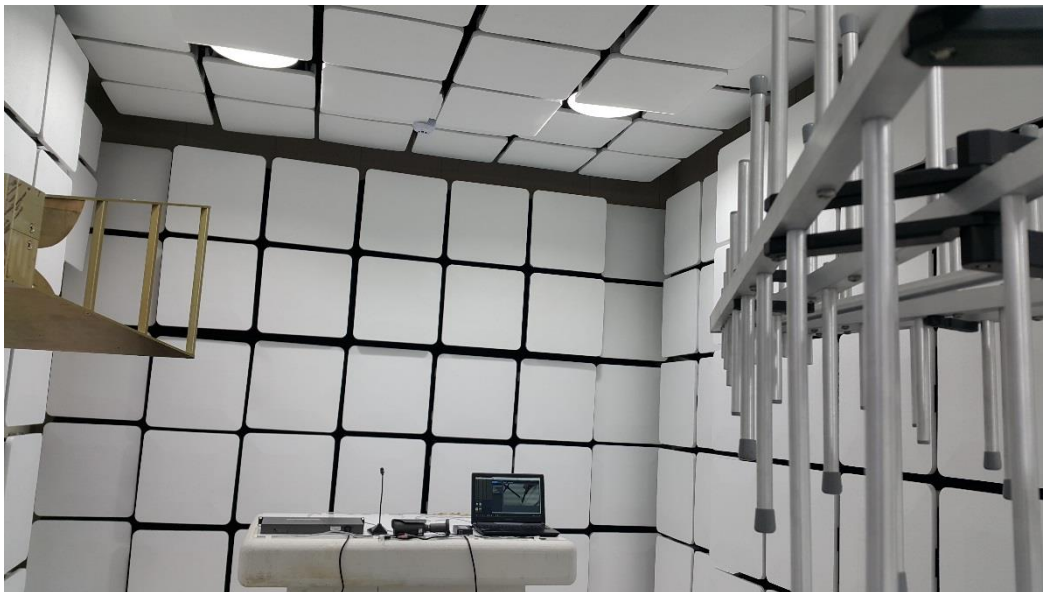

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Electrical Fast Transients/Bursts



Surge Transients



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Conducted Disturbance



Voltage Dips and Short Interruptions

N/A

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal Photographs

(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Main board

(Top)



(Bottom)

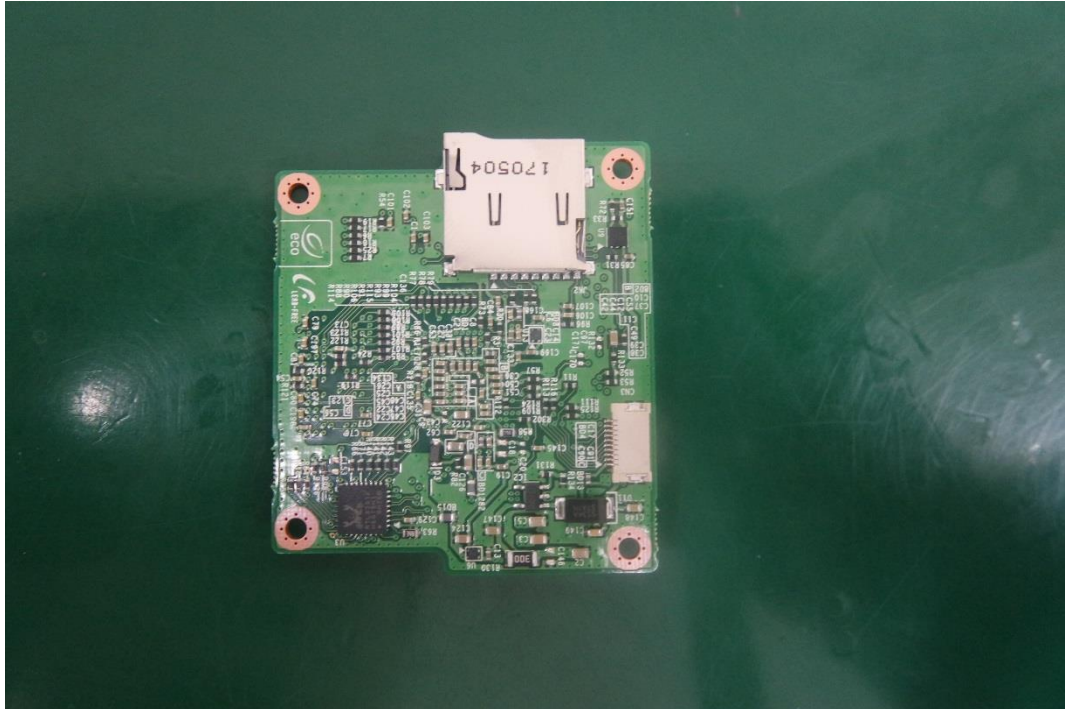


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – Serve board

(Top)



(Bottom)

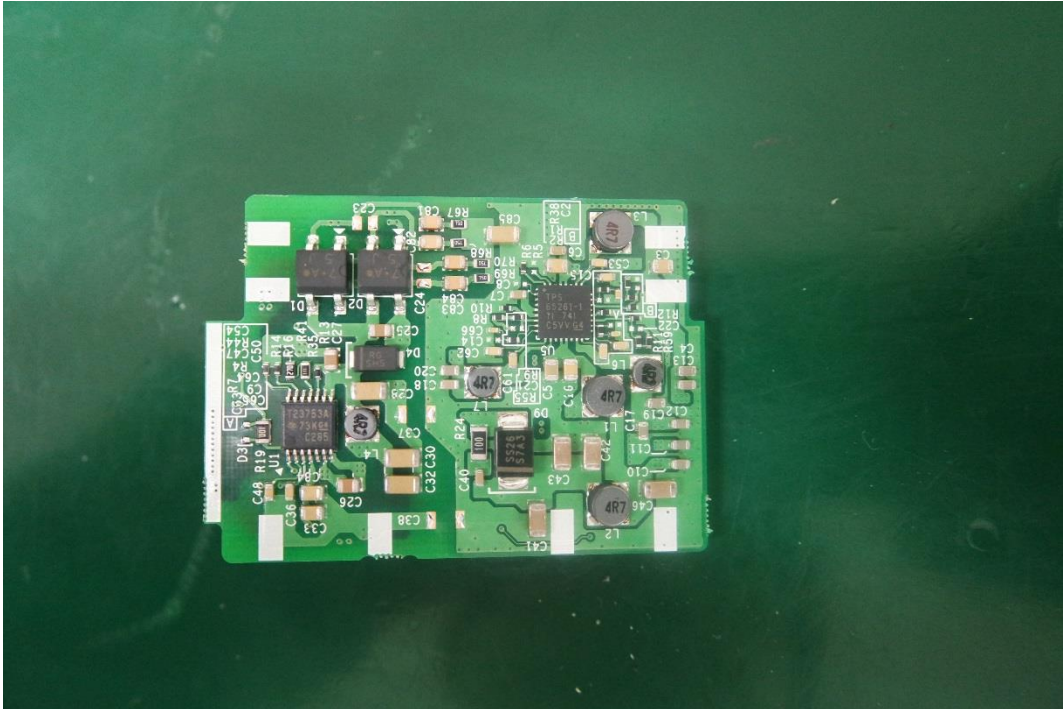

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – LED

(Top)




(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – LENS

(Top)

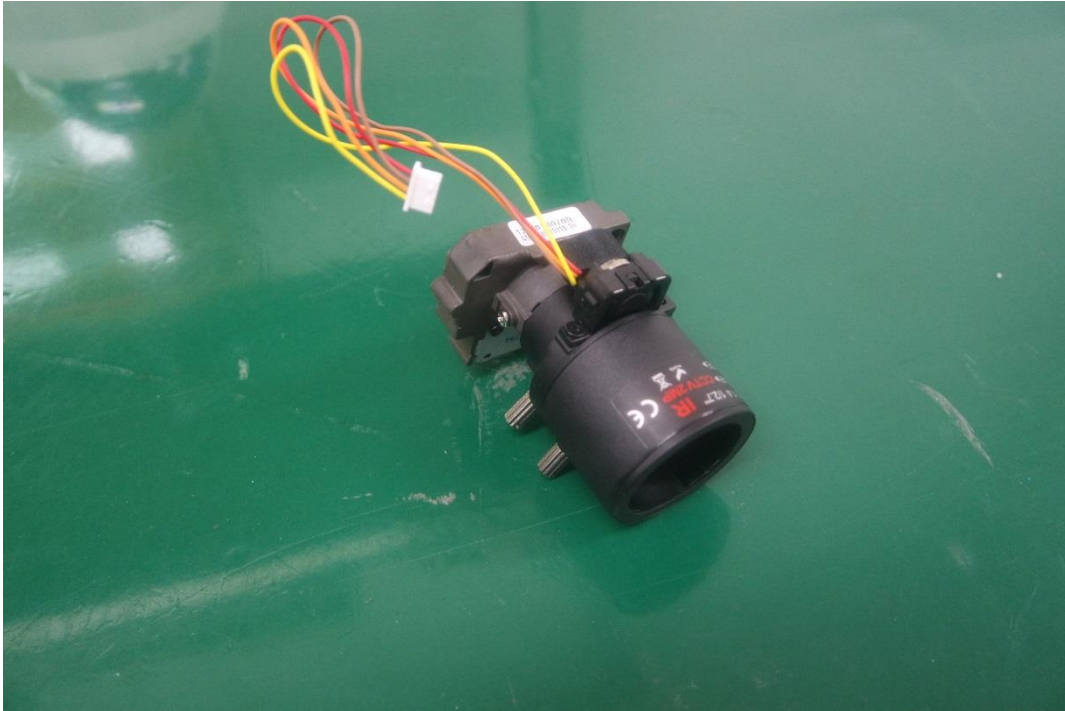

(Bottom)

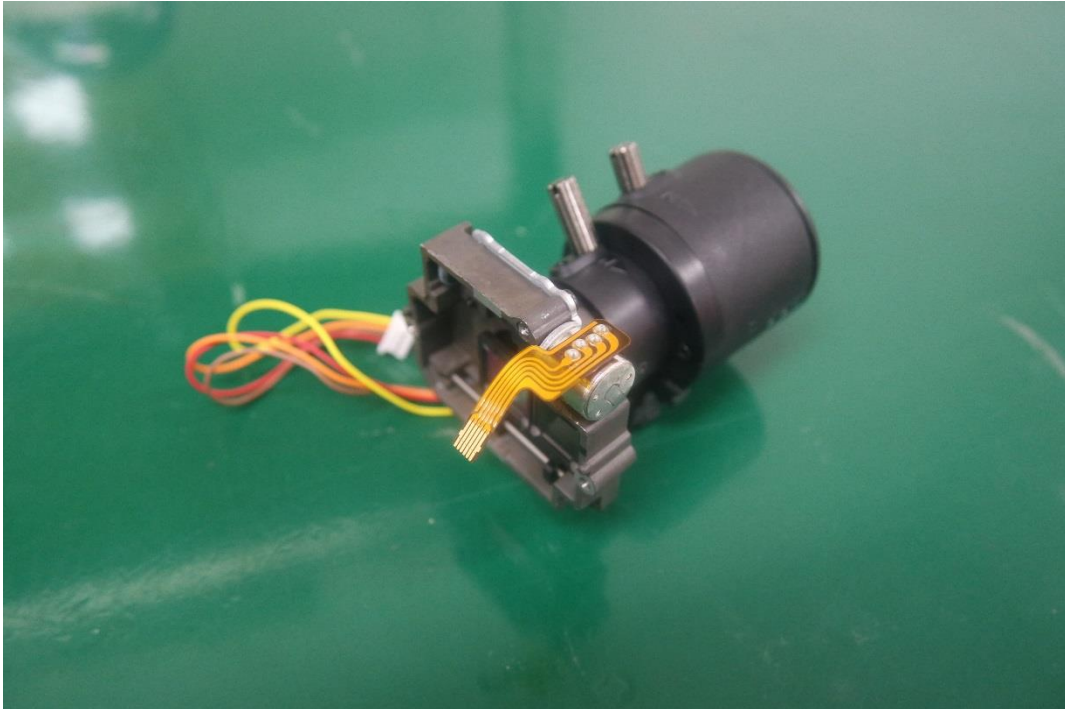

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal View – LENS board

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Label and Location



NETWORK CAMERA

Model No : SNO-L6083RP

Manufacturer : Hanwha Techwin (Tianjin) Co.,Ltd.

Made in China

