



EMC TEST REPORT For VCCI

Test Report No. : KES-EM-22T0681-R1
Date of Issue : Feb. 24, 2023
Product name : THERMAL CAMERA
Model/Type No. : TNO-4051T
Variant Model : TNO-4041T
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Jul. 21, 2022
Test date : Jul. 22, 2022
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Kang-Hyeon, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0681-R1
Page (2) of (49)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Aug. 08, 2022	KES-EM-22T0681	Issued
Feb. 24, 2023	KES-EM-22T0681-R1	Change the Applicant and manufacturer at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	6
1.2	Variant Model Differences	6
1.3	Device Modifications	6
1.4	Equipment Under Test.....	6
1.5	Support Equipments	7
1.6	External I/O Cabling	8
1.7	EUT Operating Mode(s)	11
1.8	Configuration.....	12
1.9	Remarks when standards applied	13
1.10	Calibration Details of Equipment Used for Measurement	13
1.11	Test Facility	13
1.12	Laboratory Accreditations and Listings	13
2.0	Test Regulations.....	14
2.1	Conducted Emissions Mains Power Ports.....	15
2.2	Conducted Emissions at Telecommunication Ports.....	16
2.3	Radiated Electric Field Emissions(Below 1 GHz)	17
2.4	Radiated Electric Field Emissions(Above 1 GHz)	18
APPENDIX A – TEST DATA.....		19
Conducted Emissions at Mains Power Ports.....		19
Conducted Emissions at Telecommunication Ports		24
Radiated Electric Field Emissions(Below 1 GHz)		27
Radiated Electric Field Emissions(Above 1 GHz).....		30
Test Setup Photos and Configuration		33
Conducted Emissions at Mains Power Ports.....		33
Conducted Emissions at Telecommunication Ports		34
Radiated Electric Field Emissions(Below 1 GHz)		36
Radiated Electric Field Emissions(Above 1 GHz).....		38
EUT External Photographs		40
EUT Internal Photographs		41

1.0 General Product Description

Main Specifications of EUT are:

Specifications

Video	
Imaging Device	Uncooled micro bolometer
Resolution	640x480, 640x360, 320x240
Max. Framerate	H.265/H.264: Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max. 30fps/25fps(60Hz/50Hz)
NETD	< 50mK
Pixel Size	17μm
Video Out	CVBS: 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P) for installation
Lens	
Focal Length (Zoom Ratio)	35mm fixed focal
Max. Aperture Ratio	F1.0
Angular Field of View	H: 17.2° / V: 13° / D: 22°
Min. Object Distance	36m(118.11ft)
Focus Control	Fixed
Operational	
Camera Title	Displayed up to 85 characters
Digital Image Stabilization	Support(built-in gyro sensor)
Motion Detection	8ea, 8point polygonal zones
Privacy Masking	32ea, polygonal zones - Color: Grey/Green/Red/Blue/Black/White - Mosaic
Video Rotation	Flip, Mirror, Hallway view(90°/270°)
Analytics	Directional detection, Motion detection, Appear/Disappear, Enter/Exit, Loitering, Tampering, Virtual line, Audio detection, Temperature detection, Sound classification, Shock detection
Serial Interface	RS-485/422(Samsung-T, Pelco-D/P, Panasonic, Bosch, AD, GE, Vicon, Honeywell)
Alarm I/O	Input 1ea / Output 2ea
Alarm Triggers	Analytics, Network disconnect, Alarm input
Alarm Events	File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC or NAS recording at event triggers Alarm output Handover
Audio In	Selectable(mic in/line in) Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm
Audio Out	Line out, Max.output level: 1Vrms
Network	
Ethernet	RJ-45(10/100BASE-T)
Video Compression	H.265/H.264: Main/Baseline/High, MJPEG
Audio Compression	G.711 u-law /G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz
Smart Codec	Manual(5ea area), WiseStream II
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0681-R1
Page (5) of (49)

Streaming	Unicast(20 users) / Multicast Multiple streaming(Up to 10 profiles)
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour, LLDP, SRTP
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP)
Application Programming Interface	ONVIF Profile S/G/T SUNAPI(HTTP API) Wisenet open platform

General

Web Viewer	Supported OS: Windows 7, 8.1, 10, Mac OS X 10.10, 10.11, 10.12 Recommended Browser: Google Chrome Supported Browser: MS Explorer 11, MS Edge, Mozilla Firefox(Window 64bit only), Apple Safari(Mac OS X only)
Edge Storage	Micro SD/SDHC/SDXC 1slot 256GB
Memory	1024MB RAM, 256MB Flash

Environmental & Electrical

Operating Temperature / Humidity	-40°C ~ +60°C (-40°F ~ +140°F) / Less than 90% RH
Storage Temperature / Humidity	-50°C ~ +60°C (-58°F ~ +140°F) / Less than 90% RH
Certification	IP66, IK10, NEMA4X
Input Voltage	PoE(IEEE802.3af, Class3), 24VAC, 12VDC
Power Consumption	PoE: Max. 10W, typical 8.6W 12VDC: Max. 9W, typical 7.5W 24VAC: Max. 10.5W, typical 8.9W

Mechanical

Color / Material	White / Aluminum
RAL Code	RAL9003
Product Dimensions / Weight	Φ101.97x309mm(4.01x12.17") / 2452g(5.41lb)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 100 V, 60 Hz ☒ PoE

1.2 Variant Model Differences

Lens size difference.

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
THERMAL CAMERA	TNO-4051T	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
AC/AC ADAPTER	DY-2425AC	-	Daeyou	-
AC/DC ADAPTER	2ACB022F	-	Channel Well Technology (Guangzhou) Co., Ltd.	-
PoE ADAPTER	MA-INJ-4	-	Changzhou Wujin Hong Guang radio Factory Co.,LTD	-
Notebook	LG15N54	503NZWY038929	LG Electronics	-
Notebook Adaptor	PA-1900-14	OF2R2633487017764	LITE-ON TECHNOLOGY COPORATION	-
Button Alarm	-	-	-	-
Alarm	-	-	-	-
Controller	SPC-1010	C50E67WG10100F	SamSung Techwin Co.,Ltd.	-
Controller ADAPTER	AD0481-1503000KB	-	Shenzhen ABP Technology Co.,Ltd.	-
Smartphone	-	-	APPLE INCORPORATED	-
Headset	K550	-	Britz®	-
Micro SD Card	-	-	Sandisk	8 GB

1.6 External I/O Cabling

■ AC Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
THERMAL CAMERA (EUT)	RJ-45 (LAN)	Notebook	RJ-45 (LAN)	3.0	U
	Slot	Micro SD Card	Slot	-	-
	Alarm OUT	Alarm	Alarm IN	3.0	U
	Alarm IN	Button Alarm	Alarm OUT	3.0	U
	RS-485	Controller	RS-485	3.0	U
	Audio IN	Headset	Audio OUT	1.7	U
	Audio OUT		Audio IN	1.7	U
	2 Pin	AC/AC ADAPTER	2 Pin	1.6	U
Notebook	3.5 mm	Smartphone	3.5 mm	0.8	U
	JACK	Notebook Adaptor	JACK	1.7	U
Controller	JACK	Controller ADAPTER	JACK	1.5	U

* Unshielded=U, Shielded=S

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0681-R1

Page (9) of (49)

■ DC Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
THERMAL CAMERA (EUT)	RJ-45 (LAN)	Notebook	RJ-45 (LAN)	3.0	U
	Slot	Micro SD Card	Slot	-	-
	Alarm OUT	Alarm	Alarm IN	3.0	U
	Alarm IN	Button Alarm	Alarm OUT	3.0	U
	RS-485	Controller	RS-485	3.0	U
	Audio IN	Headset	Audio OUT	1.7	U
	Audio OUT		Audio IN	1.7	U
	2 Pin	AC/DC ADAPTER	2 Pin	1.6	U
Notebook	3.5 mm	Smartphone	3.5 mm	0.8	U
	JACK	Notebook Adaptor	JACK	1.7	U
Controller	JACK	Controller ADAPTER	JACK	1.5	U

* Unshielded=U, Shielded=S

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0681-R1

Page (10) of (49)

■ PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
THERMAL CAMERA (EUT)	RJ-45 (PoE)	PoE ADAPTER	RJ-45 (PoE)	3.0	U
	Slot	Micro SD Card	Slot	-	-
	Alarm OUT	Alarm	Alarm IN	3.0	U
	Alarm IN	Button Alarm	Alarm OUT	3.0	U
	RS-485	Controller	RS-485	3.0	U
	Audio IN	Headset	Audio OUT	1.7	U
	Audio OUT		Audio IN	1.7	U
Notebook	3.5 mm	Smartphone	3.5 mm	0.8	U
	JACK	Notebook Adaptor	JACK	1.7	U
	RJ-45 (LAN)	PoE ADAPTER	RJ-45 (LAN)	3.0	U
Controller	JACK	Controller ADAPTER	JACK	1.5	U

* Unshielded=U, Shielded=S

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.7 EUT Operating Mode(s)

Test Mode	operating
AC, DC Mode	1. Check the camera video output on the laptop 2. Check if the network status is operating normally during PING TEST 3. Check the output of the 1 kHz tone output from the smartphone and the microphone input from the headset 4. Press the button alarm button to check the normal operation of the alarm. 5. Checked the files stored in the Micro SD Card after testing.
PoE Mode	


EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd

1.8 Configuration


■ AC Main

□ DC Main


■ AC Mode

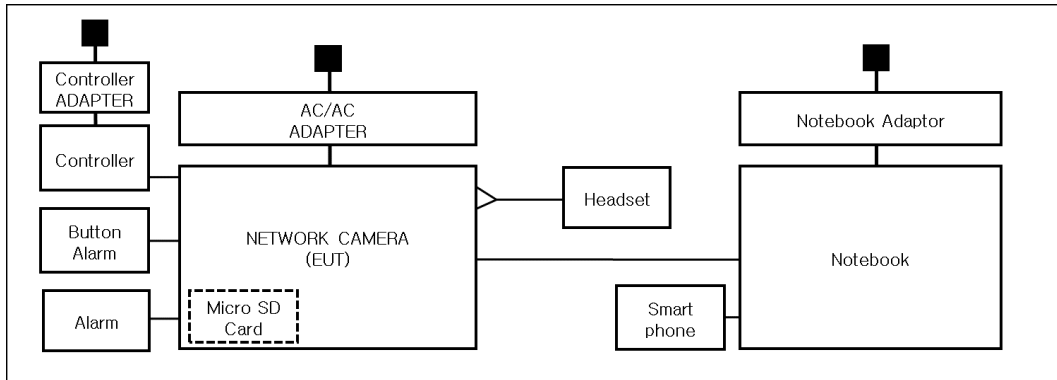

■ DC Mode

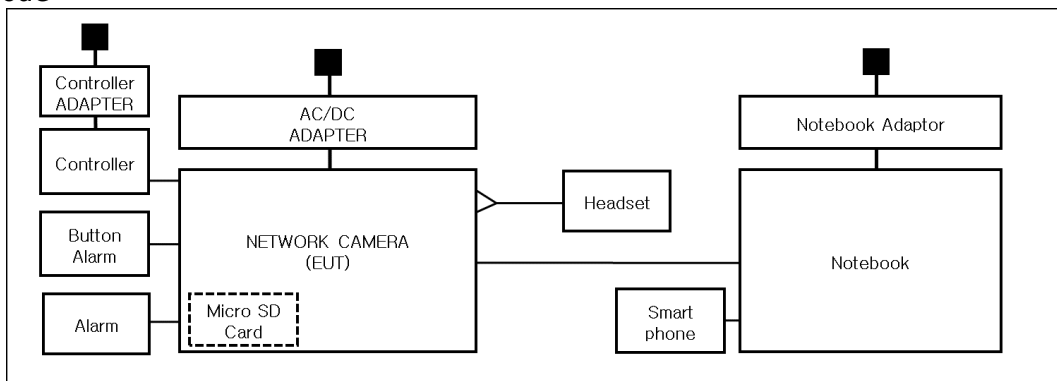

■ PoE Mode

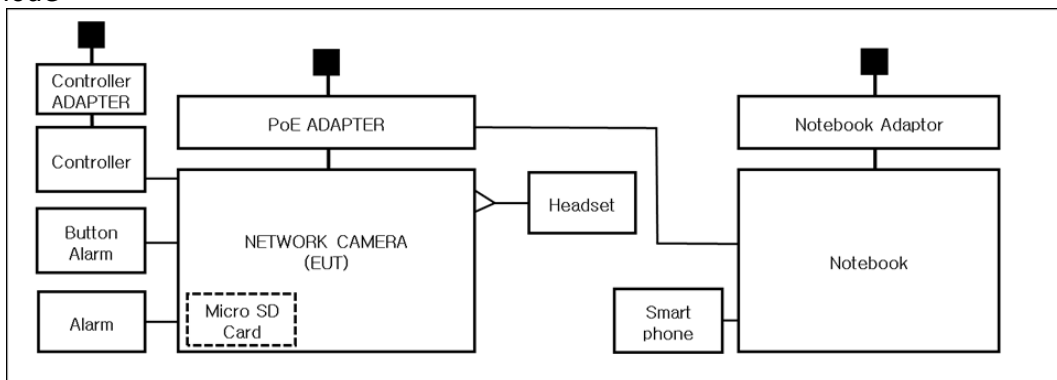

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0681-R1

Page (14) of (49)

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **VCCI-CISPR 32:2016**

☒ Class A

☐ Class B

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

2.1 Conducted Emissions Mains Power Ports

Test Date

Jul. 22, 2022

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	12, 28, 2022
☒	LISN	ENV216	R & S	101787	12, 27, 2022
☒	LISN	ESH2-Z5	R & S	100450	12, 27, 2022
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 27, 2022

Test Conditions

Temperature: (24,3 ± 0,3) °C

Relative Humidity: (44,8 ± 0,3) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Jul. 22, 2022

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	12, 28, 2022
☒	LISN	ENV216	R & S	101787	12, 27, 2022
☒	LISN	ESH2-Z5	R & S	100450	12, 27, 2022
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 27, 2022
☒	8-WIRE ISN CAT3,5	ENY81	R & S	100174	12, 28, 2022
☐	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	12, 28, 2022

Test Conditions

Temperature: (24,3 ± 0,3) °C

Relative Humidity: (44,8 ± 0,3) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

- See Appendix A for test data.
 - For Ethernet interfaces, measurements are required at the highest data rate supported by the interface.

2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Jul. 22, 2022

Test Location☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	03, 31, 2023
☒	AMPLIFIER	SCU 01	R & S	100603	11, 24, 2022
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
☒	ATTENUATOR	8491A	HP	32173	03, 08, 2023

Test Conditions

Temperature: (24,8 ± 0,3) °C

Relative Humidity: (45,3 ± 0,3) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Jul. 22, 2022

Test Location

SEMI ANECHOIC CHAMBER #5

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	ES10/RE	TOYO Corporation	2022.01.000	-
☒	EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	03, 31, 2023
☒	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	12, 16, 2022
☒	PREAMPLIFIER	8449B	HP	3008A00538	06, 02, 2023

Test Conditions

Temperature: (25,1 ± 0,2) °C

Relative Humidity: (46,2 ± 0,2) % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.The Average of the test data is the cispr average result.

APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

■ AC Mode

HOT LINE

Common Information

Test Description:	Conducted Emission
Model No.:	TNO-4051T
Phase:	L1
Mode:	AC
Operator Name:	KES

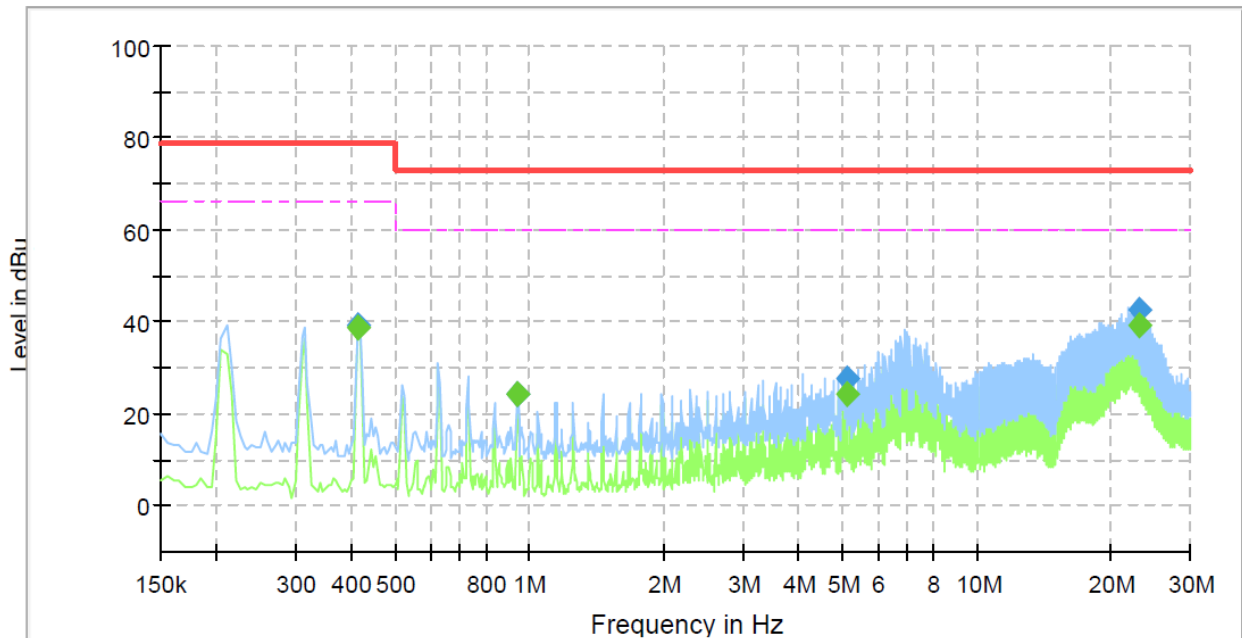


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.415000	---	38.86	66.00	27.14	1000.0	9.000	L1	19.6
0.415000	38.98	---	79.00	40.02	1000.0	9.000	L1	19.6
0.940000	---	24.31	60.00	35.69	1000.0	9.000	L1	20.1
0.940000	24.33	---	73.00	48.67	1000.0	9.000	L1	20.1
5.110000	---	24.19	60.00	35.81	1000.0	9.000	L1	19.6
5.110000	27.78	---	73.00	45.22	1000.0	9.000	L1	19.6
23.130000	---	38.97	60.00	21.03	1000.0	9.000	L1	20.1
23.130000	42.56	---	73.00	30.44	1000.0	9.000	L1	20.1

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	TNO-4051T
Phase:	N
Mode:	AC
Operator Name:	KES

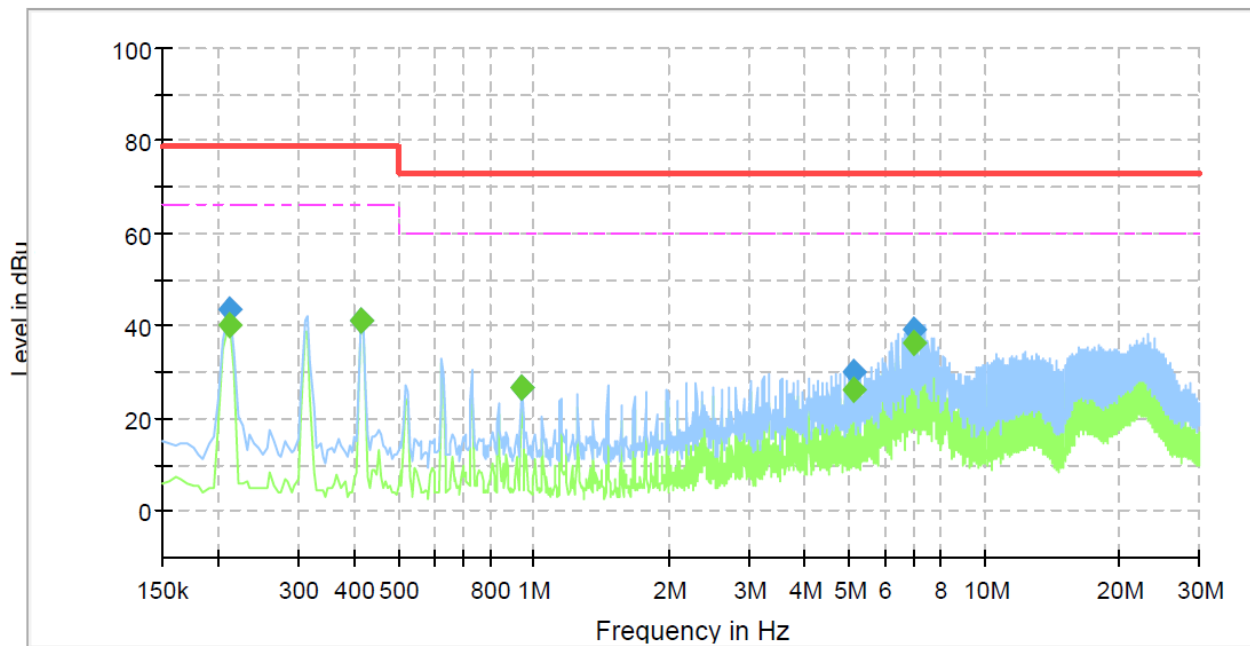

Final Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.210000	---	40.41	66.00	25.59	1000.0	9.000	N	19.4
0.210000	43.39	---	79.00	35.61	1000.0	9.000	N	19.4
0.415000	---	40.94	66.00	25.06	1000.0	9.000	N	19.6
0.415000	41.07	---	79.00	37.93	1000.0	9.000	N	19.6
0.940000	---	26.85	60.00	33.15	1000.0	9.000	N	20.1
0.940000	26.85	---	73.00	46.15	1000.0	9.000	N	20.1
5.110000	---	25.97	60.00	34.03	1000.0	9.000	N	19.6
5.110000	29.83	---	73.00	43.17	1000.0	9.000	N	19.6
6.990000	---	36.33	60.00	23.67	1000.0	9.000	N	19.5
6.990000	39.01	---	73.00	33.99	1000.0	9.000	N	19.5

■ DC Mode

HOT LINE

Common Information

Test Description:	Conducted Emission
Model No.:	TNO-4051T
Phase:	L1
Mode:	DC
Operator Name:	KES

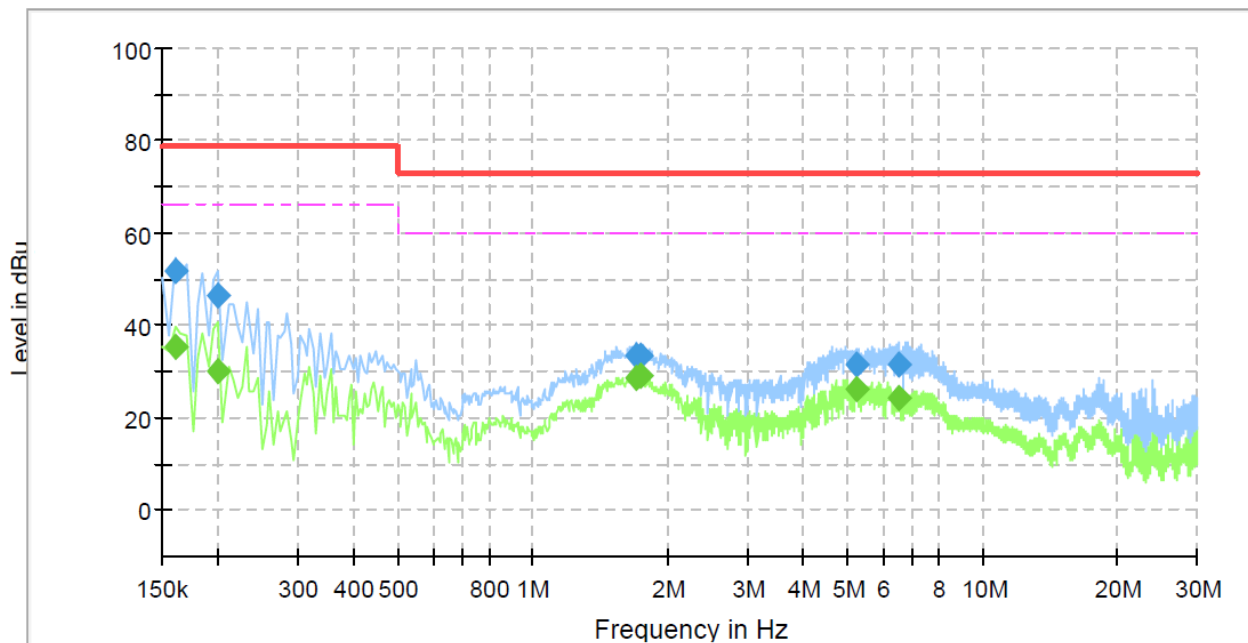

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	35.17	66.00	30.83	1000.0	9.000	L1	19.4
0.160000	51.60	---	79.00	27.40	1000.0	9.000	L1	19.4
0.200000	---	30.20	66.00	35.80	1000.0	9.000	L1	19.4
0.200000	46.33	---	79.00	32.67	1000.0	9.000	L1	19.4
1.705000	---	28.74	60.00	31.26	1000.0	9.000	L1	20.3
1.705000	33.24	---	73.00	39.76	1000.0	9.000	L1	20.3
1.735000	---	28.97	60.00	31.03	1000.0	9.000	L1	20.3
1.735000	33.29	---	73.00	39.71	1000.0	9.000	L1	20.3
5.255000	---	25.96	60.00	34.04	1000.0	9.000	L1	19.6
5.255000	31.40	---	73.00	41.60	1000.0	9.000	L1	19.6
6.490000	---	24.23	60.00	35.77	1000.0	9.000	L1	19.5
6.490000	31.33	---	73.00	41.67	1000.0	9.000	L1	19.5

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

NEUTRAL LINE**Common Information**

Test Description:

Model No.:

Phase:

Mode:

Operator Name:


Conducted Emission

TNO-4051T

N

DC

KES

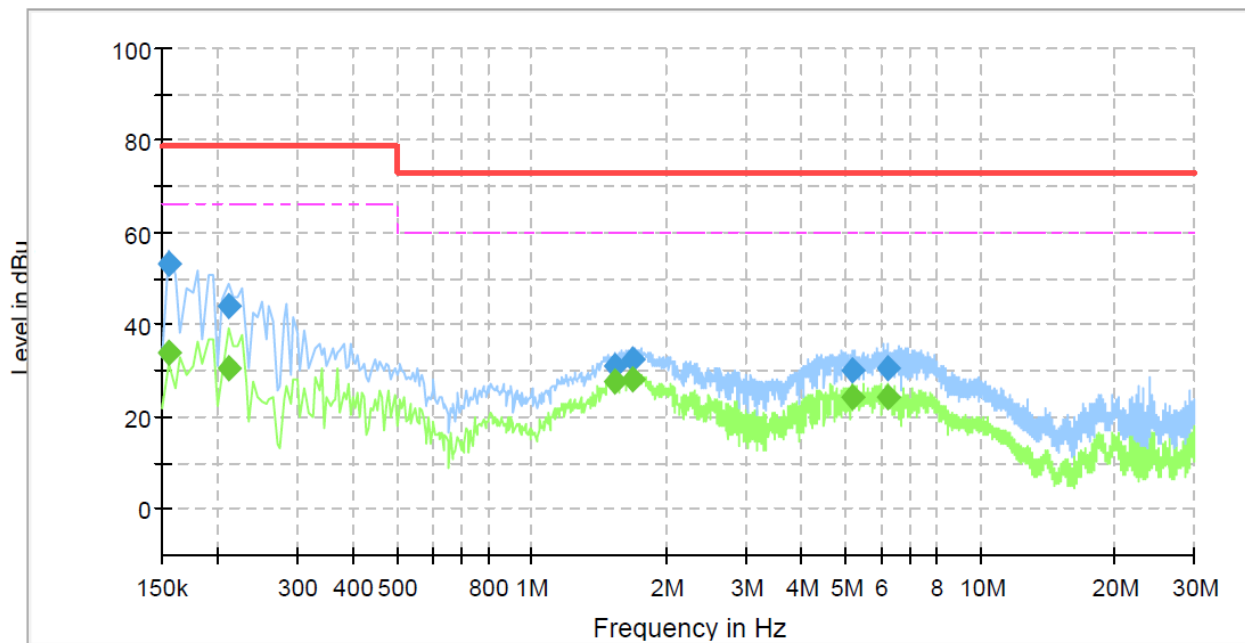

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0681-R1
Page (23) of (49)

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	33.88	66.00	32.12	1000.0	9.000	N	19.4
0.155000	53.11	---	79.00	25.89	1000.0	9.000	N	19.4
0.210000	---	30.58	66.00	35.42	1000.0	9.000	N	19.4
0.210000	44.24	---	79.00	34.76	1000.0	9.000	N	19.4
1.525000	---	27.65	60.00	32.35	1000.0	9.000	N	20.2
1.525000	31.20	---	73.00	41.80	1000.0	9.000	N	20.2
1.680000	---	28.08	60.00	31.92	1000.0	9.000	N	20.3
1.680000	32.58	---	73.00	40.42	1000.0	9.000	N	20.3
5.210000	---	24.45	60.00	35.55	1000.0	9.000	N	19.6
5.210000	30.18	---	73.00	42.82	1000.0	9.000	N	19.6
6.230000	---	24.22	60.00	35.78	1000.0	9.000	N	19.5
6.230000	30.68	---	73.00	42.32	1000.0	9.000	N	19.5

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


Conducted Emissions at Telecommunication Ports

■ AC Mode

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	TNO-4051T
Mode :	AC
Speed :	100
Operator Name:	KES

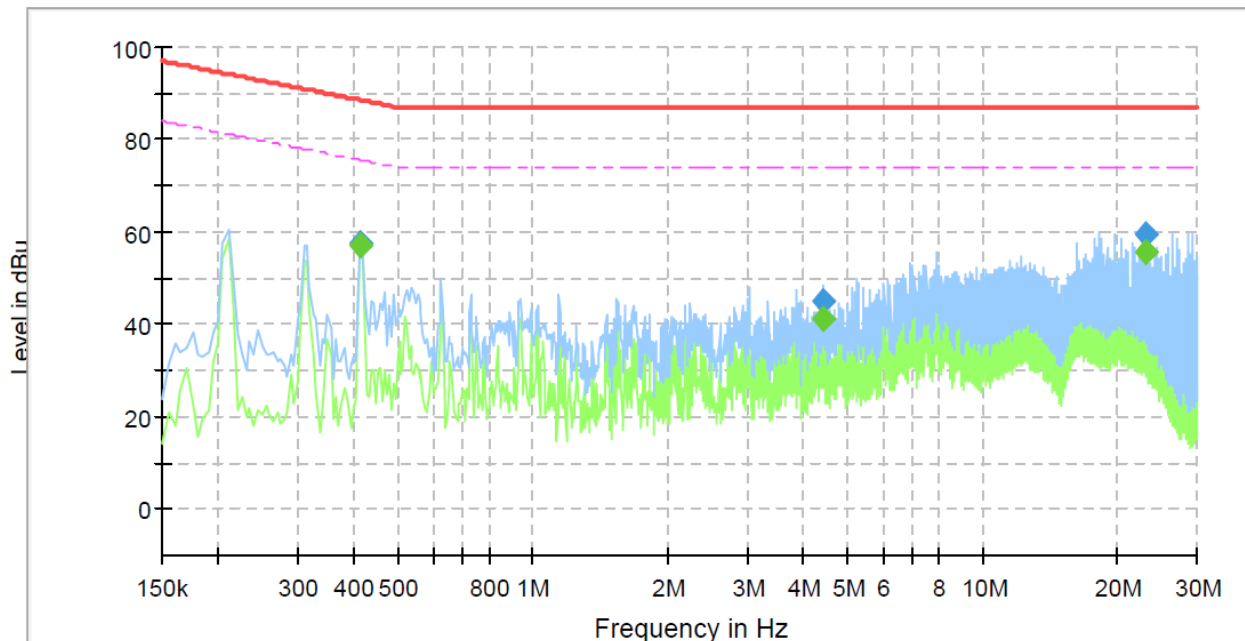

Final Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.415000	---	57.29	75.55	18.26	1000.0	9.000	Single Line	19.7
0.415000	57.64	---	88.55	30.91	1000.0	9.000	Single Line	19.7
4.410000	---	41.08	74.00	32.92	1000.0	9.000	Single Line	19.6
4.410000	44.85	---	87.00	42.15	1000.0	9.000	Single Line	19.6
23.130000	---	55.79	74.00	18.21	1000.0	9.000	Single Line	20.1
23.130000	59.45	---	87.00	27.55	1000.0	9.000	Single Line	20.1

■ DC Mode

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	TNO-4051T
Mode :	DC
Speed :	100
Operator Name:	KES

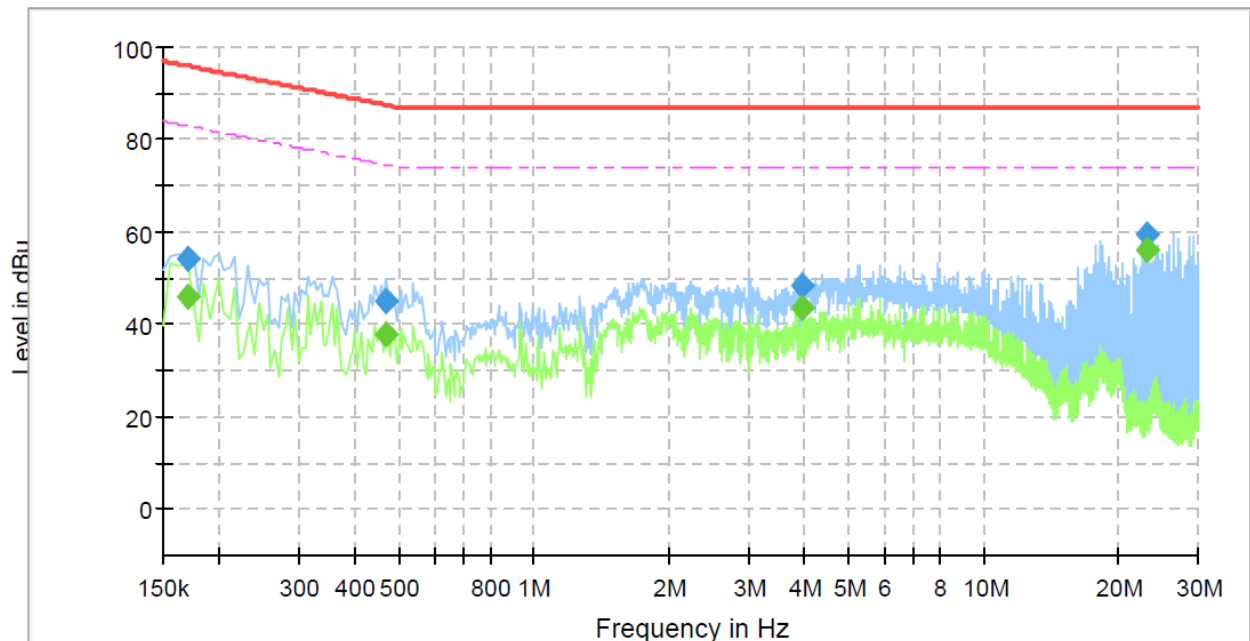

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.170000	---	46.00	82.96	36.96	1000.0	9.000	Single Line	19.8
0.170000	53.98	---	95.96	41.98	1000.0	9.000	Single Line	19.8
0.470000	---	37.83	74.51	36.68	1000.0	9.000	Single Line	19.7
0.470000	44.88	---	87.51	42.63	1000.0	9.000	Single Line	19.7
3.955000	---	43.35	74.00	30.65	1000.0	9.000	Single Line	19.7
3.955000	48.46	---	87.00	38.54	1000.0	9.000	Single Line	19.7
23.130000	---	56.14	74.00	17.86	1000.0	9.000	Single Line	20.1
23.130000	59.66	---	87.00	27.34	1000.0	9.000	Single Line	20.1

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	TNO-4051T
Mode :	PoE
Speed :	100
Operator Name:	KES

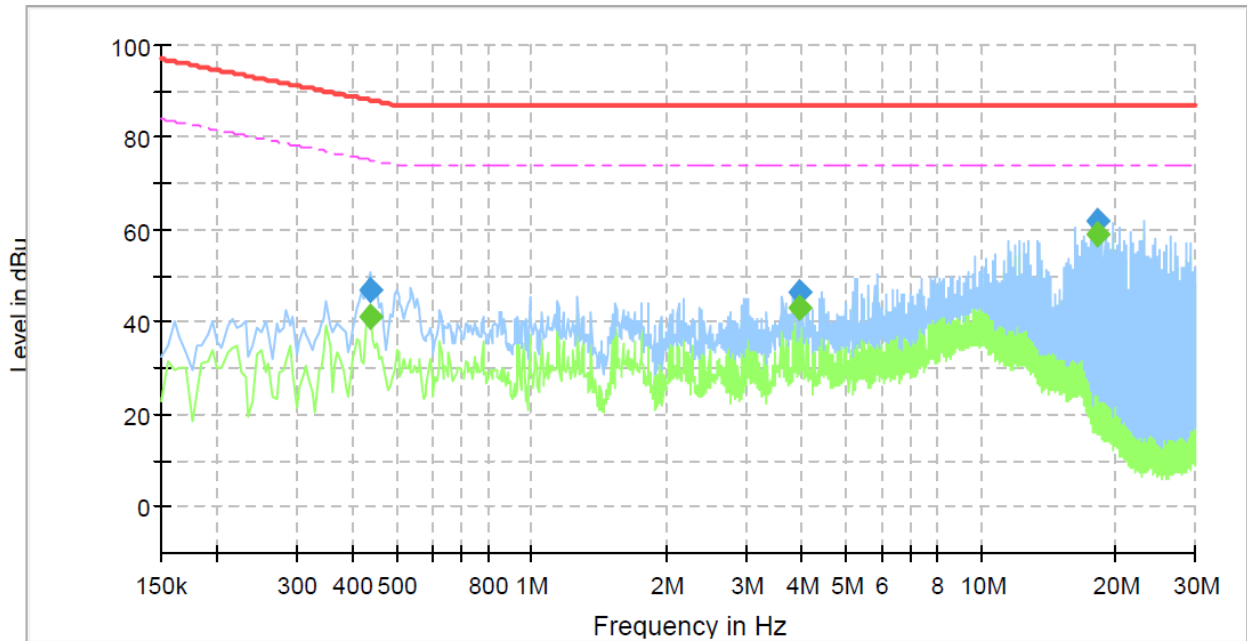

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.440000	---	41.11	75.06	33.95	1000.0	9.000	Single Line	19.7
0.440000	46.74	---	88.06	41.32	1000.0	9.000	Single Line	19.7
3.955000	---	42.90	74.00	31.10	1000.0	9.000	Single Line	19.7
3.955000	46.60	---	87.00	40.40	1000.0	9.000	Single Line	19.7
18.245000	---	59.00	74.00	15.00	1000.0	9.000	Single Line	19.8
18.245000	61.82	---	87.00	25.18	1000.0	9.000	Single Line	19.8

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]


QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

Radiated Electric Field Emissions(Below 1 GHz)

■ AC Mode

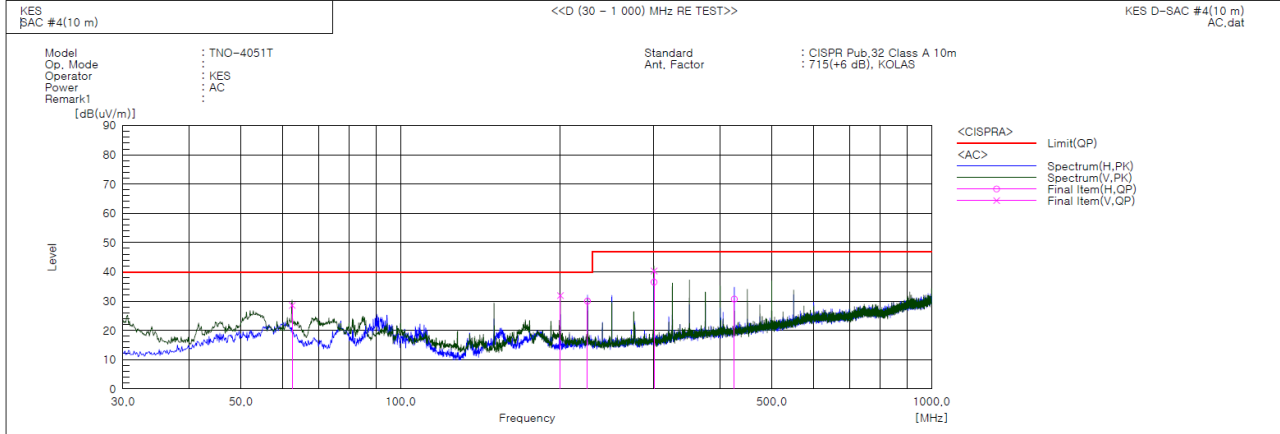

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	62.495	V	51.0	-22.5	28.5	40.0	11.5	104.0	122.1	
2	199.993	V	52.9	-21.0	31.9	40.0	8.1	211.0	295.9	
3	224.970	H	50.2	-20.2	30.0	40.0	10.0	400.0	240.9	
4	300.024	V	58.3	-18.0	40.3	47.0	6.7	163.0	127.9	
5	300.024	H	54.5	-18.0	36.5	47.0	10.5	325.0	125.3	
6	425.033	H	44.4	-13.7	30.7	47.0	16.3	398.0	3.9	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0681-R1

Page (28) of (49)

DC Mode

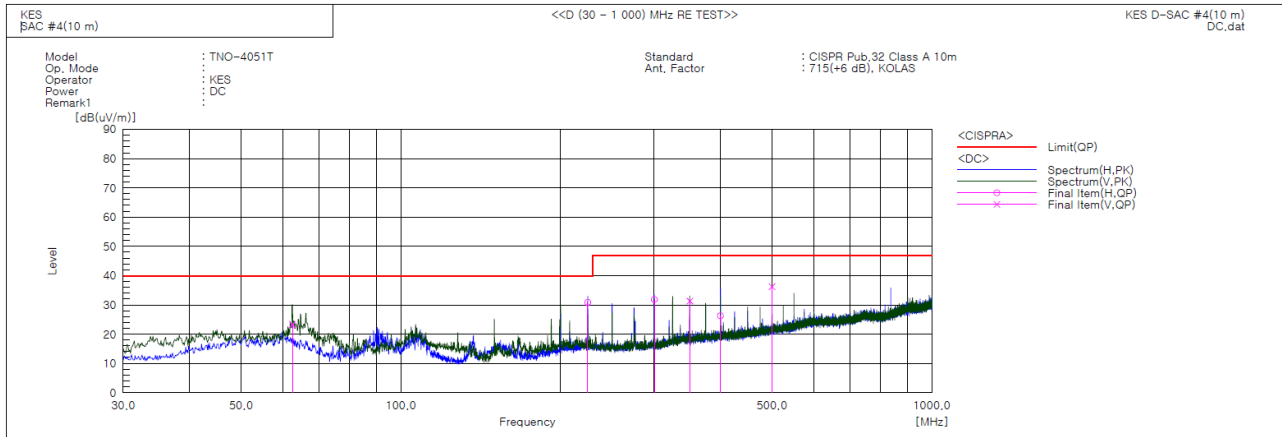


Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	62.495	V	45.8	-22.5	23.3	40.0	16.7	114.0	324.4	
2	224.970	H	51.1	-20.2	30.9	40.0	9.1	391.0	68.8	
3	300.024	H	49.8	-18.0	31.8	47.0	15.2	326.0	51.9	
4	349.979	V	46.6	-15.3	31.3	47.0	15.7	100.0	252.2	
5	400.055	H	40.5	-14.2	26.3	47.0	20.7	400.0	325.2	
6	500.086	V	47.7	-11.5	36.2	47.0	10.8	100.0	89.4	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode

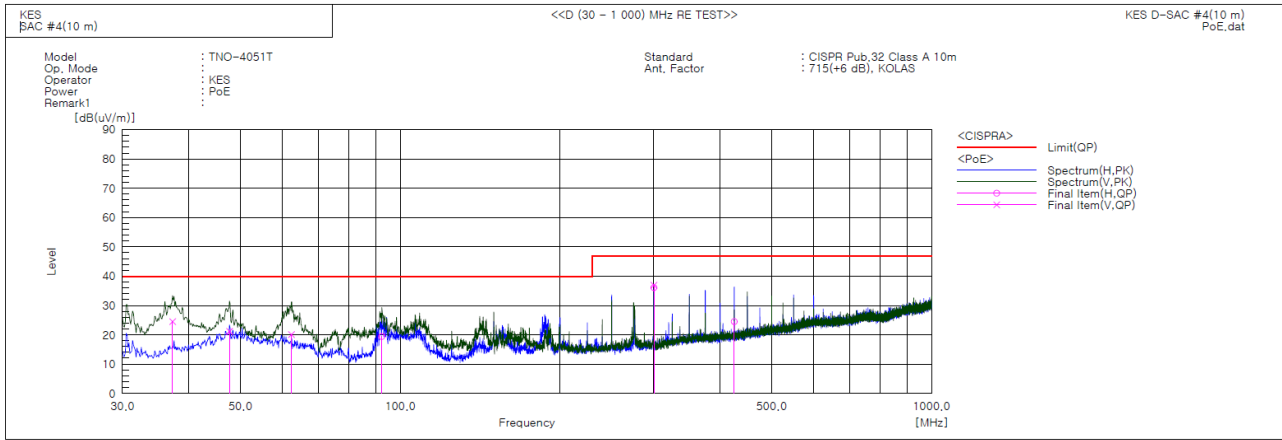

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	37.275	V	48.5	-24.0	24.5	40.0	15.5	101.0	53.9	
2	47.703	V	42.4	-21.2	21.2	40.0	18.8	177.0	109.1	
3	62.374	V	42.6	-22.5	20.1	40.0	19.9	123.0	118.6	
4	92.323	H	43.2	-23.8	19.4	40.0	20.6	400.0	251.7	
5	300.021	H	54.1	-18.0	36.1	47.0	10.9	328.0	291.7	
6	300.024	V	54.9	-18.0	36.9	47.0	10.1	100.0	236.4	
7	425.033	H	38.2	-13.7	24.5	47.0	22.5	372.0	309.5	

◆ Calculation

Corrected Amplitude [dBuV] = Amplitude[dBuV] + Correction Factor [dB]


Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss



Radiated Electric Field Emissions(Above 1 GHz)

■ AC Mode

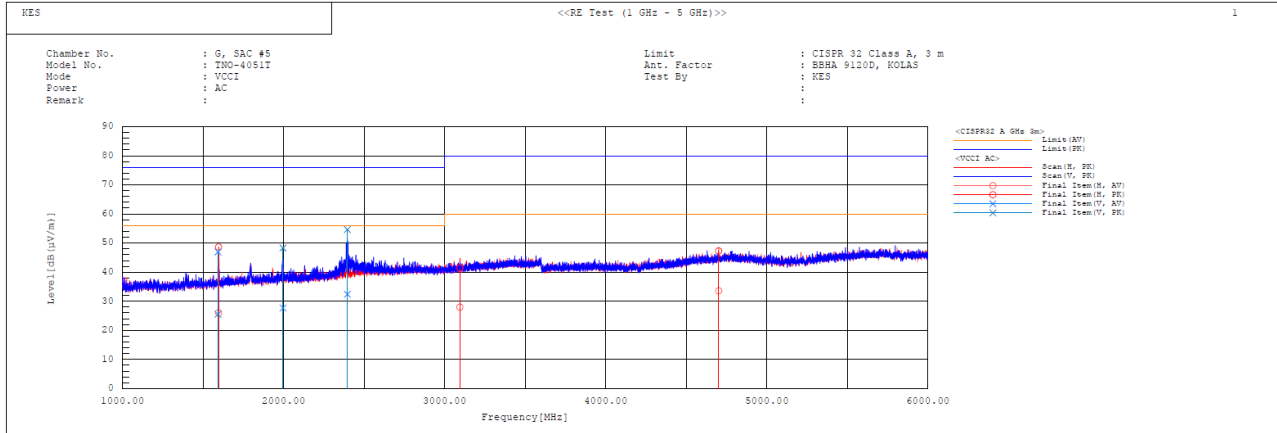


Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
1	1592.989	V	51.6	30.2	-4.7	46.9	25.5	56.0	76.0	9.1	50.5	100.0	210.0
2	1595.783	H	30.8	53.3	-4.7	26.1	48.6	56.0	76.0	29.9	27.4	100.0	298.6
3	1996.226	V	30.4	51.0	-2.7	27.7	48.3	56.0	76.0	28.3	27.7	100.0	91.7
4	2396.362	V	33.9	56.1	-1.5	32.4	54.6	56.0	76.0	23.6	21.4	100.0	198.2
5	3094.129	H	26.8	40.2	1.2	28.0	41.4	60.0	80.0	32.0	38.6	100.0	295.4
6	4700.702	H	27.5	41.2	6.1	33.6	47.3	60.0	80.0	26.4	32.7	100.0	104.8



DC Mode

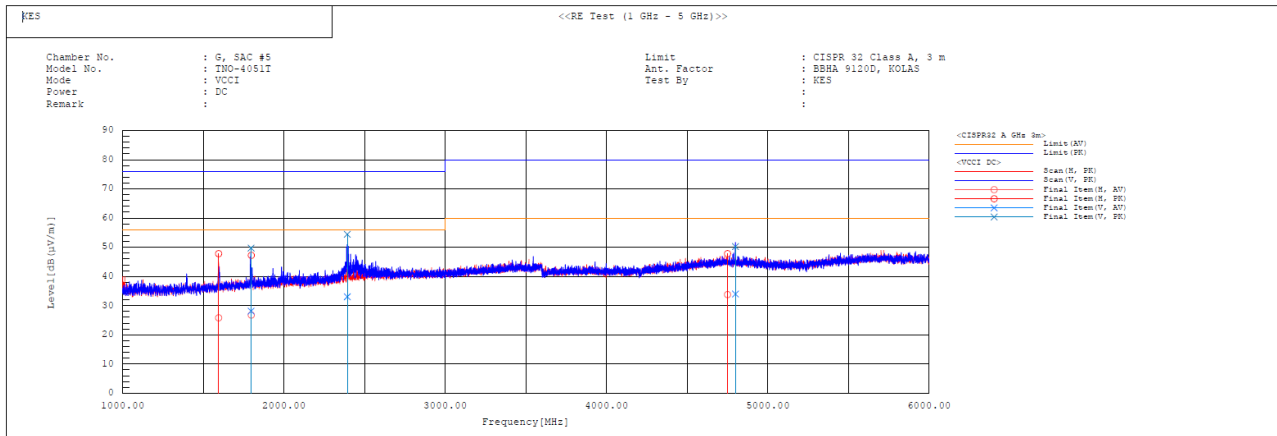


Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB (μV)]	Reading PK [dB (μV)]	c.f. [dB (1/m)]	Result AV [dB (μV/m)]	Result PK [dB (μV/m)]	Limit AV [dB (μV/m)]	Limit PK [dB (μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
1	1594.538	H	30.5	52.5	-4.7	25.8	47.8	56.0	76.0	30.2	28.2	100.0	359.6
2	1795.697	V	31.8	53.4	-3.7	28.1	49.7	56.0	76.0	27.9	26.3	100.0	187.3
3	1796.832	H	30.5	50.9	-3.7	26.8	47.2	56.0	76.0	29.2	28.8	100.0	359.6
4	2392.271	V	34.5	55.9	-1.5	33.0	54.4	56.0	76.0	23.0	21.6	100.0	176.8
5	4750.500	H	27.5	41.5	6.3	33.8	47.8	60.0	80.0	26.2	32.2	100.0	89.9
6	4799.024	V	27.5	43.7	6.5	34.0	50.2	60.0	80.0	26.0	29.8	100.0	12.1



PoE Mode

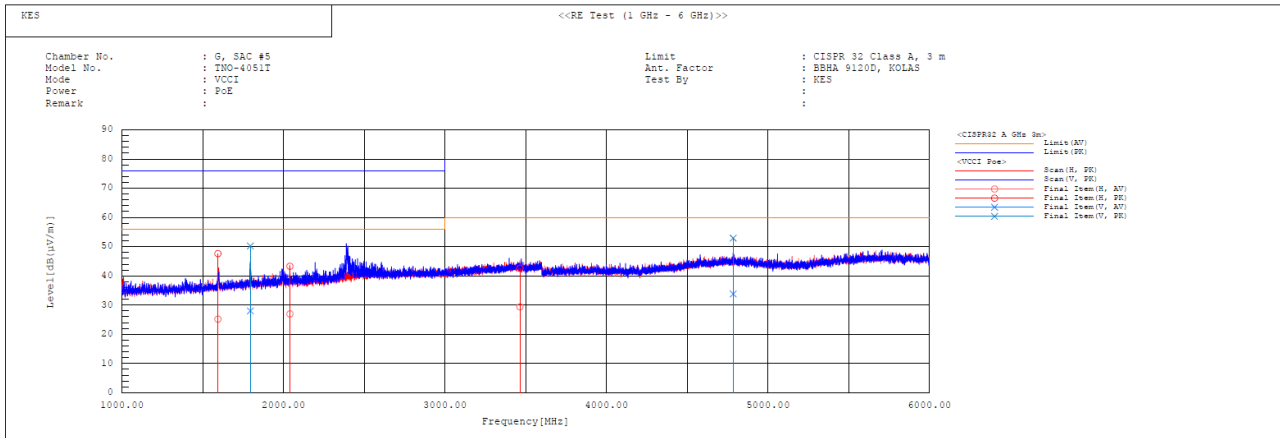

Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
1	1594.034	H	29.9	52.3	-4.7	25.2	47.6	56.0	76.0	30.8	28.4	100.0	294.5
2	1794.628	V	31.7	53.9	-3.7	28.0	50.2	56.0	76.0	28.0	25.8	100.0	183.1
3	2039.917	H	29.6	45.9	-2.6	27.0	43.3	56.0	76.0	29.0	32.7	100.0	160.1
4	3463.755	H	27.6	40.8	1.8	29.4	42.6	60.0	80.0	30.6	37.4	100.0	89.0
5	4784.000	V	27.4	46.5	6.4	33.8	52.9	60.0	80.0	26.2	27.1	100.0	331.0

Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports

■ DC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


Conducted Emissions at Telecommunication Ports

■ DC Mode




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode

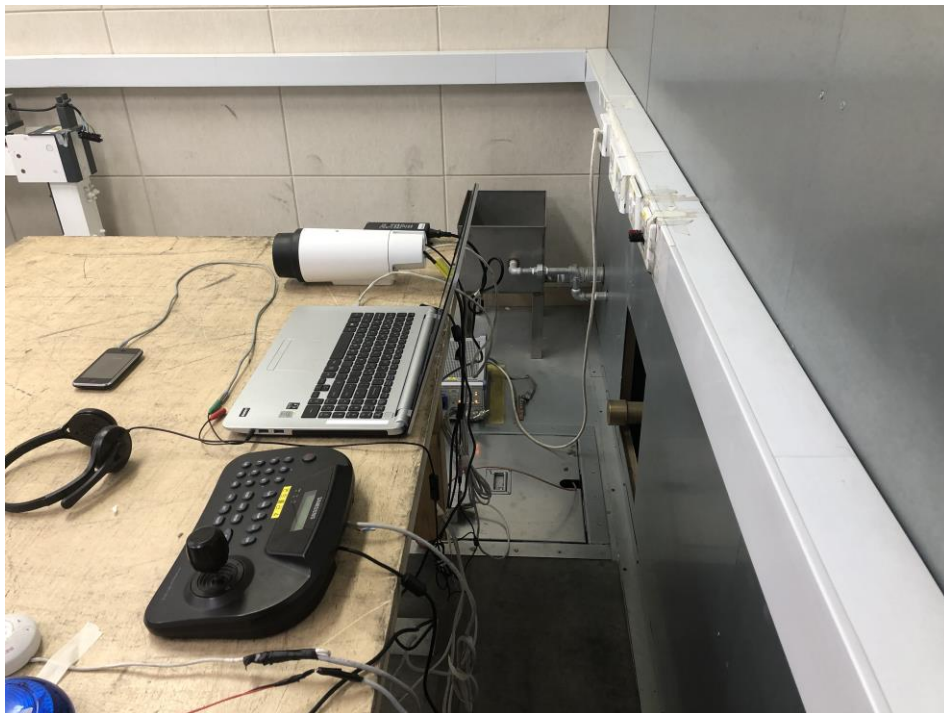


Radiated Electric Field Emissions(Below 1 GHz)

■ DC Mode

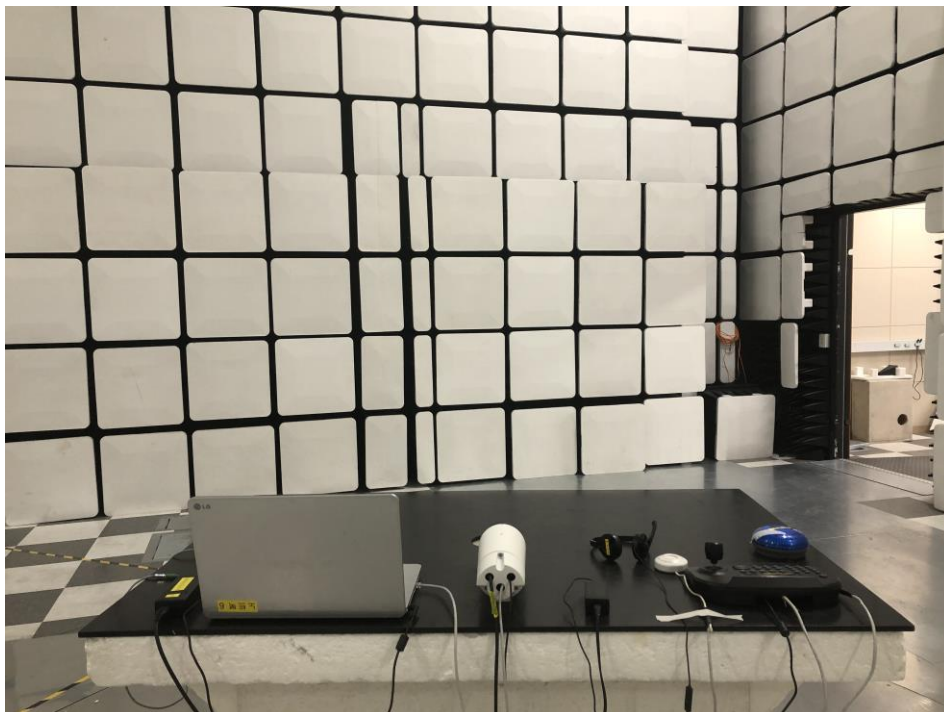

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



■ PoE Mode

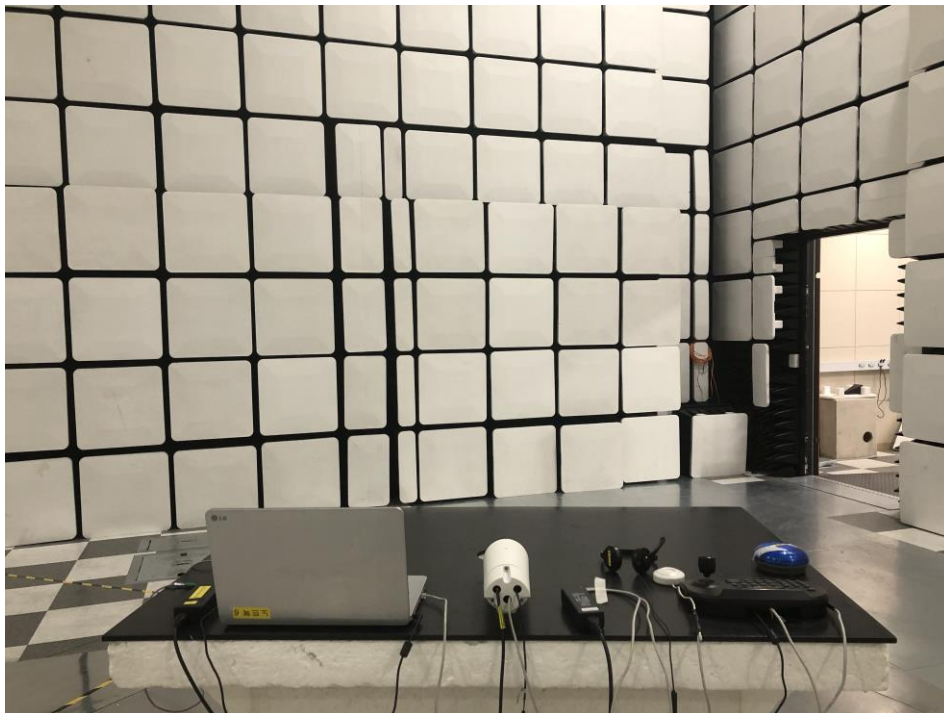

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



Radiated Electric Field Emissions(Above 1 GHz)

■ DC Mode

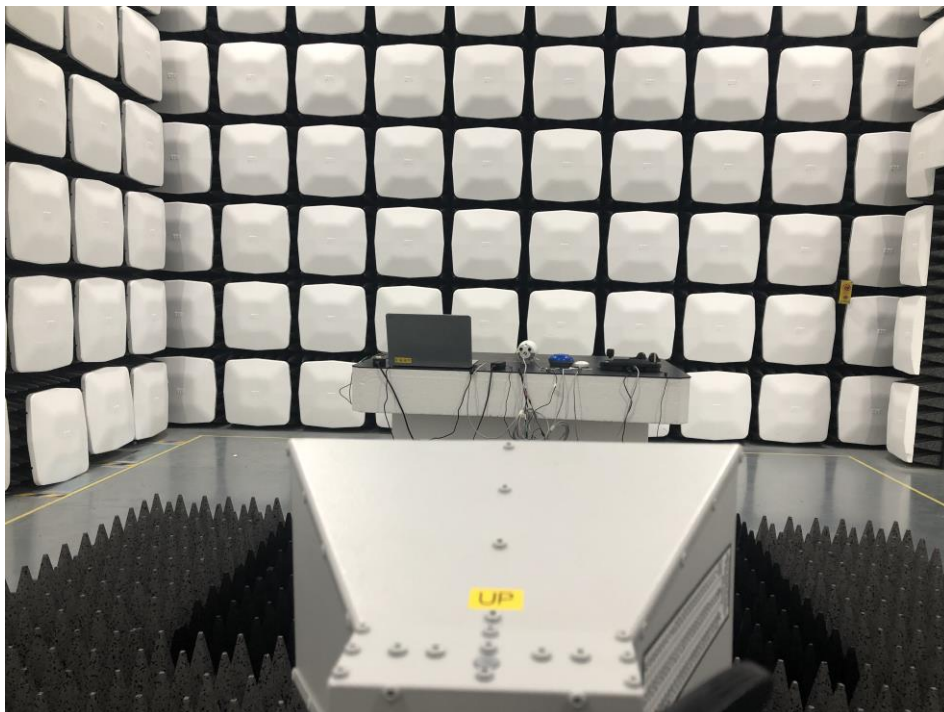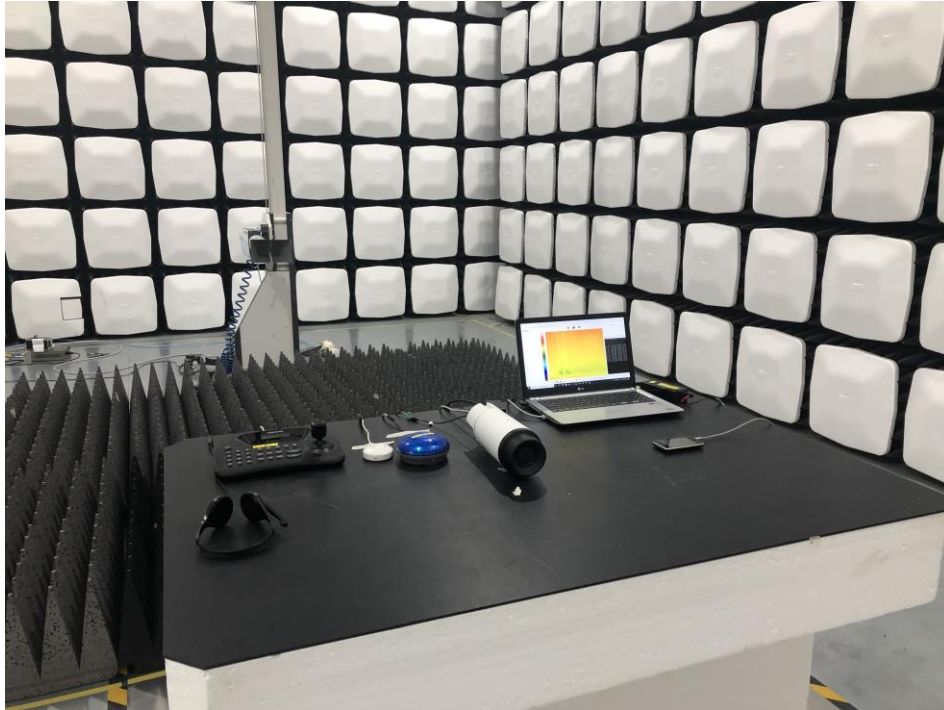

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

■ PoE Mode

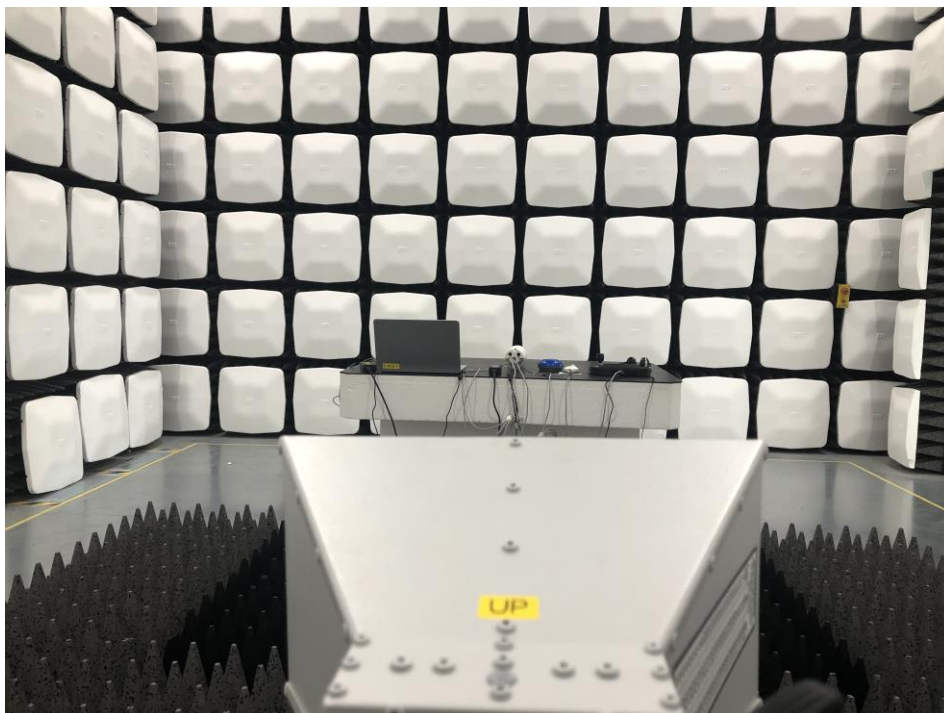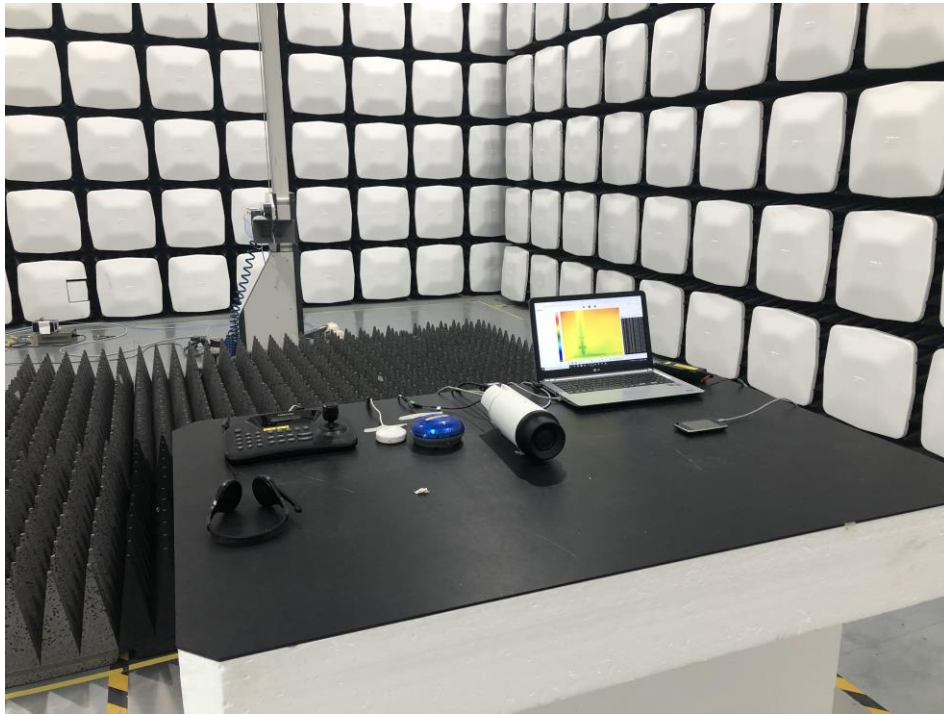

EUT External Photographs

(Top)




(Bottom)




EUT Internal Photographs

(Internal View)

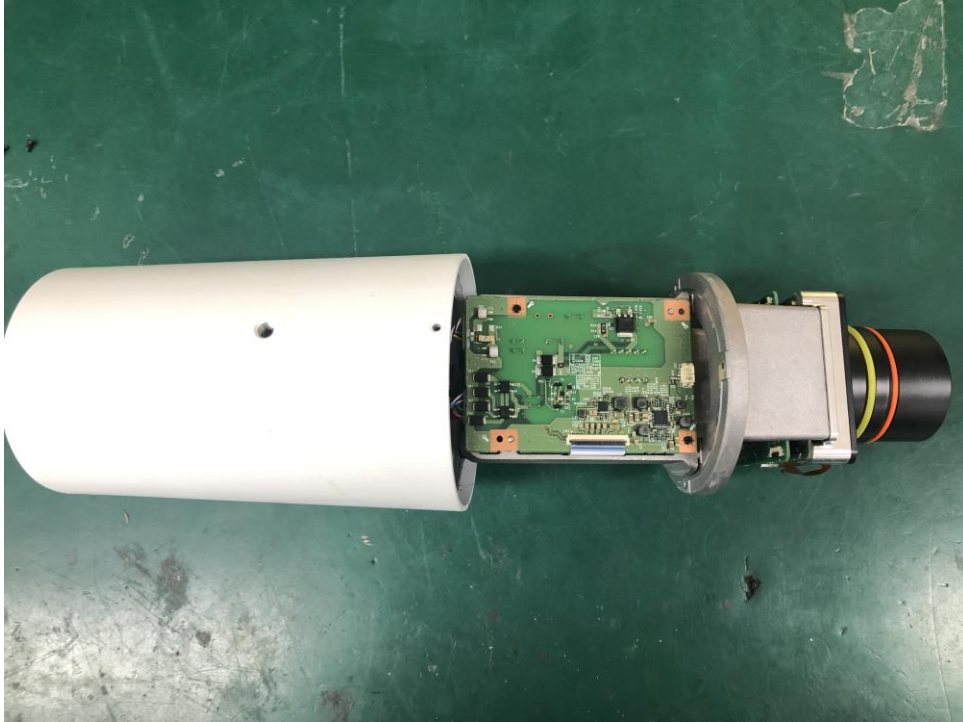


EUT Internal View – Board 1

(Top)

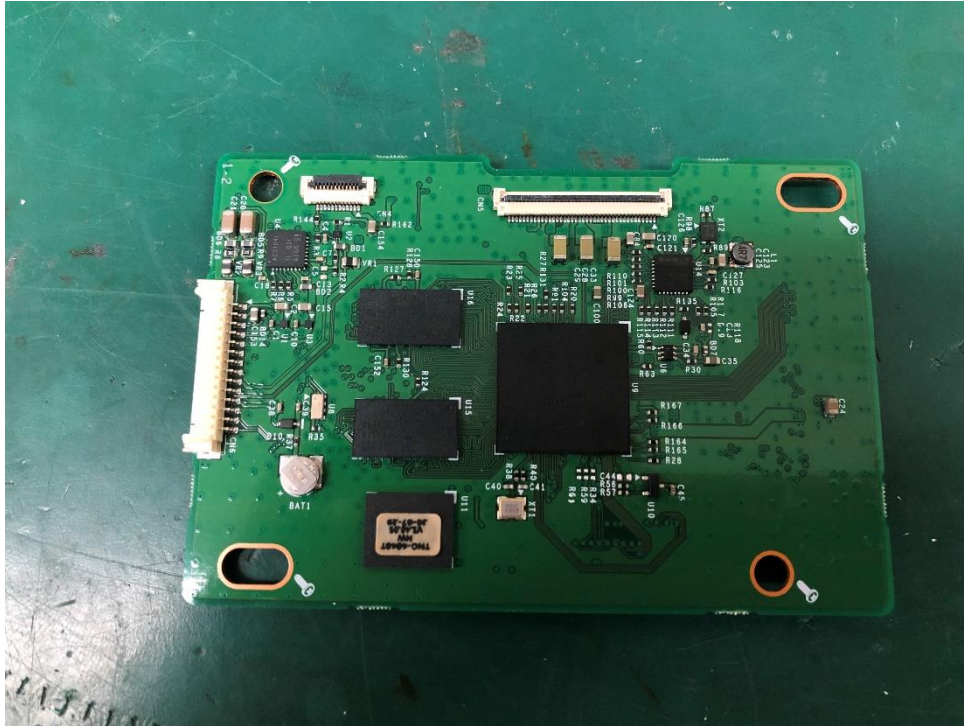

(Bottom)

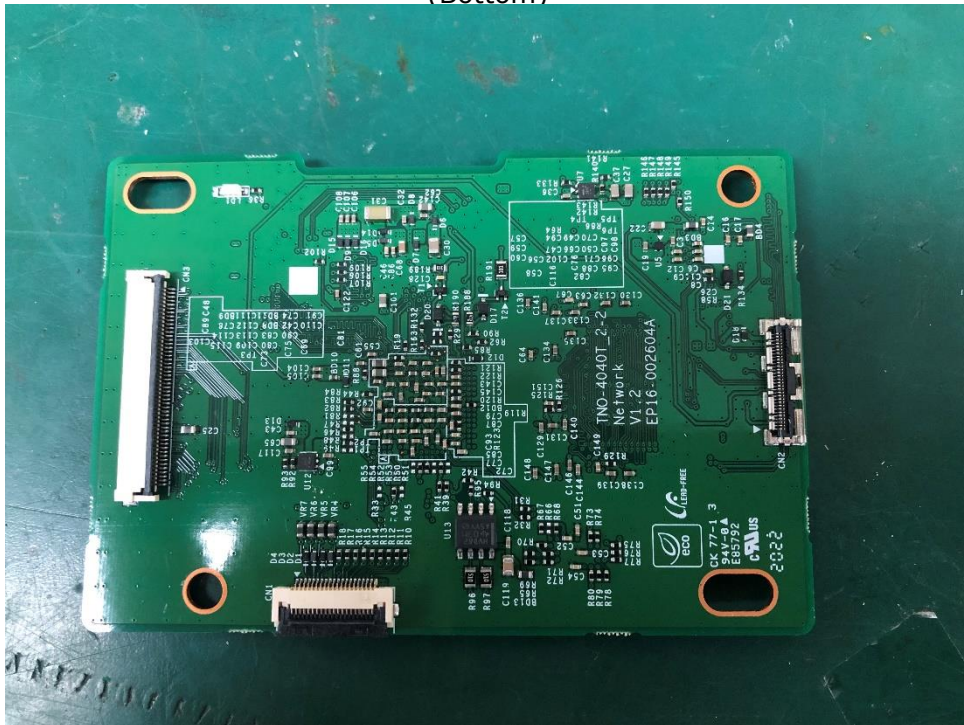


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 2

(Top)



(Bottom)

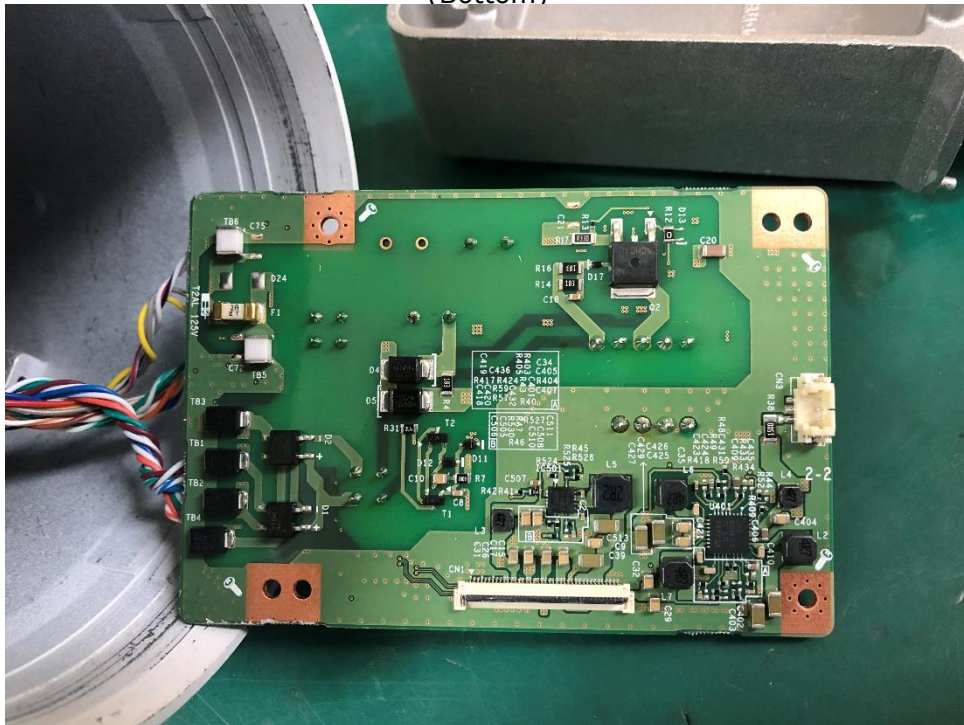


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 3

(Top)




(Bottom)

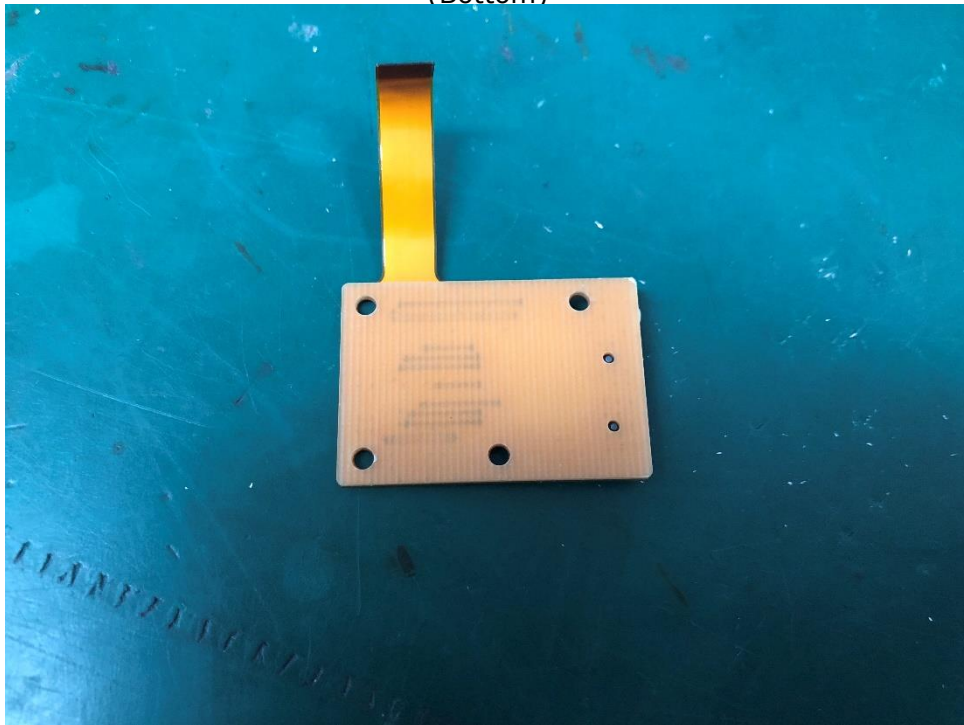

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View –Board 4

(Top)

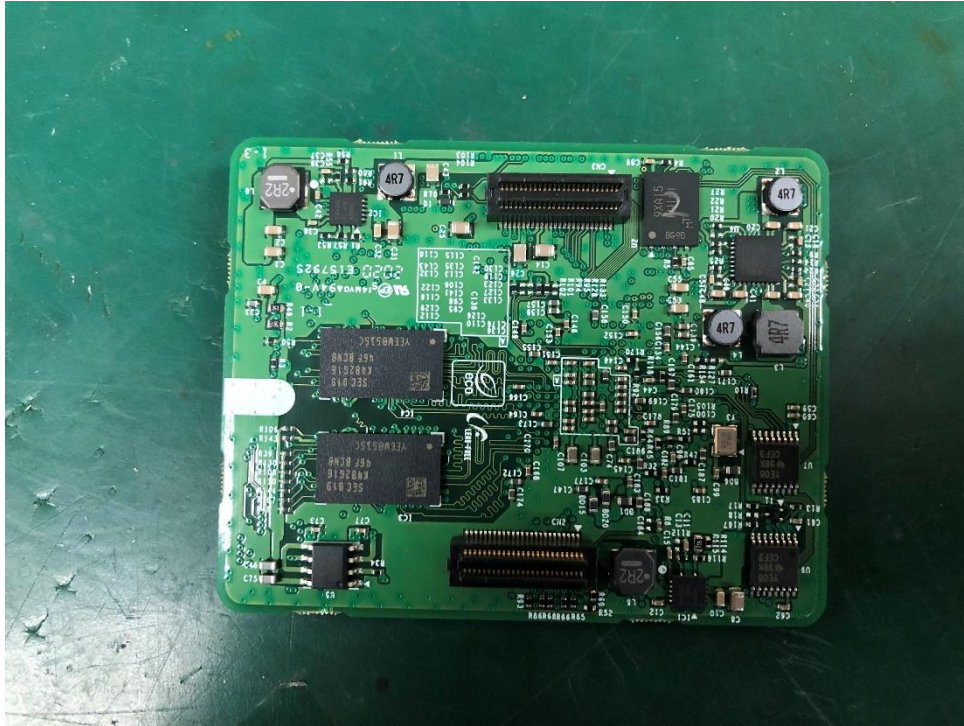

(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 5

(Top)




(Bottom)

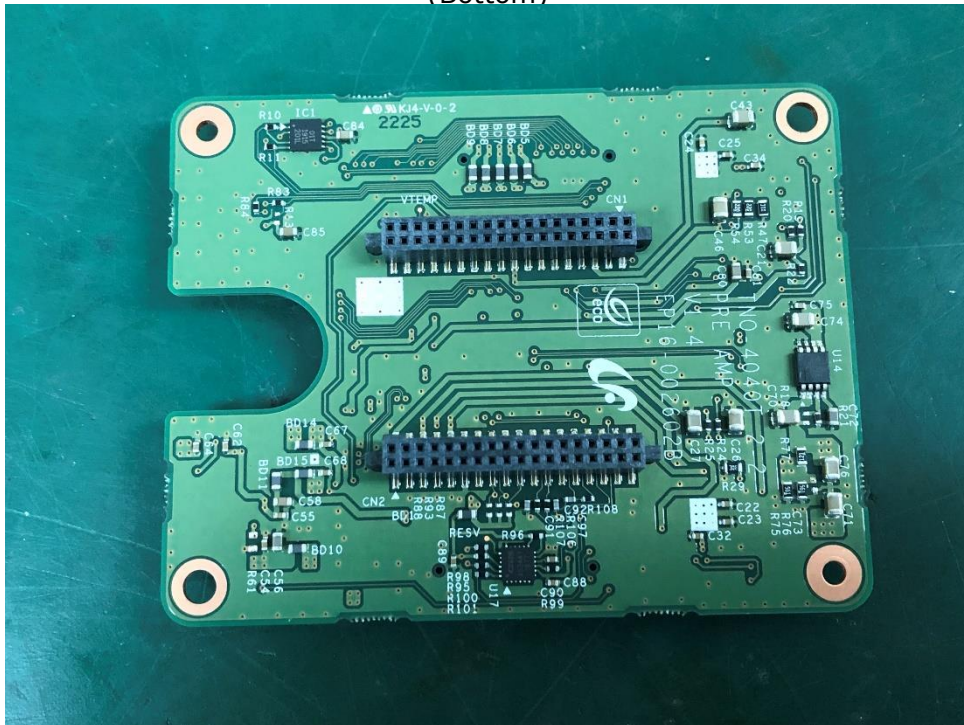

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 6

(Top)

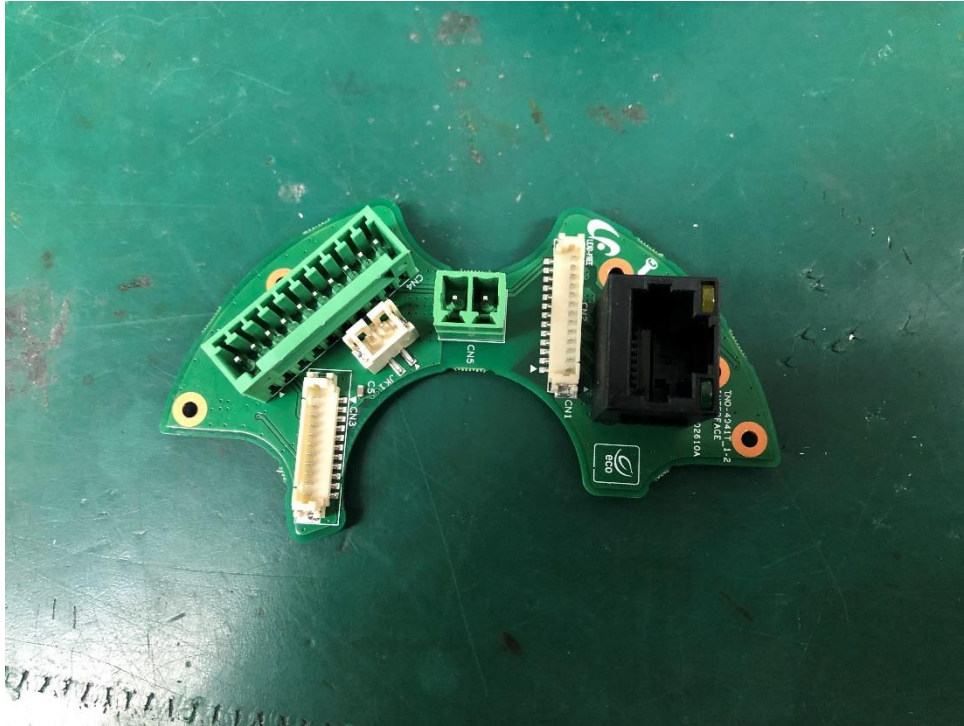

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Lens

(Top)



Label Photographs



この装置は、クラスA情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。

VCCI-A