



EMC TEST REPORT For CE

Test Report No. : KES-E1-19T0083

Date of Issue : Feb. 15, 2019

Product name : Network Camera

Model/Type No. : XND-6081F

Variant Model : -

Applicant : Hanwha Techwin Co., Ltd.

Applicant Address : 6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13488, KOREA

Manufacturer : 1. Hanwha Techwin (Tianjin) Co.,Ltd.
2. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
3. D-TECH CO.,LTD.

Manufacturer Address : 1. No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin,
300385, People's Republic of China
2. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
3. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do,
Korea (Suwon Industrial Complex)

Date of Receipt : Jan. 21, 2019

Test date : Feb. 12, 2019 ~ Feb. 14, 2019

Test Results : ☒ In Compliance ☐ Not in Compliance

Tested by

Young Ho, Lee
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-19T0083
Page (2) of (65)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Feb. 15, 2019	KES-E1-19T0083	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	6
1.2	Variant Model Differences	6
1.3	Device Modifications	6
1.4	Equipment Under Test	6
1.5	Support Equipments	6
1.6	External I/O Cabling	7
1.7	EUT Operating Mode(s)	8
1.8	Configuration	9
1.9	Remarks when standards applied	10
1.10	Calibration Details of Equipment Used for Measurement	10
1.11	Test Facility	10
1.12	Laboratory Accreditations and Listings	10
2.0	Test Regulations	11
2.1	Conducted Emissions at Mains Power Ports	13
2.2	Conducted Emissions at Telecommunication Ports	14
2.3	Radiated Electric Field Emissions(Below 1 GHz)	15
2.4	Radiated Electric Field Emissions(Above 1 GHz)	16
2.5	Harmonic Current Emissions	17
2.6	Voltage Fluctuations and Flicker	18
3.0	Criteria for compliance	19
3.1	Electrostatic Discharge	21
3.2	Radiated Electric Field Immunity	24
3.3	Electrical Fast Transients/Bursts	27
3.4	Surge Transients	30
3.5	Conducted Disturbance	33
3.6	Voltage Dips and Short Interruptions	36
APPENDIX A – TEST DATA		38
Conducted Emissions at Mains Power Ports		38
Conducted Emissions at Telecommunication Ports		40
Radiated Electric Field Emissions(Below 1 GHz)		44
Radiated Electric Field Emissions(Above 1 GHz)		46
Harmonic Current Emissions and Voltage Fluctuations and Flicker		48
Test Setup Photos and Configuration		51
Conducted Voltage Emissions		51
Conducted Telecommunication Emissions		52
Radiated Electric Field Emissions(Below 1 GHz)		53
Radiated Electric Field Emissions(Above 1 GHz)		54
Harmonic Current Emissions and Voltage Fluctuations and Flicker		55
Electrostatic Discharge		56
Radiated Electric Field Immunity		56
Electrical Fast Transients/Bursts		57
Surge Transients		57
Conducted Disturbance		58
Voltage Dips and Short Interruptions		58
EUT External Photographs		59
EUT Internal Photographs		60



1.0 General Product Description

Main Specifications of EUT are:

SPECIFICATION

Items	Description		
	XNW-6081/XNV-6081R	XND-6081V/XND-6081RV	XND-6081F/XND-6081RF
Video	Imaging Device	1/2.8" 2MP CMOS	
	Effective Pixels	1945(H) x 1097(V)	
	NETD	None	
	Pixel Size	None	
	Min. Illumination	XNW-6081/XND-6081V/XND-6081F - Color : 0.015 Lux(F1.4, 1/30sec), B/W : 0.0015 Lux(F1.4, 1/30sec) XNV-6081R/XND-6081RV/XND-6081RF - Color : 0.015 Lux(F1.4, 1/30sec), B/W : 0 Lux(IR LED on)	
	Video Out	CVBS: 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P) for installation USB : Micro USB type B, 1280x720 for installation	
Lens	Focal Length (Zoom Ratio)	2.8~12mm(4.3x) motorized varifocal	
	Max. Aperture Ratio	F1.4(Wide) ~ F3.6(Tele)	
	Angular Field of View	H : 119.5°(Wide) ~ 27.9°(Tele)	
		V : 62.8°(Wide) ~ 15.7°(Tele)	
		D : 142.1°(Wide) ~ 32.0°(Tele)	
	Min. Object Distance	0.5m (1.64ft)	
	Focus Control	Simple focus	
	Lens Type	DC Auto Iris, P-iris	
	Mount Type	None	
Pan / Tilt / Rotate	Optional Lens	None	
	Pan / Tilt / Rotate range	0°~360° / -45°~85° / 0°~355°	
	Pan Range	Remote adjustment (Max. 200 cycles)	
	Pan Speed	None	
	Tilt Range	None	
	Tilt Speed	None	
	Rotate Range	None	
	Sequence	None	
	Preset Accuracy	None	
	Azimuth	None	
	Auto Tracking	None	

Items	Description		
	XNW-6081/XNV-6081R	XND-6081V/XND-6081RV	XND-6081F/XND-6081RF
Operational	IR Viewable Length	50m(164.04ft)	
	Camera Title	Displayed up to 85 characters	
	Day & Night	Auto (ICR)	
	Backlight Compensation	BLC, HLC, WDR, SSDR	
	Wide Dynamic Range	150dB	
	Digital Noise Reduction	SSNR V	
	Digital Image Stabilization	Support (built-in Gyro Sensor)	
	Defog	Support	
	Motion Detection	8ea, 8point Polygonal zones	
	Privacy Masking	32ea, polygonal zones	
		- Color : Gray, Green, Red, Blue, Black, White - Mosaic	
	Gain Control	Low / Middle / High	
	White Balance	ATW / AWC / Manual / Indoor / Outdoor	
	LDC	Support	
	Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec)	
	Video Rotation	Flip, Mirror, Halfway view(90°/270°)	
	Analytics	Defocus detection, Directional detection, Fog detection, Face detection, Motion detection, Digital auto tracking, Appear/Disappear, Enter/Exit, Loitering, Tampering, Virtual line, Audio detection, Sound classification, Shock detection	
	Business Intelligence	People counting, Queue management, Heatmap	
	Serial Interface	None	
	Alarm I/O	Input 1ea / Output 1ea	
	Alarm Triggers	Analytics, Network disconnect, Alarm input	



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0083

Page (5) of (65)

Items	Description		
	XNV-6081/XNV-6081R	XND-6081V/XND-6081RV	XND-6081F/XND-6081RF
Operational	Alarm events	• File upload via FTP, E-Mail • Notification via E-Mail • SD/SDHC/SDXC or NAS recording at event triggers • Alarm output • Handover • Audio playback	
	Audio In	Selectable (Mic IN/Line IN) Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm	Selectable (Mic IN/Line IN/Built-in mic) Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm
	Audio out	Line out, Max output level: 1 Vrms	
	Wiper	None	
	Coaxial Protocol	None	
	Video Transmission Distance	None	
Radiometry	Temperature detect range	None	
	Temperature accuracy	None	
	Temperature detection	None	
	Additional	None	
Network	Ethernet	RJ-45 (10/100BASE-T)	
	Video Compression	H.265/H.264: Main/Baseline/High, MJPEG	
	Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240	
	Max. Framerate	H.265/H.264: Max. 60fps/50fps(60Hz/50Hz) MJPEG: Max. 30fps/25fps(60Hz/50Hz)	

Items	Description		
	XNV-6081/XNV-6081R	XND-6081V/XND-6081RV	XND-6081F/XND-6081RF
Network	Smart Codec	Manual(Sea area), WiseStream II	
	Bitrate Control	H.264/H.265 : CBR or VBR MJPEG : VBR	
	Streaming	Unicast(20 users) / Multicast Multiple streaming(Up to 10 profiles)	
	Audio Compression	G.711 μ -law / G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 16KHz	
	Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP/UDP, RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour, LLDP	
	Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1x Authentication (EAP-TLS, EAP-LEAP)	
	Edge Storage	Micro SD/SDHC/SDXC 2slot 512GB	
	Application Programming Interface	ONVIF Profile S/G/T SUNAPI(HTTP API) Wisenet Open Platform	
	Web Viewer	Supported OS : Windows 7 / 8.1 / 10, MAC OS X 10.10, 10.11, 10.12 Recommended Browser : Google Chrome Supported web browsers : MS Explorer11, MS Edge, Mozilla Firefox (Window 64bit only), Apple Safari (Mac OS X only)	
	Memory	1024MB RAM, 256MB Flash	

Items	Description		
	XNV-6081/XNV-6081R	XND-6081V/XND-6081RV	XND-6081F/XND-6081RF
Environmental	Operating Temperature / Humidity	-50°C ~ +60°C (-58°F ~ +140°F) / Less than 90% RH * Start up should be done at above -35°C	
	Storage Temperature / Humidity	-50°C ~ +60°C (-58°F ~ +140°F) / Less than 90% RH	
	Certification	IP66/IP67, IK10+, NEMA4X	IP52, IK10
Electrical	Input Voltage	PoE(IEEE802.3af, Class3), 24VAC, 12VDC	PoE(IEEE802.3af, Class3), 12VDC
	Power Consumption	XNV-6081 - PoE: Max 7.0W, typical 4.90W 12VDC: Max 5.4W, typical 3.70W 24VAC: Max 7.1W, typical 4.90W XNV-6081R - PoE: Max 12.95W, typical 10.30W 12VDC: Max 10.8W, typical 8.40W 24VAC: Max 13.3W, typical 10.40W XND-6081V/XND-6081F - PoE: Max 7.0W, typical 4.20W 12VDC: Max 5.4W, typical 3.10W XND-6081RV/XND-6081RF - PoE: Max 12.95W, typical 9.4W 12VDC: Max 10.8W, typical 7.6W	
Mechanical	Color / Material	White / Aluminum	
	RAL Code	RAL9003	
	Product dimensions / weight	XNV-6081 : Ø180x125mm(7.09x4.92"), 1.45kg(3.20 lb) XNV-6081R : Ø180x125mm(7.09x4.92"), 1.75kg(3.86 lb)	Ø160x125mm (6.30x4.92"), 1.45kg(3.20 lb)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 230Vac ☐ 100 Vac ☐ 24 Vac ☒ 12 Vdc ☒ PoE
Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
Network Camera	XND-6081F	-	Hanwha Techwin (Tianjin) Co.,Ltd.	EUT

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
PoE Adaptor	ANY4805C-LT1	RD935608201696420 0	Power Dsine	-
Notebook	ProBook4430s	-	HP	-
Notebook Adaptor	SeriesPPP0009H	-	CHICONY POWER TECHNOLOGY (SUZHOU) CO.,LTD,	-
Speaker	BR10000A CUVE	-	BEIJING EDIFIER HI- TECH GROUP.	-
MIC	CMK-303	-	CAMAC	-
Alarm 1	SIP-1201DD D0	-	SAMSUNG TECHWIN CO., LTD.	-
Alarm 2	-	-	-	-
Cellular phone	LG-SU760	108KPQJ0186212	LG	-

1.6 External I / O Cabling

■ DC 12 V

Start		END		Cable Spec.	
Description	I / O Port	Description	I / O Port	Length	Shield
Network Camera (EUT)	RJ-45	Notebook	RJ-45	3.0	U
	3.5 mm	Speaker	3.5 mm	1.6	U
	3.5 mm	MIC	3.5 mm	1.7	U
	Alarm Out	Alarm 1	Alarm In	3.0	U
	Alarm In	Alarm 2	Alarm Out	3.0	U
Notebook	3.5 mm	Cellular phone	3.5 mm	1.0	U

* Unshielded=U, Shielded=S

■ PoE

Start		END		Cable Spec.	
Description	I / O Port	Description	I / O Port	Length	Shield
Network Camera (EUT)	RJ-45	PoE Adaptor	RJ-45	3.0	U
	3.5 mm	Speaker	3.5 mm	1.6	U
	3.5 mm	MIC	3.5 mm	1.7	U
	Alarm Out	Alarm 1	Alarm In	3.0	U
	Alarm In	Alarm 2	Alarm Out	3.0	U
Notebook	3.5 mm	Cellular phone	3.5 mm	1.0	U
	RJ-45	PoE Adaptor	RJ-45	3.0	U

* Unshielded=U, Shielded=S



1.7 EUT Operating Mode(s)


Test Mode	operating
DC 12 V	EUT Monitoring, Ping Test
PoE	EUT Monitoring, Ping Test

EUT Test operating S / W		
Name	Version	Manufacture Company
WebViewer	-	Hanwha Techwin Co., Ltd.


1.8 Configuration

■ AC Main
 □ DC Main

■ DC 12 V

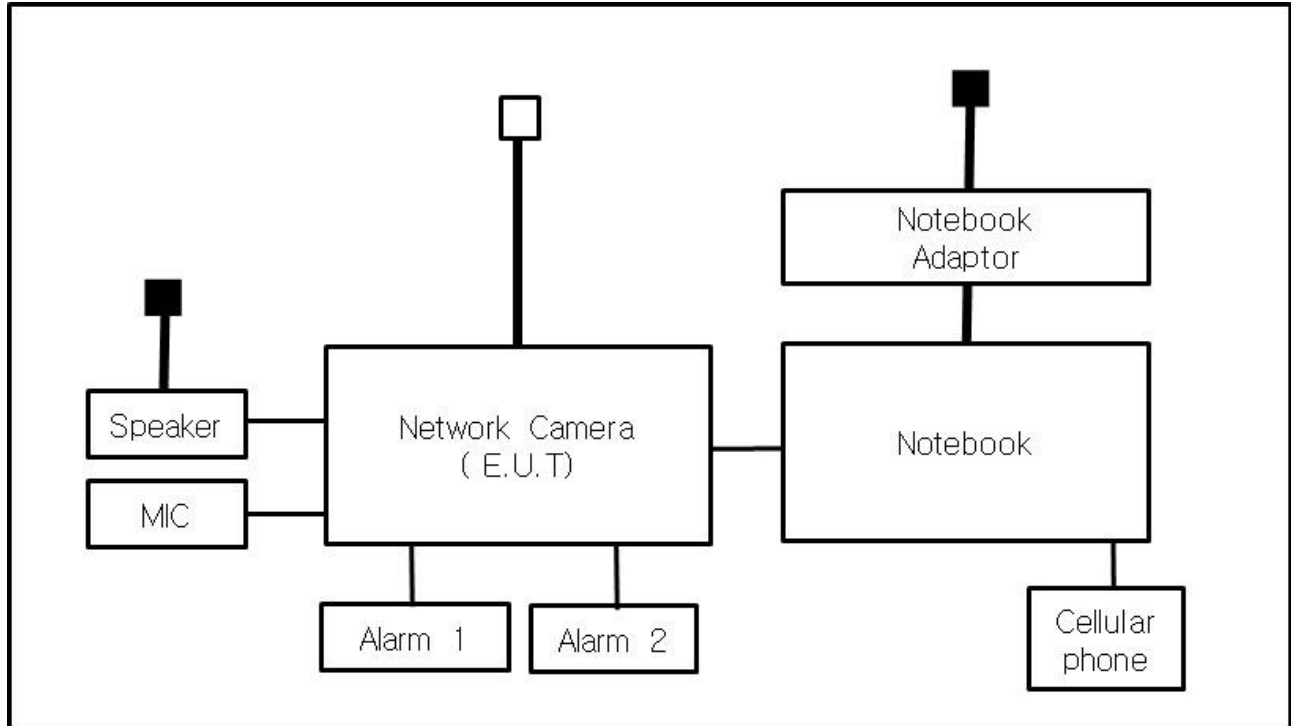

■ PoE

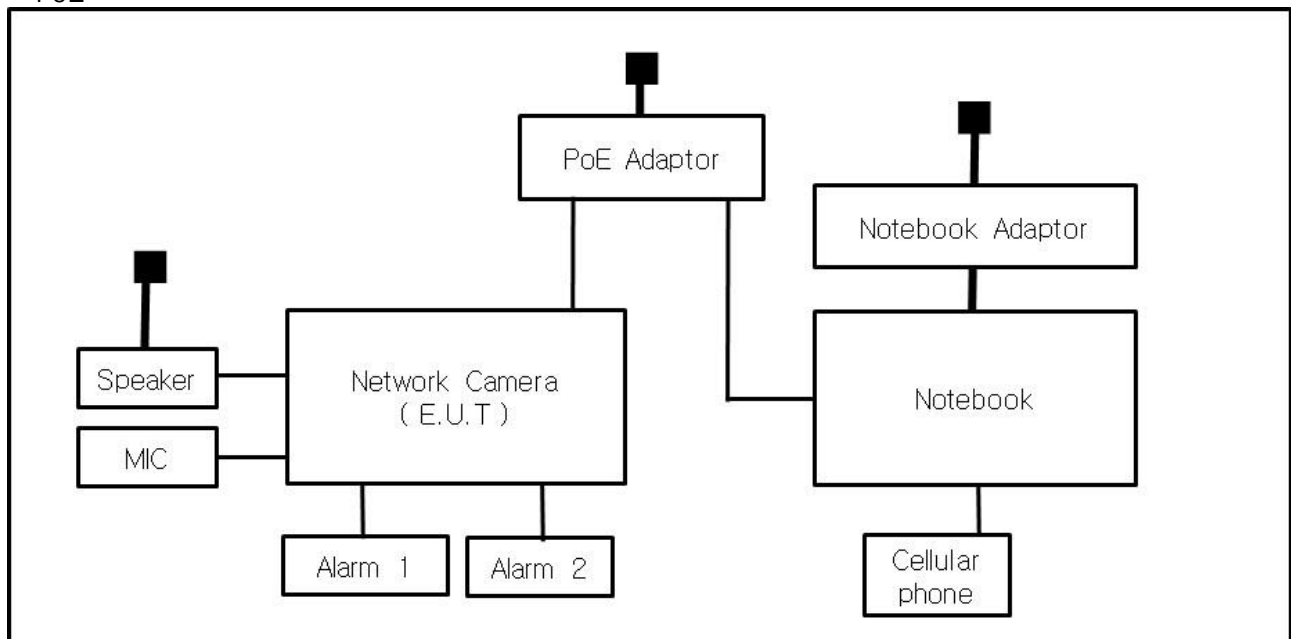

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeoju-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2012

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Aechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
Europe	TÜ V SÜ D	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 17 07 01633 001

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547:2009

☒ EN 55032:2015

☒ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☒ EN 50130-4:2011+A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-19T0083
Page (12) of (65)

-
- | | | |
|---|----------------------------------|----------------------------------|
| ☐ VCCI-CISPR 32:2016 | ☐ Class A | ☐ Class B |
| ☐ AS/NZS CISPR32:2015 | ☐ Class A | ☐ Class B |
| ☐ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
| ☐ IC Regulation ICES-003 : 2016 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
| ☐ RE- Directive 2014/53/EU | | |
| ☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
| ☐ EN 301 489-3 V1.6.1 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
| ☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



2.1 Conducted Emissions at Mains Power Ports

Test Date

N/A

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	EMC32	R & S	9.12.00	-
☐	EMI TEST RECEIVER	ESR3	R & S	101781	04, 25, 2019
☐	LISN	ENV216	R & S	101787	01, 04, 2020
☐	LISN	ESH2-Z5	R & S	100450	04, 25, 2019

Test Conditions

Temperature: °C

Relative Humidity: % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

It is not tested apply because it is powered by DC and PoE

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Feb. 13, 2019

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101781	04, 25, 2019
☒	LISN	ENV216	R & S	101787	01, 04, 2020
☒	LISN	ESH2-Z5	R & S	100450	04, 25, 2019
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 26, 2019
☒	8-WIRE ISN CAT3,5	ENY81	R & S	100174	01, 07, 2020
☐	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	01, 07, 2020

Test Conditions

Temperature: 22,9 °C

Relative Humidity: 43,1 % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Feb. 12, 2019

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 11, 2019
☒	AMPLIFIER	SCU 01	R & S	100603	11, 26, 2019
☒	ATTENUATOR	8491A	HP	32173	03, 21, 2019
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	11, 29, 2020

Test Conditions

Temperature: 21,4 °C
Relative Humidity: 42,0 % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Feb. 12, 2019

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 06, 2019
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	05, 31, 2019
☒	ATTENUATOR	8491A	HP	35496	03, 21, 2019
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 02, 2019

Test Conditions

Temperature: 23,1 °C

Relative Humidity: 44,0 % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.5 Harmonic Current Emissions

Test Date

N/A

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	dpa.control	EM TEST	5.4.11.0	-
☐	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	08, 08, 2019
☐	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Classification of Equipment for Harmonic Current Emissions

- ☐ Class A
- ☐ Class B
- ☐ Class C(Below 25 W)
- ☐ Class C(Above 25 W)
- ☐ Class D

Test Results

The requirements are:

- ☐ PASS
- ☐ NOT PASS
- ☒ NOT APPLICABLE

Remarks

It is not tested apply because it is powered by DC and PoE



2.6 Voltage Fluctuations and Flicker

Test Date

N/A

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	dpa.control	EM TEST	5.4.11.0	-
☐	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	08, 08, 2019
☐	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

It is not tested apply because it is powered by DC and PoE

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011+A1:2014 Alarm systems-Part 4: Electromagnetic compatibility Product family standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it

difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test

report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.



Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change,
and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.
For component of CCTV systems, where the status is monitored by observing the TV picture,
then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:
(a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
(b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could
still be used; and
(c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip / interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the conditioning is permissible, providing that there is no
residual
change in the EUT or any change in outputs, which could be interpreted by associated
equipment
as a change. The EUT shall meet the acceptance criteria for the functional test, after the
conditioning.



3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Feb. 14, 2019

Test Location

EMS-ESD: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS01Z0454	10, 11, 2019
☒	HCP	-	KES	-	-
☒	VCP	-	KES	-	-

Test Conditions

Temperature: 22,9 °C
Relative Humidity: 43,8 % R.H.
Atmospheric Pressure: 101,6 kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge

Discharge Voltage:	Contact	Air	HCP	VCP
	☐ 2 kV	☒ 2 kV	☐ 2 kV	☐ 2 kV
	☐ 4 kV	☒ 4 kV	☐ 4 kV	☐ 4 kV
	☒ 6 kV	☐ 6 kV	☒ 6 kV	☒ 6 kV
	☐ 8 kV	☒ 8 kV	☐ 8 kV	☐ 8 kV
	☐ 15 kV	☐ 15 kV	☐ 15 kV	☐ 15 kV


Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Location of Discharge:

Air
Contact

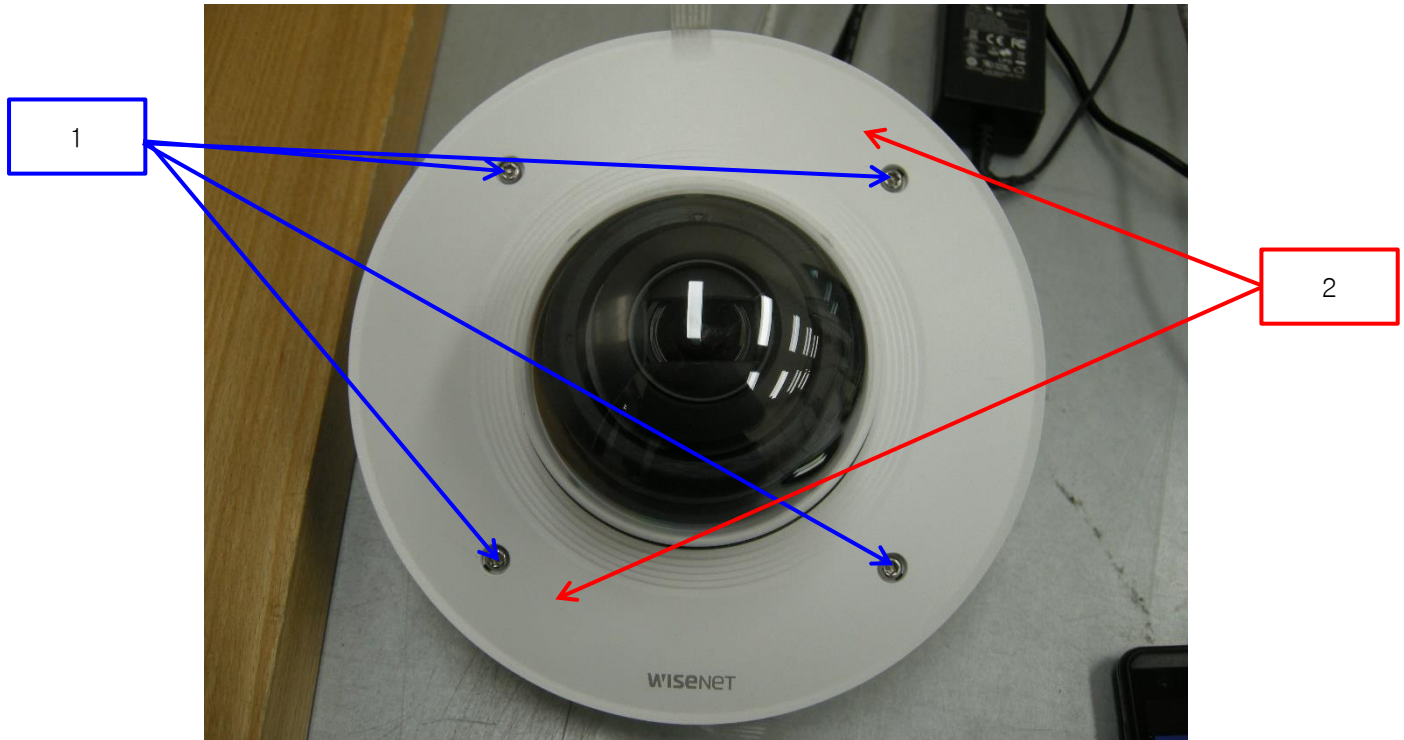



Test Data

■ DC 12 V

Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Screw	Contact Discharge	Complied	-
2	Enclosure	Air Discharge	Complied	-

Note: "Blank" = Not performed

■ PoE

Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Screw	Contact Discharge	Complied	-
2	Enclosure	Air Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria



3.2 Radiated Electric Field Immunity

Reference Standard

EN 61000-4-3:2006 +A2:2010

Test Date

Feb. 13, 2019

Test Location

EMS-RS: ☐ SEMI ANECHOIC CHAMBER #2☒ SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	EMC32	R & S	10.10.02	-
☒	SIGNAL GENERATOR	SMB 100A	R & S	177586	08, 06, 2019
☒	BROADBAND AMPLIFIER	BBA100	R & S	101239	08, 06, 2019
☒	BROADBAND AMPLIFIER	100S1G6M1	AR	579931	08, 06, 2019
☒	POWER METER	NRP2	R & S	103475	08, 06, 2019
☒	AVG POWER SENSOR	NRP-Z91	R & S	102526	08, 06, 2019
☒	AVG POWER SENSOR	NRP-Z91	R & S	102527	08, 06, 2019
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
☒	DIRECTIONAL COUPLER	KYDC-D1070-DX40	KY TELECOM	KY150001	08, 06, 2019
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM, INC	781	05, 02, 2019

Test Conditions

Temperature: 23,0 °C
Relative Humidity: 43,8 % R.H.
Atmospheric Pressure: 102,0 kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-19T0083
Page (25) of (65)

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☒ 1 s ☐ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0083

Page (26) of (65)

Test Data

■ DC 12 V

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

■ PoE

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

RemarksPASS Required Performance Criteria



3.3 Electrical Fast Transients / Bursts

Reference Standard

EN 61000-4-4:2012

Test Date

Feb. 14, 2019

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 27, 2019
☐	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 27, 2019
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	11, 26, 2019

Test Conditions

Temperature: 22,9 °C
Relative Humidity: 43,8 % R.H.
Atmospheric Pressure: 101,6 kPa

Test Specifications

Pulse Amplitude & Polarity:
(AC Power Lines) ☐ ± 1.0 kV ☐ ± 2.0 kV
☐ ± 4.0 kV

Pulse Amplitude & Polarity:
(Other supply / Signal Lines) ☐ ± 0.5 kV ☒ ± 1.0 kV
☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☐ 5 kHz ☒ 100 kHz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ Complied



Test Data

■ DC 12 V

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L1	Complied	Complied
L2	Complied	Complied
L1 – L2	Complied	Complied

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
Alarm In	Complied	Complied
Alarm Out	Complied	Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0083

Page (29) of (65)

■ PoE

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
Alarm In	Complied	Complied
Alarm Out	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

RemarksPASS Required Performance Criteria



3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014

Test Date

N/A

Test Location

EMS-Surge: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMS Test S/W	iec.control	EM TEST	5.4.7	-
☐	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 26, 2019
☐	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 27, 2019
☐	CDN	CNV 508N1	EM TEST	P1610176296	11, 28, 2019

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Atmospheric Pressure:

kPa



Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common Mode and 2 ohm for differential Mode

Surge Amplitude : Common Mode
☐ (0,5 / 1,0 / 2,0) kV
Differential Mode
☐ (0,5 / 1,0) kV

Number of Surges: ☐ 5 surges per angle

Angle: ☐ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity: ☐ Positive & Negative

Repetition Rate: ☐ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☐ Complied

Other supply / Signal Lines

Source Impedance: 42 ohm for common Mode

Surge Amplitude: Common Mode
☐ (0,5 / 1,0) kV

Number of Surges: ☐ 5 Surges

Polarity: ☐ Positive & Negative

Repetition Rate: ☐ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☐ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0083

Page (32) of (65)

Test Data☐ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Signal Lines☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results☐ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**No test is required because it is not permitted to connect cables > 30 m long.

3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Feb. 14, 2019

Test Location

EMS-CS: Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	5.3.11	-
☒	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	11, 26, 2019
☒	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 26, 2019
☒	CDN	CDN M016	TESEQ	43694	11, 26, 2019
☐	CDN	CDN M016	TESEQ	43697	11, 26, 2019
☒	CDN	CDN T800	TESEQ	42800	11, 26, 2019
☒	EM CLAMP	KEMZ 801A	TESEQ	44099	11, 27, 2019

Test Conditions

Temperature: 22,6 °C
Relative Humidity: 43,3 % R.H.
Atmospheric Pressure: 101,7 kPa

Test Specifications

Frequency range: ☒ 150 kHz to 100 MHz ☐ 150 kHz to 80 MHz

Voltage Level: ☐ 1 Vrms ☐ 3 Vrms
☒ 10 Vrms

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☒ 1 s ☐ 3 s

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Test Data

■ DC 12 V

☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L1 – L2	CDN	Complied

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	CDN T800	Complied
Alarm In	Clamp	Complied
Alarm Out	Clamp	Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0083

Page (35) of (65)

■ PoE

☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	CDN T800	Complied
Alarm In	Clamp	Complied
Alarm Out	Clamp	Complied

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

RemarksPASS Required Performance Criteria



3.6 Voltage Dips and Short Interruptions

Reference Standard

EN 61000-4-11:2004

Test Date

N/A

Test Location

EMS-Voltage dip: Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMS Test S/W	iec.control	AMETEK CTS	7.1.2	-
☐	ULTRA COMPACT SIMULATOR	UCS 500 N5	EM TEST	V0936105120	06, 26, 2019
☐	MOTOR VARIAC	MV2616	EM TEST	V0936105123	06, 26, 2019

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Atmospheric Pressure:

kPa



Test Specifications & Observations/Remarks

(Test Voltage :)

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☐ 20 % dip	☐ 250 / 5 000	_____
☐ 30 % dip	☐ 25 / 500	_____
☐ 60 % dip	☐ 10 / 200	_____
☐ 100 % dip	☐ 250 / 5 000	_____

- Voltage variations

☐ Unom + 10 %	☐ 253.0 V (ac)	_____
☐ Unom - 15 %	☐ 195.5 V (ac)	_____

Observations:

Complied – No degradation of function

Test Results

- ☐ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☒ NOT APPLICABLE

Remarks

It is not tested apply because it is powered by DC and PoE



APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

N/A



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-19T0083
Page (39) of (65)

[NEUTRAL]

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Conducted Emissions at Telecommunication Ports

■ DC 12 V
[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XND-6081F
Mode	DC12V 10Mbps
Operator Name:	KES

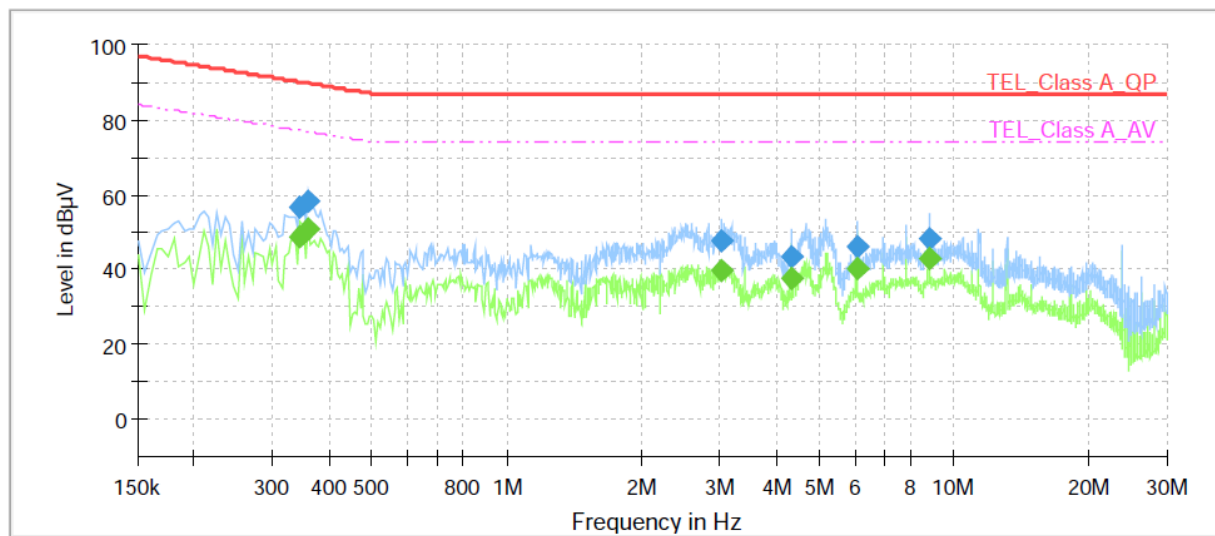

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.345000	---	48.63	77.08	28.45	1000.0	9.000	Single Line	19.9
0.345000	56.76	---	90.08	33.32	1000.0	9.000	Single Line	19.9
0.360000	---	51.07	76.73	25.66	1000.0	9.000	Single Line	19.9
0.360000	58.44	---	89.73	31.29	1000.0	9.000	Single Line	19.9
3.025000	---	39.67	74.00	34.33	1000.0	9.000	Single Line	19.7
3.025000	47.82	---	87.00	39.18	1000.0	9.000	Single Line	19.7
4.350000	---	37.79	74.00	36.21	1000.0	9.000	Single Line	19.7
4.350000	43.53	---	87.00	43.47	1000.0	9.000	Single Line	19.7
6.085000	---	40.36	74.00	33.64	1000.0	9.000	Single Line	19.8
6.085000	46.02	---	87.00	40.98	1000.0	9.000	Single Line	19.8
8.805000	---	42.87	74.00	31.13	1000.0	9.000	Single Line	19.8
8.805000	48.34	---	87.00	38.66	1000.0	9.000	Single Line	19.8



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0083

Page (41) of (65)

[100 Mbps]

Common Information

Test Description:

Telecommunication Emission

Model No.:


XND-6081F

Mode

DC12V 100Mbps

Operator Name:

KES

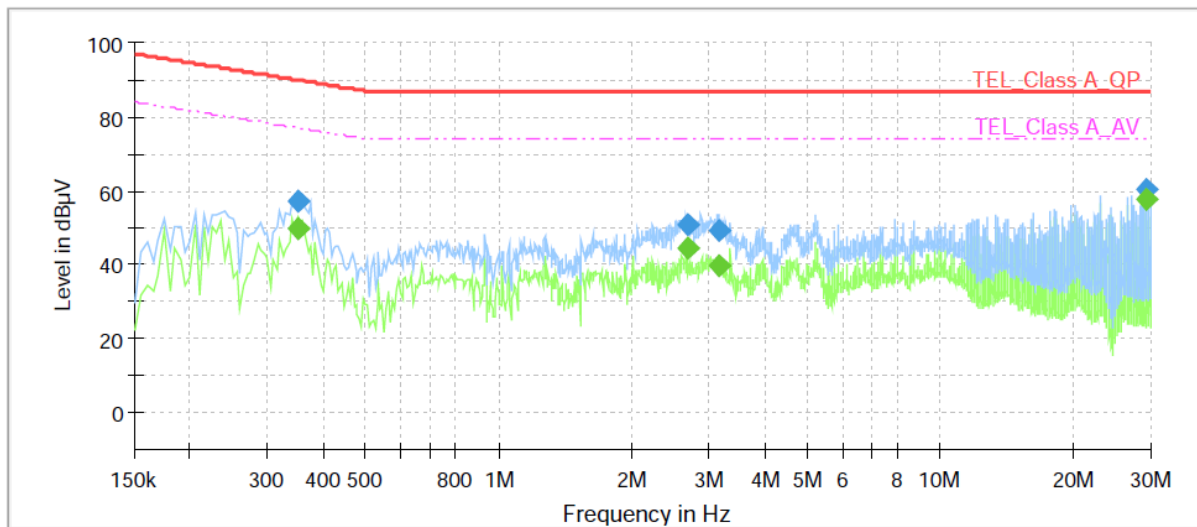

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.350000	---	50.00	76.96	26.96	1000.0	9.000	Single Line	19.7
0.350000	57.15	---	89.96	32.81	1000.0	9.000	Single Line	19.7
2.680000	---	44.61	74.00	29.39	1000.0	9.000	Single Line	19.6
2.680000	50.80	---	87.00	36.20	1000.0	9.000	Single Line	19.6
3.145000	---	39.63	74.00	34.37	1000.0	9.000	Single Line	19.6
3.145000	49.12	---	87.00	37.88	1000.0	9.000	Single Line	19.6
29.235000	---	57.94	74.00	16.06	1000.0	9.000	Single Line	20.5
29.235000	60.42	---	87.00	26.58	1000.0	9.000	Single Line	20.5

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




■ PoE
[10 Mbps]

Common Information

Test Description:
Model No.:
Mode
Operator Name:

Telecommunication Emission
XND-6081F
PoE 10Mbps
KES

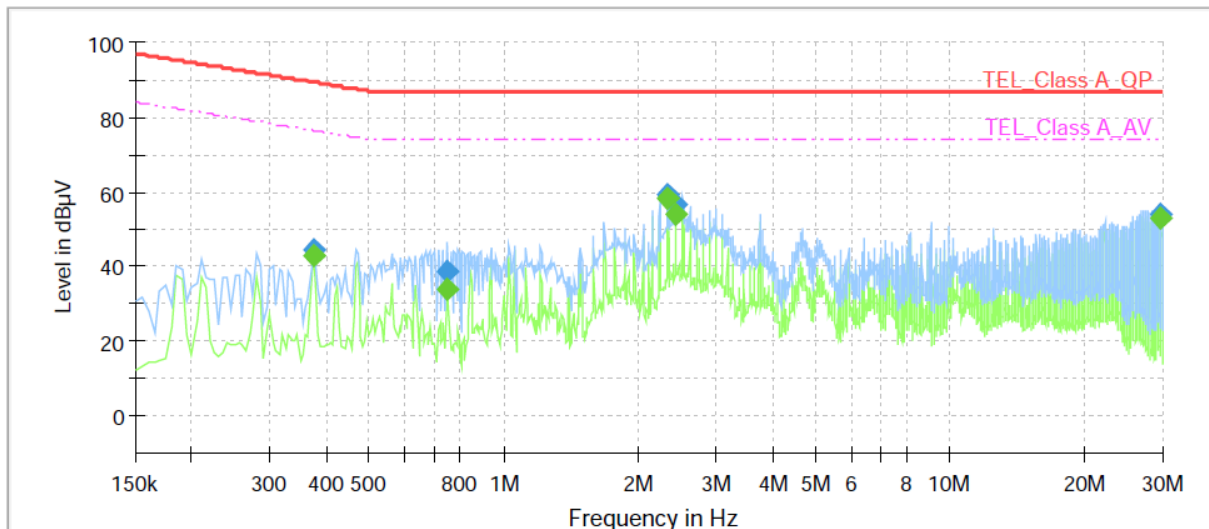


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.375000	---	42.82	76.39	33.57	1000.0	9.000	Single Line	19.9
0.375000	44.21	---	89.39	45.18	1000.0	9.000	Single Line	19.9
0.750000	---	33.92	74.00	40.08	1000.0	9.000	Single Line	19.8
0.750000	38.57	---	87.00	48.43	1000.0	9.000	Single Line	19.8
2.340000	---	58.15	74.00	15.85	1000.0	9.000	Single Line	19.7
2.340000	59.46	---	87.00	27.54	1000.0	9.000	Single Line	19.7
2.430000	---	54.13	74.00	19.87	1000.0	9.000	Single Line	19.7
2.430000	56.62	---	87.00	30.38	1000.0	9.000	Single Line	19.7
29.625000	---	53.06	74.00	20.94	1000.0	9.000	Single Line	20.8
29.625000	54.25	---	87.00	32.75	1000.0	9.000	Single Line	20.8

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XND-6081F
Mode	PoE 100Mbps
Operator Name:	KES

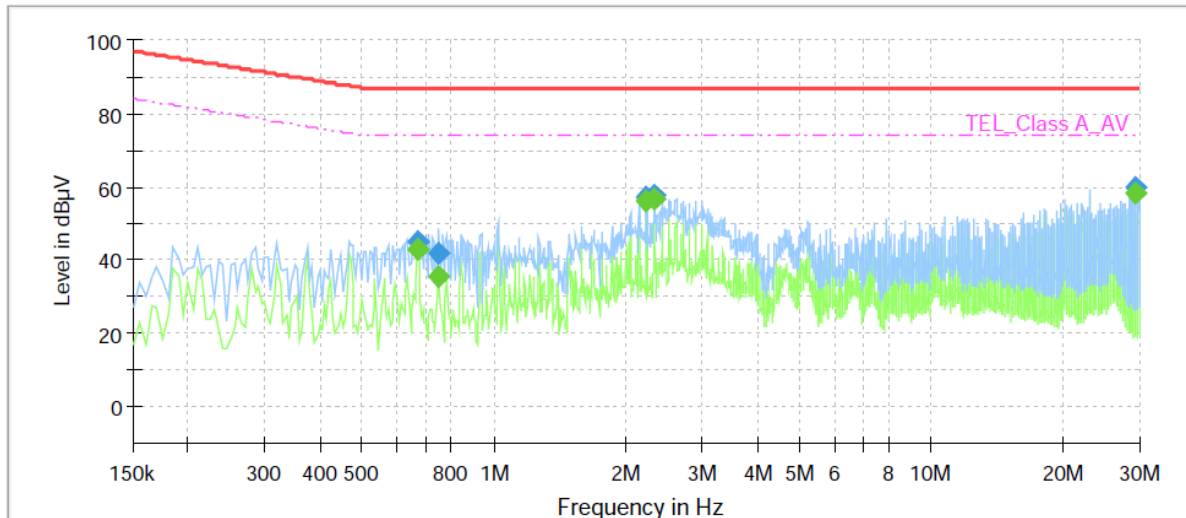

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.670000	---	42.86	74.00	31.14	1000.0	9.000	Single Line	19.7
0.670000	44.92	---	87.00	42.08	1000.0	9.000	Single Line	19.7
0.750000	---	35.47	74.00	38.53	1000.0	9.000	Single Line	19.6
0.750000	41.75	---	87.00	45.25	1000.0	9.000	Single Line	19.6
2.240000	---	56.32	74.00	17.68	1000.0	9.000	Single Line	19.6
2.240000	57.38	---	87.00	29.62	1000.0	9.000	Single Line	19.6
2.335000	---	56.65	74.00	17.35	1000.0	9.000	Single Line	19.6
2.335000	57.86	---	87.00	29.14	1000.0	9.000	Single Line	19.6
29.235000	---	57.99	74.00	16.01	1000.0	9.000	Single Line	20.5
29.235000	60.05	---	87.00	26.95	1000.0	9.000	Single Line	20.5

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:

KES-E1-19T0083

Page (44) of (65)

Radiated Electric Field Emissions(Below 1 GHz)

■ DC 12 V

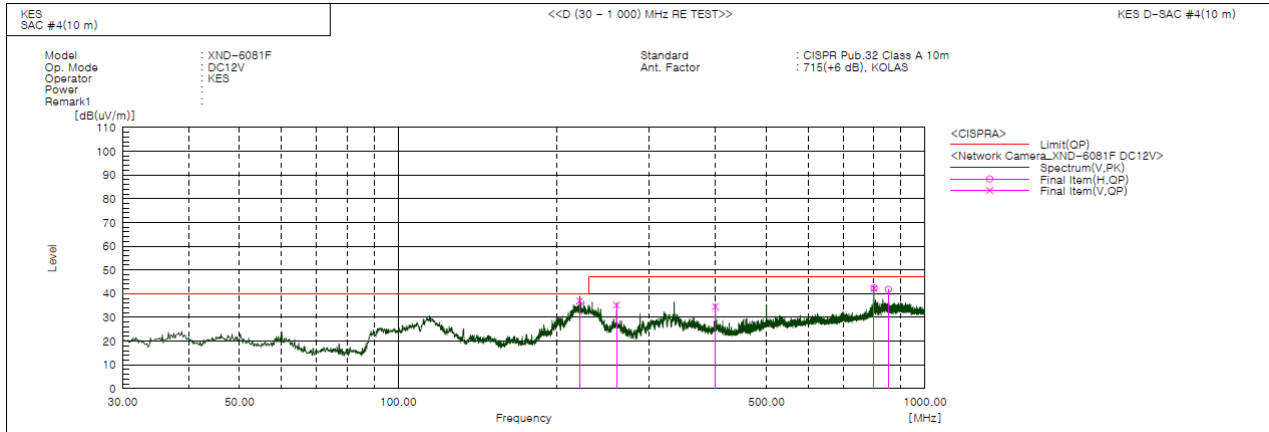

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	221.012	V	57.5	-20.6	36.9	40.0	3.1	153.5	185.0	
2	259.792	V	55.1	-19.9	35.2	47.0	11.8	100.0	334.0	
3	400.005	V	49.8	-15.3	34.5	47.0	12.5	135.0	296.0	
4	800.108	H	50.1	-7.7	42.4	47.0	4.6	215.0	345.0	
5	800.103	V	49.9	-7.7	42.2	47.0	4.8	100.0	24.0	
6	852.008	H	48.3	-6.5	41.8	47.0	5.2	231.0	345.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0083

Page (45) of (65)

■ PoE

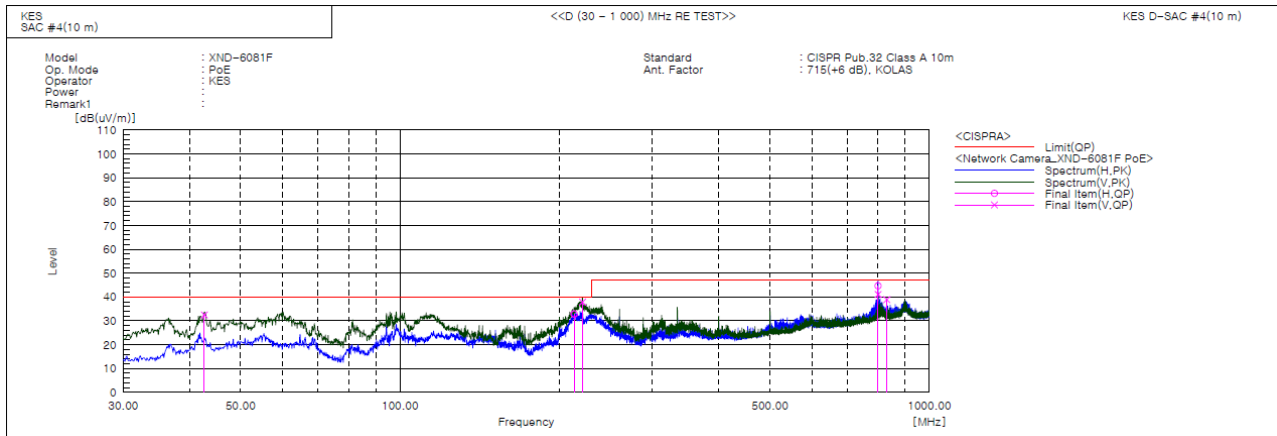

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	42.712	V	54.8	-22.3	32.5	40.0	7.5	100.0	100.0	
2	213.415	H	53.9	-21.0	32.9	40.0	7.1	360.0	212.0	
3	221.186	V	58.5	-20.6	37.9	40.0	2.1	100.0	7.0	
4	800.006	H	52.4	-7.7	44.7	47.0	2.3	357.0	34.0	
5	800.028	V	48.8	-7.7	41.1	47.0	5.9	100.0	119.0	
6	830.593	V	46.0	-7.1	38.9	47.0	8.1	162.0	161.0	

◆ Calculation – SEMI ANECHOIC CHAMBER #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:

KES-E1-19T0083

Page (46) of (65)

Radiated Electric Field Emissions(Above 1 GHz)

■ DC 12 V

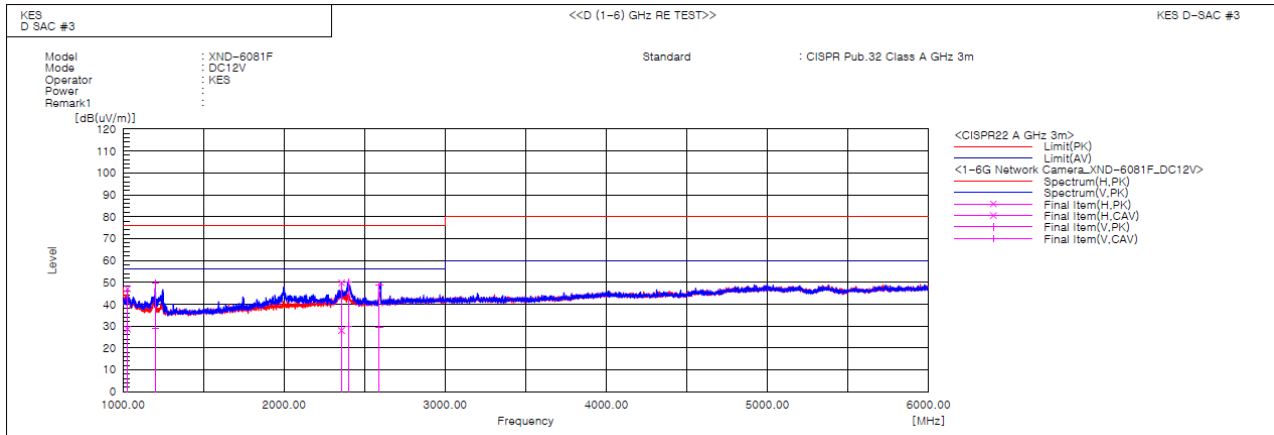

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1028.130	H	55.0	36.4	-7.9	47.1	28.5	76.0	56.0	28.9	27.5	100.0	160.2	
2	1199.263	V	56.8	36.2	-7.2	49.6	29.0	76.0	56.0	26.4	27.0	100.0	24.5	
3	2356.864	H	50.2	28.4	-0.5	49.7	27.9	76.0	56.0	26.3	28.1	100.0	150.1	
4	2400.003	V	50.4	29.9	-0.3	50.1	29.6	76.0	56.0	25.9	26.4	100.0	354.1	
5	2591.311	V	48.8	29.1	0.1	48.9	29.2	76.0	56.0	27.1	26.8	100.0	22.3	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0083

Page (47) of (65)

■ PoE

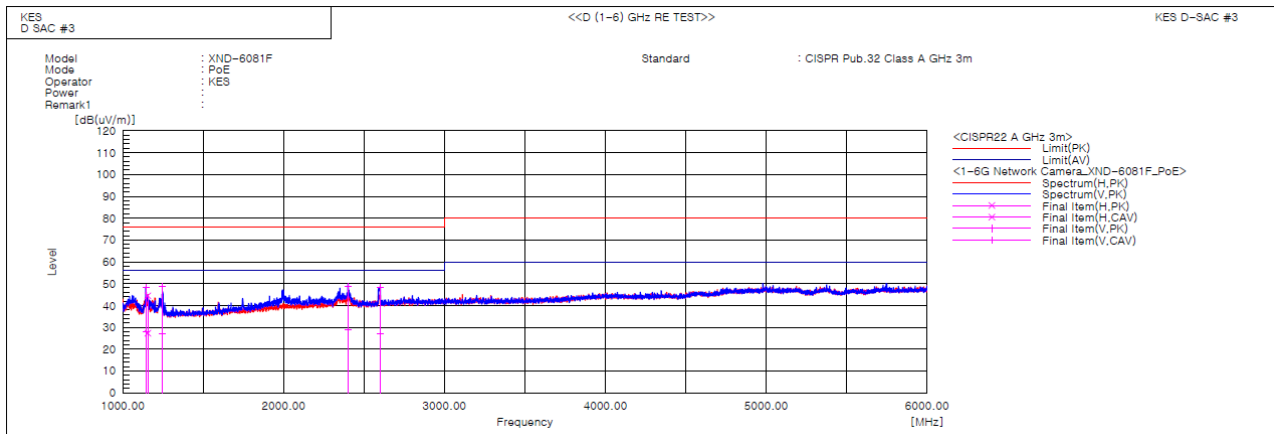

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading CAV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result CAV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1143.093	V	55.8	35.4	-7.4	48.4	28.0	76.0	56.0	27.6	28.0	100.0	214.5	
2	1155.006	H	51.8	34.6	-7.3	44.5	27.3	76.0	56.0	31.5	28.7	100.0	359.0	
3	1247.099	V	55.6	33.9	-7.0	48.6	26.9	76.0	56.0	27.4	29.1	100.0	232.7	
4	2400.508	V	49.0	29.3	-0.3	48.7	29.0	76.0	56.0	27.3	27.0	100.0	7.7	
5	2600.007	V	48.4	27.0	0.1	48.5	27.1	76.0	56.0	27.5	28.9	100.0	65.5	

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-19T0083
Page (50) of (65)

Test Data - Voltage Fluctuations**Maximum Flicker results**

	EUT values	Limit	Result
Pst			
Plt			
dc [%]			
dmax [%]			
Tmax [s]			

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Test Setup Photos and Configuration

Conducted Voltage Emissions

N/A

N/A

Conducted Telecommunication Emissions




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

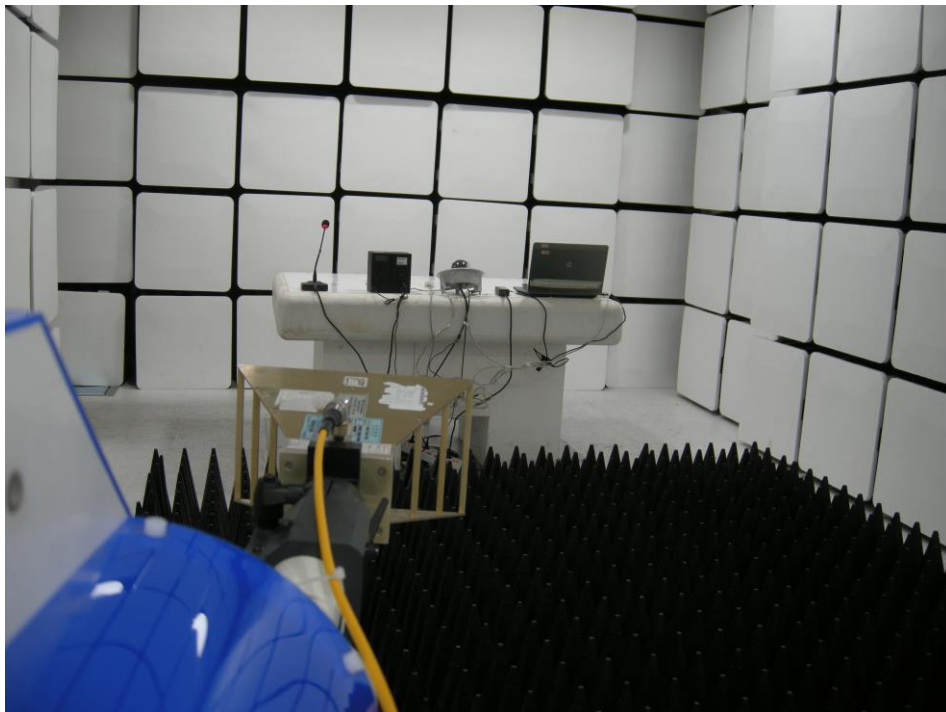

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-19T0083
Page (55) of (65)

Harmonic Current Emissions and Voltage Fluctuations and Flicker


N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Electrostatic Discharge



Radiated Electric Field Immunity

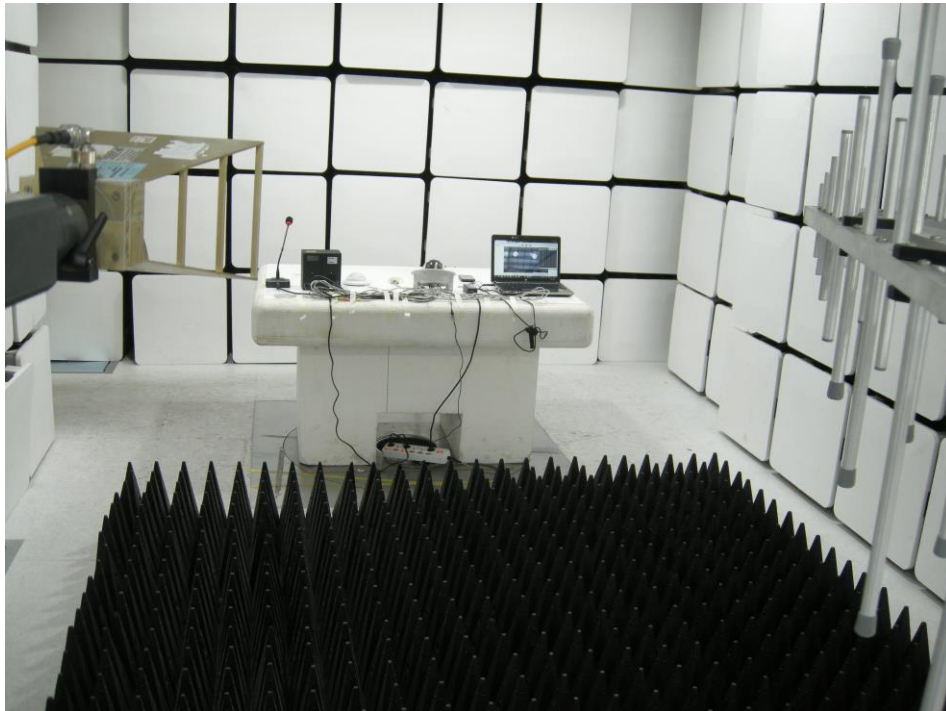

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Electrical Fast Transients / Bursts



Surge Transients

N/A

Conducted Disturbance



Voltage Dips and Short Interruptions


N/A

EUT External Photographs

(Top)




(Bottom)

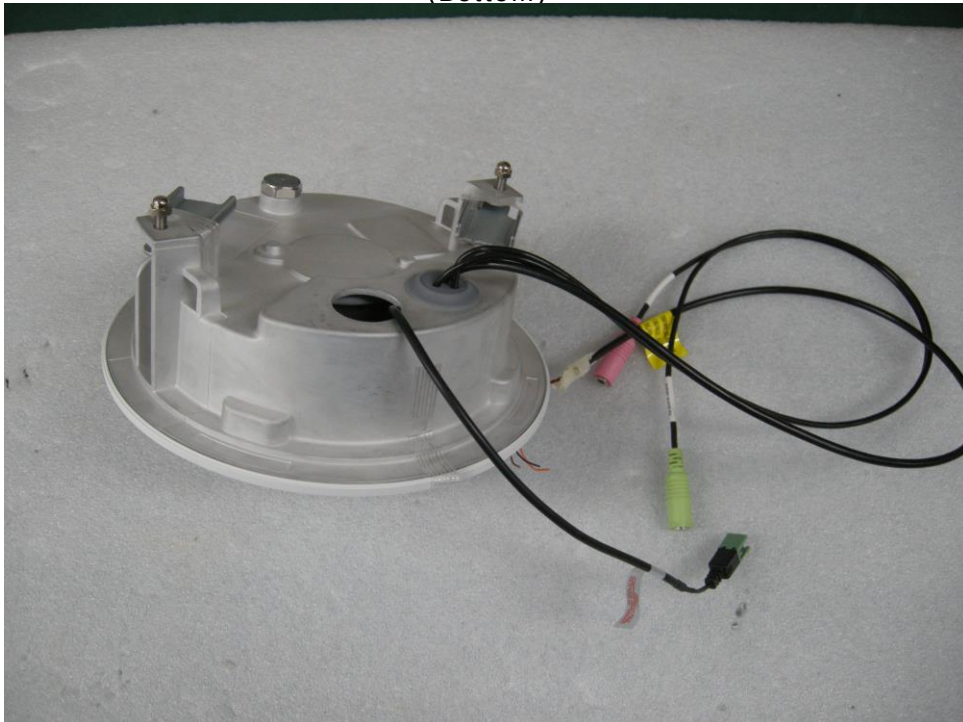

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


EUT Internal Photographs

(Internal View)

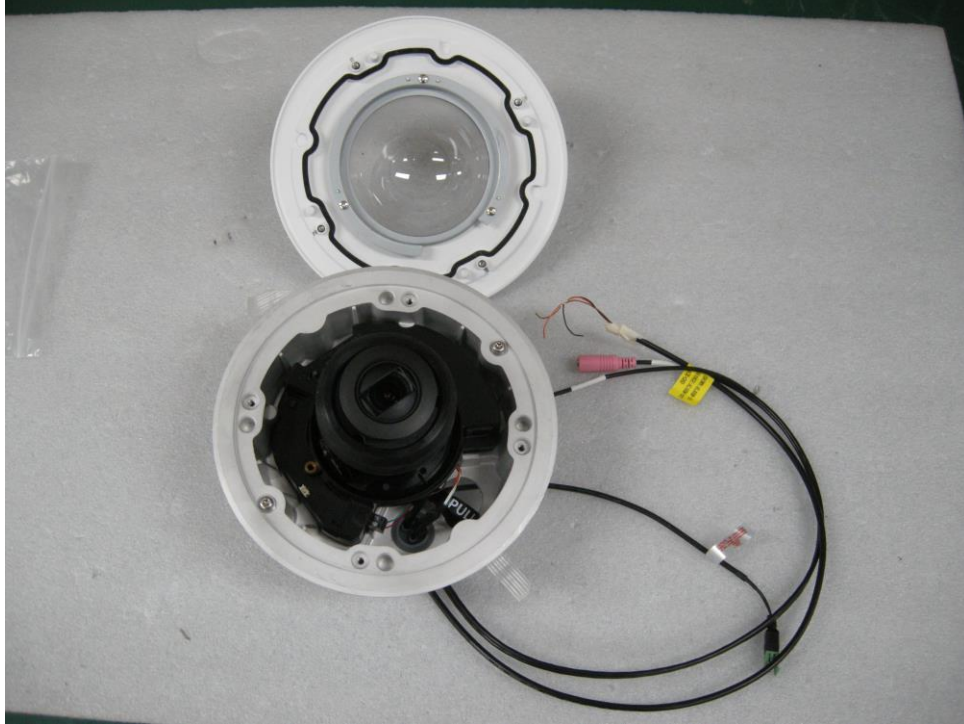


EUT Internal View – Connector Board

(Top)

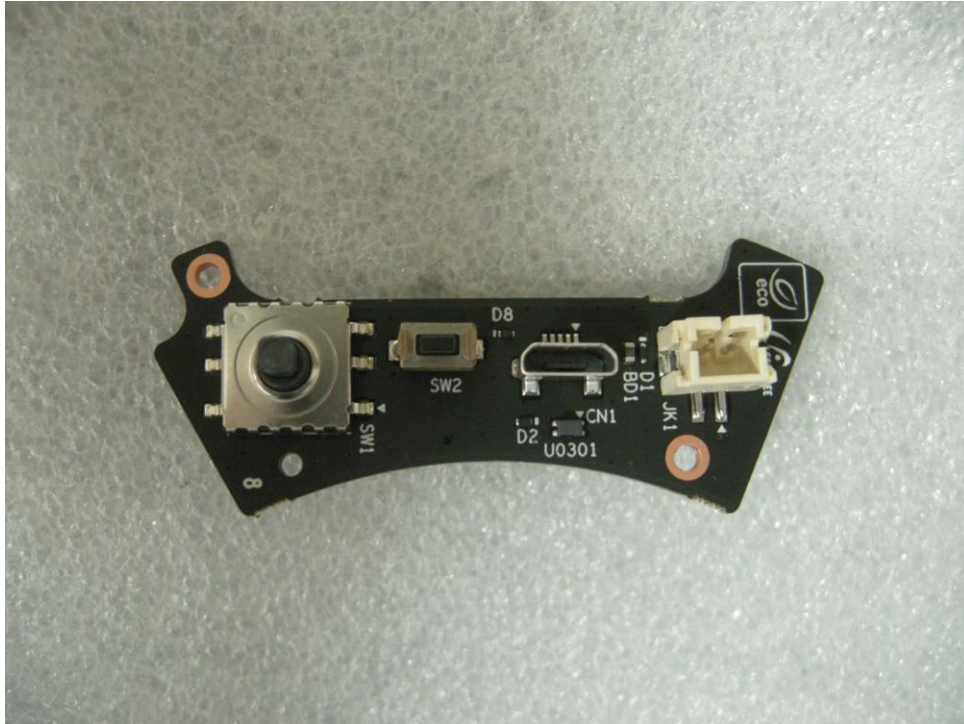


(Bottom)

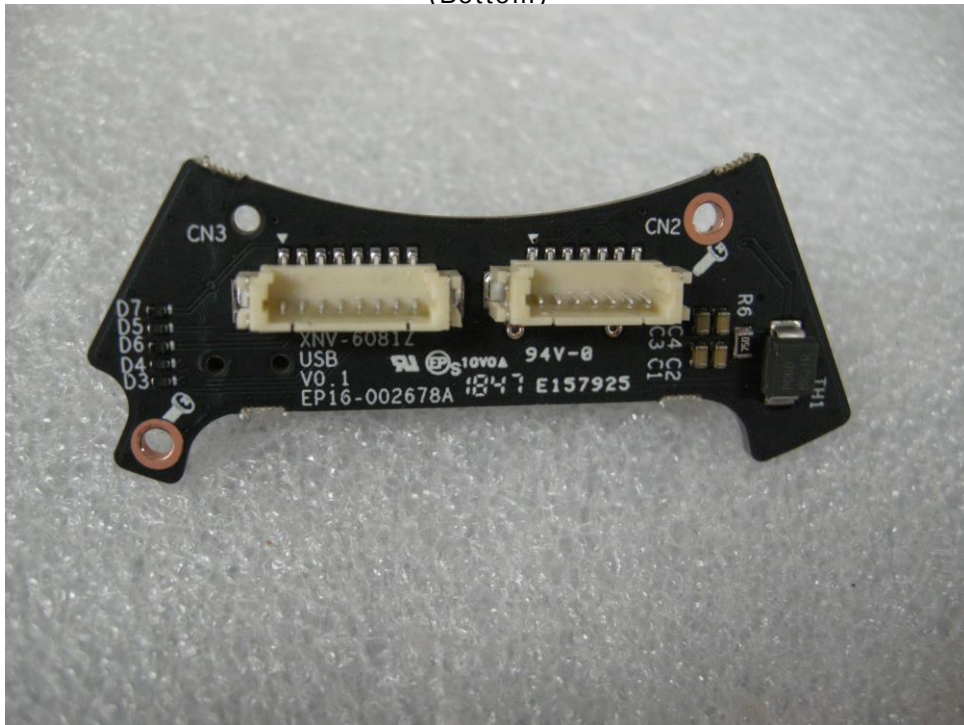


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Lens Board

(Top)

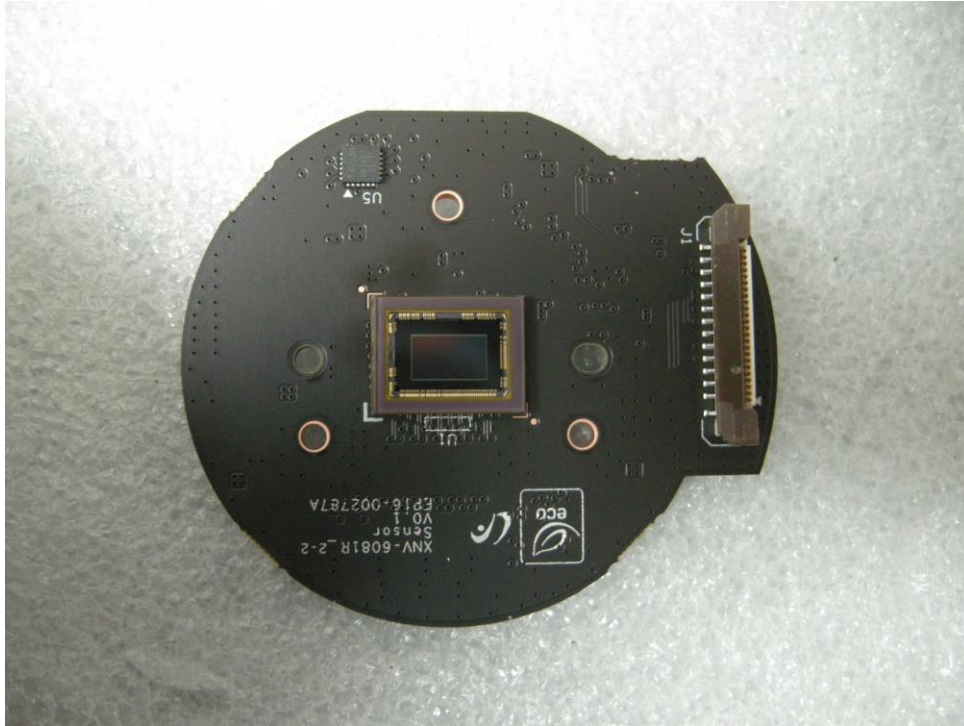

(Bottom)

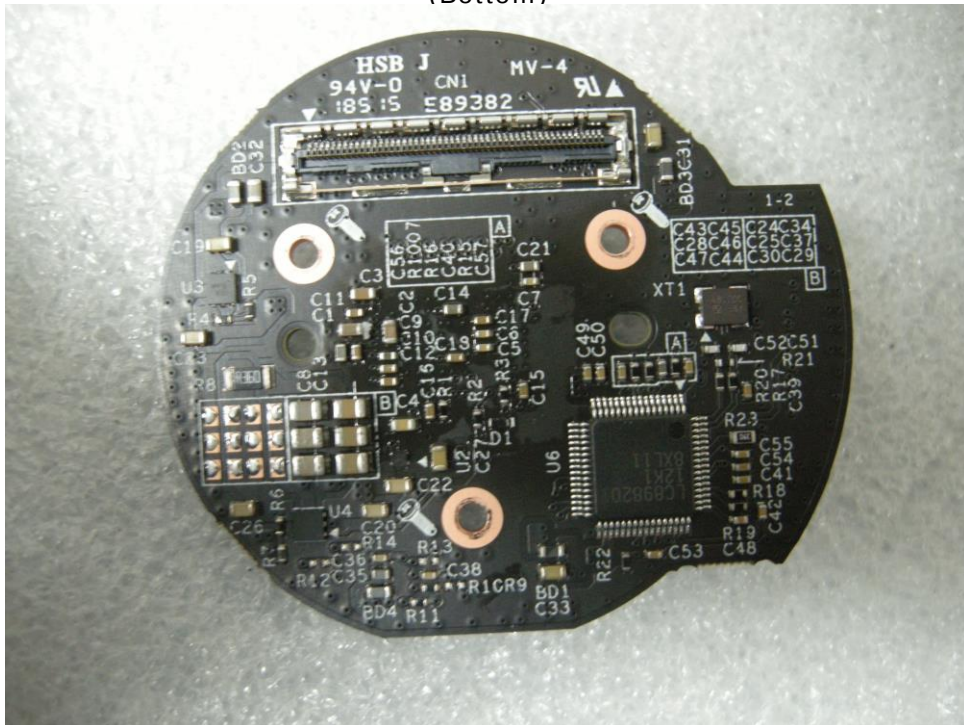

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Lens Module

(Top)




(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Main Board

(Top)

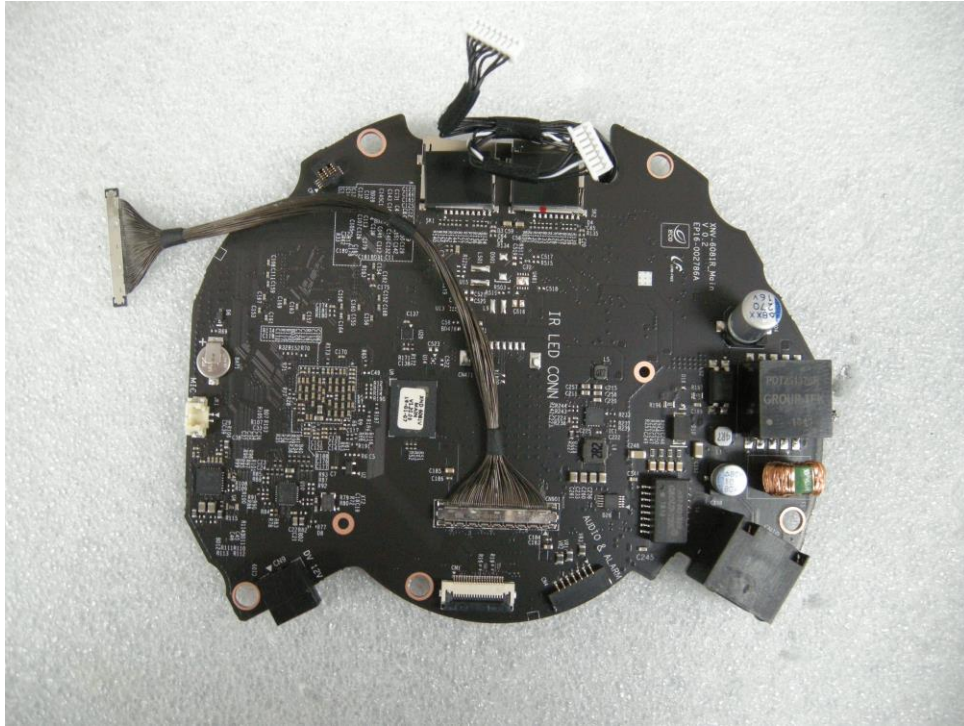


(Bottom)

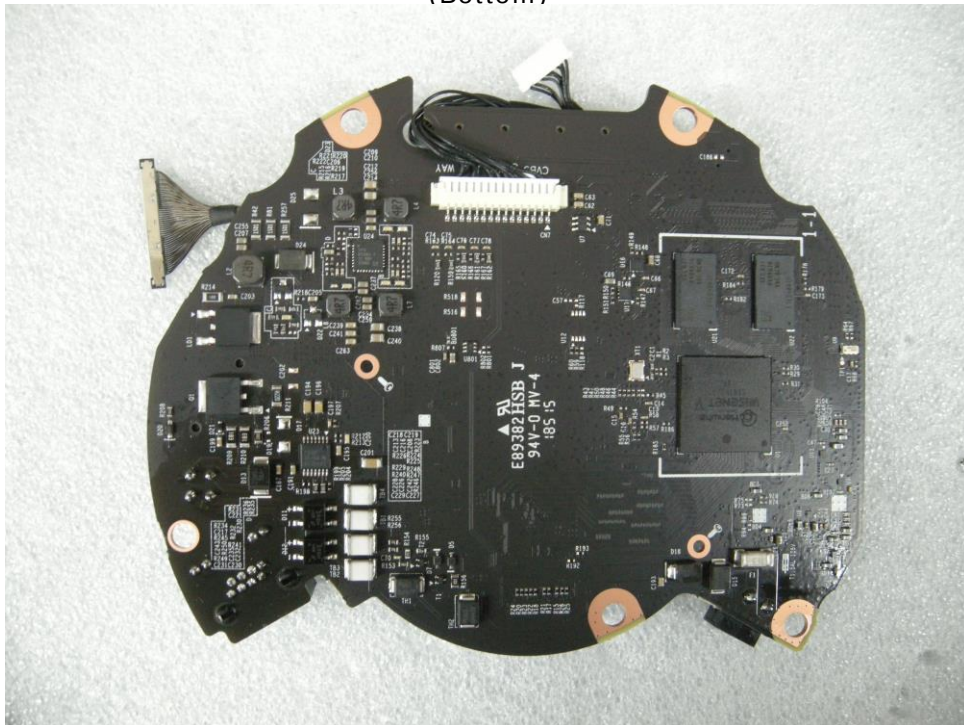

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Label and Location

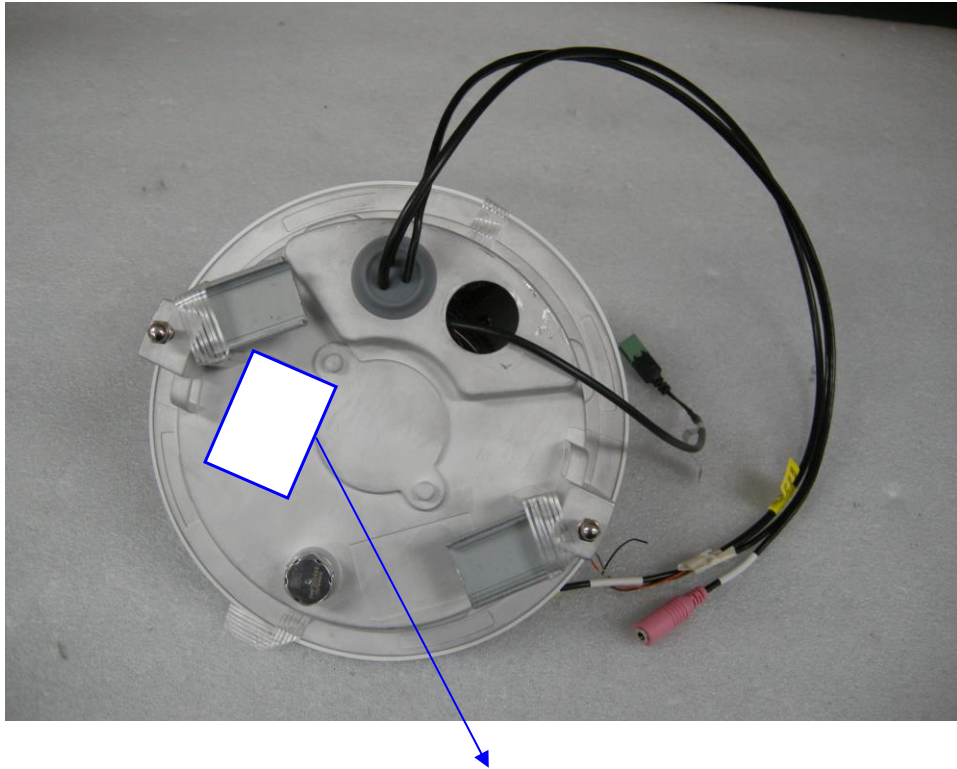

Network Camera

Model No : XND-6081F

Manufacturer : Hanwha Techwin (Tianjin) Co.,Ltd.

Made in China

