

Verification

*With The 47 CFR, Part2 and Part15 Of FCC Requirement
&
IC ICES-003*

Hereby certifies that

Type of device: All other devices

Category: NETWORK CAMERA

Model No.: XNO-6085RN

Additional Model name: -

Manufactures and address

Hanwha Vision Co., Ltd

**6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, 13488,
KOREA**

This document is the proof that above product, system, and also relates OEM models are complying with FCC requirement. We, LTA Co., Ltd is the accredited EMC laboratory for NVLAP(US), RRA(KOREA). We certify that the above products had performed test on our laboratory and it was confirmed to comply with FCC requirement. These products might be marketed at the US accordance to DoC of FCC Rule based on the standard 47CFR Part 2 and 15. The test was performed accordance to the procedures from ANSI C63.4-2014. Test data and results are issue on the EMC test report No. as follows.

Reference Endorsed Test Report No. is LR500112302X

February 22, 2023

Young Kyu Shin, Technical Manager
LTA Co., Ltd.



NVLAP LAB CODE 200723-0

TEST REPORT

This laboratory is accredited by Radio Research Laboratory and National Voluntary Laboratory Accreditation Program.
The tests reported herein have been performed in accordance with its terms of accreditation.

Test Report No. : LR500112302X
Issue Date : February 22, 2023
Applied Standard : FCC Part 15, Subpart B
Trade Name : Hanwha Vision Co., Ltd
Category : NETWORK CAMERA
Model Name : XNO-6085RN
Additional Model name : -
Serial Number : Identification

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



NVLAP LAB CODE 200723-0

Revision history

Revision	Date of issue	Test report No.	Description
0	07.07.2017	LR500111707D	Initial
1	22.02.2023	LR500112302X	Change company name and manufacturer name

TABLE OF CONTENTS

<u>Text</u>	<u>Page</u>
Contents -----	3
LTA Certification -----	4
General Information -----	6
Brief Information -----	7
Test site description -----	11
Test Procedure -----	13
List of test equipment used for the test -----	16
Radiated disturbance measurement (Result & Graph) -----	17
Conducted disturbance measurement (Result & Graph) -----	26
Conclusions -----	30
Photograph of the measurements -----	31
Photograph of the EUT -----	39

★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★ ★

LTA Certification

Applicant / Manufacture

Company name : Hanwha Vision Co., Ltd
Address : 6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, 13488, KOREA
Telephone / Facsimile : +82-70-7147-8361

Factory #1

Company name : HANWHA VISION VIETNAM COMPANY LIMITED
Address : Lot O-2, Que Vo Industrial Zone extended area ,Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam

Factory #2

Company name : D-TECH CO., LTD.
Address : 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea
(Suwon Industrial Complex)

Equipment Under Test (EUT)

Category : NETWORK CAMERA
Brand : Hanwha Vision Co., Ltd
Model name : XNO-6085RN
Serial number : Identification
Intended environment : Industrial area
Date of receipt : June 21, 2017
EUT condition : Pre-production, not damaged
Operating Mode : Recording (AC, DC, PoE) mode
Interface ports : AC IN, DC IN, Video, Micro USB, Audio IN, Audio OUT, ALARM, GND,
Micro SD Slot, Network
Power rating : DC 12 V, AC 24 V
Test memory size : -
Crystal/Oscillator(s) : -
Firmware version : XXXX

Model Description

- NONE

Model Specification

- NONE

*** To be continued next page ***

LTA Certification –cont.–

Test Performed

Test started & completed : June 28-July 03, 2017

Location : LTA Co., Ltd.

Test Specification

Purpose of the test : Compliance test to the following standard

Applied standard : FCC Part 15, Subpart B

Classification : Class A

Deviations from Standard : N/A

Test Method

Test Results

Measurement	Results*	Test method
Radiated disturbance	Complies	ANSI C 63.4-2014
Conducted disturbance	Complies	ANSI C 63.4-2014

* : The compliance statement is based on nominal value only.

Modification performed by the lab.:

- N.A

-We were performed the test according to LTA procedure LTA-QI-04.

Laboratory's Certificate

Report number : LR500112302X

Issue date : February 22, 2023

This test report is issued under the authority of:

The test was supervised by:



Young Kyu Shin, Technical Manager



Jong chae Kim, Test Engineer

The results in this report apply only to the sample(s) tested.

It is not allowed to copy this report even partly without the allowance of the test laboratory.

General information's

Purpose

This document is based on the Electromagnetic Interference (EMI) tests performed on the “XNO-6085RN”. The measurements were performed according to the measurement procedure described in ANSI C 63.4-2014. The tests were carried out in order to confirm whether the electromagnetic emissions from the EUT(Equipment Under Test), are within the class A limits defined in FCC Part 15, Subpart B- “Section 15.107- Conducted limits” and “Section 15.109-Radiated emission limits”.

Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Measurement uncertainty

Radiated disturbance (30 to 1000MHz) : +3.94 [dB] , -3.94 [dB] (k=2)
 (1GHz to 18GHz) : +3.46 [dB] , -3.46 [dB] (k=2)
 Conducted disturbance (0.15 to 30MHz) : +1.46[dB] , -1.46 [dB] (k=2)

The coverage factor k=2 yields approx. a 95% level of confidence for near-normal distribution typical of most measurement results.

Accredited agencies

LTA Co., Ltd. Is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2017-09-30	ECT accredited Lab.
RRA	KOREA	KR0049	-	EMC accredited Lab.
FCC	U.S.A	649054	2019-04-13	FCC CAB
VCCI	JAPAN	R-2133(10 m), C-2307	2017-06-21	VCCI registration
VCCI	JAPAN	T-2009	2017-12-23	VCCI registration
VCCI	JAPAN	G-847	2018-12-13	VCCI registration
IC	CANADA	5799A-1	2019-11-07	IC filing
KOLAS	KOREA	NO.551	2017-01-08	KOLAS accredited Lab.

Brief Information

1-1 Test Summary

Parameter	Applied Standard	Status (note 1)
I. Emission		
Radiated disturbance	FCC Part 15.109	C
Conducted disturbance	FCC Part 15.107	C
Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable * The data in this test report are traceable to the national or international standards.		

Frequency range to be scanned:

0.15 MHz - 30 MHz as conducted measurement

5th harmonic of the highest frequency or 40 GHz, whichever is lower

Bandwidth:

Measured by the CISPR quasi-peak function Bandwidth is 9 kHz in the frequency 0.15 MHz to 30 MHz and 120 kHz in the frequency 30 MHz to 6,000 MHz.

Measured by the CISPR Peak function Bandwidth is 1MHz in the frequency 1 GHz to 40 GHz.

A sample calculation:

COR. F (correction factor)= Antenna factor + Cable loss- Amp.gain- Distance correction

Emission Level= meter reading + COR.F

1-2 Variant Model

- NONE

1-3 Recording (AC, DC, PoE) mode of the EUT

The tests have been conducted with the following operational mode(s) of the EUT.

Name of mode in the report	Description
Recording (AC, DC, PoE) mode :	Recording (AC, DC, PoE) mode

1-4 Modification

None

1-5 List of EUT and accessory


EUT				
Category	Model Name	Serial No.	Manufacturer	Remarks
NETWORK CAMERA	XNO-6085RN	N/A	HANWHA VISION VIETNAM COMPANY LIMITED D-TECH CO.,LTD.	-
ACCESSORY				
Category	Model Name	Serial No.	Manufacturer	Remarks
Notebook	P2416D	N/A	Dell	-
Monitor	SMC-150F	N/A	Samsung	-
Mobile Phone	SCH-E330S	N/A	Samsung	-
Earphone	N/A	N/A	N/A	-
Micro SD Card	N/A	N/A	N/A	-
AC Adapter	DRC-241500AC	N/A	Samsung	AC mode
DC Adapter	2ACB022F	N/A	N/A	DC mode
PoE Injector	PSE305	N/A	N/A	PoE mode

1-6 Cable List


Cable List (Recording (AC) mode)				
Type	Length (m)	Shielding (Cable/backshell)	Remarks	
			From	to
Monitor	1.8	NO/NO	Video	Video IN
Terminating Resistance	-	-	Micro USB	-
Mobile Phone	1.2	NO/NO	Audio IN	AUX
Earphone	1.2	NO/NO	Audio OUT	AUX
Terminating Resistance	-	-	ALARM	-
GROUND	1.0	NO/NO	GND	-
Micro SD Card	-	-	Micro SD Slot	-
AC Adapter	1.3	NO/NO	AC IN	AC OUT
Notebook	3.0	NO/NO	Network	LAN

Cable List (Recording (DC) mode)				
Type	Length (m)	Shielding (Cable/backshell)	Remarks	
			From	to
Monitor	1.8	NO/NO	Video	Video IN
Terminating Resistance	-	-	Micro USB	-
Mobile Phone	1.2	NO/NO	Audio IN	AUX
Earphone	1.2	NO/NO	Audio OUT	AUX
Terminating Resistance	-	-	ALARM	-
GROUND	1.0	NO/NO	GND	-
Micro SD Card	-	-	Micro SD Slot	-
DC Adapter	1.3	NO/NO	DC IN	DC OUT
Notebook	3.0	NO/NO	Network	LAN
Cable List (Recording (PoE) mode)				
Type	Length (m)	Shielding (Cable/backshell)	Remarks	
			From	to
Monitor	1.8	NO/NO	Video	Video IN
Terminating Resistance	-	-	Micro USB	-
Mobile Phone	1.2	NO/NO	Audio IN	AUX
Earphone	1.2	NO/NO	Audio OUT	AUX
Terminating Resistance	-	-	ALARM	-
GROUND	1.0	NO/NO	GND	-
Micro SD Card	-	-	Micro SD Slot	-
PoE Injector	3.0	NO/NO	Network	OUT

1-7 Block diagram of the EUT test / Recording (AC / DC) mode

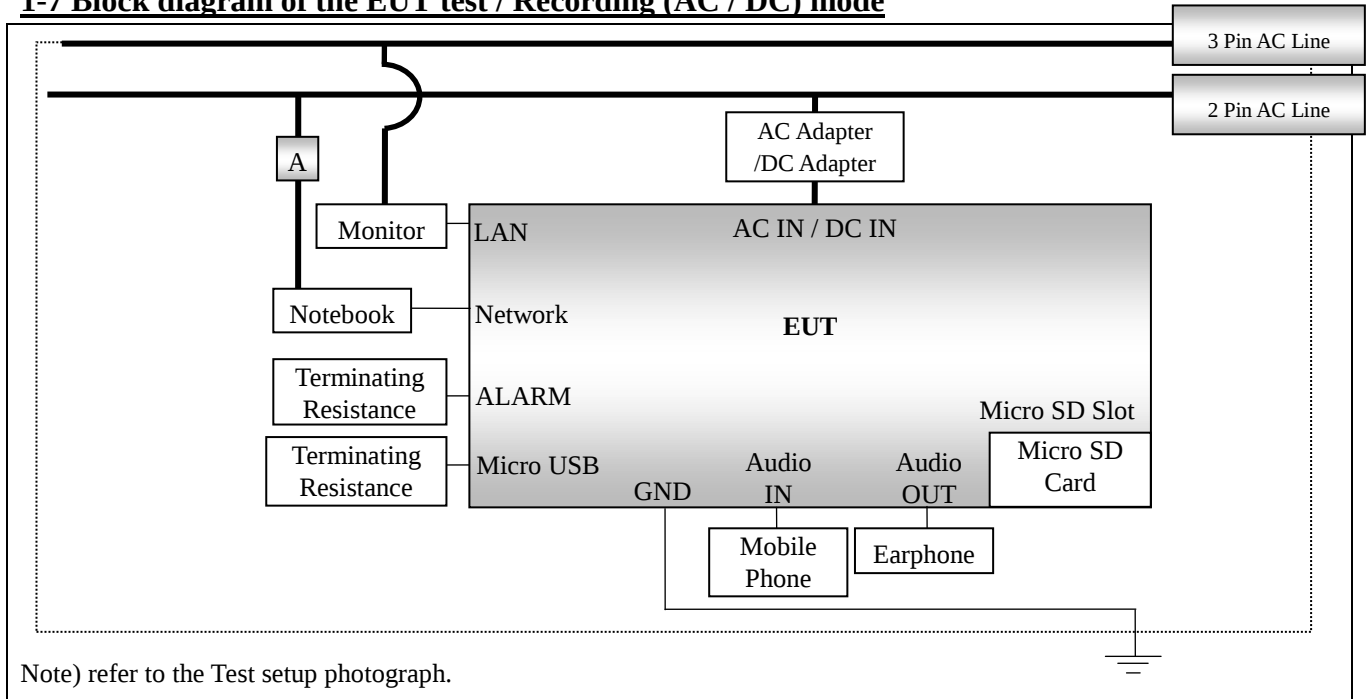

1-7 Block diagram of the EUT test / Recording (PoE) mode

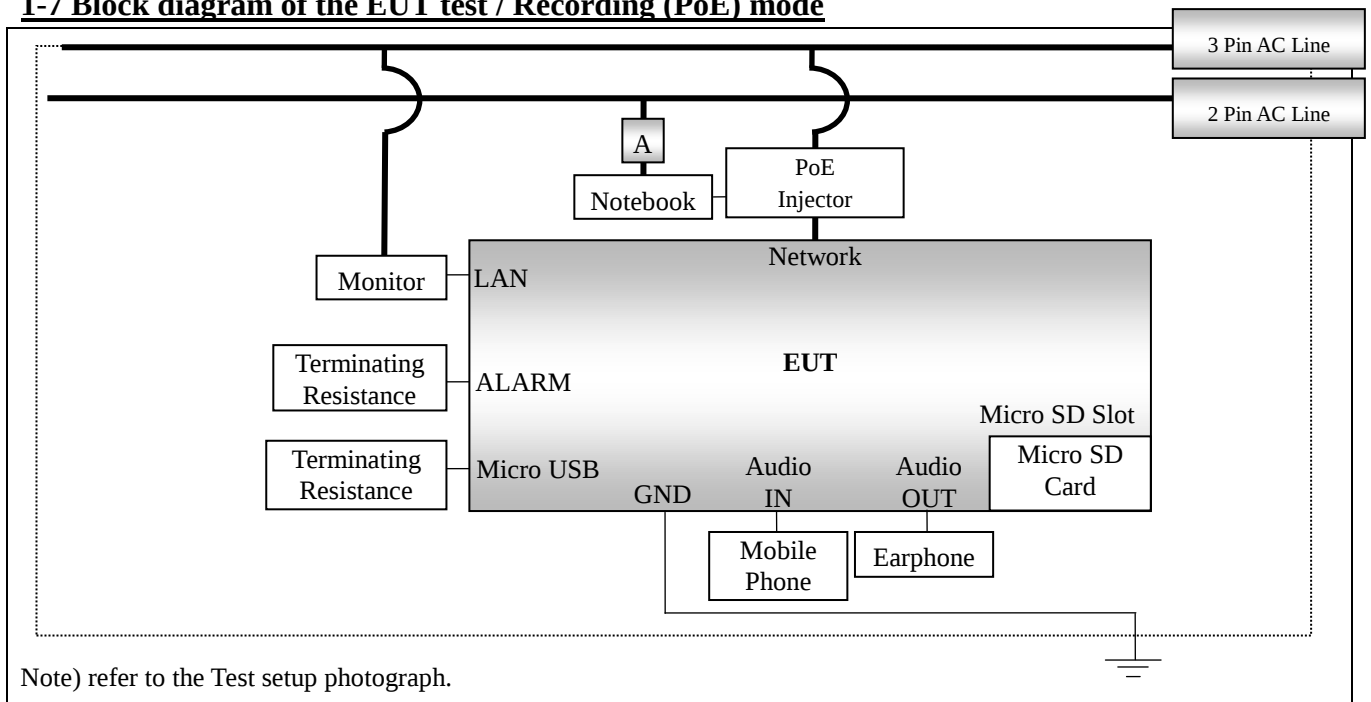


2- Test Site Description

1-Facility


All the testing facilities are periodically serviced as a daily check for equipment and cables systems, an every 6 months facility check for the facilities and a monthly check and annual calibration for testing equipment according to ISO/IEC 17025. All the testing facilities are used as the same specifications shown below. There are descriptions both for radiated disturbance measurement and conducted disturbance measurement conformed by ANSI C 63.4-2014.

The NSA measurement of the OATS was performed on February 25, 2017 according to ANSI C 63.4:2014


2-1 Radiated Disturbance Measurement – Below 1GHz

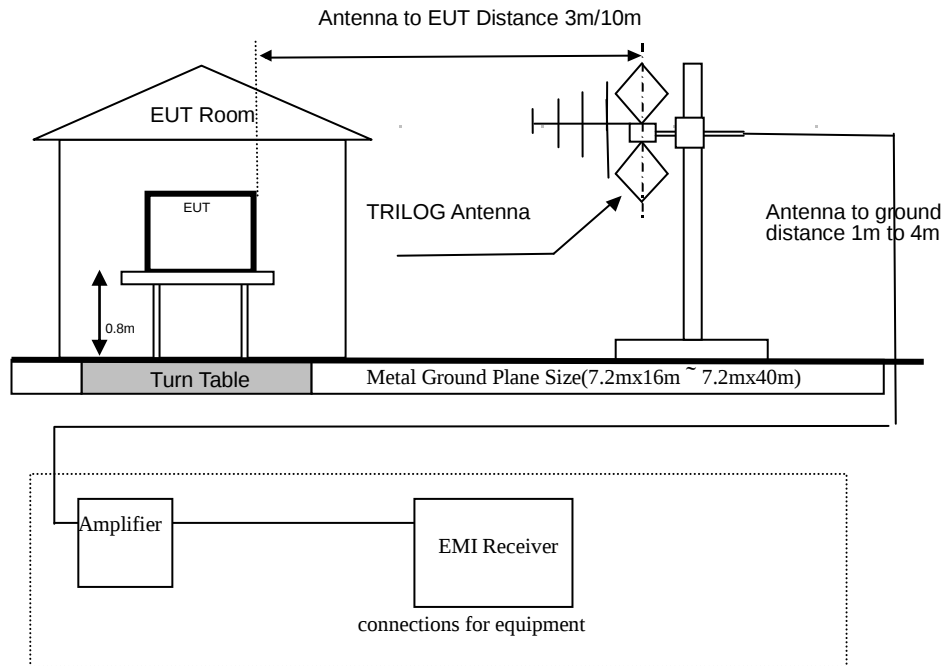

2-2 Conducted Disturbance Measurement

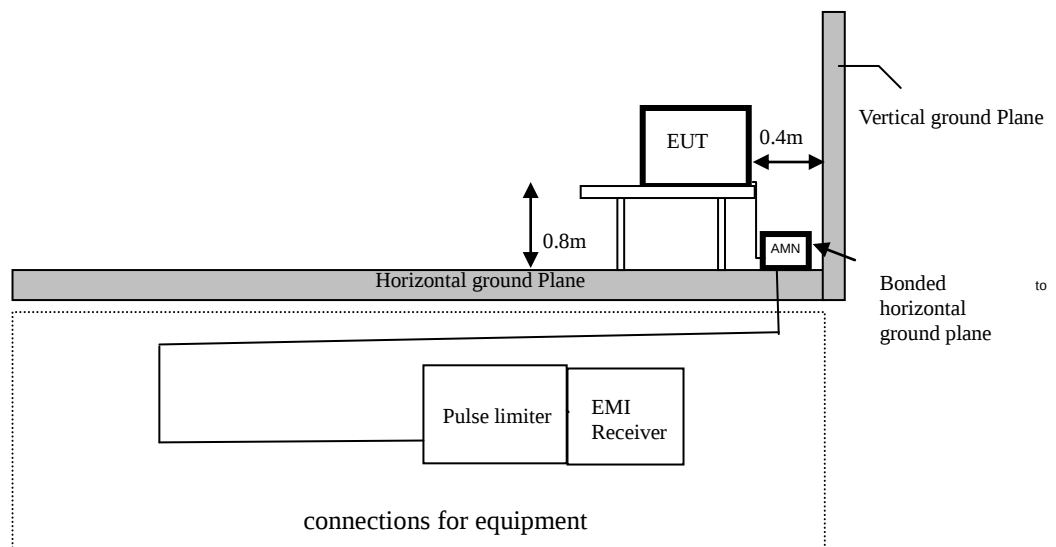

2-3 Radiated Disturbance Measurement – Above 1GHz

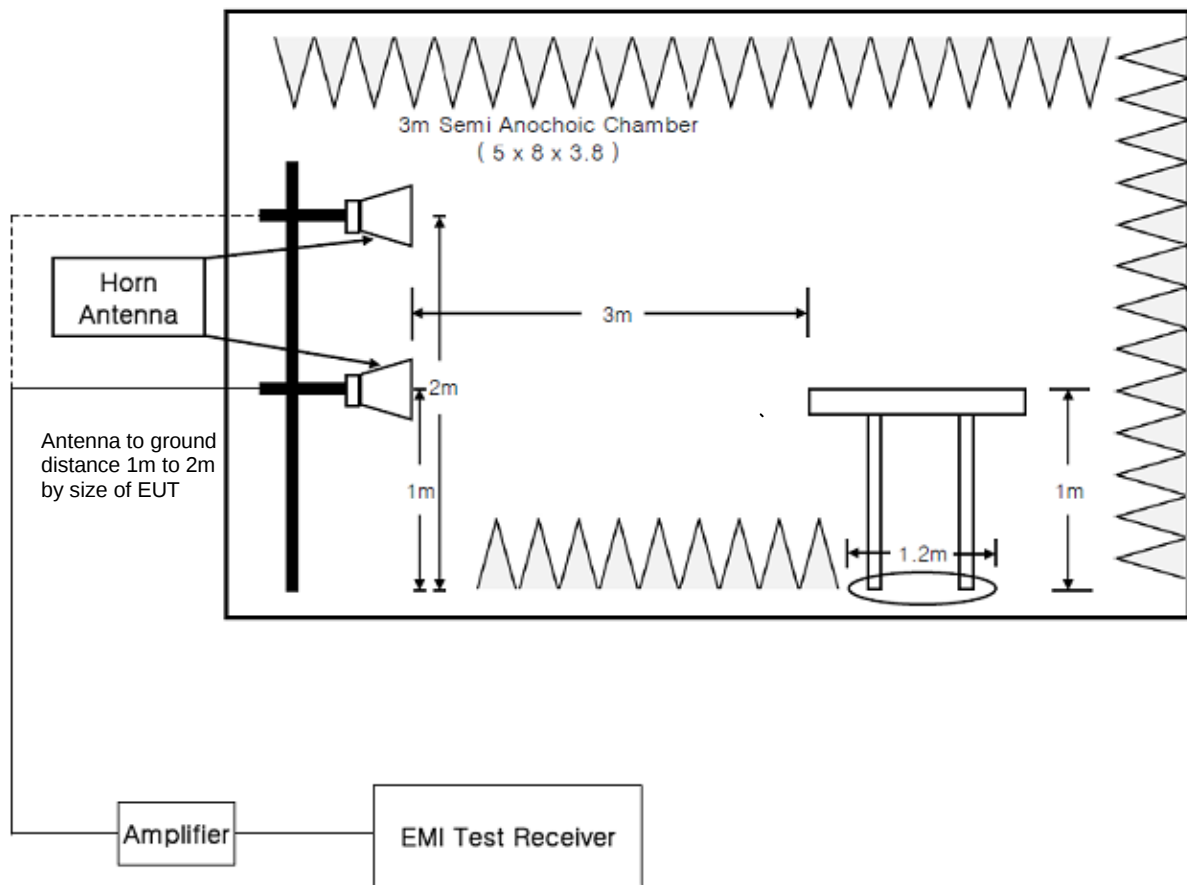

3- Test Procedure

3-1 Radiated Disturbance Measurements – Below 1GHz

- Test site is met the requirements of ANSI C 63.4-2014 and the distance between the EUT and the antenna is adjusted 3 m/10 m.
- The turntable can be rotated 360 degrees.
- The antenna can be adjusted between 1m and 4m in height above the ground.
- The EUT is placed on the non-conducting table with 0.8m height on the turntable.
- Measurements are carried out using a EMI test receiver with peak detectors (100 kHz bandwidth) and an EMI receiver with quasi-peak detectors(120 kHz bandwidth).
- Refer to the list of test equipment used for the test.
- TRILOG antenna are used as wideband antenna.
- The TRILOG antenna is used in the frequency range of 30 MHz to 1 000 MHz, the Horn antenna is used in the frequency range of 1GHz to 18 GHz.
- A variable attenuator is used for verifying amplifier's linearity.
- Rotating the turntable and adjusting the height of the antenna are carried out by control buttons on the console.
- Refer to "Brief Information"(page 7-10) about details of the EUT and configuration of the cables.

- Measurement is carried out by a LTA operator as manual operation.
 - searching for some of High disturbance frequency points than the other points with the following settings; bandwidth 100 kHz, frequency range 10 MHz between 30MHz and 300 MHz and frequency range 50 MHz between 300 MHz and 1 GHz.
 - searching the worst direction with the maximum level of the disturbance wave in rotating the turntable 360 degrees at each searched frequency point.
 - setting the height of the antenna with the maximum level of the disturbance wave from 1m to 4m.
 - reading the disturbance level by the EMI receiver with quasi-peak detectors (120 kHz bandwidth) according to ANSI C 63.4-2014.
 - measuring to vertical and horizontal polarization.
 - calculating the measurement result with the following formula or equation:
(Measurement result= measured value + antenna factor + antenna cable loss)

3-2 Conducted Disturbance Measurements

- The measurement is carried out on an open site with horizontal and metallic ground plane.
- An AMN(Artificial Mains Network) with a nominal impedance ($50\ \Omega/50\ \mu\text{H}$) as defined in ANSI C 63.4-2014., shall be utilized.
- The AMN is grounded on a horizontal metal ground plane.
- Measurement is carried out using an EMI receiver with quasi-peak detectors and average detector.
(Refer to the List of test equipment used for the test.)
- The shortest distance between the EUT and the AMN is 0.8m.
- The EUT is placed on the non-conducting table with 0.8m height.
- A remote switch is used for changing phases between Line (L) and Neutral (N).
- Refer to "Brief Information"(page 7-10) about details of the EUT and configuration of the cables.

- Measurement is carried out as manual operation.
 - detecting the maximized emission level using the maxhold function after setting the spectrum analyzer bandwidth 1KHz and the frequency range from 150 kHz to 1 MHz , 1 MHz to 5 MHz and 5 MHz to 30 MHz.
 - searching the maximum frequency point of the disturbance wave in each frequency range.
 - reading the disturbance level of quasi-peak, average and Line (L) and Neutral (N) in 9 kHz bandwidth by the EMI receiver.
 - calculating the measurement result with the following formula or equation.
(Result = Reading + Cor.F.)
(Margin = Limit- Result)

3-3 Radiated Disturbance Measurements – Above 1GHz

- Test site is met the requirements of ANSI C 63.4-2014 and the distance between the EUT and the antenna is adjusted 3m.
- The turntable can be rotated 360 degrees.
- The antenna can be adjusted between 1m in height above the ground.
- The EUT is placed on the non-conducting table with 1m height on the turntable.
- Measurements are carried out using a EMI test receiver with peak detectors (1 MHz bandwidth) and an EMI receiver with peak and average detectors(1 MHz bandwidth).
- Refer to the list of test equipment used for the test.
- HORN antenna are used as wideband antenna.
- The HORN antenna is used in the frequency range of 1 GHz to 18 GHz.
- A variable attenuator is used for verifying amplifier's linearity.
- Rotating the turntable and adjusting the height of the antenna are carried out by control buttons on the console.
- Refer to "Brief Information"(page 7-10) about details of the EUT and configuration of the cables.
- Measurement is carried out by a LTA operator as manual operation.
 - searching the worst direction with the maximum level of the disturbance wave in rotating the turntable 360 degrees at each searched frequency point.
 - setting the height of the antenna with the maximum level of the disturbance wave from 1 m
 - reading the disturbance level by the EMI receiver with peak and average detectors (1MHz bandwidth) according to ANSI C 63.4-2014.
 - measuring to vertical and horizontal polarization.
 - calculating the measurement result with the following formula or equation:
(Measurement result= measured value + antenna factor + antenna cable loss)

4- List of Equipment Used For the Tests


	Item	Model Name	Serial No.	Manufacturer	Interval	Last Cal.
1	EMI TEST Receiver	ESR	101499	Rohde & Schwarz	1 year	Jul-16
2	Pulse Limiter	ESH3-Z2	100710	Rohde & Schwarz	1 year	Mar-17
3	DIGITAL THERMO HYGROMETER	TH-611	NONE	BODYCOM	1 year	Sep-16
4	DTV Signal Generator	MFG-100	15M2002	MFLO	1 year	Mar-17
5	Color TV Pattern Generator	PM-5518-TX	LO5333	Philips	-	-
6	LISN	ESH3-Z6	100378	Rohde & Schwarz	1 year	Sep-16
7	LISN(main)	ESH3-Z5	893045/017	Rohde & Schwarz	1 year	Mar-17
8	LISN(sub)	ENV216	100408	Rohde & Schwarz	1 year	Sep-16
9	ISN	ISN T800	27109	TESEQ	1 year	Jan-17
10	ISN	ENY81-CA6	101565	Rohde & Schwarz	1 year	Jan-17
11	CURRENT PROBE	EZ-17	100508	Rohde & Schwarz	1 year	Jan-17
12	LISN	ESH3-Z6	100378	Rohde & Schwarz	1 year	Sep-16
13	EMI TEST Receiver	ESCI7	100772	Rohde & Schwarz	1 year	Sep-16
14	Amplifier (25 dB)	8447D	2944A07974	HP	1 year	Sep-16
15	DIGITAL THERMO HYGROMETER	TESTEK-303A	TAEGUANG	-	1 year	Mar-17
16	Log.-Per. Antenna	VULP 9118	9118 A 401	SCHWARZBECK	2 year	Apr-17
17	Biconical Antenna	VHA 9103	VHA 9103- 2315	SCHWARZBECK	2 year	Apr-17
18	TRILOG Antenna	VULB9160	9160-3237	SCHWARZBECK	2 year	May-17
19	TRILOG Antenna	VULB9160	9160-3242	SCHWARZBECK	2 year	Jul-16
20	Amplifier (25 dB)	8449B	3008A00337	HP	1 year	Mar-17
21	Spectrum Analyzer (~ 26.5 GHz)	E4407B	MY45108946	Agilent	1 year	Mar-17
22	HORN ANTENNA	3115	114105	ETS	2 year	May-16
23	HORN ANTENNA	3115	114105	ETS	2 year	Jul-16
24	TRILOG Antenna	VULB9268	775	SCHWARZBECK	2 year	Mar-17
25	HORN ANTENNA	3115	000550005	ETS	2 year	May-17

5-1 Radiated Disturbance Measurements (Below 1GHz) / Recording (AC) mode _ V



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: XNO-6085R* (*N:NT/P:PAL) Temp/Humi: 21 / 51
Test Mode : Recording mode Tested by: LEE H W

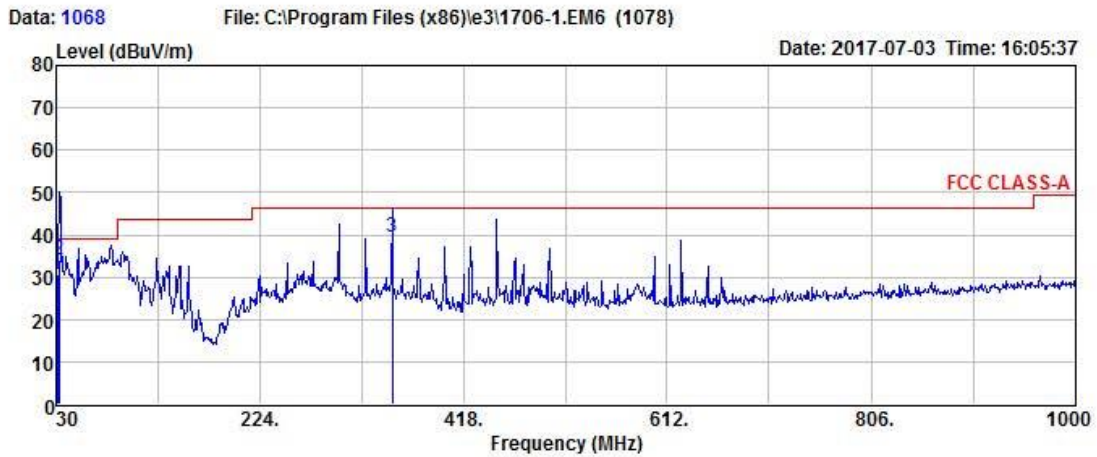

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QF dBuV/m	dBuV/m	dB	cm	deg	
30.97	45.87	-15.10	30.77	39.00	8.23	193	30	VERTICAL
32.91	49.04	-14.90	34.14	39.00	4.86	144	316	VERTICAL
350.10	48.89	-9.54	39.35	46.40	7.05	114	152	VERTICAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

TEST EQUIPMENT USED: 13, 14, 15, 18

-Continue

(Below 1GHz) / Recording (AC) mode _ H




4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No. : XNO-6085R* (*N:NT/P:PAL) Temp/Humi: 21 / 51
Test Mode : Recording mode Tested by: LEE H W

Data: 1067

File: C:\Program Files (x86)\e3\1706-1.EM6 (1078)

Date: 2017-07-03 Time: 16:03:48

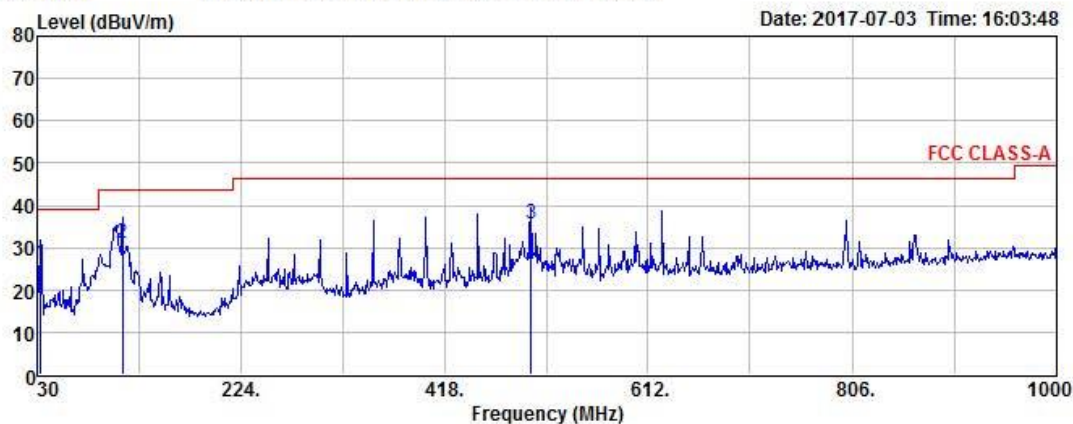


Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
32.91	40.74	-14.90	25.84	39.00	13.16	187	75	HORIZONTAL
111.48	45.56	-14.38	31.18	43.50	12.32	162	208	HORIZONTAL
500.45	42.14	-6.63	35.51	46.40	10.89	184	144	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


-Continue

(Ablow 1GHz) / Recording (AC) mode

EUT/Model No.: XNO-6085R* (*N:NT/P:PAL) Temp/Humi: 21 / 51
Test Mode : Recording mode Tested by: LEE H W

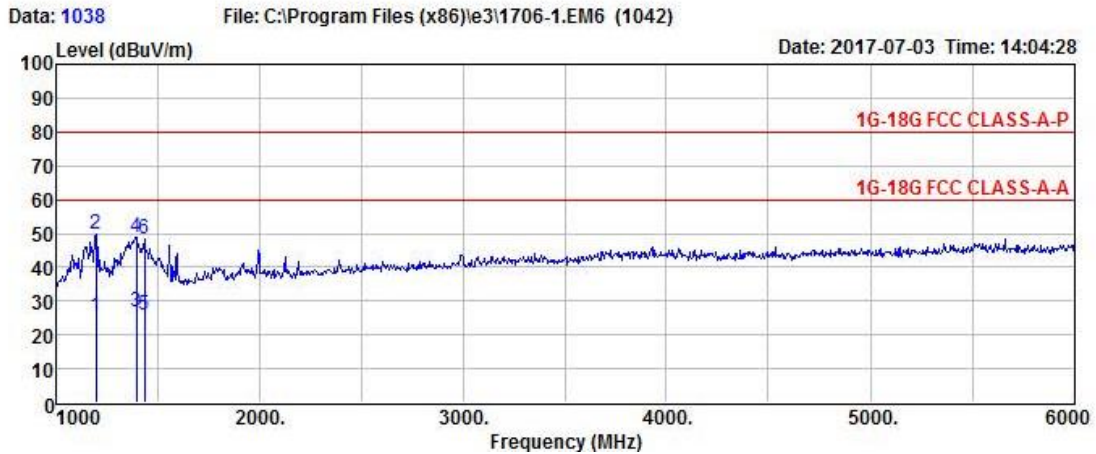

EUT/Model No.: XNO-6085R* (*N:NT/P:PAL) Temp/Humi: 21 / 51
Test Mode : Recording mode Tested by: LEE H W

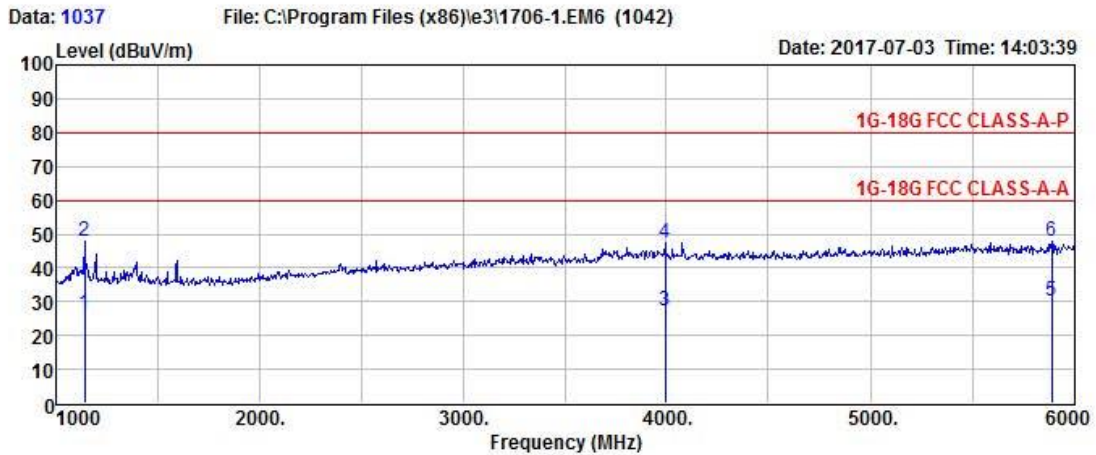

Manufacture : Hanwha Techwin Co., Ltd.

Test Date

Temp.:
[°C]

Humidity:
[%]

Barometric
[mbar]

2017/7/3

21

51

Model : XNO-6085R* (*N:NT/P:PAL)

TEST mode : Recording mode

Freq.(MHz)	Reading(PK)	Reading(AV)	C.F	Result(PK)	Result(AV)	Limit(PK)	Limit(AV)	Margin(PK)	Margin(AV)	Height	Angle	Polarity
MHz	dBuV	dBuV	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	cm	deg	Hor/Ver
1140.0	57.2	36.1	-5.99	51.20	30.07	80.0	60.0	28.80	29.93	220	153	H
3995.0	40.7	20.4	10.38	51.04	30.77			28.96	29.23	108	170	H
5885.0	36.2	18.7	14.98	51.19	33.72			28.81	26.28	152	206	H
1195.0	59.4	35.0	-6.05	53.36	28.91			26.64	31.09	152	171	V
1395.0	57.6	35.4	-5.08	52.47	30.29			27.53	29.71	214	15	V
1435.0	56.5	34.1	-4.79	51.70	29.28			28.30	30.72	117	156	V

TEST EQUIPMENT USED: 13, 20, 25


5-1 Radiated Disturbance Measurements (Below 1GHz) / Recording (DC) mode _ V



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: XNO-6085R* (*N:NT/P:PAL) Temp/Humi: 21 / 51
Test Mode : Recording mode Tested by: LEE H W

Data: 990 File: C:\Program Files (x86)\e3\1706-1.EM6 (1078) Date: 2017-07-03 Time: 11:48:43

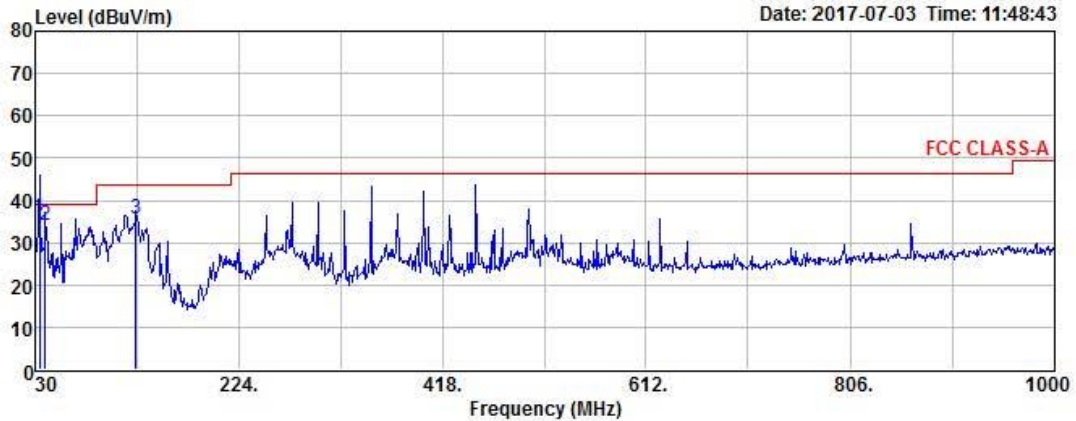

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
33.88	50.93	-14.81	36.12	39.00	2.88	117	150	VERTICAL
39.70	48.22	-14.24	33.98	39.00	5.02	170	153	VERTICAL
126.03	48.89	-13.20	35.69	43.50	7.81	139	328	VERTICAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

TEST EQUIPMENT USED: 13, 14, 15, 18

-Continue

(Below 1GHz) / Recording (DC) mode _ H



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No. : XNO-6085R* (*N:NT/P:PAL)


Temp/Humi: 21 / 51

Test Mode : Recording mode

Tested by: LEE H W

Data: 989

File: C:\Program Files (x86)\e3\1706-1.EM6 (1078)

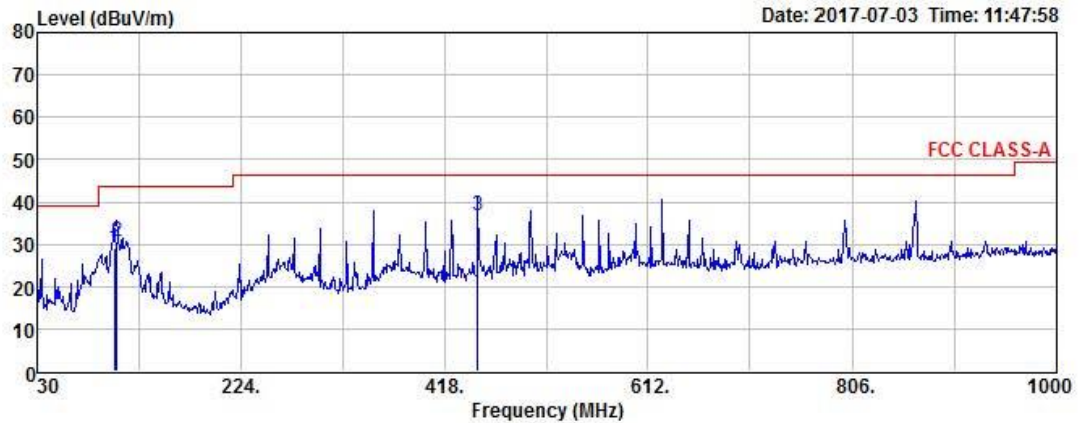


Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
103.72	44.70	-15.57	29.13	43.50	14.37	218	155	HORIZONTAL
105.66	45.67	-15.21	30.46	43.50	13.04	185	311	HORIZONTAL
450.01	44.01	-7.18	36.83	46.40	9.57	193	11	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


-Continue

(Ablow 1GHz) / Recording (DC) mode

EUT/Model No.: XNO-6085R* (*N:NT/P:PAL) Temp/Humi: 21 / 51
Test Mode : Recording mode Tested by: LEE H W

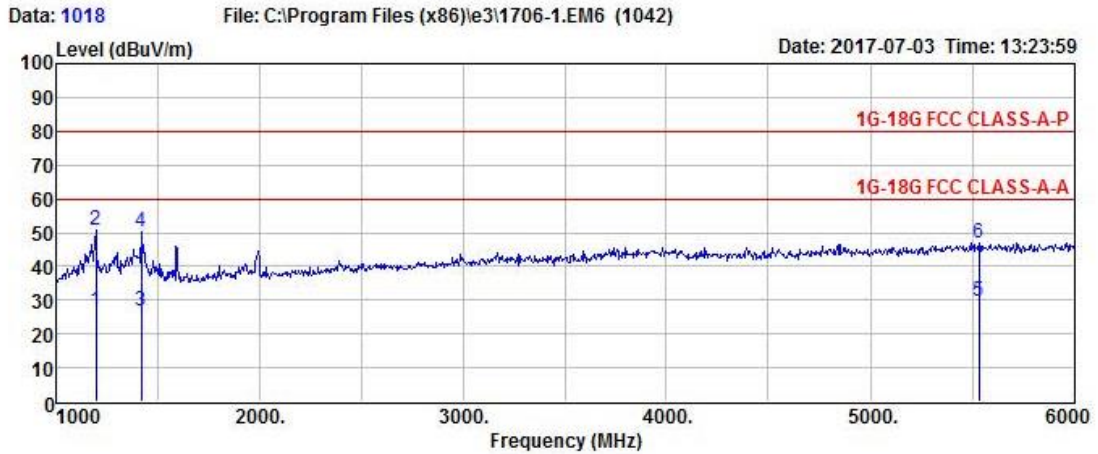

EUT/Model No.: XNO-6085R* (*N:NT/P:PAL) Temp/Humi: 21 / 51
Test Mode : Recording mode Tested by: LEE H W

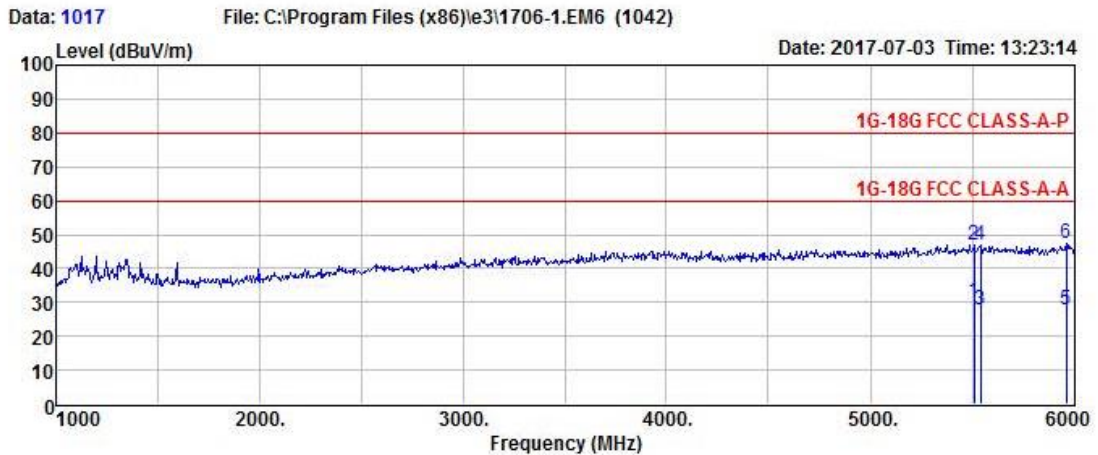

Manufacture : Hanwha Techwin Co., Ltd.

Model : XNO-6085R* (*N:NT/P:PAL)

TEST mode : Recording mode

Test Date

2017/7/3

Temp.:
[°C]

Humidity:
[%]

Barometric
[mbar]

21

51

Freq.(MHz)	Reading(PK)	Reading(AV)	C.F	Result(PK)	Result(AV)	Limit(PK)	Limit(AV)	Margin(PK)	Margin(AV)	Height	Angle	Polarity
MHz	dBuV	dBuV	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	cm	deg	Hor/Ver
5505.0	36.0	19.1	14.49	50.51	33.62	80.0	60.0	29.49	26.38	153	358	H
5535.0	36.1	16.9	14.54	50.61	31.47			29.39	28.53	117	154	H
5960.0	35.6	16.0	15.35	50.90	31.35			29.10	28.65	217	155	H
1195.0	60.5	36.4	-6.05	54.42	30.32			25.58	29.68	160	155	V
1420.0	58.6	35.0	-4.9	53.67	30.10			26.33	29.90	138	204	V
5530.0	35.9	18.6	14.53	50.42	33.17			29.58	26.83	174	155	V

TEST EQUIPMENT USED: 13, 20, 25

5-1 Radiated Disturbance Measurements (Below 1GHz) / Recording (PoE) mode _ V




4, Songjiuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: XNO-6085R* (*N:NT/P:PAL) Temp/Humi: 21 / 51
Test Mode : Recording mode Tested by: LEE H W

Data: 1078

File: C:\Program Files (x86)\e3\1706-1.EM6 (1078)

Date: 2017-07-03 Time: 16:12:26

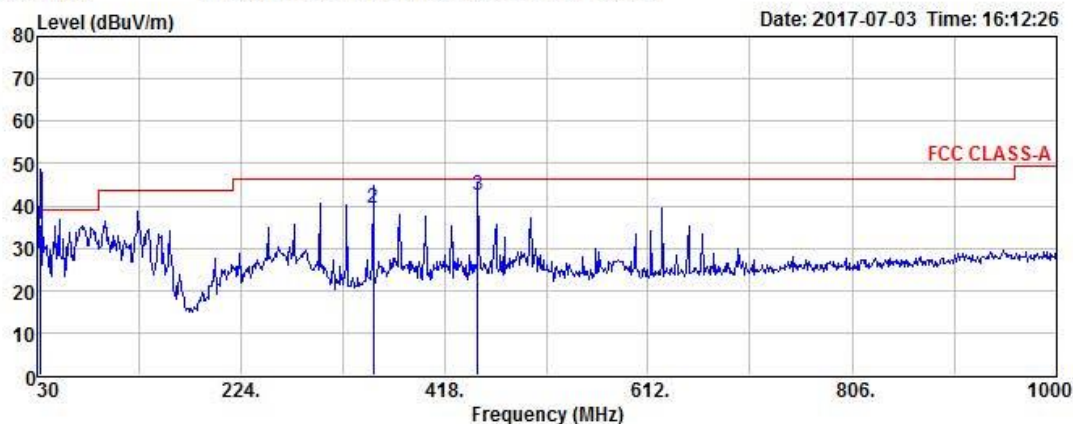

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
32.91	50.51	-14.90	35.61	39.00	3.39	108	138	VERTICAL
350.10	49.16	-9.54	39.62	46.40	6.78	193	154	VERTICAL
450.01	49.82	-7.18	42.64	46.40	3.76	228	192	VERTICAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

TEST EQUIPMENT USED: 13, 14, 15, 18

-Continue

(Below 1GHz) / Recording (PoE) mode _ H



4, Songjiuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: XNO-6085R* (*N:NT/P:PAL)

Temp/Humi: 21 / 51


Test Mode : Recording mode

Tested by: LEE H W

Data: 1077

File: C:\Program Files (x86)\e3\1706-1.EM6 (1078)

Date: 2017-07-03 Time: 16:11:50

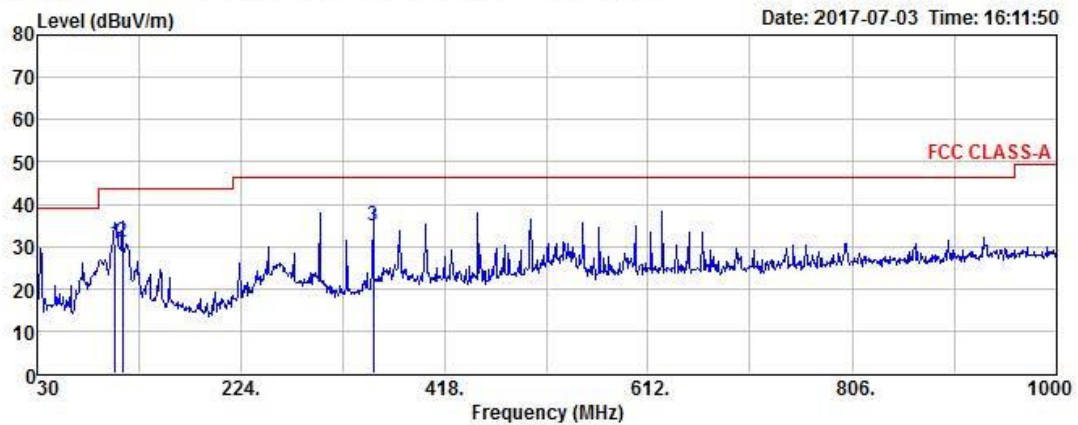


Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
104.69	46.04	-15.37	30.67	43.50	12.83	185	130	HORIZONTAL
111.48	45.37	-14.38	30.99	43.50	12.51	237	245	HORIZONTAL
350.10	44.39	-9.54	34.85	46.40	11.55	143	19	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


-Continue

(Ablow 1GHz) / Recording (PoE) mode

EUT/Model No.: XNO-6085R* (*N:NT/P:PAL) Temp/Humi: 21 / 51
Test Mode : Recording mode Tested by: LEE H W

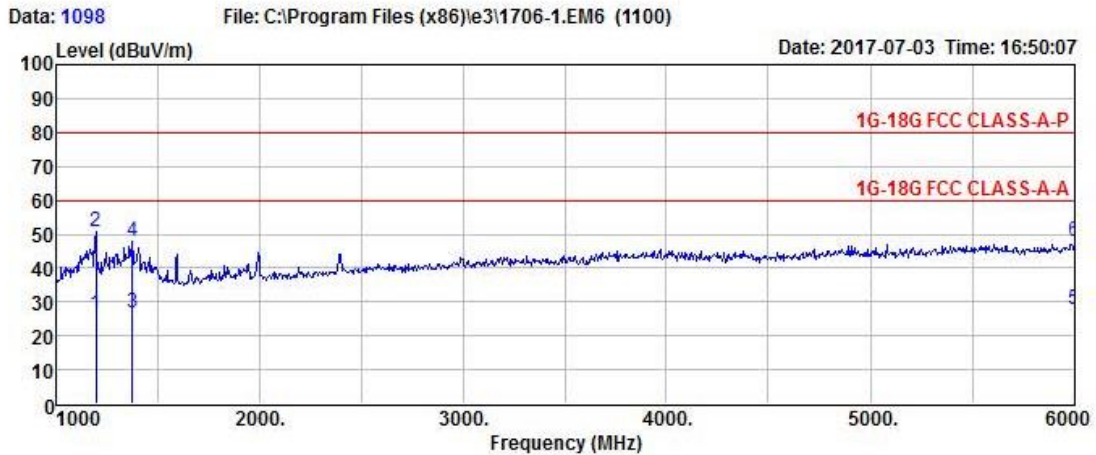

EUT/Model No.: XNO-6085R* (*N:NT/P:PAL) Temp/Humi: 21 / 51
Test Mode : Recording mode Tested by: LEE H W

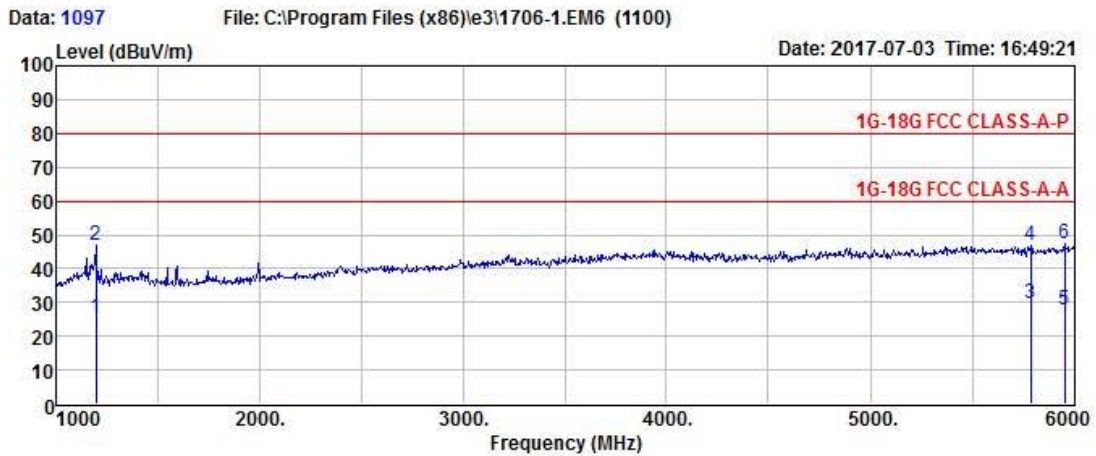

Manufacture : Hanwha Techwin Co., Ltd.

Model : XNO-6085R* (*N:NT/P:PAL)

TEST mode : Recording mode

Test Date

2017/7/3

Temp.:
[°C]

Humidity:
[%]

Barometric
[mbar]

21

51

Freq.(MHz)	Reading(PK)	Reading(AV)	C.F	Result(PK)	Result(AV)	Limit(PK)	Limit(AV)	Margin(PK)	Margin(AV)	Height	Angle	Polarity
MHz	dBuV	dBuV	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	cm	deg	Hor/Ver
1195.0	56.2	35.2	-6.05	50.18	29.11	80.0	60.0	29.82	30.89	124	182	H
5785.0	35.8	18.7	14.65	50.46	33.39			29.54	26.61	139	228	H
5950.0	35.6	15.9	15.31	50.88	31.24			29.12	28.76	132	115	H
1195.0	60.5	35.6	-6.05	54.40	29.59			25.60	30.41	140	248	V
1375.0	56.5	35.4	-5.18	51.34	30.20			28.66	29.80	181	304	V
6000.0	35.7	16.0	15.49	51.20	31.48			28.80	28.52	168	190	V

TEST EQUIPMENT USED: 13, 20, 25

5-2 Conducted disturbance Measurements

(LINE) / Recording (AC) mode




4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008, 9
Fax: +82-31-3236010

EUT / Model No. : XNO-6085R* (*N:NT/P:PAL)	Phase : LINE
Test Mode : Recording mode	Test Power : 120 / 60
Temp. / Humi. : 21 / 45	Test Engineer : LEE H W

Data: 2803

File: D:\Conducted Data\2017\LTA_Conduction_2017_06.EM6 (3043)

Date: 2017-06-28

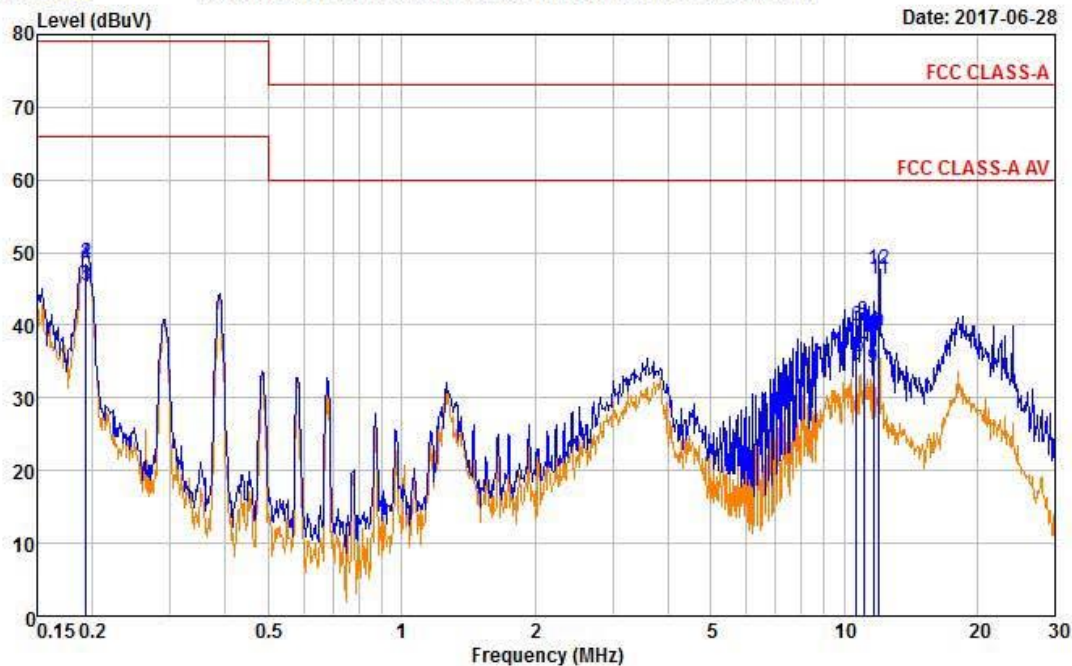

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV	dB	QP	AV	QP	AV	QP	AV
	dBuV	dBuV		dBuV	dBuV	dBuV	dBuV	dB	dB
0.193	38.44	35.16	10.09	48.53	45.25	79.00	66.00	30.47	20.75
0.193	38.56	35.29	10.09	48.65	45.38	79.00	66.00	30.35	20.62
10.682	29.37	23.96	10.63	40.00	34.59	73.00	60.00	33.00	25.41
11.070	29.96	24.95	10.66	40.62	35.61	73.00	60.00	32.38	24.39
11.651	28.28	23.35	10.70	38.98	34.05	73.00	60.00	34.02	25.95
12.000	37.05	35.72	10.72	47.77	46.44	73.00	60.00	25.23	13.56

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

TEST EQUIPMENT USED: 01, 02, 03, 07, 08

-Continue

(NEUTRAL) / Recording (AC) mode




4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT / Model No. : XNO-6085R* (*N:NT/P:PAL)	Phase : NEUTRAL
Test Mode : Recording mode	Test Power : 120 / 60
Temp. / Humi. : 21 / 45	Test Engineer : LEE H W

Data: 2807

File: D:\Conducted Data\2017\LTA_Conduction_2017_06.EM6 (3043)

Date: 2017-06-28

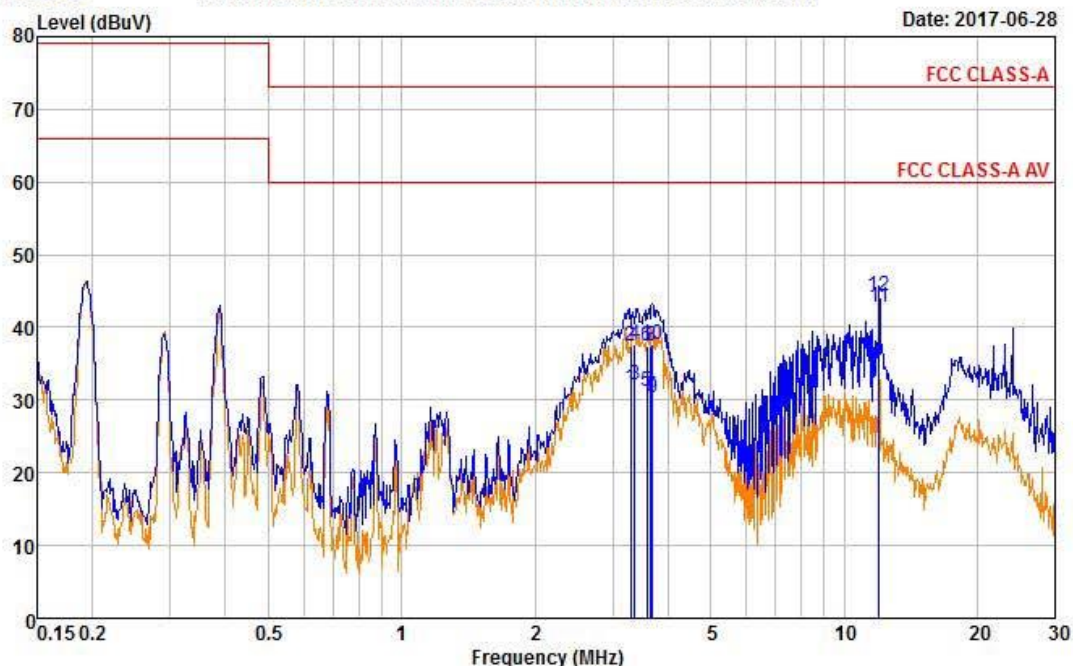

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
3.297	27.11	21.31	10.29	37.40	31.60	73.00	60.00	35.60	28.40
3.371	27.31	21.70	10.29	37.60	31.99	73.00	60.00	35.40	28.01
3.578	27.22	20.84	10.30	37.52	31.14	73.00	60.00	35.48	28.86
3.659	27.16	20.28	10.30	37.46	30.58	73.00	60.00	35.54	29.42
3.686	27.33	20.10	10.30	37.63	30.40	73.00	60.00	35.37	29.60
12.001	33.68	32.09	10.72	44.40	42.81	73.00	60.00	28.60	17.19

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

5-2 Conducted disturbance Measurements

(LINE) / Recording (DC) mode




4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008, 9
Fax: +82-31-3236010

EUT / Model No. : XNO-6085R* (*N:NT/P:PAL)	Phase : LINE
Test Mode : Recording mode	Test Power : 120 / 60
Temp. / Humi. : 21 / 45	Test Engineer : LEE H W

Data: 3015

File: D:\Conducted Data\2017\LTA_Conduction_2017_06.EM6 (3043)

Date: 2017-06-29

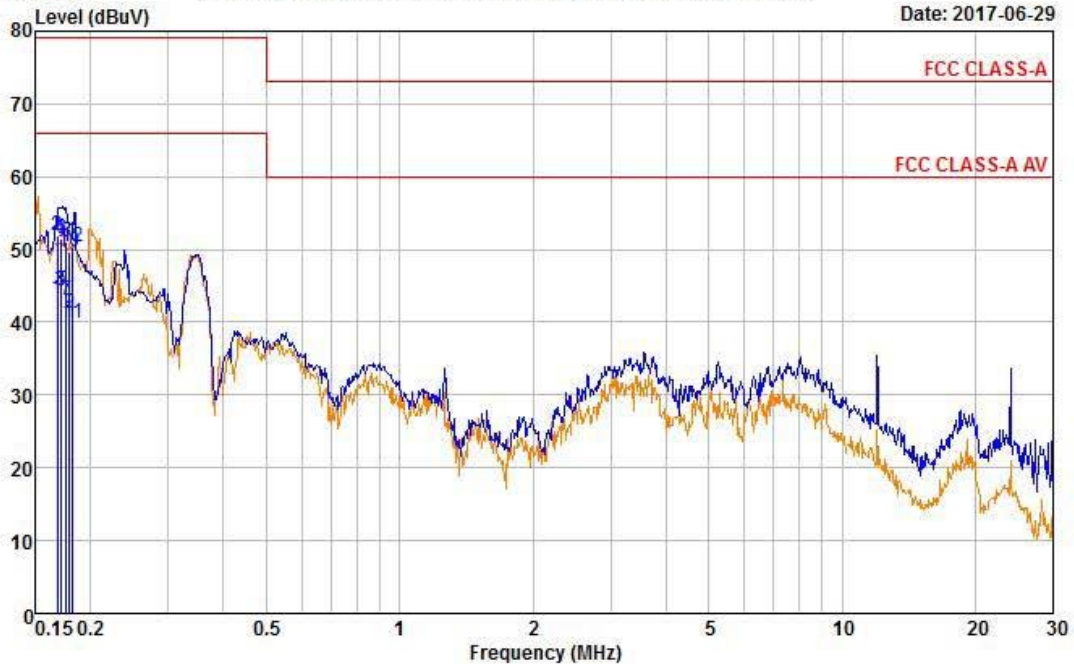

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV	dB	QP	AV	QP	AV	QP	AV
	dBuV	dBuV		dBuV	dBuV	dBuV	dBuV	dB	dB
0.168	41.84	33.11	10.10	51.94	43.21	79.00	66.00	27.06	22.79
0.171	41.45	34.26	10.10	51.55	44.36	79.00	66.00	27.45	21.64
0.172	41.45	34.27	10.10	51.55	44.37	79.00	66.00	27.45	21.63
0.176	40.92	32.87	10.10	51.02	42.97	79.00	66.00	27.98	23.03
0.180	39.58	31.06	10.10	49.68	41.16	79.00	66.00	29.32	24.84
0.183	40.21	29.87	10.10	50.31	39.97	79.00	66.00	28.69	26.03

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

TEST EQUIPMENT USED: 01, 02, 03, 07, 08

-Continue

(NEUTRAL) / Recording (DC) mode




4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008,9
Fax: +82-31-3236010

EUT / Model No. : XNO-6085R* (*N:NT/P:PAL)	Phase : NEUTRAL
Test Mode : Recording mode	Test Power : 120 / 60
Temp. / Humi. : 21 / 45	Test Engineer : LEE H W

Data: 3019

File: D:\Conducted Data\2017\LTA_Conduction_2017_06.EM6 (3043)

Date: 2017-06-29

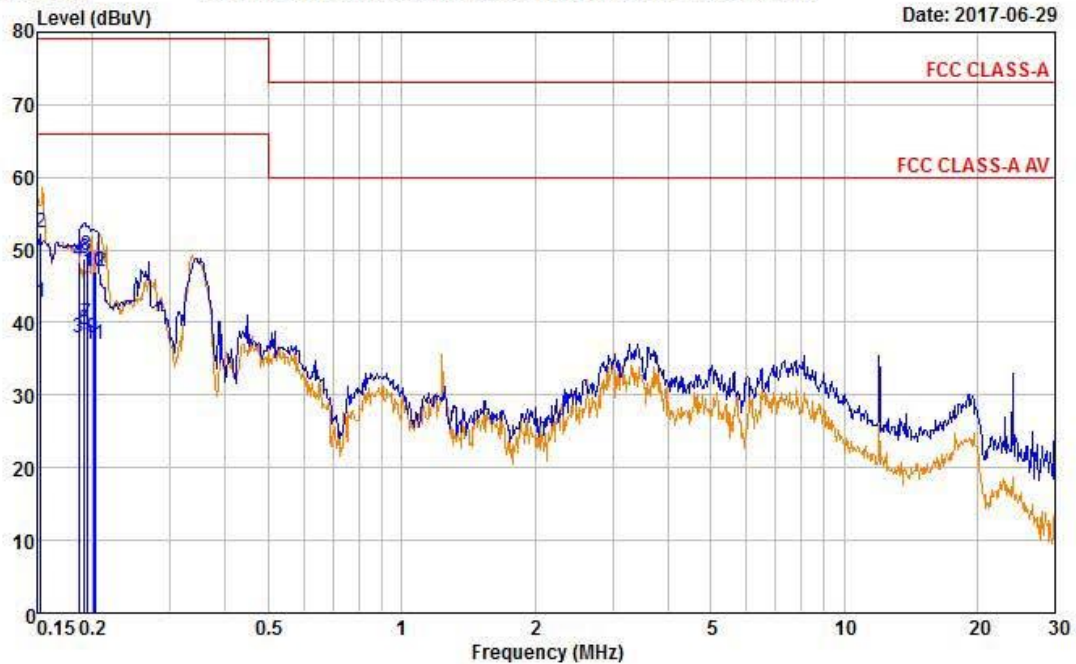

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV	dB	QP	AV	QP	AV	QP	AV
	dBuV	dBuV		dBuV	dBuV	dBuV	dBuV	dB	dB
0.153	42.24	32.68	10.15	52.39	42.83	79.00	66.00	26.61	23.17
0.186	38.29	27.73	10.16	48.45	37.89	79.00	66.00	30.55	28.11
0.192	38.73	28.80	10.16	48.89	38.96	79.00	66.00	30.11	27.04
0.194	39.06	29.66	10.16	49.22	39.82	79.00	66.00	29.78	26.18
0.201	36.94	27.63	10.17	47.11	37.80	79.00	66.00	31.89	28.20
0.203	36.92	26.81	10.17	47.09	36.98	79.00	66.00	31.91	29.02

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter


Conclusions

Product models "**XNO-6085RN**" meets all of the Class A requirements of the FCC Part 15, Subpart B. Limits of radio disturbance characteristics of ITE).

(Refer to Test Specification and Test Results in the "LTA certification", page4 and 5.)

- Recording (AC, DC, PoE) mode: The highest internal source of an EUT is above 108 MHz, the measurement shall only be made up to 6 GHz.(The highest internal source of an EUT : Above 108 MHz)


Photograph of the Radiated Disturbance Measurements (Below 1GHz) / Recording (AC) mode

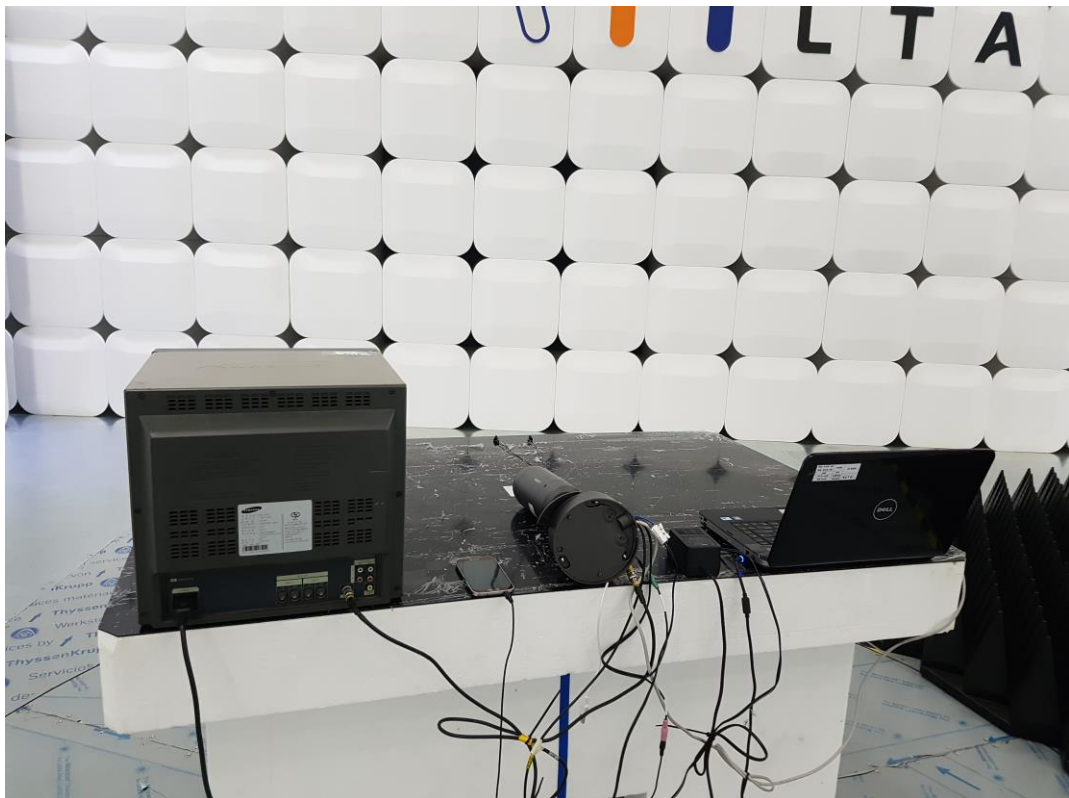

Photograph of the Radiated Disturbance Measurements (Below 1GHz) / Recording (DC) mode





Photograph of the Radiated Disturbance Measurements (Below 1GHz) / Recording (PoE) mode

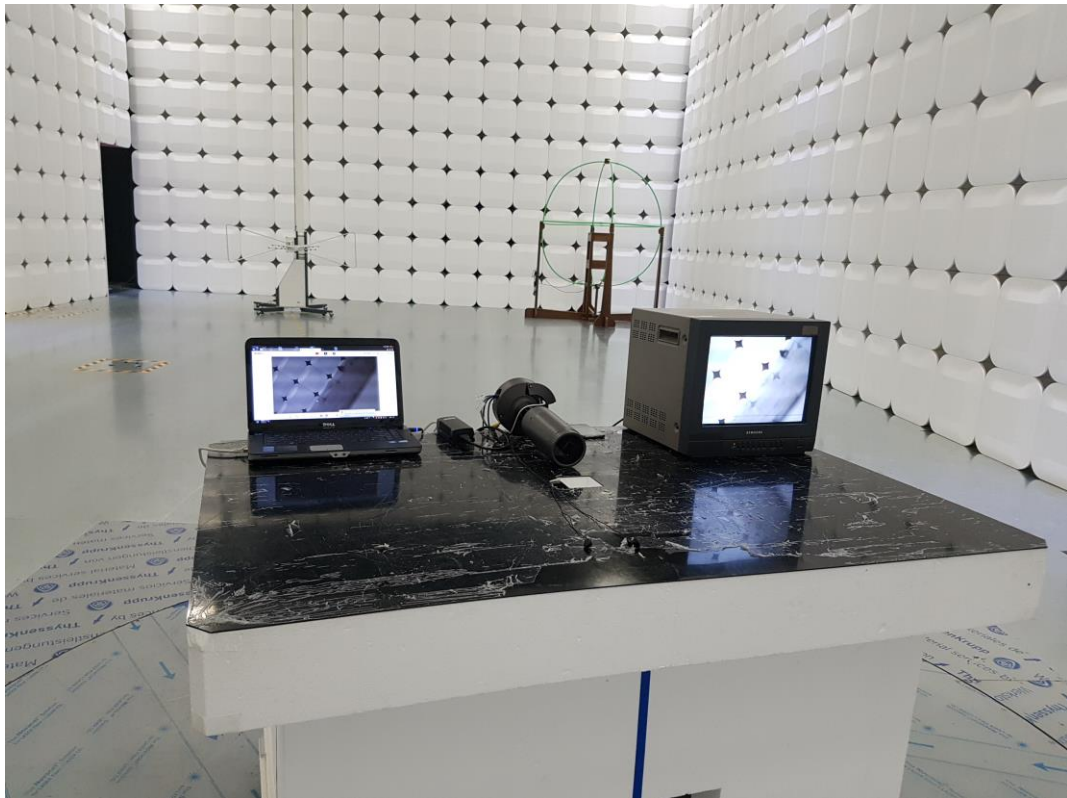





Photograph of the Radiated Disturbance Measurements (Ablow 1GHz) / Recording (AC) mode


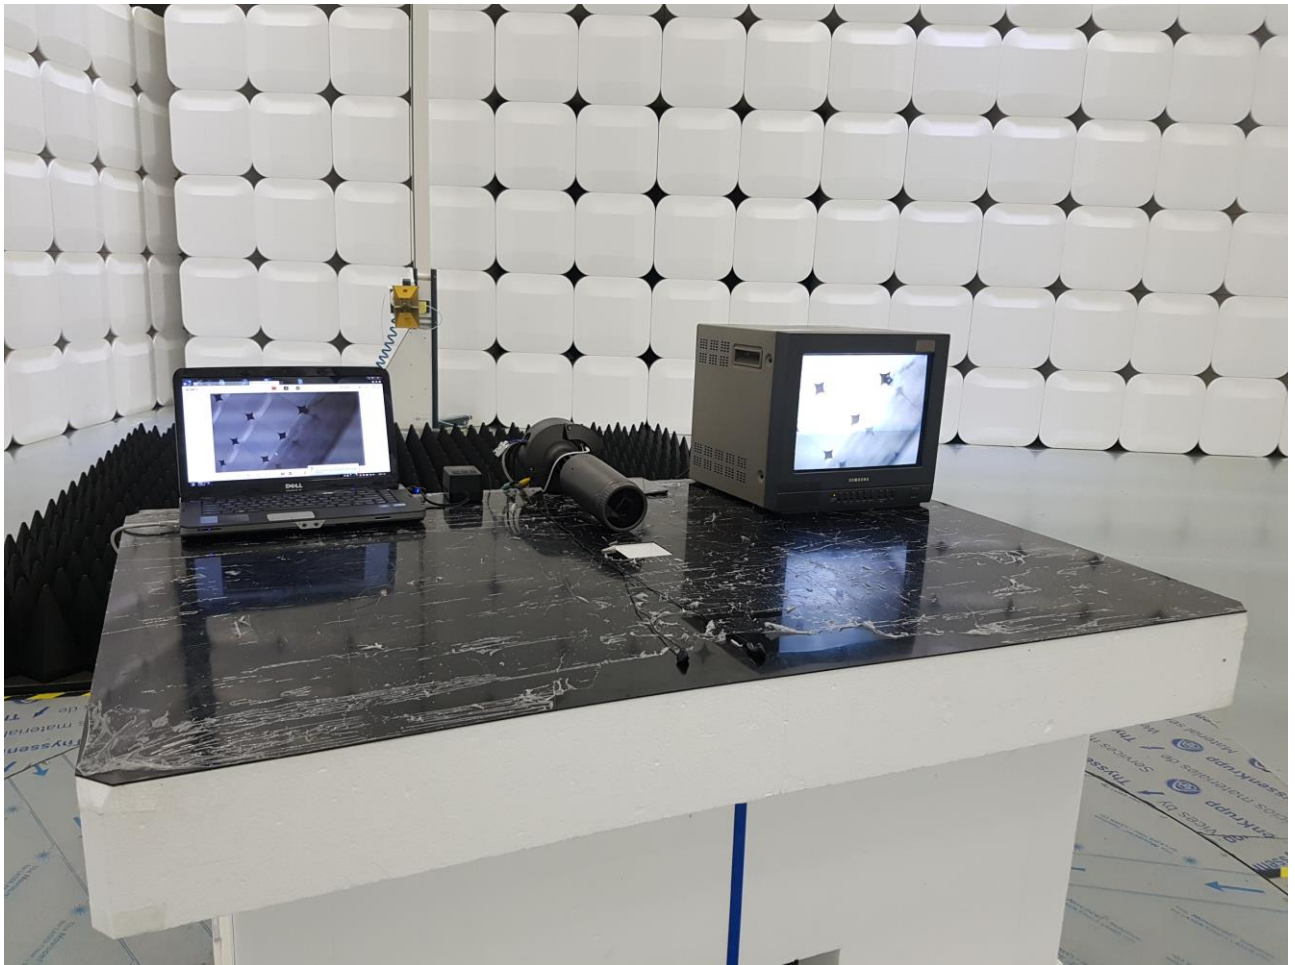


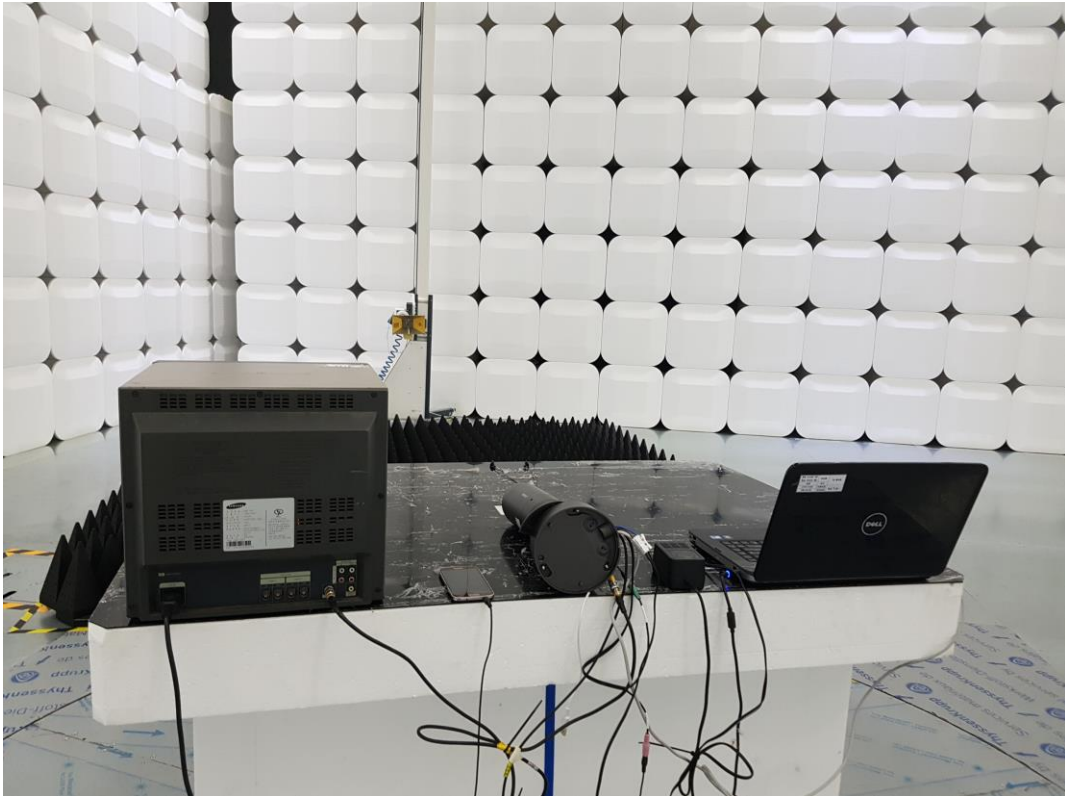

Photograph of the Radiated Disturbance Measurements (Ablow 1GHz) / Recording (DC) mode

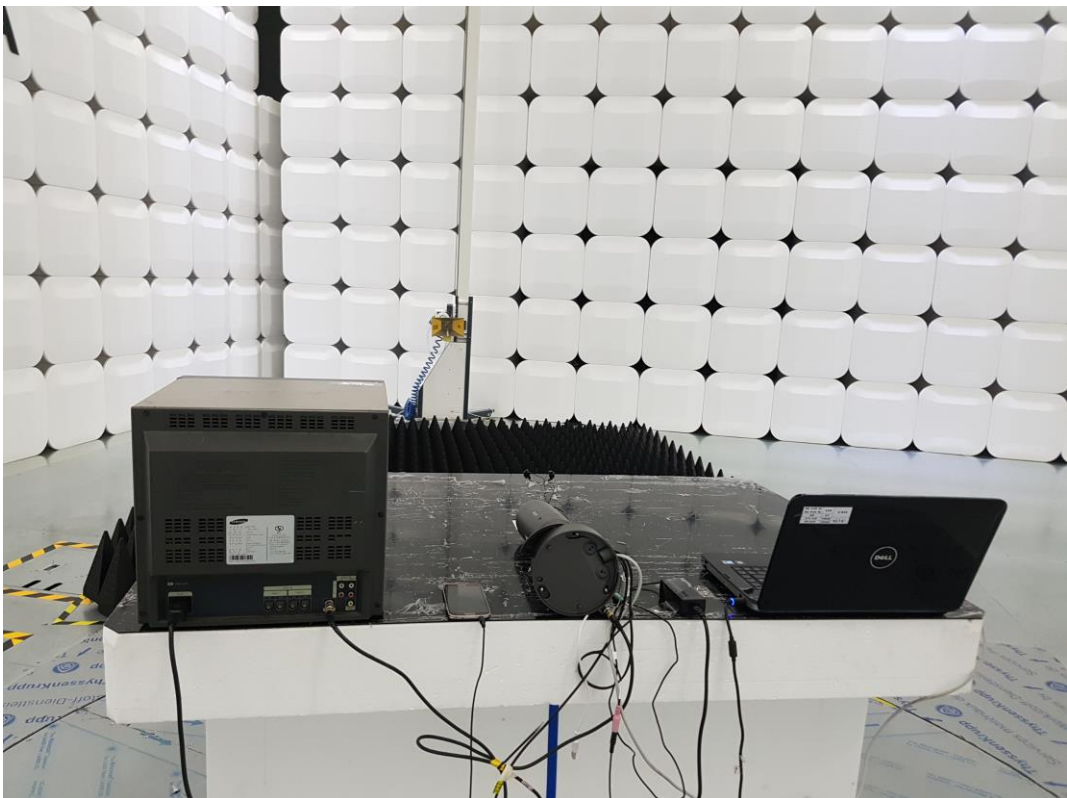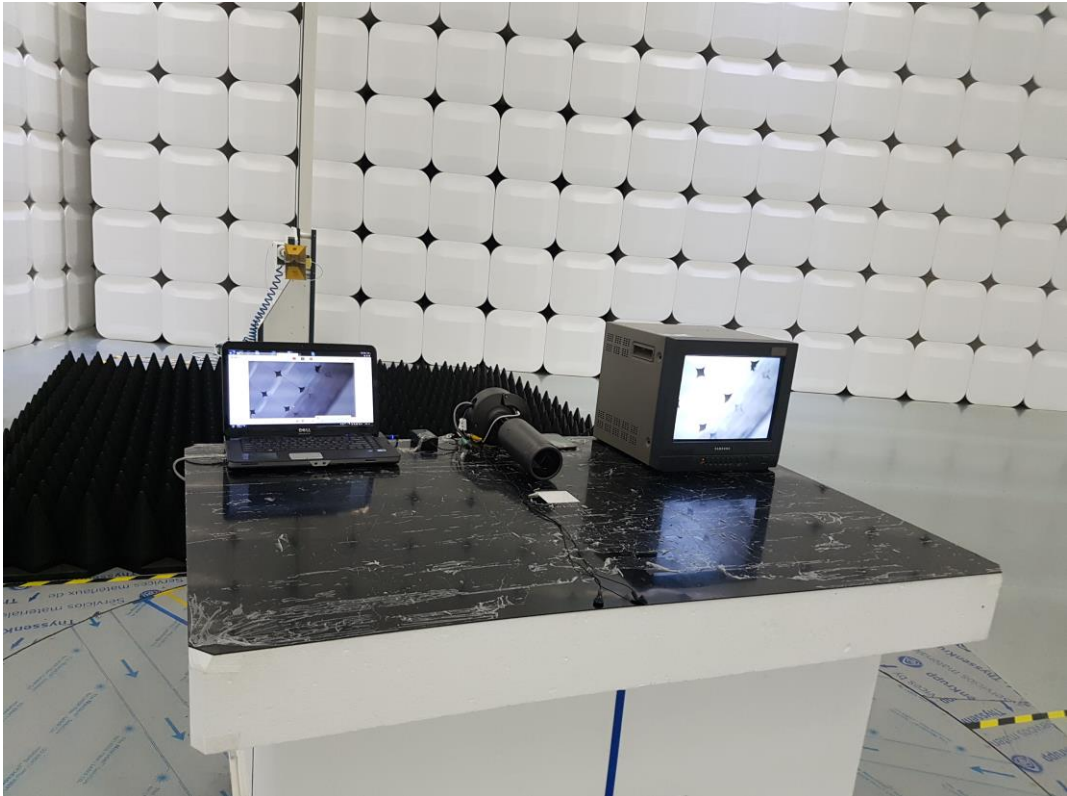

Photograph of the Radiated Disturbance Measurements (Ablow 1GHz) / Recording (PoE) mode

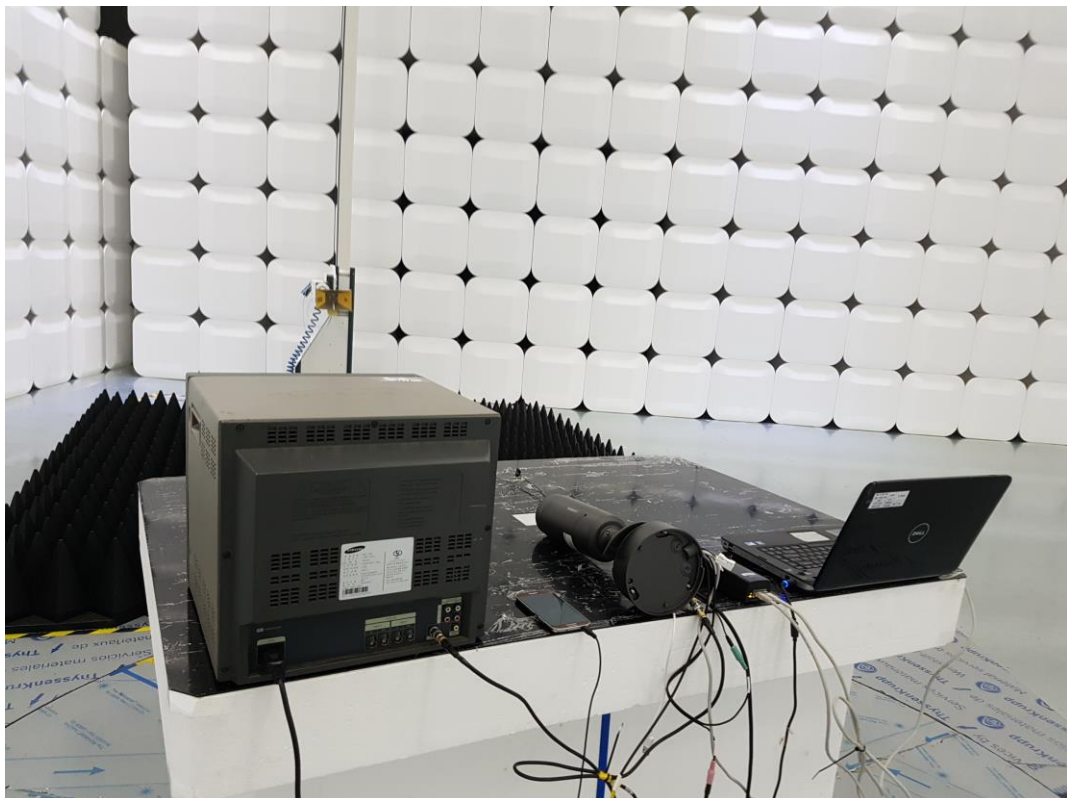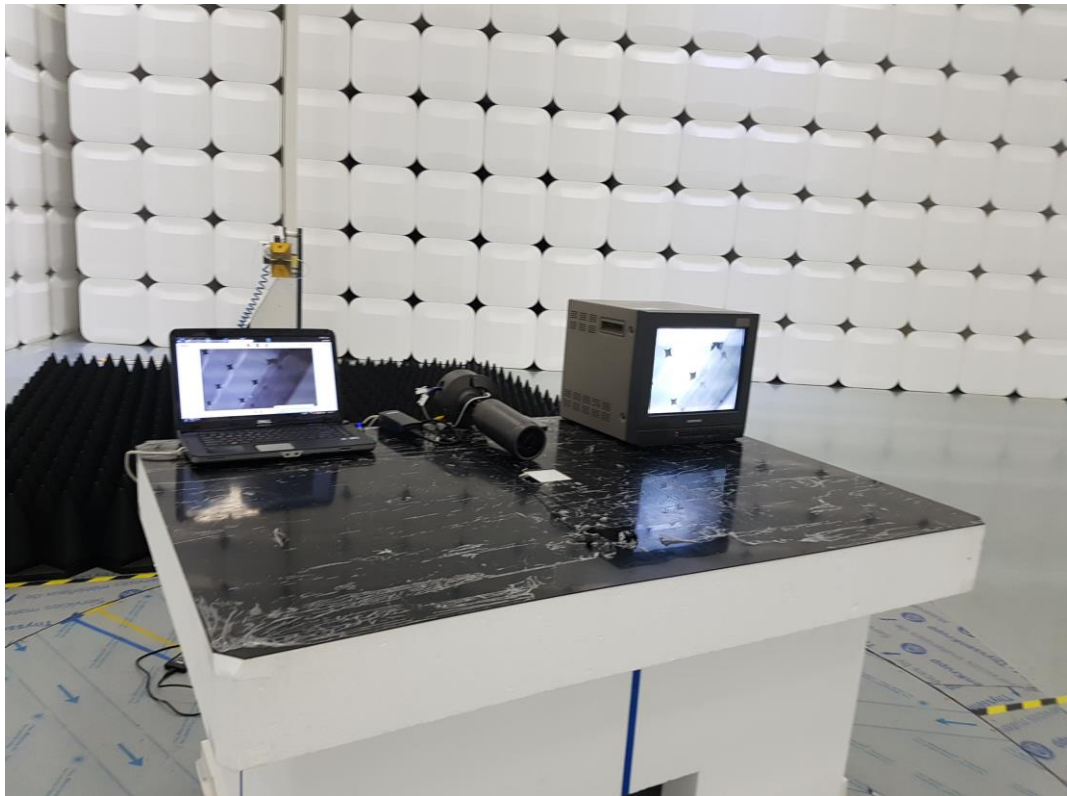

**Photograph of the Conducted disturbance Measurements (Maximum emission configuration)
/ Recording (AC) mode**



**Photograph of the Conducted disturbance Measurements (Maximum emission configuration)
/ Recording (DC) mode**




Photograph of the Equipment Under Test



Photograph of the Equipment Under Test





Photograph of the Equipment Under Test

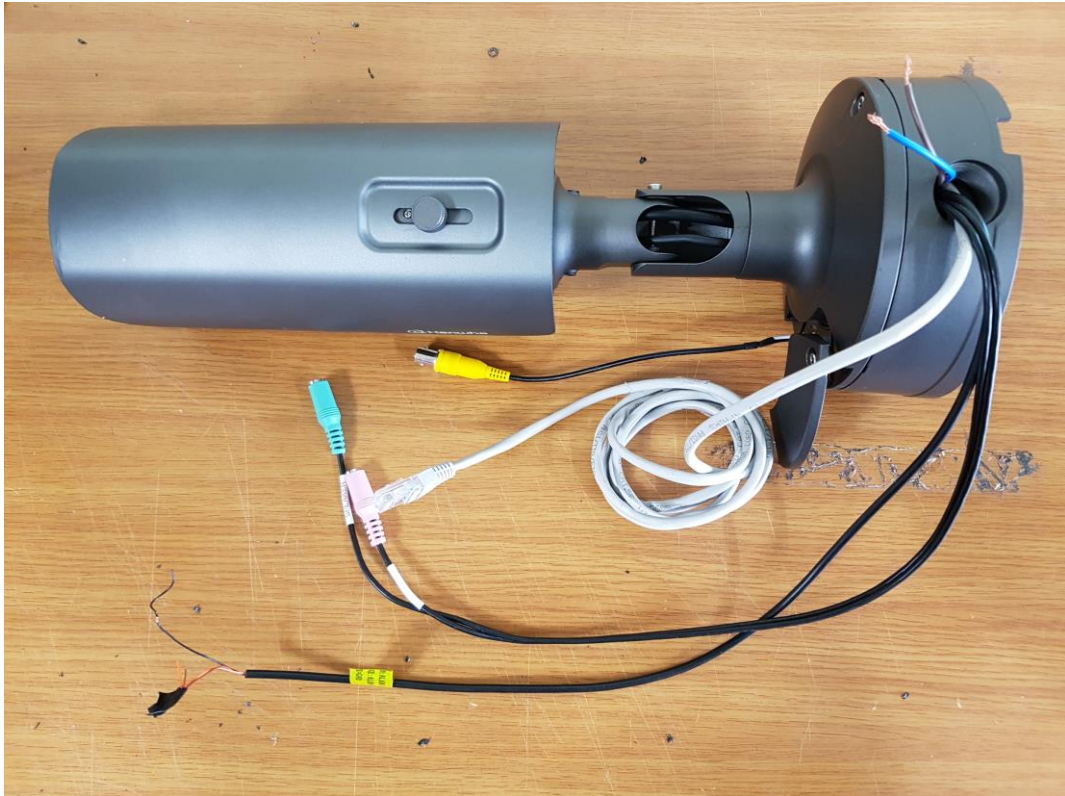

Photograph of the Equipment Under Test





Photograph of the Equipment Under Test

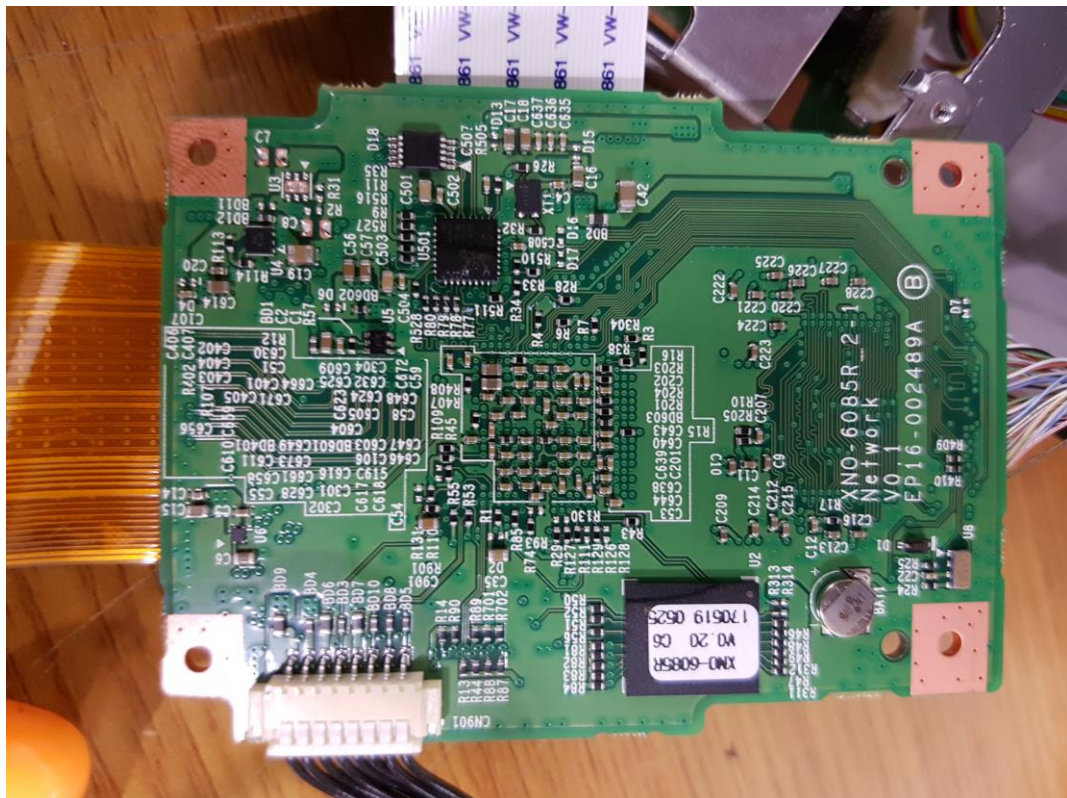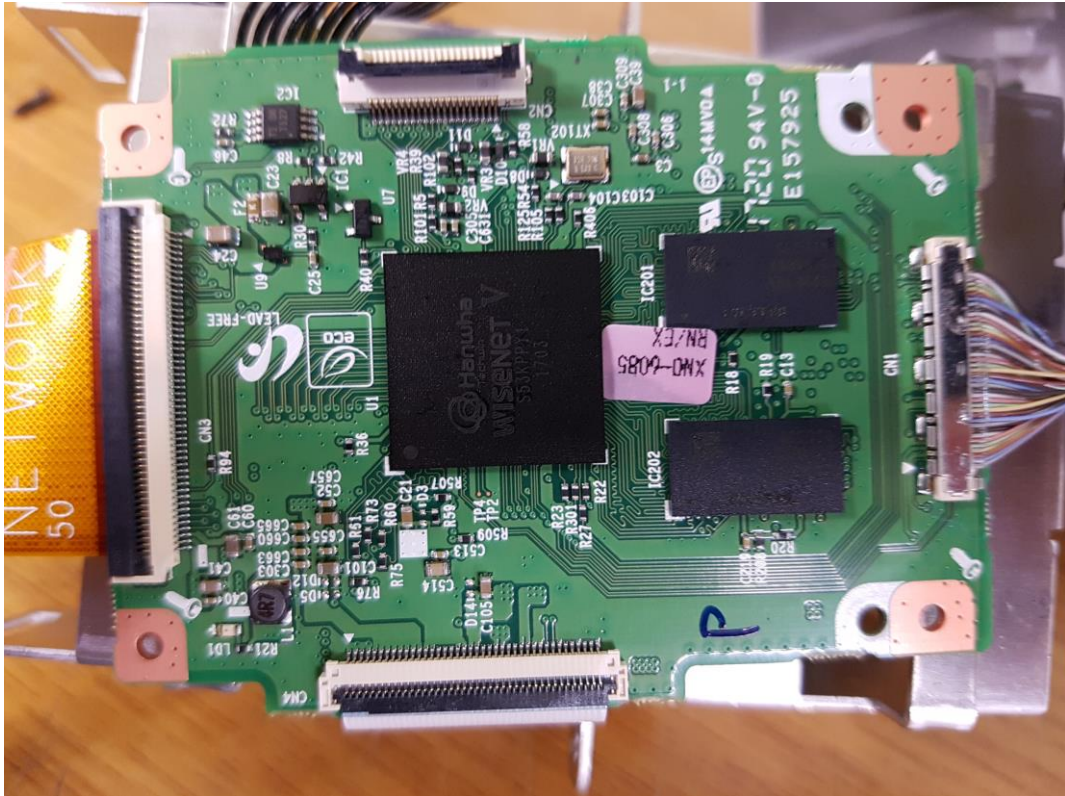



Photograph of the Equipment Under Test





Photograph of the Equipment Under Test

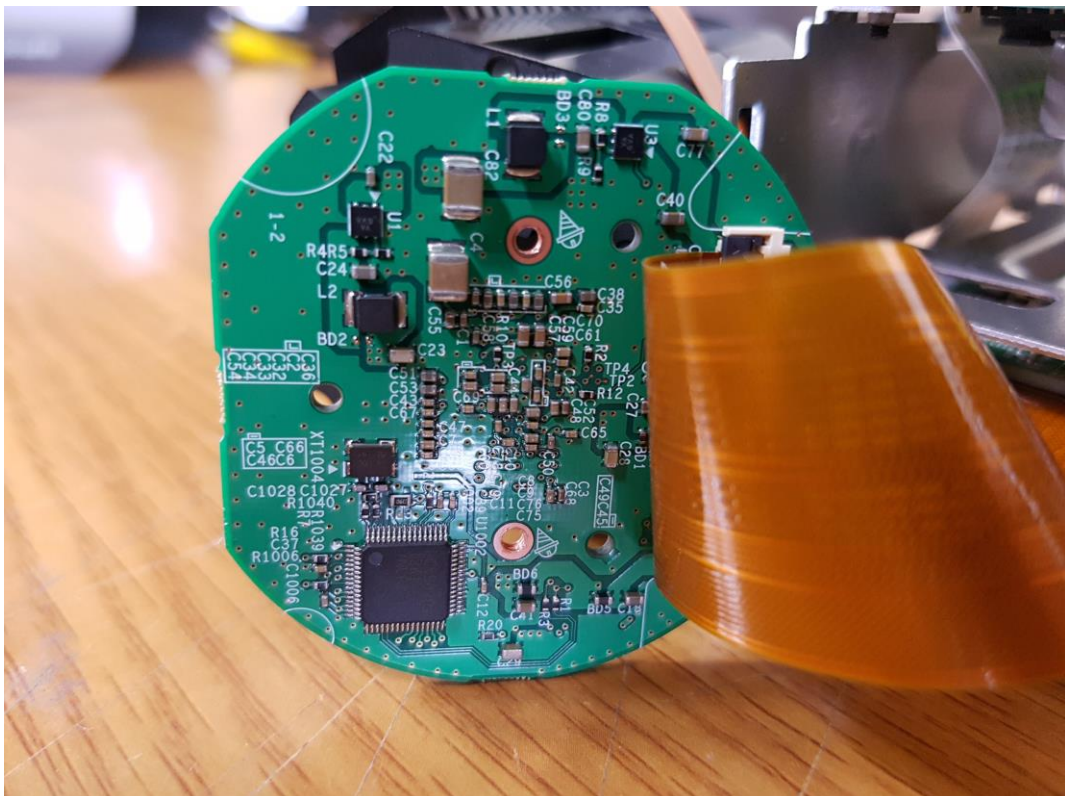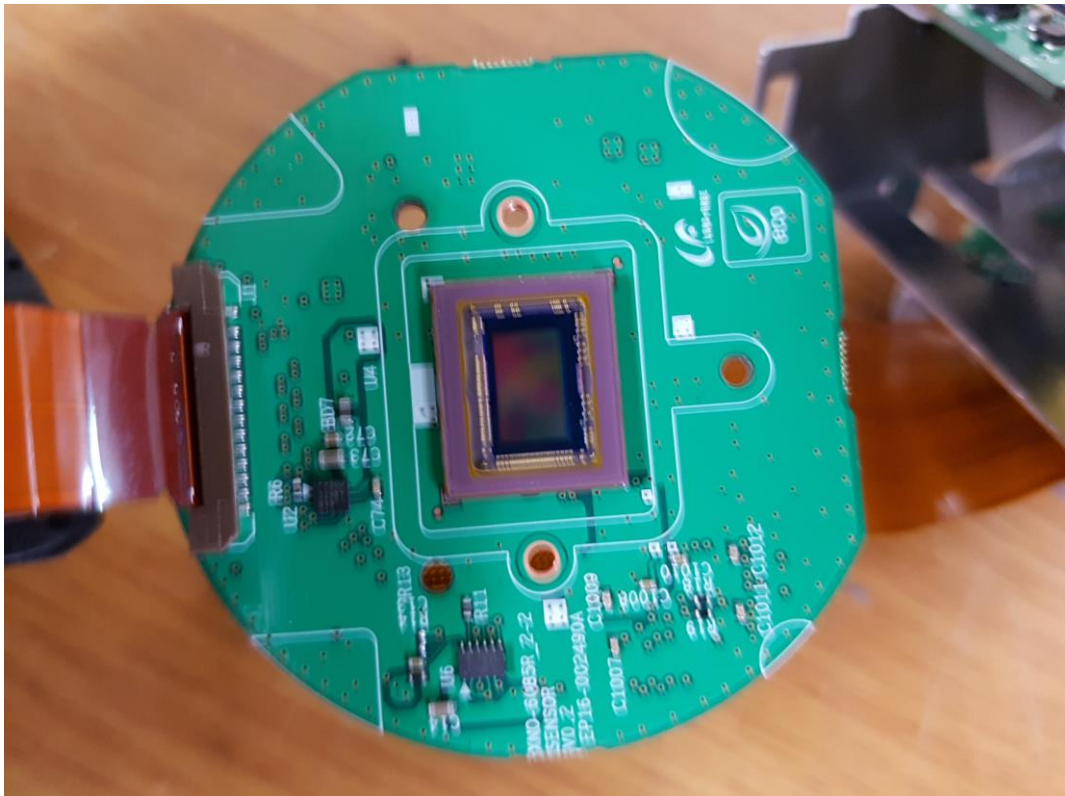

Photograph of the Equipment Under Test

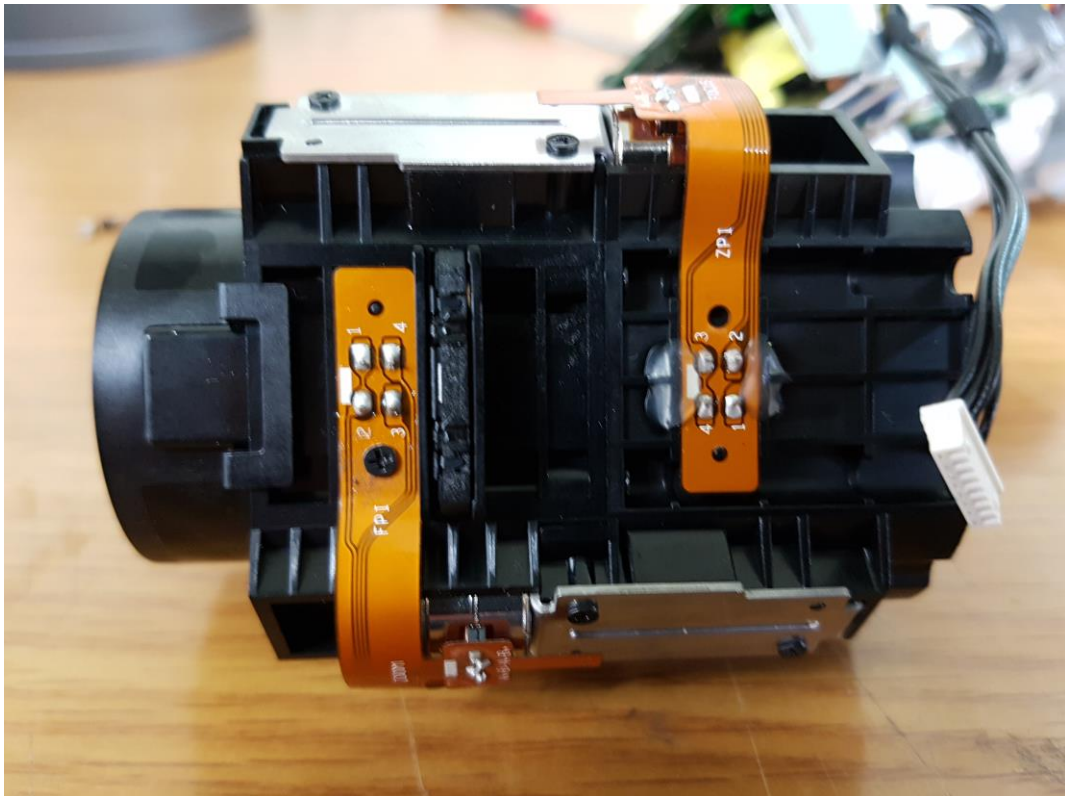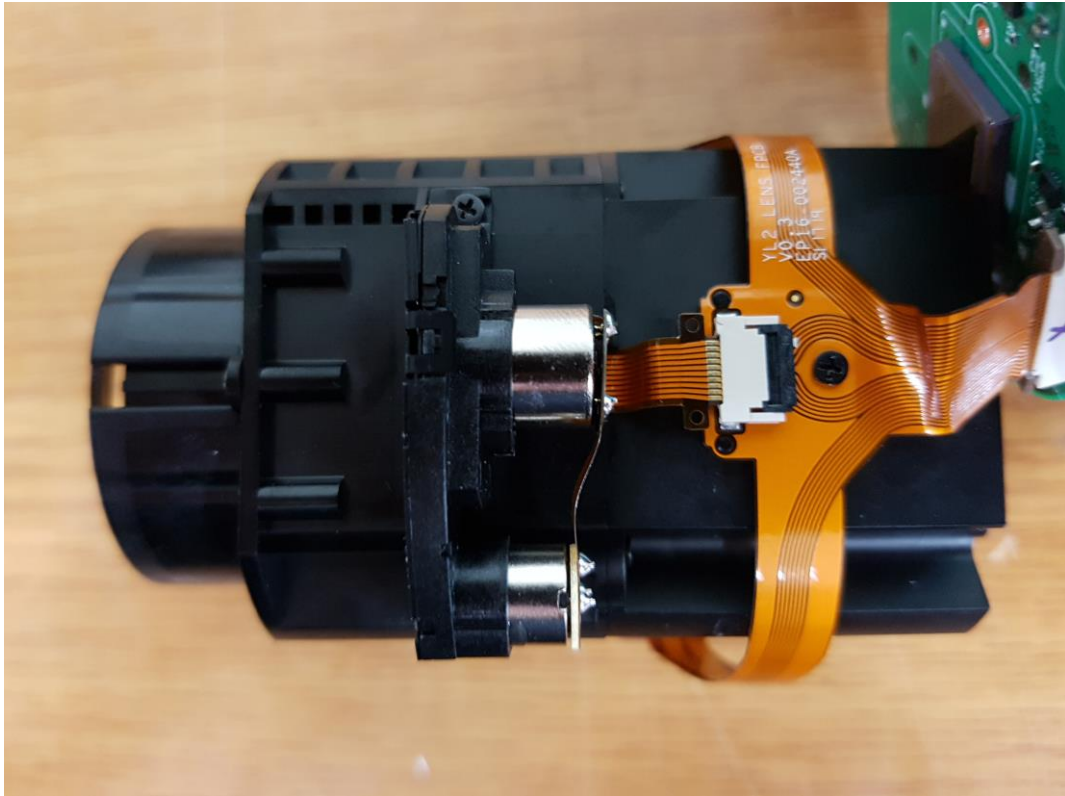

Photograph of the Equipment Under Test

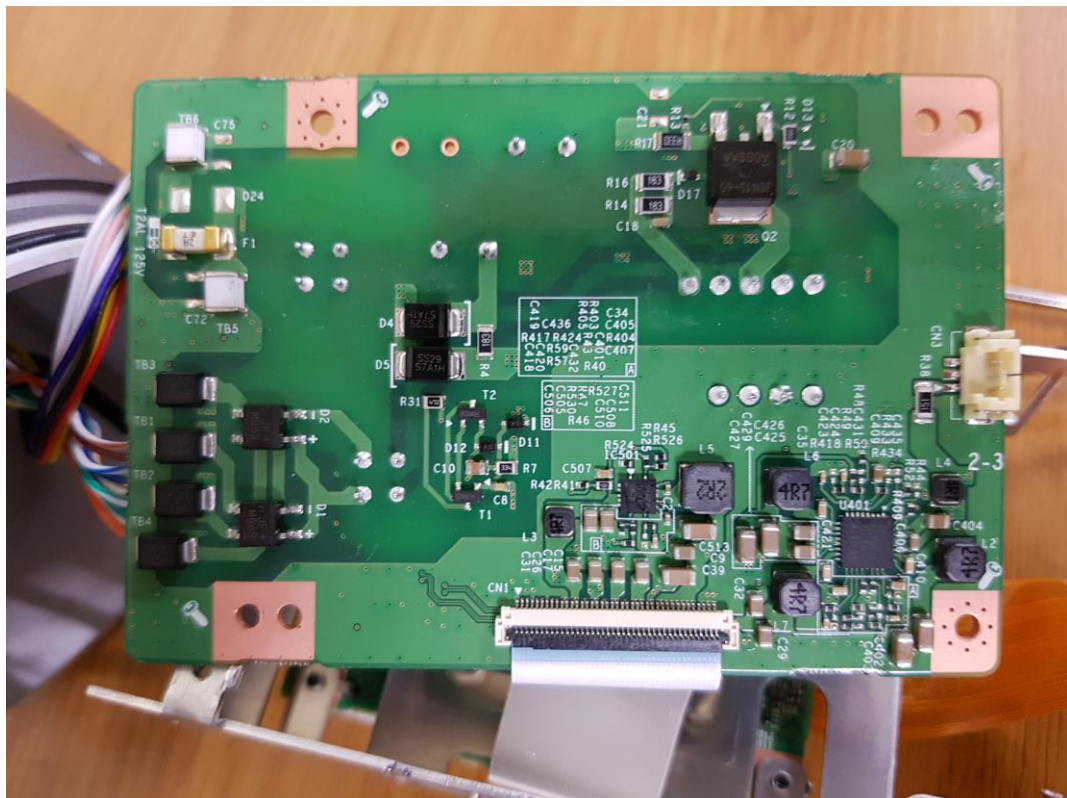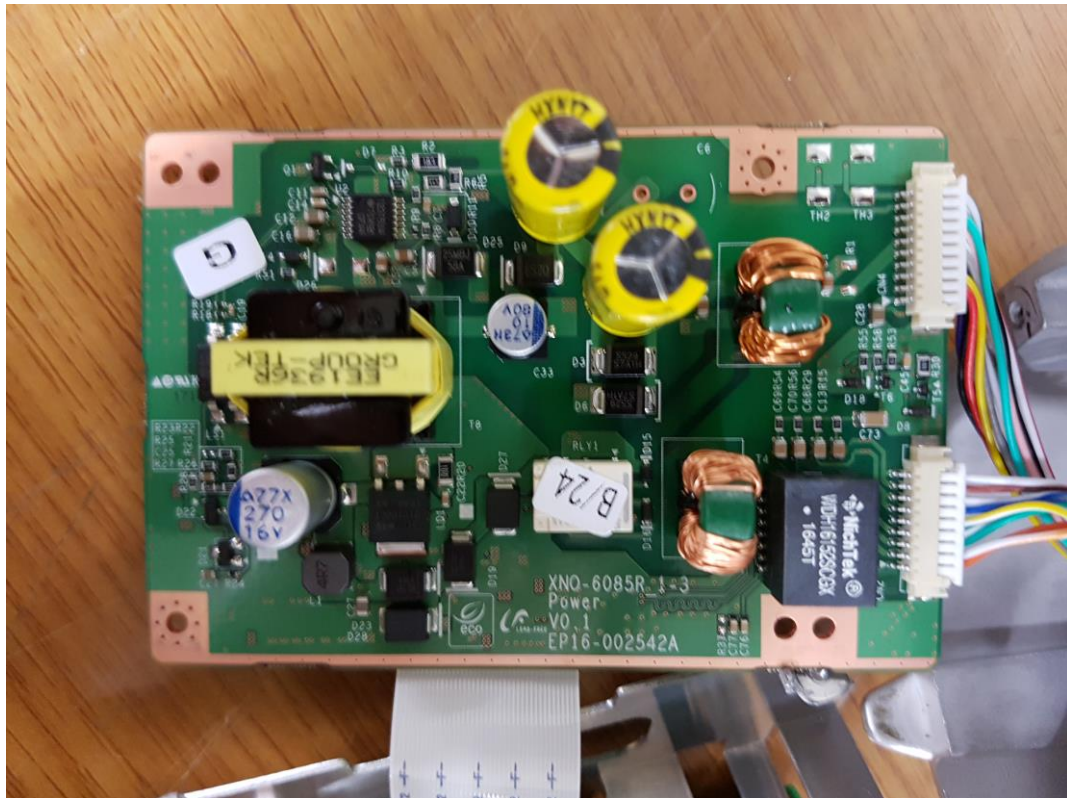

Photograph of the Equipment Under Test

