



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0146
Page (1) of (62)

EMC TEST REPORT

Test Report No. : KES-EM-23T0146
Date of Issue : Feb. 23, 2023
Product name : Network Video Recorder
Model/Type No. : XRN-420S
Variant Model : -
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Feb. 08, 2023
Test date : Feb. 16, 2023 ~ Feb. 19, 2023
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Dong Hyun, Won
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0146
Page (2) of (62)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Feb. 23, 2023	KES-EM-23T0146	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences.....	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	8
1.6	External I/O Cabling	9
1.7	EUT Operating Mode(s)	9
1.8	Configuration.....	10
1.9	Remarks when standards applied	11
1.10	Calibration Details of Equipment Used for Measurement	11
1.11	Test Facility	11
1.12	Laboratory Accreditations and Listings	11
2.0	Test Regulations.....	12
2.1	Conducted Emissions at Mains Power Ports	13
2.2	Conducted Emissions at Telecommunication Ports	14
2.3	Radiated Electric Field Emissions(Below 1 GHz)	15
2.4	Radiated Electric Field Emissions(Above 1 GHz)	16
2.5	Harmonic Current Emissions	17
2.6	Voltage Fluctuations and Flicker	18
3.0	Criteria for compliance.....	19
3.1	Electrostatic Discharge.....	21
3.2	Radiated Electric Field Immunity	26
3.3	Electrical Fast Transients/Bursts	29
3.4	Surge Transients	31
3.5	Conducted Disturbance	34
3.6	Voltage Dips and Short Interruptions	37
APPENDIX A – TEST DATA.....		39
Conducted Emissions at Mains Power Ports.....		39
Conducted Emissions at Telecommunication Ports		41
Radiated Electric Field Emissions(Below 1 GHz)		43
Radiated Electric Field Emissions(Above 1 GHz).....		44
Harmonic Current Emissions and Voltage Fluctuations and Flicker		45
Test Setup Photos and Configuration		48
Conducted Emissions at Mains Power Ports.....		48
Conducted Emissions at Telecommunication Ports		49
Radiated Electric Field Emissions(Below 1 GHz)		50
Radiated Electric Field Emissions(Above 1 GHz).....		51
Harmonic Current Emissions and Voltage Fluctuations and Flicker		52
Electrostatic Discharge		53
Radiated Electric Field Immunity		53
Electrical Fast Transients/Bursts		54
Surge Transients.....		54
Conducted Disturbance.....		55
Voltage Dips and Short Interruptions.....		55
EUT External Photographs		56
EUT Internal Photographs		57

1.0 General Product Description

Main Specifications of EUT are:

Display		
Video	Inputs	Max. 4CH
	Resolution	CIF ~ 8MP
	Protocols	sunapi, ONVIF
Live	Local Display	HDMI, VGA
	Multi Screen Display	[Dual Monitor] 1/ 2V/ 2H/ 3V/ 4/ Sequence [Web] 1/ 2V/ 2H/ 3V/ 4
	Resolution	[Local Monitor] 8M(30fps), 1080p(120fps), 720P(120fps), D1(120fps)
Intelligent Analysis		
Search	Object image	AI Search support
Comparision	Event Trigger	N/A
Attribute (AI)	Person	N/A
	Face	N/A
	Vehicle	N/A
Performance		
System	Operating System	Linux
Record	Compression	H.265, H.264, MJPEG, WiseStream(H.265, H.264)
	Recording Bandwidth	50Mbps
	Resolution	CIF ~ 8MP
	Mode	Normal, Dual Stream, Schedule(Continuous/Event), Event (Pre/Post), Bookmark
	Event Trigger	Alarm Input, Video Loss, Camera Event(Sensor, MD, Video Analytics, Defocus, Audio), Dynamic Event
	Event Action	e-Mail, Event Push, PTZ Preset, Alarm Out, Buzzer, Monitor Out
Search & Play	Playback Bandwidth	Max 32Mbps
	User	Max. 4 Users (Local 1, Remote 3)
	Mode	Time, Event, Text, Export, ARB, Bookmark Person, Face Vehicle, LP
	Simultaneous playback	Max 16CH - Set : 4CH - Remote : 4CH Per User
	Resolution	CIF ~ 8MP
	Fisheye Dewarping	N/A
	Playback Control	Fast/Slow Forward / Backward, Move one step Up / Down
Storage	Built-In	2TB ~ 6TB
	Internal HDD	1ea (Max 8TB)
	External	N/A
	RAID	N/A
Backup	File backup	BU/Exe(GUI), JPG/AVI(Web)
	Function	Multi channel(Upto 4 CH) Play, Date-Time/Title display
Sensor	I/O	4/2 (NO/NC Selectable)
Audio	Input/Output	4CH (network)/output (Set)
	Compression	G.711, G.726, AAC(16/48KHz)
	Audio Communication	2-Way



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0146
Page (5) of (62)

Network		
Interface		4 Port PoE, RJ-45(1 Gbps)
Protocol		TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)
DDNS		Hanwha DDNS
Transmission Bandwidth		64Mbps
Max Remote Users		Search (3), Live Unicast (10), Multicast (20)
IP Version		IPv4/v6
Security		IP address filtering, User access Log, 802.1x, Encryption
Language		English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai, Vietnam
OS		Window 10, Mac OS X(10.13)
Web Browser		Google Chrome, Mac Safari, Firefox, Edge
Viewer Software	Type	WAVE(Sunapi 연동), SSM, Webviewer, Smart Viewer, Wisenet Mobile
	CMS Support	Support SDK/CGI(SUNAPI) for integration to 3rd party VMS
Functions		
Camera Setup	Register	Auto, Manual
	Setup Items	IP address, Add profile edit, Bitrate, Camera MD setup (8 point polygon) Camera video setup (Simple focus, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSNR, Shutter, SSDR, DIS), Fisheye Dewarping Mode, Hallway View Setup, Camera Webpage
PTZ	Control	Via GUI, Webviewer
	Preset	300 Presets
Smart phone	Support Model	iOS, Android
	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)
	Control	Live(4ch) : Multi-Profile Support Playback(4ch)
	Max. Remote Users	Search (3), Live Unicast (10)
Redundancy	Failover	N+1
	ARB	Yes
Easy configuration		P2P(QR code)
System Control		Mouse, Web

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0146
Page (6) of (62)

Indicator/Interface		
Front	Indicator	LED(Status indicator) : - Power(1), Record(1), Network(1)
Connectors	HDMI	3840x2160 30Hz
	VGA	1920x1080 30Hz
	Audio	Out(1EA) : RCA output
	Ethernet	PoE RJ-45(LAN, 10/100) 4 ea ,RJ-45 1ea (WAN, 1Gbps)
	Alarm	(1) In(4EA, Terminal Block) (2) Out(2EA, Terminal Block) - Relay Out1(NO/NC/COM) - Relay Out2(NO/COM)
	USB	2EA(Front 1 x USB 2.0, Rear 1 x USB 2.0)
	Storage	N/A
	Serial	N/A
	Reset	Switch(1EA, PW clear)
	Power Cord	DC Adaptor
	POE Budget	Max. 50W
System		
Log	Log List	Max. 100,000 (System, Event each log)
Environmental		
Operating Temperature / Humidity		+0°C to +40°C(+32°F to +104°F)
Humidity		20% ~ 85% RH
Noise		47 db
Electrical		
Power		100 ~ 240 VAC ±10%; 50/60 Hz
Power Consumption		최대 75W(1HDDs, PoE on)
Mechanical		
Color / Material		Black
Dimension (WxHxD)		W370.0 x H44.0 x D320mm (1U)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 230 V, 50 Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
Network Video Recorder	XRN-420S	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT
Adapter	FSP090-AWAN3	-	Zhonghan Electronics (Shenzhen) Co., Ltd.	-
Mouse	MOKJUO	-	Primax Electronics Ltd.	-
HDD	ST4000VX000	-	SEAGATE	4 TB

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Notebook	LG15N54	503NZWY038929	LG Electronics Inc.	-
Notebook Adapter	PA-1900-14	OF2R263348701 7764	LITE-ON TECHNOLOGY COPORATION	-
Monitor 1	-	-	DELL INC.	-
Monitor 2	HSTND-7041-L	6CM6020YQQ	HP Inc.	-
Camera	QNV-6023R	-	HANWHA VISION VIETNAM COMPANY LIMITED	-
Speaker	BR10000A CUVE	-	BEIJING EDIFIER HI- TECH GROUP.	-
Alarm	PRO-SL	-	SENSOR PRO	-
Button Alarm	-	-	-	-
Smartphone	SM-G991N	-	Samsung Electronics Inc.	-
USB Memory	-	-	SanDisk	32 GB

1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
Network Video Recorder (EUT)	DC Jack	Adapter (EUT)	DC Jack	1.5	U
	USB	Mouse (EUT)	USB	1.8	U
	SATA	HDD (EUT)	SATA	0.2	U
	RJ-45 (LAN)	Notebook	RJ-45	3.0	U
	HDMI	Monitor 1	HDMI	2.0	S
	D-SUB	Monitor 2	D-SUB	2.2	U
	RJ-45 (PoE)	Camera	RJ-45	10.0	U
	RCA	Speaker	Line	1.8	U
	3 Pin	Alarm	3 Pin	3.0	U
	2 Pin	Button Alarm	2 Pin	3.0	U
	USB	USB Memory	USB	-	-
	Ground	External Ground	Ground	2.2	U
Notebook	DC Jack	Notebook Adapter	DC Jack	2.0	S
	3.5 mm	Smartphone	USB Type C	1.2	U

* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)


Test Mode	operating
Operating	EUT Monitoring, Ping Test after testing, check if the recording is normally done on the HDD

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

1.8 Configuration

■ AC Main
□ DC Main

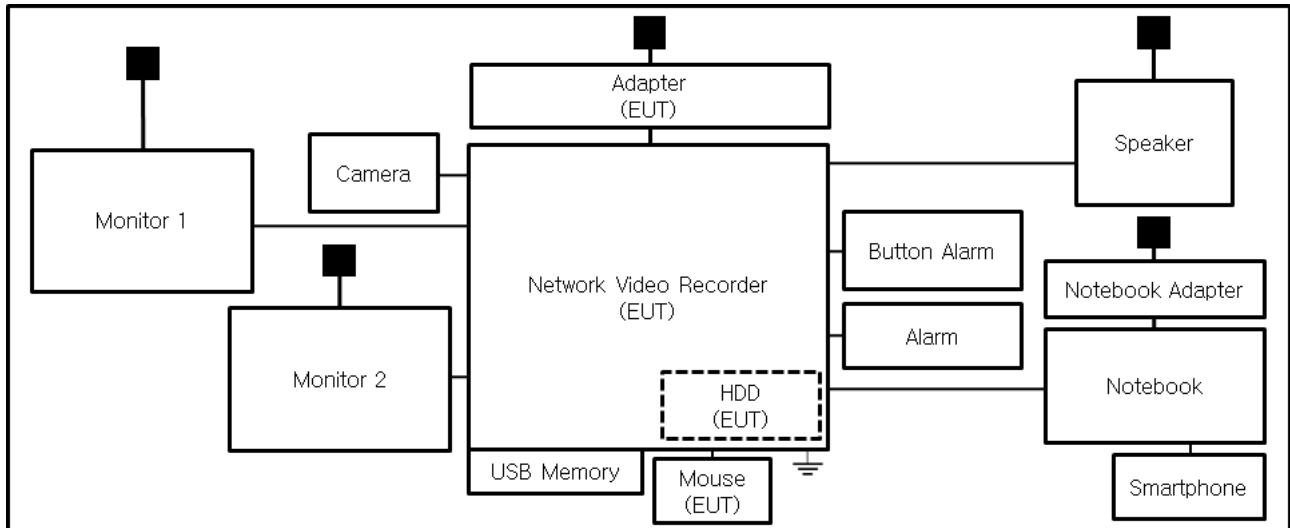

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

☒ **EMC – Regulations 2016**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

2.1 Conducted Emissions at Mains Power Ports

Test Date

Feb. 16, 2023

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	11, 11, 2023
☒	LISN	ENV216	R & S	101787	11, 10, 2023
☒	LISN	ESH2-Z5	R & S	100450	11, 10, 2023
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 10, 2023

Test Conditions

Temperature: (22,9 ± 0,1) °C

Relative Humidity: (45,7 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Feb. 16, 2023

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	11, 11, 2023
☒	LISN	ENV216	R & S	101787	11, 10, 2023
☒	LISN	ESH2-Z5	R & S	100450	11, 10, 2023
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 10, 2023
☒	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	11, 22, 2023
☐	CDN	CDNS502A	TESEQ	40431	11, 10, 2023

Test Conditions

Temperature: (22,9 ± 0,1) °C

Relative Humidity: (45,7 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

- See Appendix A for test data.
- For Ethernet interfaces, measurements are required at the highest data rate supported by the interface.

2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Feb. 17, 2023

Test Location☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	03, 31, 2023
☒	AMPLIFIER	SCU 01	R & S	100603	11, 10, 2023
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	11, 17, 2024
☒	ATTENUATOR	8491A	HP	32173	03, 08, 2023

Test Conditions

Temperature: (23,6 ± 0,1) °C

Relative Humidity: (45,2 ± 0,1) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Feb. 05, 2023

Test Location

SEMI ANECHOIC CHAMBER #5

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	ES10/RE	TOYO Corporation	2022.01.000	-
☒	EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	03, 31, 2023
☒	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	11, 08, 2023
☒	PREAMPLIFIER	8449B	HP	3008A00538	06, 02, 2023
☒	ATTENUATOR	8491B	HP	23094	04, 21, 2023

Test Conditions

Temperature: (23,1 ± 0,1) °C

Relative Humidity: (43,3 ± 0,1) % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

- See Appendix A for test data.
- The Average of the test data is the cispr average result.

2.5 Harmonic Current Emissions

Test Date

Feb. 18, 2023

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	net.control	EM TEST	2.1.4	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2023
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: (22,9 ± 0,1) °C

Relative Humidity: (43,0 ± 0,1) % R.H.

Classification of Equipment for Harmonic Current Emissions

- ☒ Class A
☐ Class B
☐ Class C(Below 25 W)
☐ Class C(Above 25 W)
☐ Class D

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.

2.6 Voltage Fluctuations and Flicker

Test Date

Feb. 18, 2023

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	net.control	EM TEST	2.1.4	-
☒	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2023
☒	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: (22,9 ± 0,1) °C

Relative Humidity: (43,0 ± 0,1) % R.H.

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:
EN 50130-4:2011 Alarm systems-Part 4: Electromagnetic compatibility Product family
standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such
Flickering of indicators occurs at a field strength of 3 V/m.
For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

- (a) there is no permanent damage or change to EUT
(e.g. no corruption of memory or changes to programmable setting etc.)
- (b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used;
and
- (c) there is no observable deterioration of the picture at 1 V/m.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change,
and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.
For component of CCTV systems, where the status is monitored by observing the TV picture,
then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:
(a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
(b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could
still be used; and
(c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the conditioning is permissible, providing that there is no
residual
change in the EUT or any change in outputs, which could be interpreted by associated
equipment
as a change. The EUT shall meet the acceptance criteria for the functional test, after the
conditioning.

3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Feb. 19, 2023

Test Location

EMS-ESD: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS01Z0454	01, 31, 2024
☒	HCP	-	KES	-	-
☒	VCP	-	Noise Ken	-	-

Test Conditions

Temperature: (24,1 ± 0,1) °C
Relative Humidity: (45,1 ± 0,1) % R.H.
Atmospheric Pressure: (100,5 ± 0,1) kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge


Discharge Voltage:	Contact	Air	HCP	VCP
	☐ 2 kV	☒ 2 kV	☐ 2 kV	☐ 2 kV
	☐ 4 kV	☒ 4 kV	☐ 4 kV	☐ 4 kV
	☒ 6 kV	☐ 6 kV	☒ 6 kV	☒ 6 kV
	☐ 8 kV	☒ 8 kV	☐ 8 kV	☐ 8 kV
	☐ 15 kV	☐ 15 kV	☐ 15 kV	☐ 15 kV

Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane


Required Performance Criteria: ☒ Complied

Location of Discharge:

Air
Contact

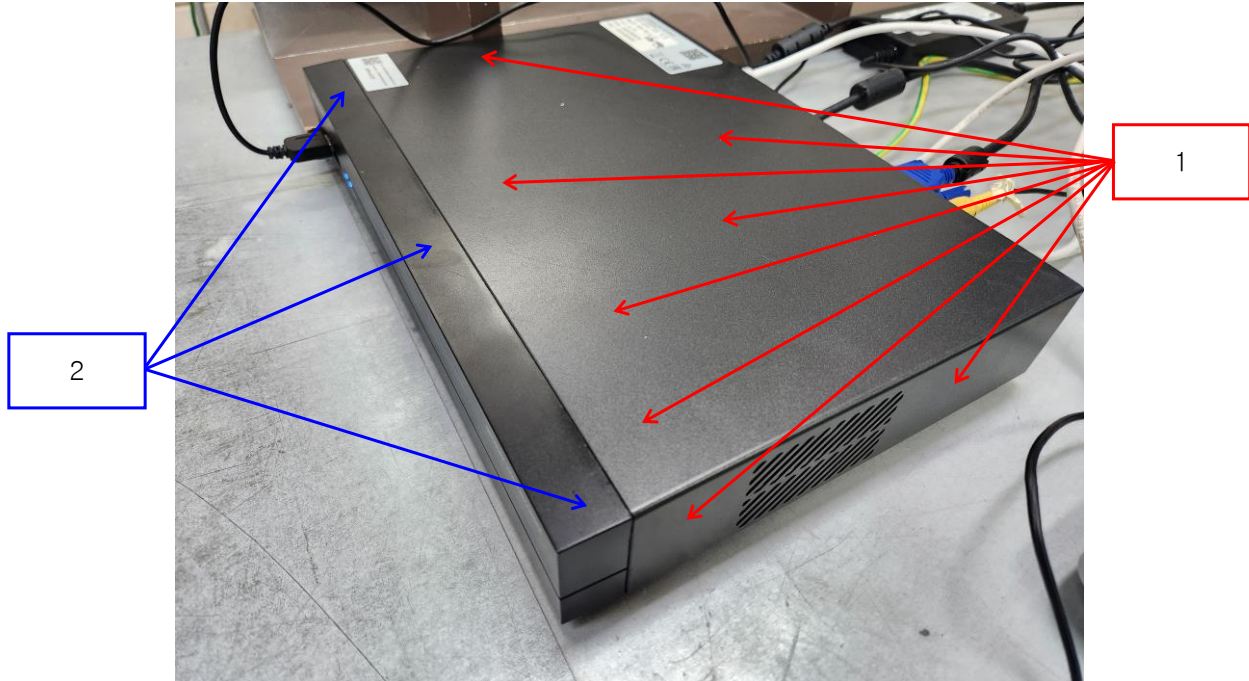

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

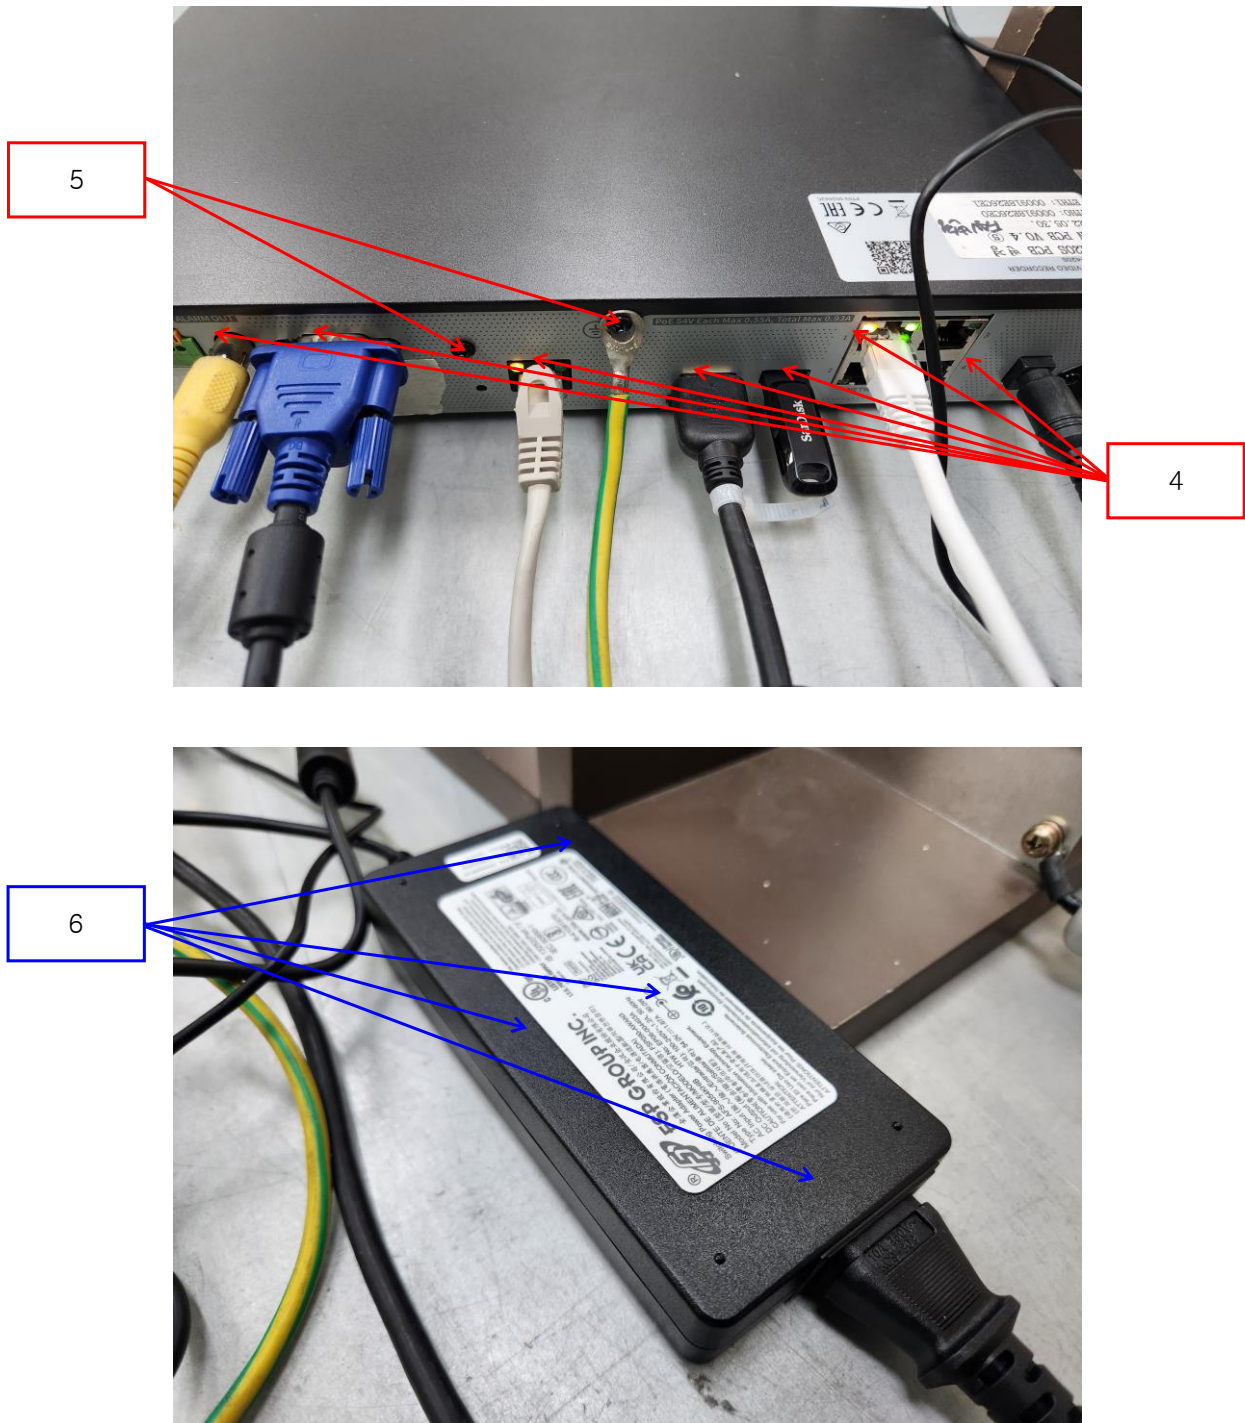

7



Test Data

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Enclosure 1	Contact Discharge	Complied	-
2	Enclosure 2	Air Discharge	Complied	-
3	USB Port	Air Discharge	Complied	-
4	Ports	Contact Discharge	Complied	-
5	Screw	Contact Discharge	Complied	-
6	Adapter	Air Discharge	Complied	-
7	Mouse	Air Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

RemarksPASS Required Performance Criteria

3.2 Radiated Electric Field Immunity

Reference Standard

EN IEC 61000-4-3:2020

Test Date

Feb. 18, 2023

Test Location

EMS-RS: ☐ SEMI ANECHOIC CHAMBER #2 ☒ SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	EMC32	R & S	10.10.02	-
☒	SIGNAL GENERATOR	SMB 100A	Rohde & Schwarz	108252	08, 01, 2023
☒	HIGH POWER DUAL AMP	SSA532	SUNGSAN	SSA532-001	-
☒	POWER METER	E4419B	Agilent	GB40203000	03, 31, 2023
☒	AVERAGE POWER SENSOR	E9301A	Agilent	MY52170007	04, 04, 2023
☒	AVERAGE POWER SENSOR	E9301A	Agilent	MY41498669	04, 04, 2023
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 03, 2023

Test Conditions

Temperature: (23,6 ± 0,2) °C
Relative Humidity: (45,8 ± 0,2) % R.H.
Atmospheric Pressure: (100,7 ± 0,1) kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0146
Page (27) of (62)

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0146
Page (28) of (62)

Test Data

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4:2012

Test Date

Feb. 19, 2023

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 28, 2023
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 29, 2023
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	11, 28, 2023

Test Conditions

Temperature: (24,1 ± 0,1) °C
Relative Humidity: (45,1 ± 0,1) % R.H.
Atmospheric Pressure: (100,5 ± 0,1) kPa

Test Specifications

Pulse Amplitude & Polarity:
(AC Power Lines) ☐ ± 1.0 kV ☒ ± 2.0 kV
☐ ± 4.0 kV

Pulse Amplitude & Polarity:
(Other supply / Signal Lines) ☐ ± 0.5 kV ☒ ± 1.0 kV
☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☐ 5 kHz ☒ 100 kHz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ Complied

Test Data☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L	Complied	Complied
N	Complied	Complied
PE	Complied	Complied
L – N	Complied	Complied
L – PE	Complied	Complied
N – PE	Complied	Complied
L – N – PE	Complied	Complied

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45 (LAN)	Complied	Complied
RJ-45 (PoE)	Complied	Complied
Alarm IN	Complied	Complied
Alarm OUT	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**PASS Required Performance Criteria

3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014/A1:2017

Test Date

Feb. 19, 2023

Test Location

EMS-Surge: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 28, 2023
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 29, 2023
☒	CDN	CNV 508N1	EM TEST	P1610176296	11, 29, 2023

Test Conditions

Temperature: (24,1 ± 0,2) °C
Relative Humidity: (45,1 ± 0,1) % R.H.
Atmospheric Pressure: (100,5 ± 0,1) kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0146
Page (32) of (62)

Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common Mode and 2 ohm for differential Mode

Surge Amplitude :

Common Mode

☒ (0,5 / 1,0 / 2,0) kV

Differential Mode

☐ (0,5 / 1,0) kV

Number of Surges:

☒ 5 surges per angle

Angle:

☒ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☒ Positive & Negative

Repetition Rate:

☐ 1 surge per min ☒ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

Other supply / Signal Lines

Source Impedance:

42 ohm for common Mode

Surge Amplitude:

Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☐ 1 surge per min ☒ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

Test Data

☒ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – PE	Complied	Complied
N – PE	Complied	Complied

Signal Lines

☒ Line to Earth – Common Mode

Mode of Application	Coupling Method	Observations	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45 (LAN)	CDN	Complied	Complied
	LINE	Complied	Complied
RJ-45 (PoE)	CDN	Complied	Complied
	LINE	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Feb. 19, 2023

Test Location

EMS-CS: Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	5.3.12	-
☒	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	11, 10, 2023
☒	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 10, 2023
☒	CDN	CDN M016	TESEQ	43694	11, 10, 2023
☒	CDN	CDN M016	TESEQ	43697	11, 10, 2023
☒	CDN	CDN T8RJ45	EM TEST	0909-09	08, 01, 2023
☒	EM CLAMP	KEMZ 801A	TESEQ	44099	11, 14, 2023

Test Conditions

Temperature: (23,0 ± 0,2) °C
Relative Humidity: (45,3 ± 0,1) % R.H.
Atmospheric Pressure: (100,8 ± 0,1) kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0146
Page (35) of (62)

Test Specifications

Frequency range: ☒ 150 kHz to 100 MHz ☐ 150 kHz to 80 MHz

Voltage Level: ☐ 1 Vrms ☐ 3 Vrms
☒ 10 Vrms

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Data☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L – N – PE	CDN	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45 (LAN)	CDN	Complied
RJ-45 (PoE)	CDN	Complied
Alarm IN	Clamp	Complied
Alarm OUT	Clamp	Complied

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:

Complied – No degradation of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**PASS Required Performance Criteria

3.6 Voltage Dips and Short Interruptions

Reference Standard
EN IEC 61000-4-11:2020

Test Date
Feb. 19, 2023

Test Location
EMS-Voltage dip: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 29, 2023
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 29, 2023

Test Conditions

Temperature: (24,1 ± 0,1) °C
Relative Humidity: (45,1 ± 0,1) % R.H.
Atmospheric Pressure: (100,5 ± 0,1) kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0146
Page (38) of (62)

Test Specifications & Observations/Remarks

- Voltage Dips and Short Interruptions

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
☒ 20 % dip	☒ 250 / 5 000	<u>Complied</u>
☒ 30 % dip	☒ 25 / 500	<u>Complied</u>
☒ 60 % dip	☒ 10 / 200	<u>Complied</u>
☒ 100 % dip	☒ 250 / 5 000	<u>Degradation</u>

- Voltage variations

☒ Unom + 10 %	☒ 253.0 V (ac)	<u>Complied</u>
☒ Unom - 15 %	☒ 195.5 V (ac)	<u>Complied</u>

Observations:

Complied – No degradation of function

Degradation - See "Remarks "

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

Remarks

During the test(100%, 250cycle), EUT was turned off but after the test, it was recovered by no operator's intervention.


APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

Common Information

Test Description: Conducted Emission
 Model No.: XRN-420S
 Phase:
 Mode: H
 Operator Name: KES

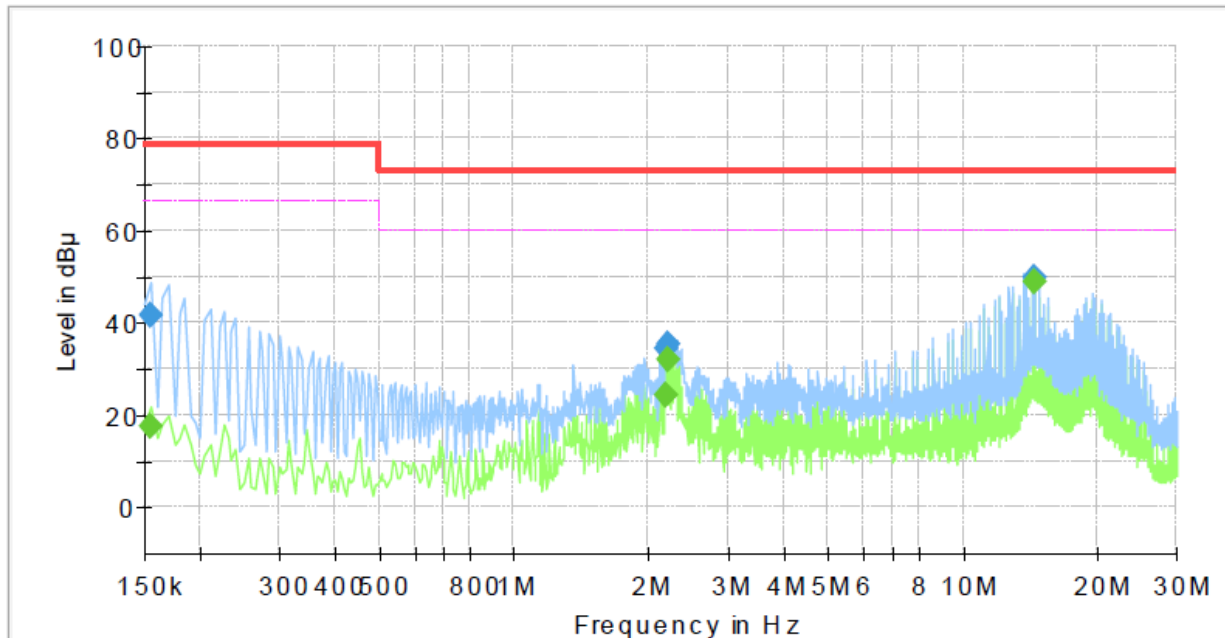


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	17.66	66.00	48.34	1000.0	9.000	L1	19.5
0.155000	41.77	---	79.00	37.23	1000.0	9.000	L1	19.5
2.190000	---	24.33	60.00	35.67	1000.0	9.000	L1	20.3
2.190000	34.48	---	73.00	38.52	1000.0	9.000	L1	20.3
2.205000	---	31.83	60.00	28.17	1000.0	9.000	L1	20.3
2.205000	35.25	---	73.00	37.75	1000.0	9.000	L1	20.3
14.505000	---	49.05	60.00	10.95	1000.0	9.000	L1	19.9
14.505000	49.95	---	73.00	23.05	1000.0	9.000	L1	19.9

[NEUTRAL]

Common Information

Test Description:	Conducted Emission
Model No.:	XRN-420S
Phase:	
Mode:	N
Operator Name:	KES

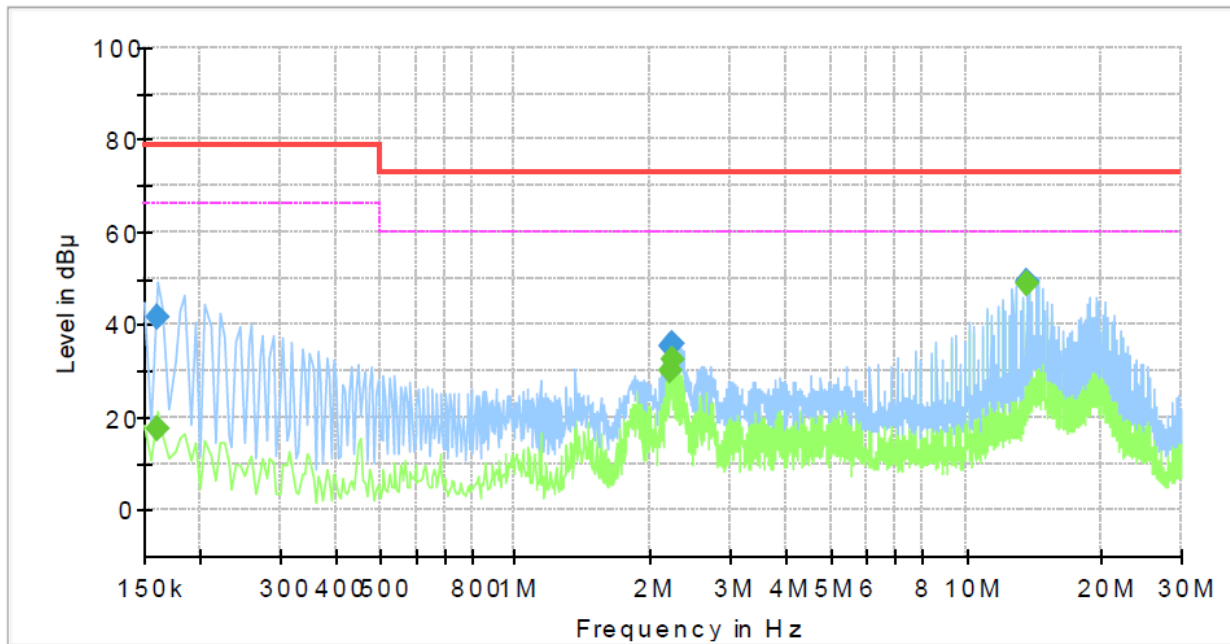

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	17.46	66.00	48.54	1000.0	9.000	N	19.4
0.160000	41.61	---	79.00	37.39	1000.0	9.000	N	19.4
2.210000	---	30.23	60.00	29.77	1000.0	9.000	N	20.3
2.210000	35.11	---	73.00	37.89	1000.0	9.000	N	20.3
2.240000	---	32.33	60.00	27.67	1000.0	9.000	N	20.3
2.240000	35.90	---	73.00	37.10	1000.0	9.000	N	20.3
13.595000	---	48.72	60.00	11.28	1000.0	9.000	N	20.0
13.595000	49.54	---	73.00	23.46	1000.0	9.000	N	20.0

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))


Conducted Emissions at Telecommunication Ports

■ LAN

[1 000 Mbps]

Common Information

Test Description: Telecommunication Emission
 Model No.: XRN-420S
 Mode : LAN_ 1 000 Mbps
 Speed :
 Operator Name: KES

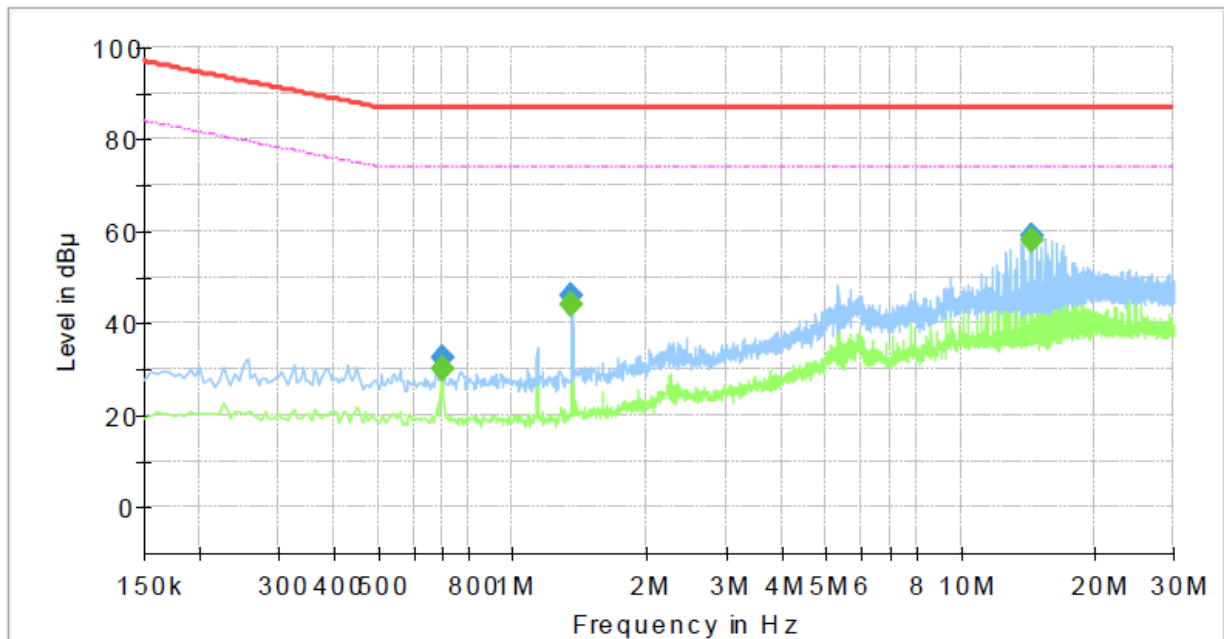

Final Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.695000	---	29.89	74.00	44.11	1000.0	9.000	Single Line	19.8
0.695000	32.51	---	87.00	54.49	1000.0	9.000	Single Line	19.8
1.360000	---	43.95	74.00	30.05	1000.0	9.000	Single Line	20.0
1.360000	45.99	---	87.00	41.01	1000.0	9.000	Single Line	20.0
14.505000	---	58.24	74.00	15.76	1000.0	9.000	Single Line	19.6
14.505000	58.85	---	87.00	28.15	1000.0	9.000	Single Line	19.6

■ PoE

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	XRN-420S
Mode :	PoE_ 100 Mbps
Speed :	
Operator Name:	KES

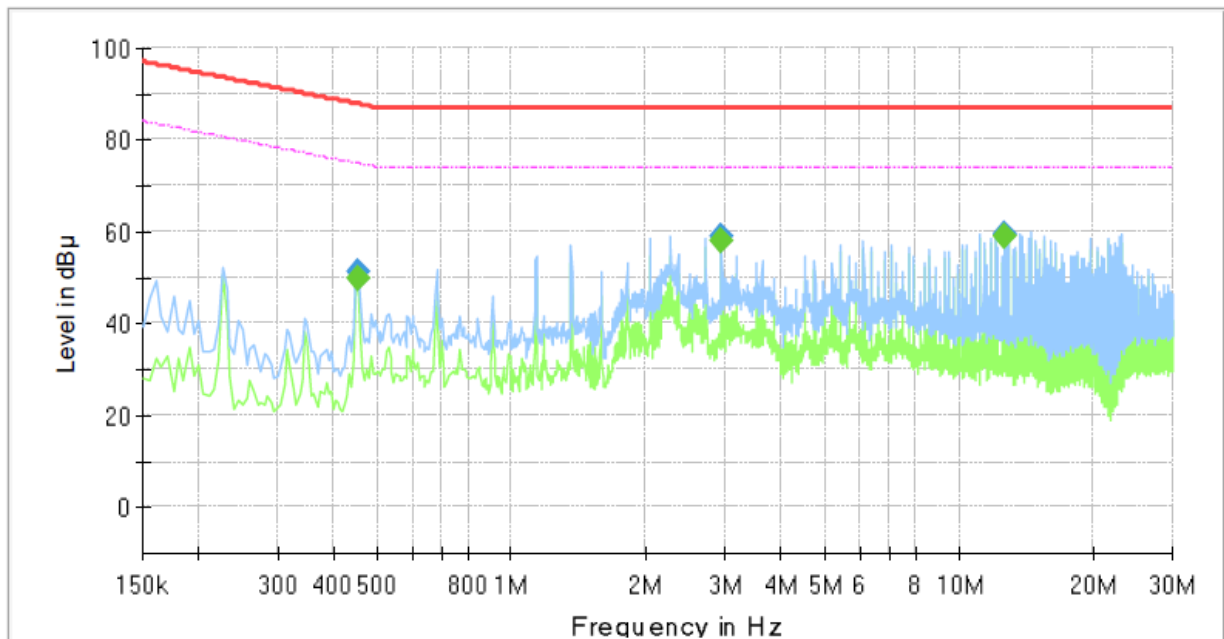

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.455000	---	49.60	74.78	25.18	1000.0	9.000	Single Line	19.7
0.455000	51.51	---	87.78	36.27	1000.0	9.000	Single Line	19.7
2.945000	---	57.88	74.00	16.12	1000.0	9.000	Single Line	19.9
2.945000	58.89	---	87.00	28.11	1000.0	9.000	Single Line	19.9
12.690000	---	59.07	74.00	14.93	1000.0	9.000	Single Line	19.7
12.690000	59.62	---	87.00	27.38	1000.0	9.000	Single Line	19.7

◆ Calculation


QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

Radiated Electric Field Emissions(Below 1 GHz)

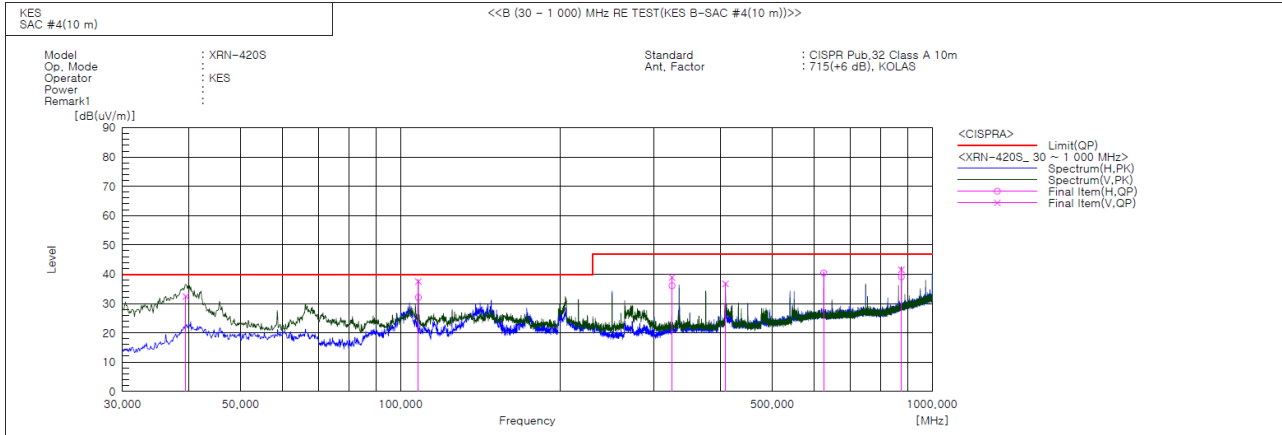

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	39.458	V	55.0	-22.6	32.4	40.0	7.6	145.0	67.0	
2	107.995	V	60.2	-22.7	37.5	40.0	2.5	110.0	11.0	
3	108.008	H	54.8	-22.7	32.1	40.0	7.9	391.0	204.0	
4	323.983	V	55.5	-16.6	38.9	47.0	8.1	106.0	11.0	
5	324.003	H	52.7	-16.6	36.1	47.0	10.9	400.0	223.0	
6	408.421	V	50.4	-13.7	36.7	47.0	10.3	364.0	275.0	
7	624.996	H	48.4	-8.0	40.4	47.0	6.6	299.0	304.0	
8	874.984	V	46.6	-5.1	41.5	47.0	5.5	150.0	152.0	
9	874.990	H	44.2	-5.1	39.1	47.0	7.9	389.0	13.0	

◆ Calculation – SEMI ANECHOIC CHAMBER #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])


Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



Radiated Electric Field Emissions(Above 1 GHz)

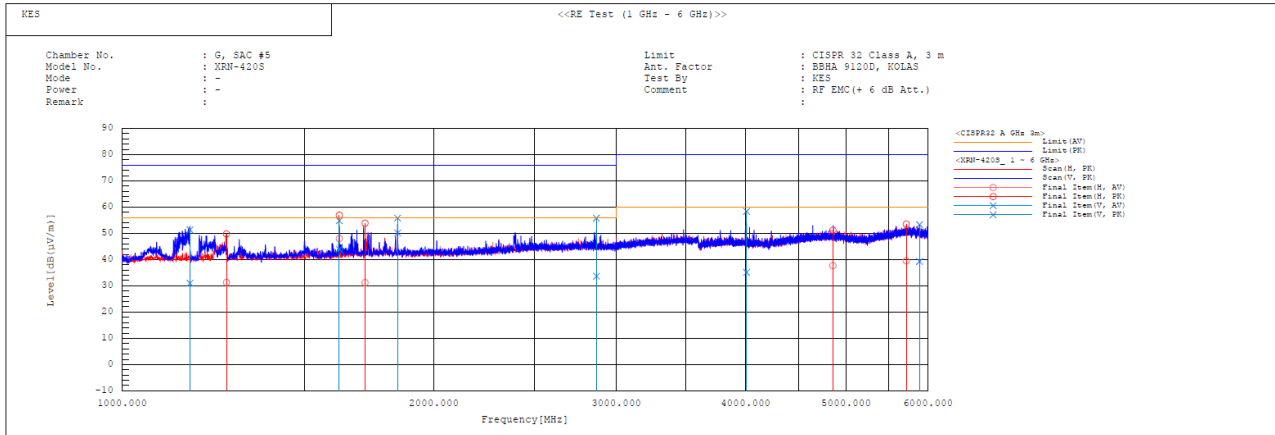

Final Result

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]	Remark
1	1162.338	V	32.4	52.7	-1.4	31.0	51.3	56.0	76.0	25.0	24.7	100.0	314.5	
2	1260.608	H	32.1	50.6	-0.8	31.3	49.8	56.0	76.0	24.7	26.2	100.0	332.1	
3	1620.017	H	47.5	56.4	0.5	48.0	56.9	56.0	76.0	8.0	19.1	100.0	29.0	
4	1620.115	V	43.4	54.3	0.5	43.9	54.8	56.0	76.0	12.1	21.2	100.0	195.6	
5	1715.973	H	30.0	52.7	1.2	31.2	53.9	56.0	76.0	24.8	22.1	100.0	260.4	
6	1844.980	V	48.2	53.9	1.9	50.1	55.8	56.0	76.0	5.9	20.2	100.0	138.0	
7	2869.299	V	28.8	51.0	4.8	33.6	55.8	56.0	76.0	22.4	20.2	100.0	287.9	
8	4006.611	V	28.1	51.3	7.0	35.1	58.3	60.0	80.0	24.9	21.7	100.0	177.5	
9	4853.240	H	27.4	40.9	10.3	37.7	51.2	60.0	80.0	22.3	28.8	100.0	150.4	
10	5713.515	H	27.3	41.3	12.2	39.5	53.5	60.0	80.0	20.5	26.5	100.0	358.9	
11	5886.984	V	26.8	40.8	12.5	39.3	53.3	60.0	80.0	20.7	26.7	100.0	203.1	

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

Harmonic Current Emissions and Voltage Fluctuations and Flicker

Average harmonic current results				
Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.065			
2	0.003	0.273	1.080	n/a
3	0.059	2.563	2.300	PASS
4	0.003	0.637	0.430	n/a
5	0.057	5.007	1.140	PASS
6	0.004	1.284	0.300	n/a
7	0.055	7.203	0.770	PASS
8	0.003	1.274	0.230	n/a
9	0.054	13.552	0.400	PASS
10	0.003	1.599	0.184	n/a
11	0.052	15.665	0.330	PASS
12	0.003	2.052	0.153	n/a
13	0.048	23.021	0.210	PASS
14	0.003	2.322	0.131	n/a
15	0.045	29.750	0.150	PASS
16	0.003	2.428	0.115	n/a
17	0.041	30.979	0.132	PASS
18	0.003	2.761	0.102	n/a
19	0.037	31.549	0.118	PASS
20	0.003	2.951	0.092	n/a
21	0.033	20.756	0.161	PASS
22	0.003	3.351	0.084	n/a
23	0.030	20.214	0.147	PASS
24	0.002	3.167	0.077	n/a
25	0.026	19.108	0.135	PASS
26	0.002	2.967	0.071	n/a
27	0.022	17.713	0.125	PASS
28	0.002	3.031	0.066	n/a
29	0.019	16.035	0.116	PASS
30	0.002	2.825	0.061	n/a
31	0.015	13.966	0.109	PASS
32	0.002	2.878	0.058	n/a
33	0.012	11.988	0.102	PASS
34	0.001	2.627	0.054	n/a
35	0.010	9.862	0.096	PASS
36	0.001	2.515	0.051	n/a
37	0.007	7.722	0.091	PASS
38	0.001	2.462	0.048	n/a
39	0.005	5.889	0.087	PASS
40	0.001	2.114	0.046	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.

Test Data - Harmonics (continued)

Maximum harmonic current results				
Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.067			
2	0.003	0.212	1.620	n/a
3	0.061	1.761	3.450	PASS
4	0.003	0.524	0.645	n/a
5	0.059	3.435	1.710	PASS
6	0.004	0.975	0.450	n/a
7	0.057	4.934	1.155	PASS
8	0.004	1.048	0.345	n/a
9	0.056	9.290	0.600	PASS
10	0.004	1.276	0.276	n/a
11	0.053	10.740	0.495	PASS
12	0.004	1.606	0.230	n/a
13	0.050	15.762	0.315	PASS
14	0.004	1.802	0.197	n/a
15	0.046	20.313	0.225	PASS
16	0.003	1.946	0.173	n/a
17	0.042	21.139	0.199	PASS
18	0.003	2.227	0.153	n/a
19	0.038	21.498	0.178	PASS
20	0.003	2.331	0.138	n/a
21	0.034	21.226	0.161	PASS
22	0.003	2.605	0.125	n/a
23	0.030	20.564	0.147	PASS
24	0.003	2.476	0.115	n/a
25	0.026	19.449	0.135	PASS
26	0.003	2.381	0.106	n/a
27	0.022	17.955	0.125	PASS
28	0.002	2.419	0.099	n/a
29	0.019	16.217	0.116	PASS
30	0.002	2.263	0.092	n/a
31	0.015	14.083	0.109	PASS
32	0.002	2.215	0.086	n/a
33	0.012	12.111	0.102	PASS
34	0.002	2.010	0.081	n/a
35	0.010	9.966	0.096	PASS
36	0.001	1.886	0.077	n/a
37	0.007	7.833	0.091	PASS
38	0.001	1.852	0.073	n/a
39	0.005	6.044	0.087	PASS
40	0.001	1.603	0.069	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-23T0146
Page (47) of (62)

Test Data - Voltage Fluctuations
Maximum Flicker results

Flicker Measurements					
	Plt	Max Pst	Max Dc	Max Dmax	Max Tmax
Line 1:	0.028	0.028	0	< 0.2	0
Limits:	0.65	1	3.3	4	0.5
Results:	PASS	PASS	PASS	PASS	PASS

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Emissions at Telecommunication Ports




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

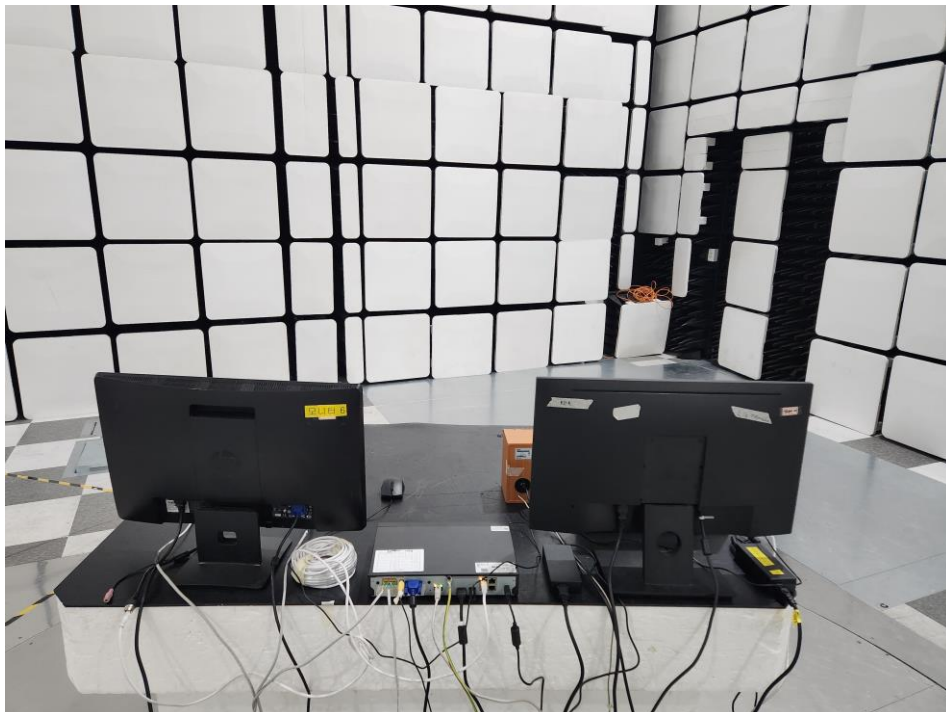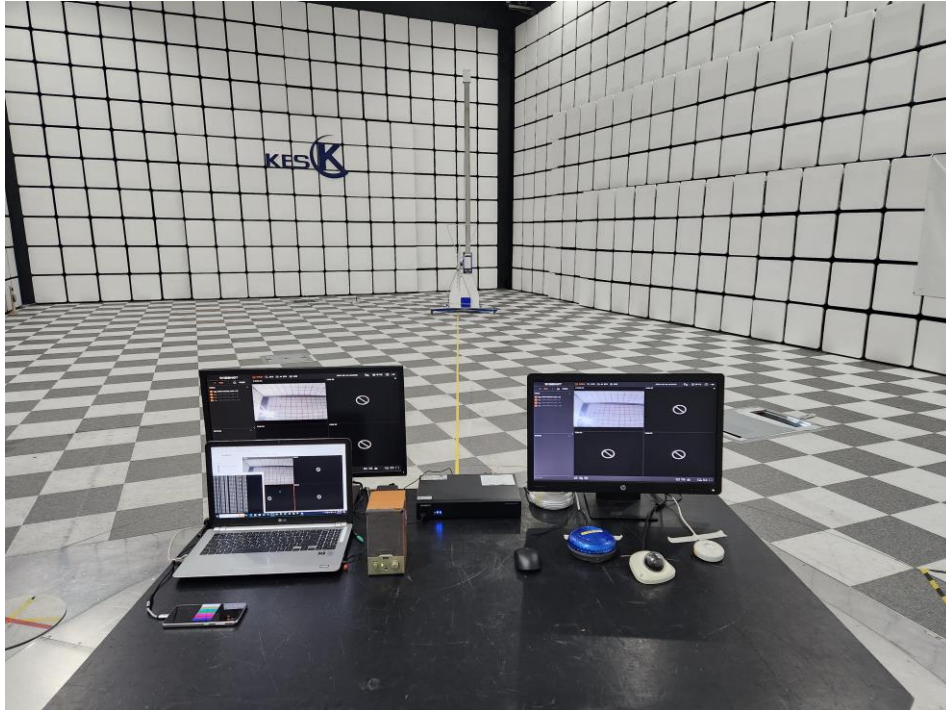

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

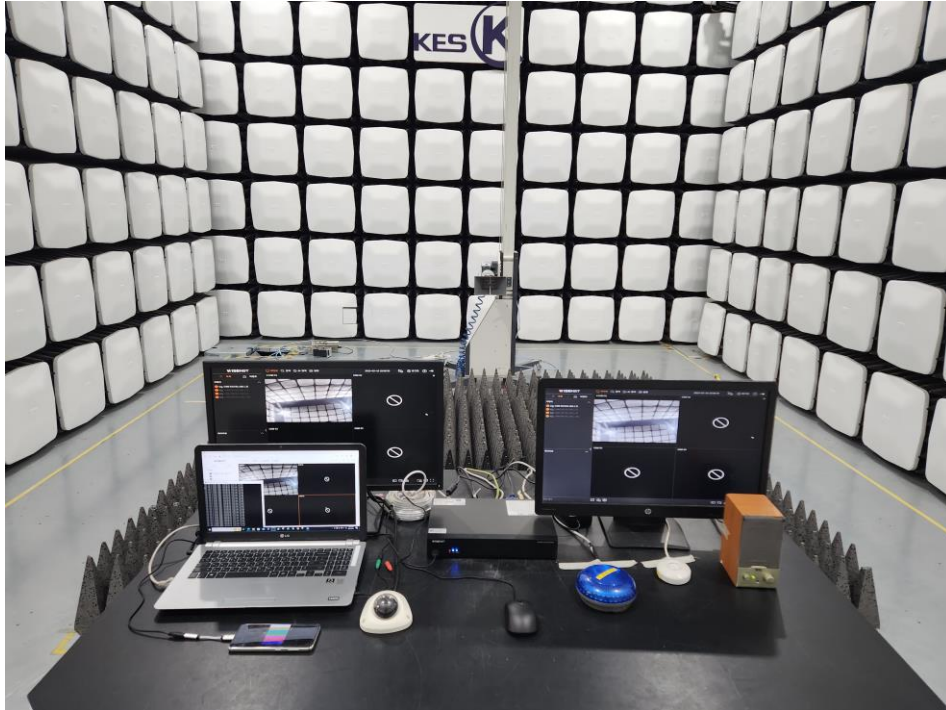

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Harmonic Current Emissions and Voltage Fluctuations and Flicker



Electrostatic Discharge



Radiated Electric Field Immunity



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Electrical Fast Transients/Bursts



Surge Transients



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Disturbance



Voltage Dips and Short Interruptions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal Photographs

(Internal View)




EUT Internal View – Main Board

(Top)



(Bottom)

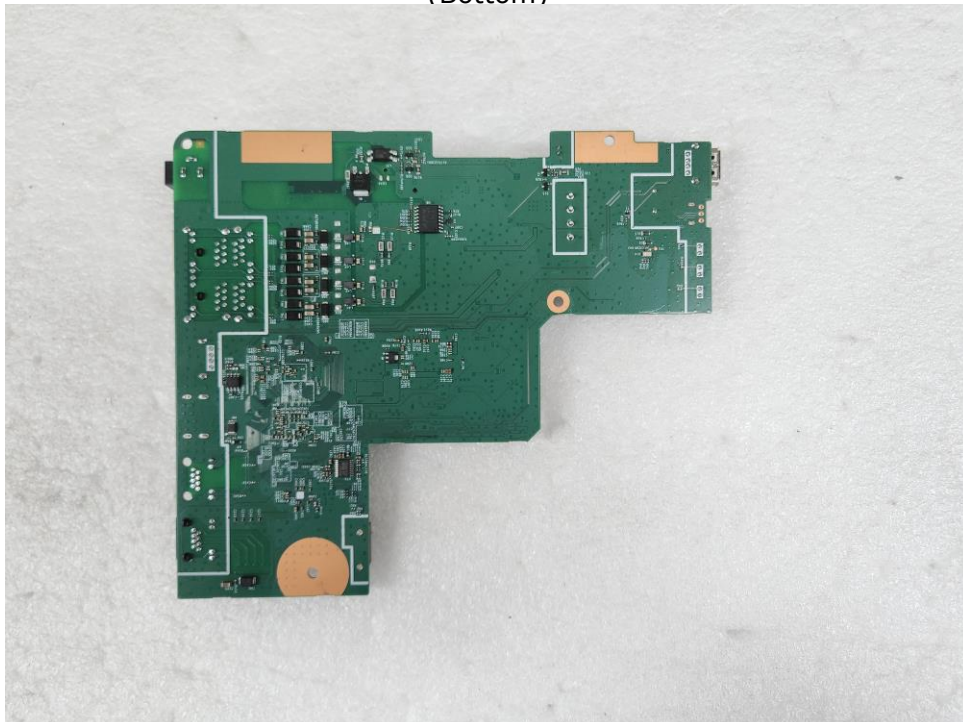

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – HDD

(Top)



(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Mouse

(Top)



(Bottom)

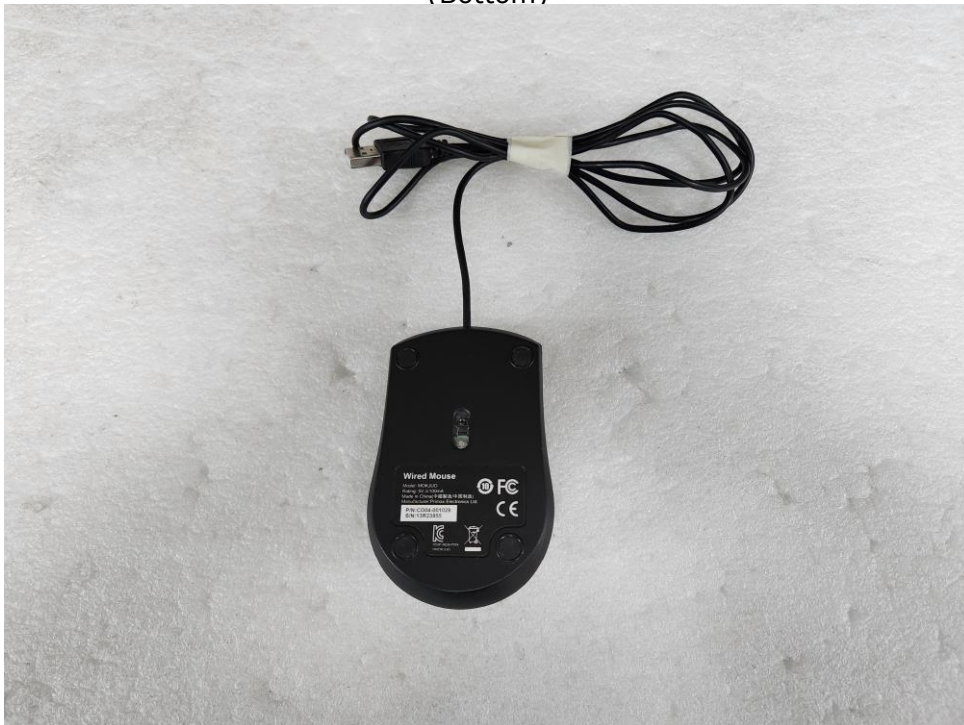

EUT Internal View – Adapter

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Label and Location



Network Video Recorder

Model No : XRN-420S

Manufacturer : HANWHA VISION VIETNAM COMPANY LIMITED

Made in Korea

