



TEST REPORT



Report No. : KES-EM241238

Page 1 / 61

KES Co., Ltd.

#3002, #3503, #3701, 40, Simin-daero365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Republic of Korea

Tel : +82-31-425-6200, Fax : +82-31-425-6200

1. Client

Applicant : Hanwha Vision Co., Ltd

Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea

2. Sample Description

Product name : NETWORK CAMERA

Model/Type No. : PNM-C7083RVD

Variant Model : -

Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.

Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended Area, Nam Son Ward, Bac Ninh City, Bac Ninh Province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do, Korea (Suwon Industrial Complex)

3. Date of Receipt : Apr. 18, 2024

4. Test date : May. 03, 2024 ~ May. 08, 2024

5. Date of Issue : May. 13, 2024

6. Test Results : In Compliance

Tested by

Reviewed by

Dong Yun, Lee
EMC Test Engineer

Dae Jung, Choi
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

KES-QP16-F01(00-23-01-01)

KES Co., Ltd.

The authenticity of this test report can be found on the verification page of our website (www.kes.co.kr).

**REPORT REVISION HISTORY**

Date	Test Report No.	Revision History
May. 13, 2024	KES-EM241238	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.



TABLE OF CONTENTS

1.0 General Product Description	4
1.1 Test Voltage & Frequency	5
1.2 Variant Model Differences	6
1.3 Device Modifications	6
1.4 Equipment Under Test	6
1.5 System Configuration	6
1.6 Support Equipments	6
1.7 External I/O Cabling	7
1.8 EUT Operating Mode(s)	7
1.9 Configuration	7
1.10 Remarks When Standards Applied	8
1.11 Calibration Details of Equipment Used for Measurement	8
1.12 Test Facility	8
1.13 Laboratory Accreditations and Listings	8
2.0 Test Regulations	9
2.1 Conducted Emissions at Mains Power Ports	10
2.2 Conducted Emissions at Telecommunication Ports	11
2.3 Impulse Noise (click)	12
2.4 Radiated Electric Field Emissions(Below 1 GHz)	13
2.5 Radiated Electric Field Emissions(Above 1 GHz)	14
2.6 Harmonic Current Emissions	15
2.7 Voltage Fluctuations and Flicker	16
3.0 Criteria for Compliance	17
3.1 Electrostatic Discharge	18
3.2 Radio-frequency Electromagnetic Field	21
3.3 Fast Transients	24
3.4 Surges	26
3.5 Conducted Disturbance	29
3.6 Power Frequency Magnetic Field Immunity	31
APPENDIX A – TEST DATA	34
Conducted Emissions at Mains Power Ports	34
Conducted Emissions at Telecommunication Ports	36
Impulse Noise (click)	37
Radiated Electric Field Emissions(Below 1 GHz)	38
Radiated Electric Field Emissions(Above 1 GHz)	39
Harmonic Current Emissions and Voltage Fluctuations and Flicker	40
Test Setup Photos and Configuration	43
Conducted Emissions at Mains Power Ports	43
Conducted Emissions at Telecommunication Ports	44
Impulse Noise (click)	45
Radiated Electric Field Emissions(Below 1 GHz)	46
Radiated Electric Field Emissions(Above 1 GHz)	47
Harmonic Current Emissions and Voltage Fluctuations and Flicker	48
Electrostatic Discharge	49
Radio-frequency Electromagnetic Field	49
Fast Transients	50
Surges	50
Conducted Disturbance	51
Power Frequency Magnetic Field Immunity	52
EUT Photographs	54
EUT Internal Layout Photographs	55



Report No. : KES-EM241238

1.0 General Product Description

Main Specifications of EUT are:

Video	
Imaging Device	1/2.8" CMOS x 2CH
Resolution	1920x1080, 1600x1200, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264: 2MP Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max. 30fps/25fps(60Hz/50Hz)
Min. Illumination	Color: 0.035lux(F2.2, 1/30sec, 30IRE) BW: 0.0035lux(F2.2, 1/30sec, 30IRE), 0lux(IR LED on)
Video Out	USB: micro USB Type B, 1280x720 for installation
Lens	
Focal Length (Zoom Ratio)	3-6mm(2x) motorized varifocal
Max. Aperture Ratio	F2.2(Wide)-F3.1(Tele)
Angular Field of View	H: 107-(Wide)-56-(Tele) V: 57-(Wide)-31-(Tele) D: 126-(Wide)-64-(Tele)
Min. Object Distance	0.5m(1.64ft)
Focus Control	Simple focus
Lens Type	Fixed IRIS
Pan / Tilt / Rotate	
Pan / Tilt / Rotate Range	0-355° / 0-78° / 0-180°
Operational	
Camera Title	Displayed up to 85 characters
Day & Night	Auto(ICR)
Backlight Compensation	BLC, WDR, SDR
Wide Dynamic Range	extremeWDR(120dB)
Digital Noise Reduction	WiseNR II (Based on AI engine), SSNR V
Motion Detection	8ea, 8point Polygonal zones
Privacy Masking	6ea, 4point Quadrangle zones - Color : Gray/Black/White
Gain Control	Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC	Support
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (1/5-1/12,000sec) Auto prefer shutter control(Based on AI engine)
Video Rotation	Flip, Mirror, Hallway view (90°/270°) - Each channel separately
Analytics	Classified object type : Person/Face/Vehicle/License plate Attributes : Vehicle(Type:car/bus/truck/motorcycle/bicycle) Support Bestshot Analytics events based on AI engine - Object detection, Virtual line(Crossing/Direction), Virtual area(Loitering/Intrusion/Enter/Exit) Analytics events* - Defocus detection, Motion detection, Tampering, Virtual area(Appear/Disappear) * Support Audio detection, Sound classification via optional SPM-4210 I/O box
Alarm I/O	* Support Alarm via optional SPM-4210 I/O box
Alarm Triggers	Analytics, Network disconnect, Alarm input via optional SPM-4210 I/O box
Alarm Events	When alarm trigger occurred - File upload(image) : e-mail/FTP - Notification : e-mail - Recording : SD/SDHC/SDXC or NAS recording at event triggers - Handover(PTZ preset, Send message by HTTP/HTTPS/TCP) - * Alarm output via optional SPM-4210 I/O box
Audio In	* Audio in via optional SPM-4210 I/O box
Audio Out	* Audio out via optional SPM-4210 I/O box
IR Viewable Length	15m(49ft) 25m(82ft) based on scene
Network	
Ethernet	Metal shielded RJ-45 (10/100/1000BASE-T)
Video Compression	H.265/H.264: Main/Baseline/High, MJPEG
Smart Codec	Manual(Sea area), WiseStream II, WiseStreamIII(Based on AI engine)
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(10 users) / Multicast 5 profiles per channel
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP (TCP, UDP Unicast)
Security	TPM 2.0 (FIPS 140-2 level 2) HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP, EAP-PEAP MSCHAPv2) Device Certificate(Hanwha Techwin Root CA, pre-installed) Secure by default certificate Secure OS/Boot/Storage, Verify firmware forgery
Application Programming Interface	ONVIF Profile S/T SUNAPI(HTTP API) Open platform

KES-QP16-F01(00-23-01-01)

KES Co., Ltd.

The authenticity of this test report can be found on the verification page of our website (www.kes.co.kr).



Report No. : KES-EM241238

General	
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Greek, Hungarian
Edge Storage	Micro SD/SDHC/SDXC 1slot Max. 512GB
Memory	2GB RAM, 512MB Flash
Environmental & Electrical	
Operating Temperature / Humidity	-40°C~+55°C(-40°F ~ +131°F) / Less than 95% RH(Non-condensing)
Storage Temperature / Humidity	-50°C~+60°C (-58°F~+140°F) / Less than 95% RH(Non-condensing)
Certification	IP66/IP67, NEMA4X, IK10
Input Voltage	PoE+(IEEE802.3at, Class4)
Power Consumption	PoE+: Max 20W, typical 15.5W
Mechanical	
Color / Material	White / Aluminum Hard-coated dome bubble
RAL Code	RAL9003
Product Dimensions / Weight	215(W)x135(D)x93.2(H)mm(8.46"x5.31"x3.67") / 1330g
Compatible Conduit hole / Gangbox	1/2" (M20) single, double, 4" octagon, 4" square
Hanging Mount (Dome)	SBP-215HMW
Certifications & Standards	
EMC	FCC 47 CFR 15 Subpart B Class A ICES-3(A)/NMB-3(A) CE/UKCA - EN 55032 Class A, EN 50130-4 VCCI CISPR 32 Class A RCM AS/NZS CISPR 32 Class A KS C 9832 Class A, KS C 9835
Safety	UL 62368-1, CAN/CSA C22.2 NO. 62368-1 IEC/EN 62471
Environment	IEC/EN 63000 IEC/EN 60529 IP66/67, IEC/EN 62262 IK10 NEMA 250 type 4X
DORI (EN62676-4 standard)	
Detect (25PPM/ 8PPF)	Wide: 28.4m(93.22ft) / Tele: 72.2m(236.94ft)
Observe (63PPM/ 19PPF)	Wide: 11.4m(37.29ft) / Tele: 28.9m(94.78ft)
Recognize (125PPM/ 38PPF)	Wide: 5.7m(18.64ft) / Tele: 14.4m(47.39ft)
Identify (250PPM/ 76PPF)	Wide: 2.8m(9.32ft) / Tele: 7.2m(23.69ft)



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 230 V, 50 Hz (PoE Adapter Input Power)

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	PNM-C7083RVD	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT

1.5 System Configuration

Description	Model Number	Serial Number	Manufacturer	Remarks
-	-	-	-	-

1.6 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Notebook	Latitude 5300	8C47BE45C060	DELL INC.	-
Notebook Adapter	LA90PM130	-	LITE-ON TECHNOLOGY CHANGZHOU CO.,LTD	-
PoE Adapter	PT-PSE109GBRO-AH	-	Dongguan PROCET Network Technology Co.,Ltd	-
Micro SD Card	-	-	SanDisk	-



1.7 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45 (PoE)	PoE Adapter	RJ-45 (PoE)	3.3	U
	SLOT	Micro SD Card	SLOT	-	-
PoE Adapter	RJ-45 (LAN)	Notebook	RJ-45 (LAN)	2.0	U
Notebook	DC Jack	Notebook Adapter	DC Jack	1.5	U


* Unshielded=U, Shielded=S

1.8 EUT Operating Mode(s)

Test mode	Normal operating
Operating	1. Check the camera video output on the Notebook. 2. Check if the network status is operating normally during PING TEST. 3. After testing, I checked the files stored on Micro SD card.

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd

1.9 Configuration

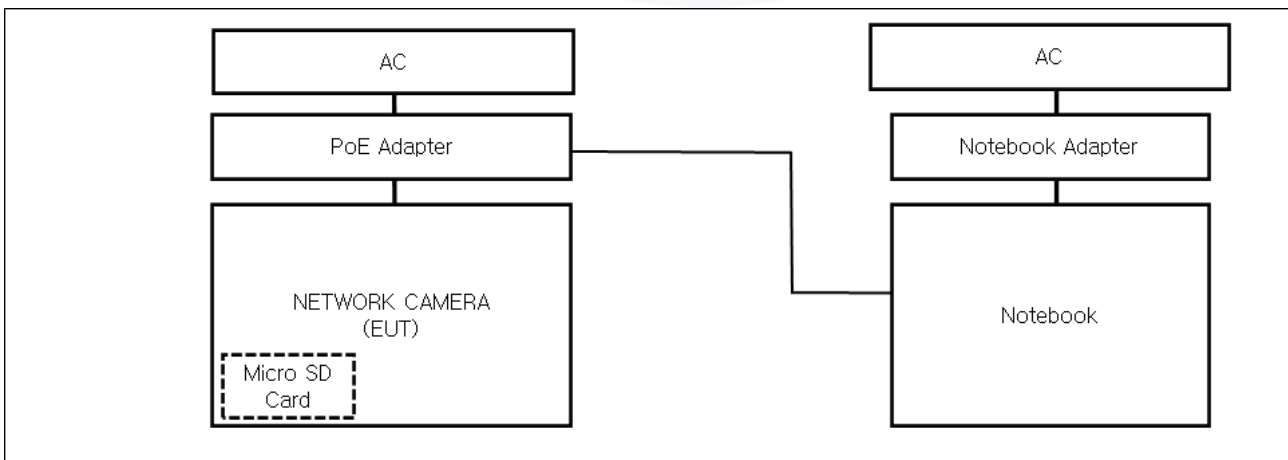

**1.10 Remarks When Standards Applied**

- The LAN port is regarded as a wired communication network port and power-related ports are not tested.

- USB port is for administrator use and is excluded from testing.

1.11 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.12 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.13 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☒ EN 50121-4:2016/A1:2019

☒ **EMC – Regulations 2016**

☒ EN 50121-4:2016/A1:2019





2.1 Conducted Emissions at Mains Power Ports

Test Date

N/A

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test SW	EMC32	R & S	9.12.00	-
☐	EMI TEST RECEIVER	ESR3	R & S	101783	Nov 08, 2024
☐	LISN	ENV216	R & S	101787	Nov 08, 2024
☐	LISN	ESH2-Z5	R & S	100450	Nov 08, 2024
☐	PULSE LIMITER	ESH3-Z2	R & S	101915	Nov 08, 2024

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

The LAN port is regarded as a wired communication network port and power-related ports are not tested.



2.2 Conducted Emissions at Telecommunication Ports

Test Date

May. 03, 2024

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test SW	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	Nov 08, 2024
☒	LISN	ENV216	R & S	101787	Nov 08, 2024
☒	LISN	ESH2-Z5	R & S	100450	Nov 08, 2024
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	Nov 08, 2024
☐	8-WIRE ISN CAT3,5	ENY81	R & S	100174	Nov 09, 2024
☒	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101666	Mar 05, 2025
☐	ISN	ISN S8	SCHWARZBECK	ISN-S8-0019	Mar 05, 2025

Test Conditions

Temperature: (23,2 ± 0,1) °C

Relative Humidity: (45,9 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.3 Impulse Noise (click)

Test Date

N/A

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	CLICK METER SOFTWARE CMS FOR DDA55	AFJ	4.19	-
☐	CLICK ANALYZER	DDA55+	AFJ INSTRUMENTS	14042211198	Feb 13, 2025
☐	LISN	ENV216	R & S	101786	Jan 10, 2025
☐	LISN	ENV216	R & S	101137	Jan 10, 2025

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

The LAN port is regarded as a wired communication network port and power-related ports are not tested.



2.4 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

May. 03, 2024

Test Location☒ SEMI ANECHOIC CHAMBER #4(10 m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	Feb 13, 2025
☒	AMPLIFIER	SCU 01	R & S	100603	Nov 08, 2024
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	Nov 17, 2024
☒	ATTENUATOR	8491A	HP	32173	Feb 13, 2025

Test Conditions

Temperature: (22,7 ± 0,2) °C
Relative Humidity: (45,3 ± 0,2) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



2.5 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

May. 03, 2024

Test Location

SEMI ANECHOIC CHAMBER #5

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	ES10/RE	TOYO Corporation	2022.01.000	-
☒	EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	Feb 13, 2025
☒	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	Nov 03, 2024
☒	PREAMPLIFIER	8449B	HP	3008A00899	Mar 05, 2025
☒	ATTENUATOR	8491B	HP	23094	Feb 13, 2025

Test Conditions

Temperature: (22,7 ± 0,2) °C
Relative Humidity: (44,9 ± 0,2) % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.
The Average of the test data is the cispr average result.



2.6 Harmonic Current Emissions

Test Date

N/A

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test SW	net.control	EM TEST	2.1.4	-
☐	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	Mar 28, 2025
☐	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Classification of Equipment for Harmonic Current Emissions

- ☐ Class A
☐ Class B
☐ Class C(Below 25 W)
☐ Class C(Above 25 W)
☐ Class D

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

The LAN port is regarded as a wired communication network port and power-related ports are not tested.



2.7 Voltage Fluctuations and Flicker

Test Date

N/A

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test SW	net.control	EM TEST	2.1.4	-
☐	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	Mar 28, 2025
☐	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

The LAN port is regarded as a wired communication network port and power-related ports are not tested.



3.0 Criteria for Compliance

Criteria for compliance was based on the following guidelines:

General performance criteria

The general principles (performance criteria) for the evaluation of the immunity test results are the following.

Performance criteria A

The apparatus shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

Performance criteria B

The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

Performance criteria C

Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.



3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

May. 03, 2024

Test Location

EMS-ESD: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS01Z0454	Jan 30, 2025
☒	HCP	-	KES	-	-
☒	VCP	-	Noise Ken	-	-

Test Conditions

Temperature: (22,5 ± 0,1) °C
Relative Humidity: (45,5 ± 0,1) % R.H.
Atmospheric Pressure: (100,6 ± 0,0) kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: ■ 10 at all locations for Air discharge
■ 10 at all locations for Contact discharge

Discharge Voltage:	Contact	Air	HCP	VCP
	☐ 2 kV	☒ 2 kV	☐ 2 kV	☐ 2 kV
	☐ 4 kV	☒ 4 kV	☐ 4 kV	☐ 4 kV
	☒ 6 kV	☐ 6 kV	☒ 6 kV	☒ 6 kV
	☐ 8 kV	☒ 8 kV	☐ 8 kV	☐ 8 kV
	☐ 15 kV	☐ 15 kV	☐ 15 kV	☐ 15 kV

Notes: HCP: Horizontal Coupling Plane

VCP: Vertical Coupling Plane

Required Performance Criteria: ☒ B



Location of Discharge:



1



2

2



**Test Data**

Indirect Discharge

No.	Test Point	Discharge Method	Performance	
			Criteria	Results
1	HCP Contact	Contact Discharge	B	A
2	VCP Contact	Contact Discharge	B	A

Direct Discharge

No.	Test Point	Discharge Method	Performance	
			Criteria	Results
1	Camera Lens	Air Discharge	B	A
2	Enclosure	Contact Discharge	B	A

Note: "Blank" = Not performed

Results:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results

☒ PASS Required Performance Criteria

☐ NOT PASS Required Performance Criteria

Remarks

Any degradations of performance was not observed during in the test.



3.2 Radio-frequency Electromagnetic Field

Reference Standard

EN IEC 61000-4-3:2020

Test Date

May 07, 2024

Test LocationEMS-RS: ☒ SEMI ANECHOIC CHAMBER #3 ☐ SEMI ANECHOIC CHAMBER #4(10 m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	EMC32	R & S	10.10.02	-
☒	SIGNAL GENERATOR	SMB 100A	Rohde & Schwarz	108252	Jul 31, 2024
☒	HIGH POWER DUAL AMP	SSA532	SUNGSAN	SSA532-001	-
☒	POWER METER	E4419B	Agilent	GB40203000	Feb 13, 2025
☒	AVERAGE POWER SENSOR	E9301A	Agilent	MY52170007	Feb 13, 2025
☒	AVERAGE POWER SENSOR	E9301A	Agilent	MY41498669	Feb 13, 2025
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	Mar 05, 2025

Test Conditions

Temperature: (22,0 ± 0,3) °C
Relative Humidity: (46,6 ± 0,3) % R.H.
Atmospheric Pressure: (99,8 ± 0,0) kPa



Test Specifications

Antenna Polarization: Horizontal & Vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Frequency Range: ☒ 80 MHz to 800 MHz [10V/m]
[Field Strength] ☒ 800 MHz to 1 GHz [20 V/m]
☒ 1,4 GHz to 2,0 GHz [10 V/m]
☒ 2,0 GHz to 2,7 GHz [5 V/m]
☒ 5,1 GHz to 6,0 GHz [3 V/m]

Modulation: ☒ 80 % AM, 1 kHz sine wave

Frequency Step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ A

**Test Data**

Side Exposed	Performance Criteria	Results	
		Horizontal	Vertical
Front	A	A	A
Right	A	A	A
Back	A	A	A
Left	A	A	A

Note: "Blank" = Not performed

Results:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results

☒ PASS Required Performance Criteria

☐ NOT PASS Required Performance Criteria

Remarks

Any degradations of performance was not observed during in the test.



3.3 Fast Transients

Reference Standard

EN 61000-4-4:2012

Test Date

May. 08, 2024

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	Nov 09, 2024
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	Nov 09, 2024
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	Nov 10, 2024

Test Conditions

Temperature: $(22,5 \pm 0,1) ^\circ\text{C}$
Relative Humidity: $(46,3 \pm 0,1) \% \text{ R.H.}$
Atmospheric Pressure: $(100,0 \pm 0,0) \text{ kPa}$

Test Specifications

Pulse Amplitude & Polarity: ☐ $\pm 2.0 \text{ kV}$ ☐ $\pm 4.0 \text{ kV}$
(Power Lines)

Pulse Amplitude & Polarity: ☒ $\pm 2.0 \text{ kV}$ ☐ $\pm 4.0 \text{ kV}$
(Signal Lines)

Pulse Amplitude & Polarity: ☐ $\pm 1.0 \text{ kV}$
(Earth Lines)

Burst Period: ☒ 300 ms

Repetition Rate: ☒ 5 kHz

Duration of Test Voltage: ☒ $\geq 1 \text{ min}$

Required Performance Criteria: ☒ A

**Test Data**☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Performance Criteria	Results	
		(+) Burst (kV)	(-) Burst (kV)
-	A	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Performance Criteria	Results	
		(+) Burst (kV)	(-) Burst (kV)
RJ-45(PoE)	A	A	A

☐ Earth ports – Coupling Clamp used

Mode of Application	Performance Criteria	Results	
		(+) Burst (kV)	(-) Burst (kV)
-	A	-	-

Note: “Blank” = Not performed

Results:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**Any degradations of performance was not observed during in the test.



3.4 Surges

Reference Standard

EN 61000-4-5:2014+A1:2017

Test Date

May. 08, 2024

Test Location

EMS-Surge: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test SW	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	Nov 09, 2024
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	Nov 09, 2024
☒	CDN	CNV 508N1	EM TEST	P1610176296	Nov 10, 2024

Test Conditions

Temperature: (22,5 ± 0,3) °C
Relative Humidity: (46,3 ± 0,3) % R.H.
Atmospheric Pressure: (100,0 ± 0,0) kPa

**Test Specifications****AC Power Lines**

Source Impedance: 12 ohm for common mode and 2 ohm for differential mode

Surge Amplitude :

Common Mode☐ (2,0) kVDifferential Mode☐ (1,0) kV

Number of Surges:

☐ 5 surges per angle

Angle:

☐ 0°, 90°, 180°, 270° (input AC power port)

Polarity:

☐ Positive & Negative

Repetition Rate:

☐ 1 surge per min☐ 1 surge per 30 sec.

Required Performance Criteria:

☐ B**DC Power Lines**

Source Impedance:

42 ohm

Surge Amplitude:

Common Mode☐ (2,0) kVDifferential Mode☐ (1,0) kV

Number of Surges:

☐ 5 Surges

Polarity:

☐ Positive & Negative

Repetition Rate:

☐ 1 surge per min☐ 1 surge per 30 sec.

Required Performance Criteria:

☐ B**Signal Lines**

Source Impedance:

42 ohm

Surge Amplitude:

Common Mode☐ (2,0) kVDifferential Mode☒ (1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min☐ 1 surge per 30 sec.

Required Performance Criteria:

☒ B

**Test Data**☐ Line to Line – Differential Mode

Mode of Application	Performance Criteria	Results	
		(+) Surge (kV)	(-) Surge (kV)
-	B	-	-

☐ Line to Earth – Common Mode

Mode of Application	Performance Criteria	Results	
		(+) Surge (kV)	(-) Surge (kV)
-	B	-	-

Signal Lines☒ Line to Line – Differential Mode

Mode of Application	Performance Criteria	Results	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45(PoE)	B	A	A

☐ Line to Earth – Common Mode

Mode of Application	Performance Criteria	Results	
		(+) Surge (kV)	(-) Surge (kV)
-	B	-	-

Note: "Blank" = Not performed

Results:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**Any degradations of performance was not observed during in the test.



3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

May. 08, 2024

Test Location

EMS-CS: Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	5.3.12	-
☒	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	Nov 08, 2024
☒	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	Nov 08, 2024
☒	CDN	CDN M016	TESEQ	43694	Nov 08, 2024
☒	CDN	CDN M016	TESEQ	43697	Nov 08, 2024
☐	CDN	CDN ST08A	TESEQ	43886	Nov 08, 2024
☒	CDN	CDN T8RJ45	EM TEST	0909-09	Jul 31, 2024

Test Conditions

Temperature: (22,6 ± 0,2) °C
Relative Humidity: (45,9 ± 0,2) % R.H.
Atmospheric Pressure: (99,9 ± 0,0) kPa

Test Specifications

Frequency Range: ☒ 150 kHz to 80 MHz
Voltage Level: ☒ 10 Vrms
Modulation: ☒ 80 % AM, 1 kHz sine wave
Frequency Step: ☒ 1 % step
Dwell Time: ☐ 1 s ☒ 3 s
Required Performance Criteria: ☒ A

**Test Data**☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Performance Criteria	Results
-	-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Performance Criteria	Results
RJ-45(PoE)	CDN	A	A

☐ Earth ports

Coupling Location (Line Stressed)	Coupling Method	Performance Criteria	Results
-	-	-	-

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Results:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**

Any degradations of performance was not observed during in the test.



3.6 Power Frequency Magnetic Field Immunity

Reference Standard

EN 61000-4-8:2010

Test Date

May. 08, 2024

Test Location

EMS-Magnetic: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	EMS Test S/W	NET.CONTROL	EM TEST	1.2.11	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	Nov 09, 2024
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	Nov 09, 2024
☒	MAGNETIC FIELD COIL	MS 100N	EM TEST	P1536163691	Nov 10, 2024
☒	CURRENT TRANSFORMER	MC 26100 (100 A)	EM TEST	P1550168963	Feb 14, 2025
☒	MULTIFUNCTION AC/DC POWER SOURCE	NETWAVE 7-400	EM TEST	P1614178393	Nov 08, 2024
☒	MAGNETICFIELD COIL	INA 703	Teseq AG	3006	Feb 14, 2025

Test Conditions

Temperature: (22,2 ± 0,1) °C
Relative Humidity: (46,5 ± 0,1) % R.H.
Atmospheric Pressure: (100,1 ± 0,0) kPa



Test Specifications

Field Strength(Power Source): ☒ 100 A/m (ac)
☒ 300 A/m (dc)
Frequency (ac): ☒ 16.7 Hz ☒ 50 Hz
Frequency (dc): ☒ 0 Hz
Required Performance Criteria: ☒ A



**Test Data**☒ Immersion method

Coil orientation	Performance	
	Criteria	Results
X - axis	A	A
Y - axis	A	A
Z - axis	A	A

☐ Proximity method

Coil orientation	Performance	
	Criteria	Results
X - axis	A	-
Y - axis	A	-
Z - axis	A	-

Note: "blank" = Not performed

Results:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**Any degradations of performance was not observed during in the test.



APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

N/A



[NEUTRAL]

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

**Conducted Emissions at Telecommunication Ports**

[1 000 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: PNM-C7083RVD
Mode :
Speed : 1 000 Mbps
Operator Name: KES

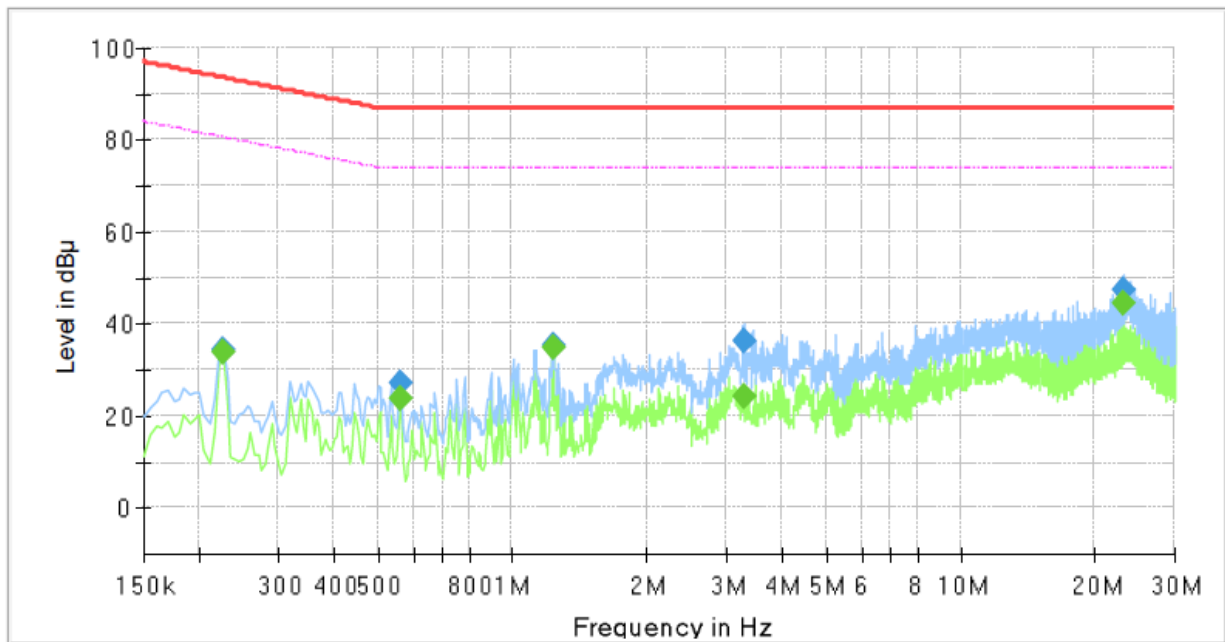**Final Result**

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.225000	---	33.83	80.63	46.80	1000.0	9.000	Single Line	19.4
0.225000	34.49	---	93.63	59.14	1000.0	9.000	Single Line	19.4
0.560000	---	23.62	74.00	50.38	1000.0	9.000	Single Line	19.2
0.560000	27.23	---	87.00	59.77	1000.0	9.000	Single Line	19.2
1.230000	---	34.70	74.00	39.30	1000.0	9.000	Single Line	19.2
1.230000	35.28	---	87.00	51.72	1000.0	9.000	Single Line	19.2
3.280000	---	24.03	74.00	49.97	1000.0	9.000	Single Line	19.2
3.280000	36.26	---	87.00	50.74	1000.0	9.000	Single Line	19.2
23.130000	---	44.41	74.00	29.59	1000.0	9.000	Single Line	19.8
23.130000	47.55	---	87.00	39.45	1000.0	9.000	Single Line	19.8

◆ Calculation

$$\text{QuasiPeak [dBuV]} / \text{CAverage [dBuV]} = \text{Reading Value [dBuV]} + \text{Corr. [dB]}$$

QuasiPeak / CAverage : The Final Value


Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))



Impulse Noise (click)

N/A

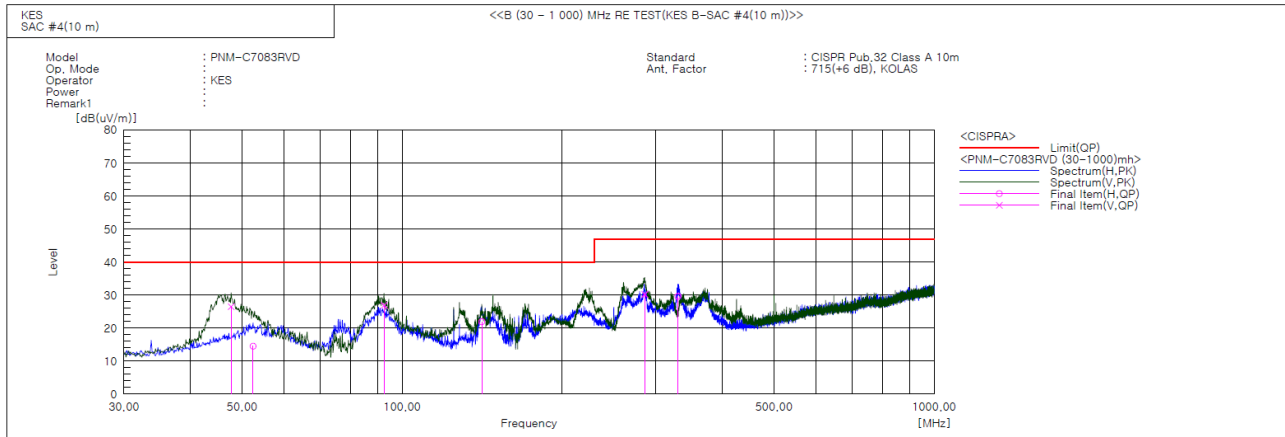**Radiated Electric Field Emissions(Below 1 GHz)****Final Result**

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	47.703	V	47.7	-21.2	26.5	40.0	13.5	125.0	229.0	
2	52.431	H	35.6	-21.1	14.5	40.0	25.5	390.0	126.0	
3	92.444	V	50.3	-23.4	26.9	40.0	13.1	112.0	266.0	
4	141.186	H	47.2	-25.3	21.9	40.0	18.1	398.0	186.0	
5	285.838	V	48.2	-18.0	30.2	47.0	16.8	110.0	66.0	
6	329.851	H	45.6	-16.0	29.6	47.0	17.4	393.0	205.0	


◆ Calculation

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

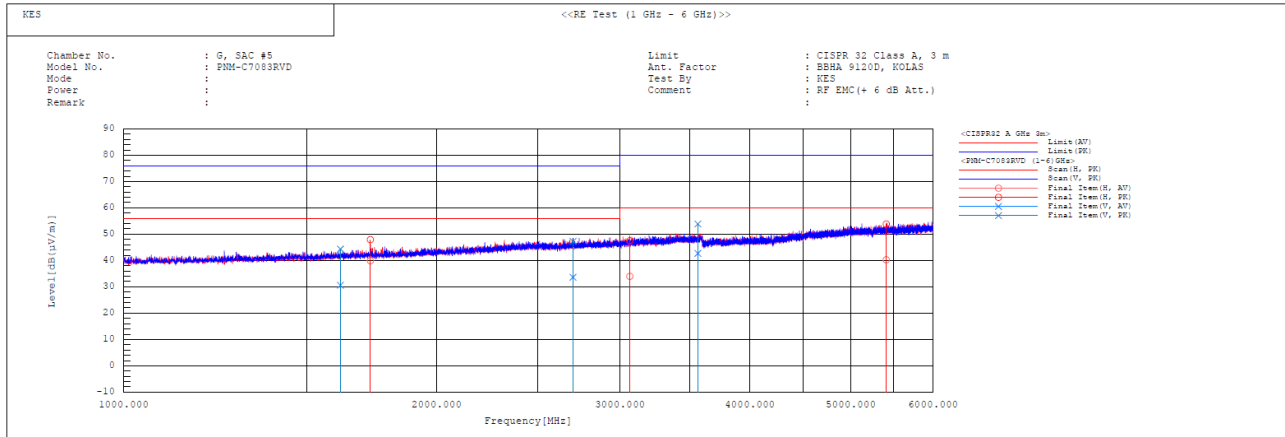**Radiated Electric Field Emissions(Above 1 GHz)****Final Result**

No.	Frequency [MHz]	Pol	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]	Remark
1	1615.665	V	29.0	42.7	1.6	30.6	44.3	56.0	76.0	25.4	31.7	100.0	0.7	
2	1726.524	H	37.9	45.9	2.0	39.9	47.9	56.0	76.0	16.1	28.1	100.0	0.4	
3	2703.321	V	27.9	41.6	5.7	33.6	47.3	56.0	76.0	22.4	28.7	100.0	1.0	
4	3065.104	H	27.4	40.9	6.6	34.0	47.5	60.0	80.0	26.0	32.5	100.0	359.5	
5	3564.113	V	35.3	46.5	7.4	42.7	53.9	60.0	80.0	17.3	26.1	100.0	264.4	
6	5408.227	H	26.8	40.4	13.5	40.3	53.9	60.0	80.0	19.7	26.1	100.0	0.2	

◆ Calculation

Over Limit [dB] = (Read Level[dB μ V] + Ant Factor[dB/m] + Cable Loss [dB] – Preamp Factor [dB]) – Limit Line[dB μ V]

Over Limit : Marjin, Read Level : Reading value, Ant Factor : ANT Factor,
Cable Loss : Cable loss, Preamp Factor : Preamp Factor

**Harmonic Current Emissions and Voltage Fluctuations and Flicker**

Average harmonic current results				
Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
N/A				

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.



Test Data - Harmonics (continued)

Maximum harmonic current results				
Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
N/A				

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.
* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.



Report No. : KES-EM241238

Page 42 / 61

Test Data - Voltage Fluctuations

Maximum Flicker results

Flicker Measurements					
	Plt	Max Pst	Max Dc	Max Dmax	Max Tmax
Line 1:	N/A				
Limits:					
Results:					





Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports

N/A



Conducted Emissions at Telecommunication Ports






Impulse Noise (click)

N/A






Radiated Electric Field Emissions(Below 1 GHz)

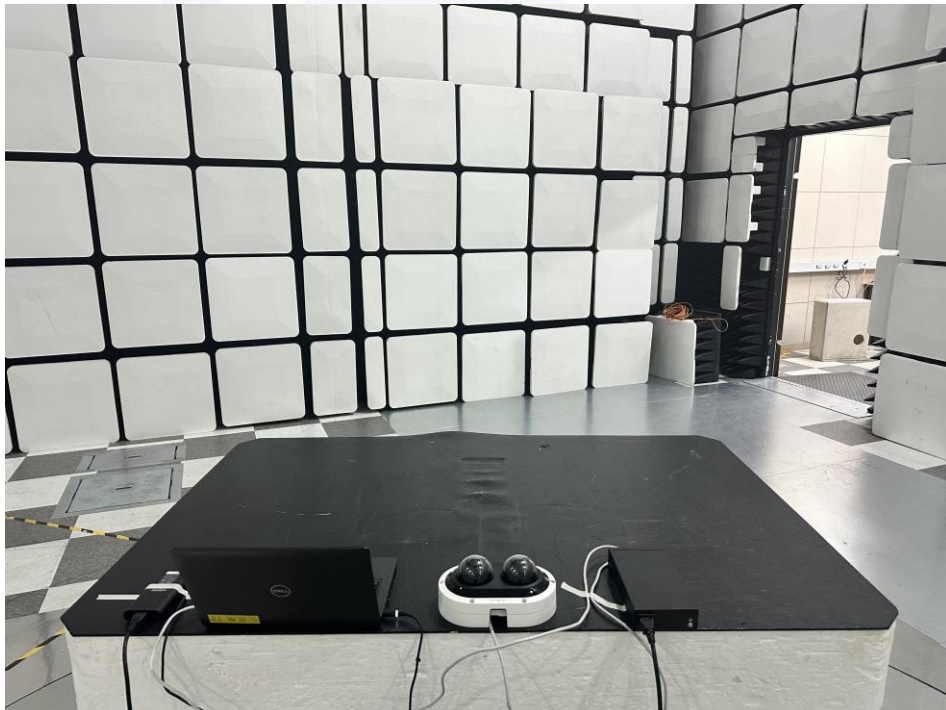



Radiated Electric Field Emissions(Above 1 GHz)

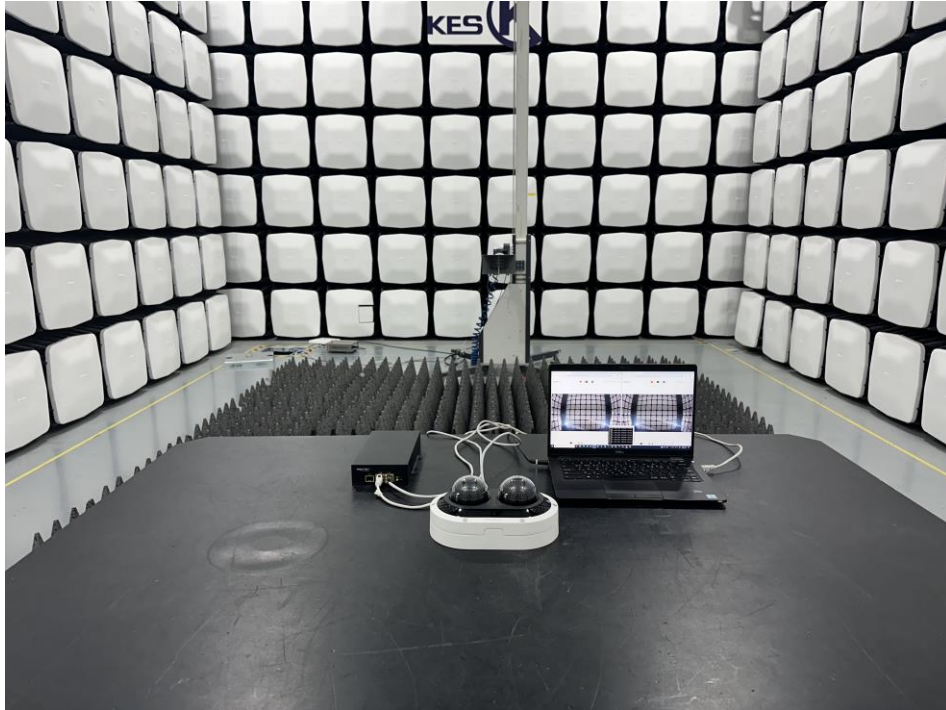



Harmonic Current Emissions and Voltage Fluctuations and Flicker

N/A






Electrostatic Discharge



Radio-frequency Electromagnetic Field

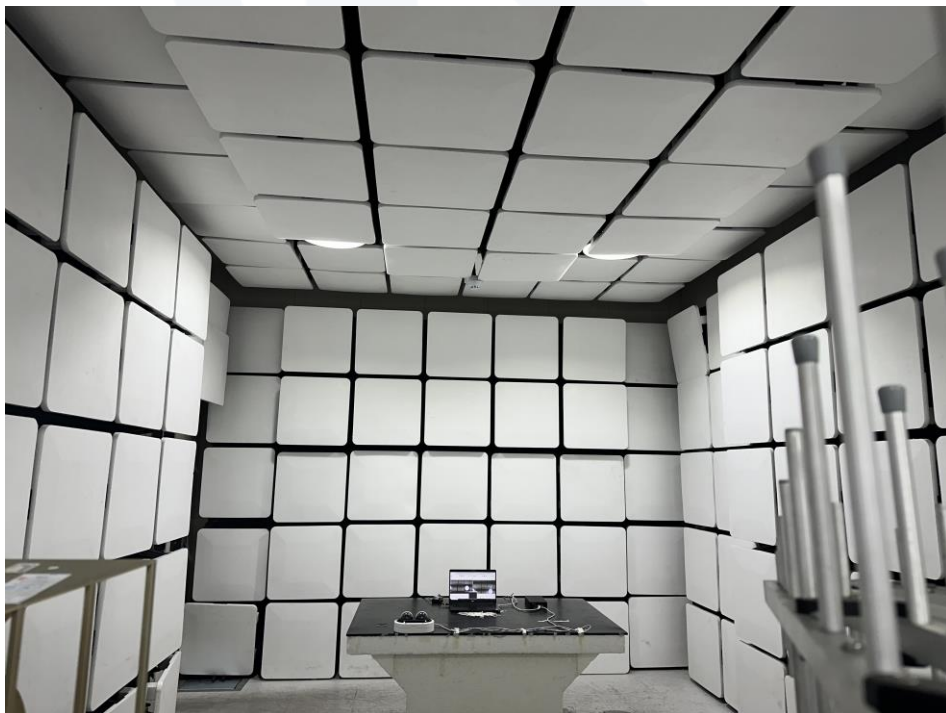



Fast Transients



Surges





Conducted Disturbance





Power Frequency Magnetic Field Immunity

[16.7 Hz (AC), 100 A/m]



[50 Hz (AC), 100 A/m]





[0 Hz (DC), 300 A/m]





EUT Photographs

(Top)




(Bottom)





EUT Internal Layout Photographs


(Internal View)

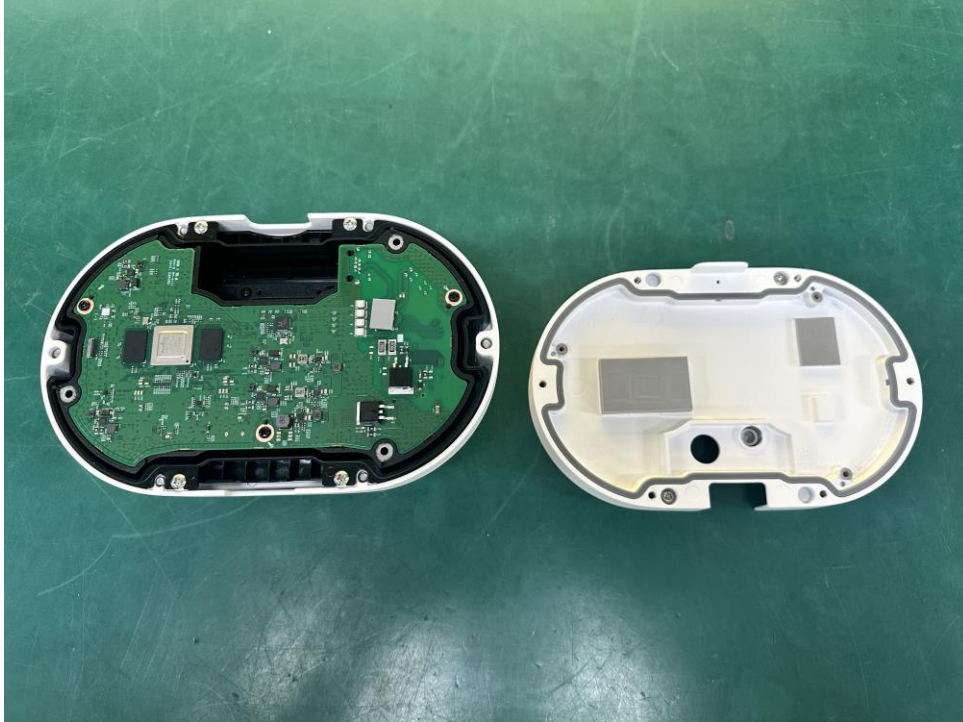




EUT Internal View – Main Board

(Top)

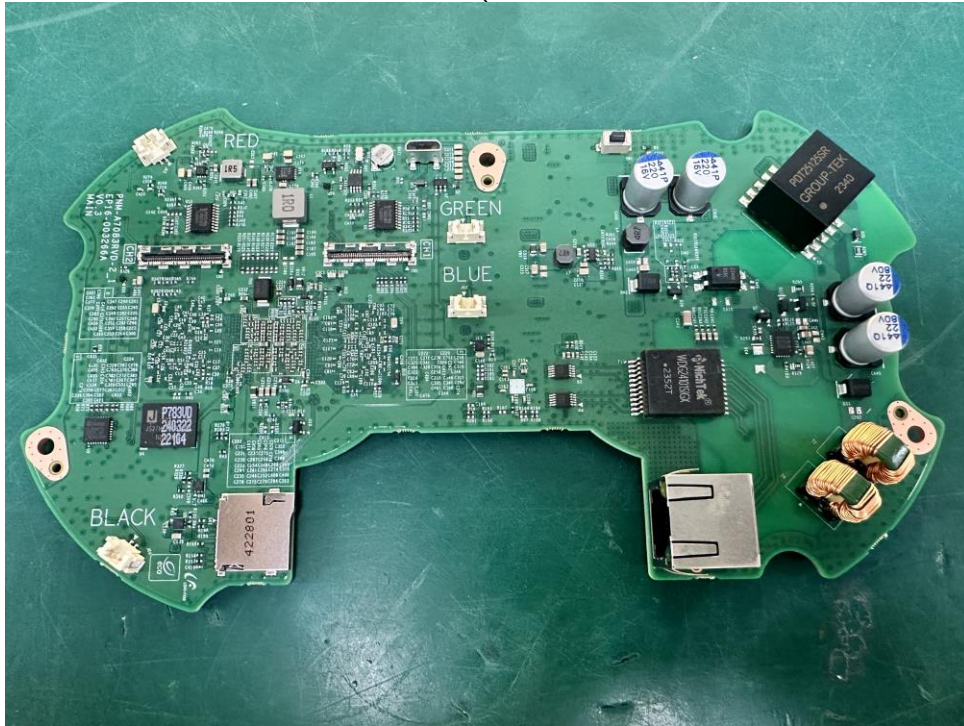


(Bottom)

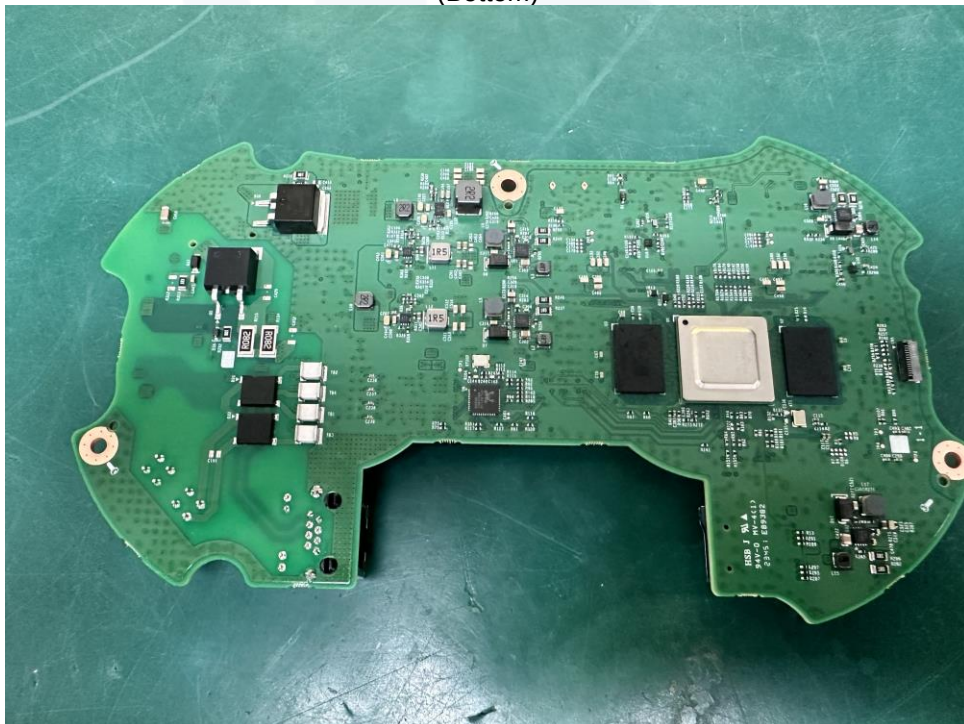



EUT Internal View – Sub Board

(Top)

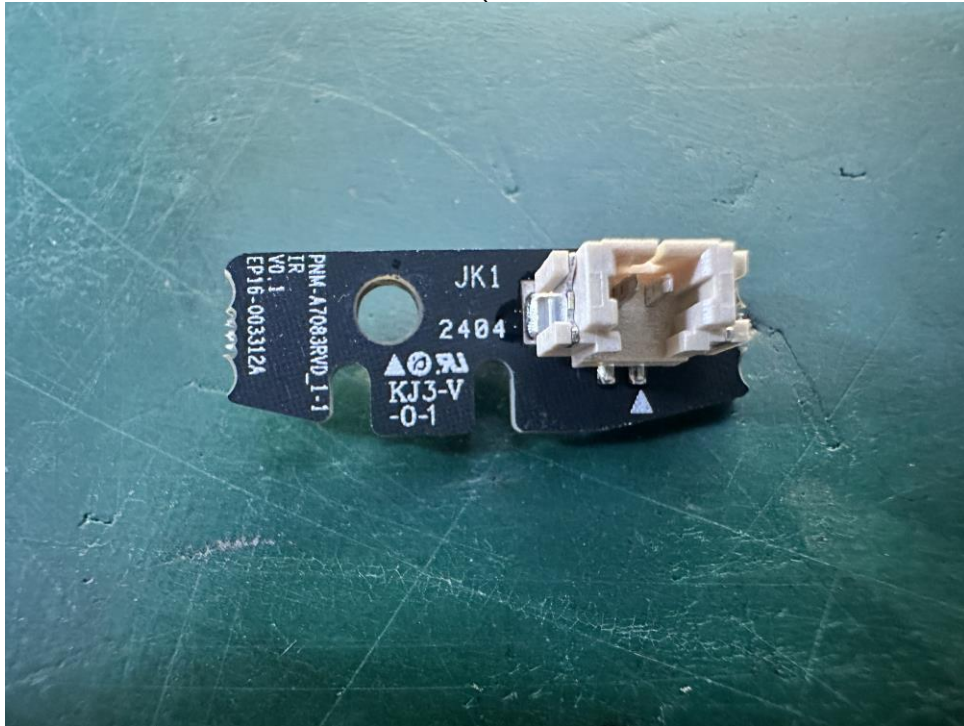


(Bottom)






EUT Internal View – Camera Board

(Top)

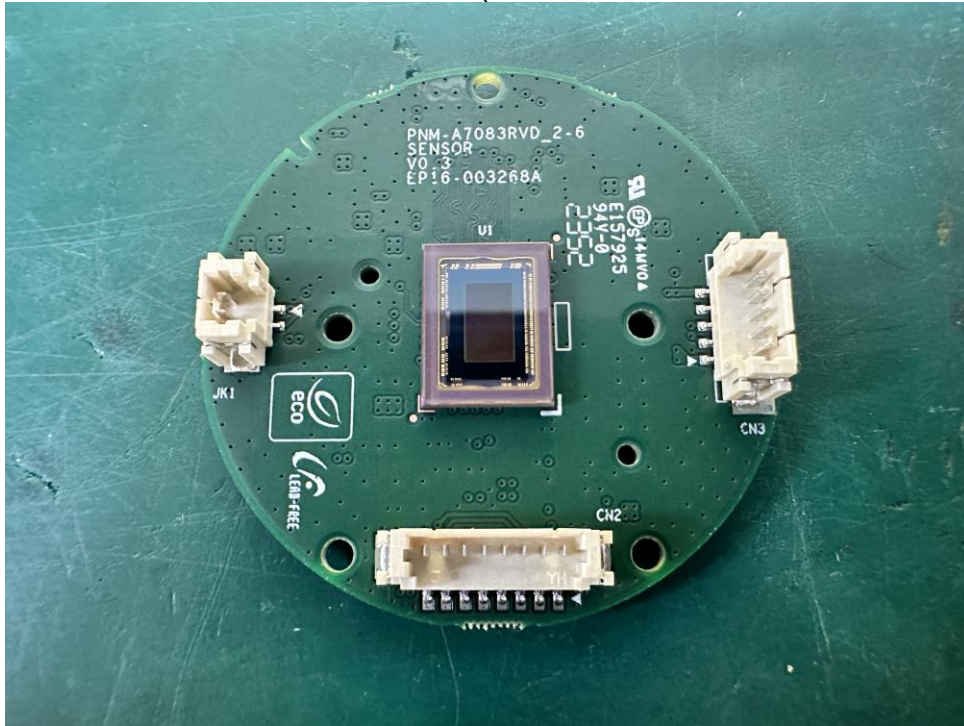


(Bottom)

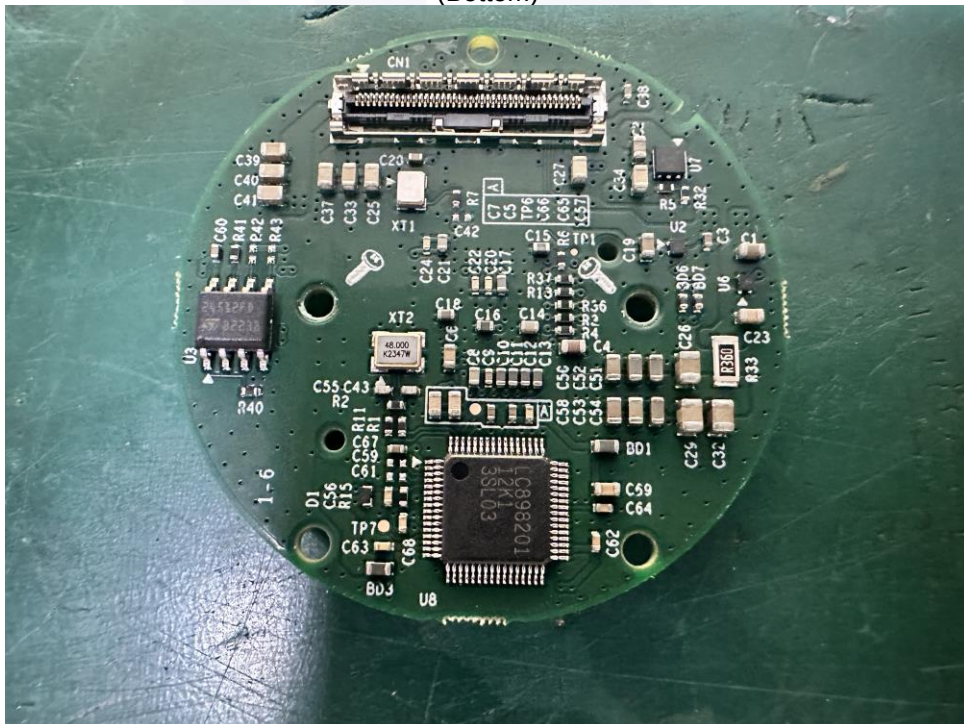




EUT Internal View – Camera Module

(Top)

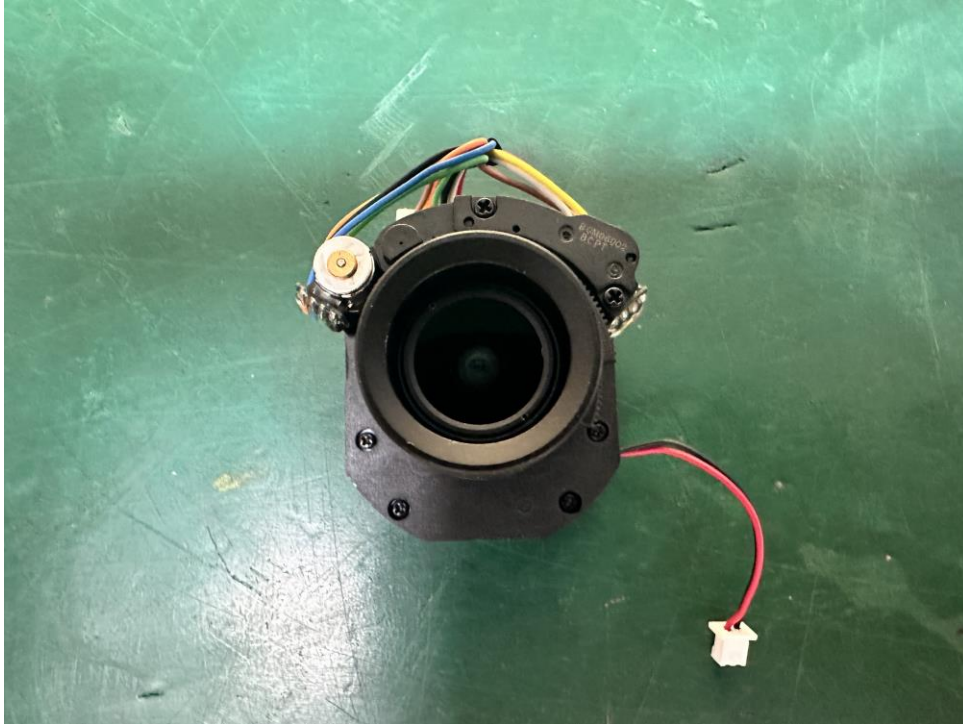

(Bottom)

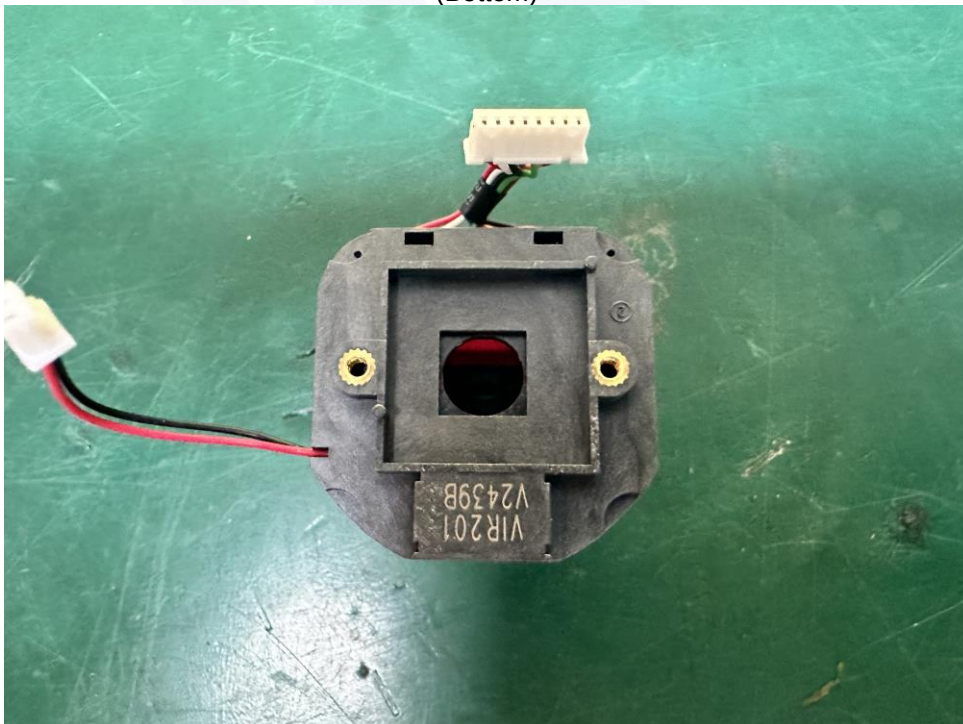




EUT Internal View – LED

(Top)




(Bottom)

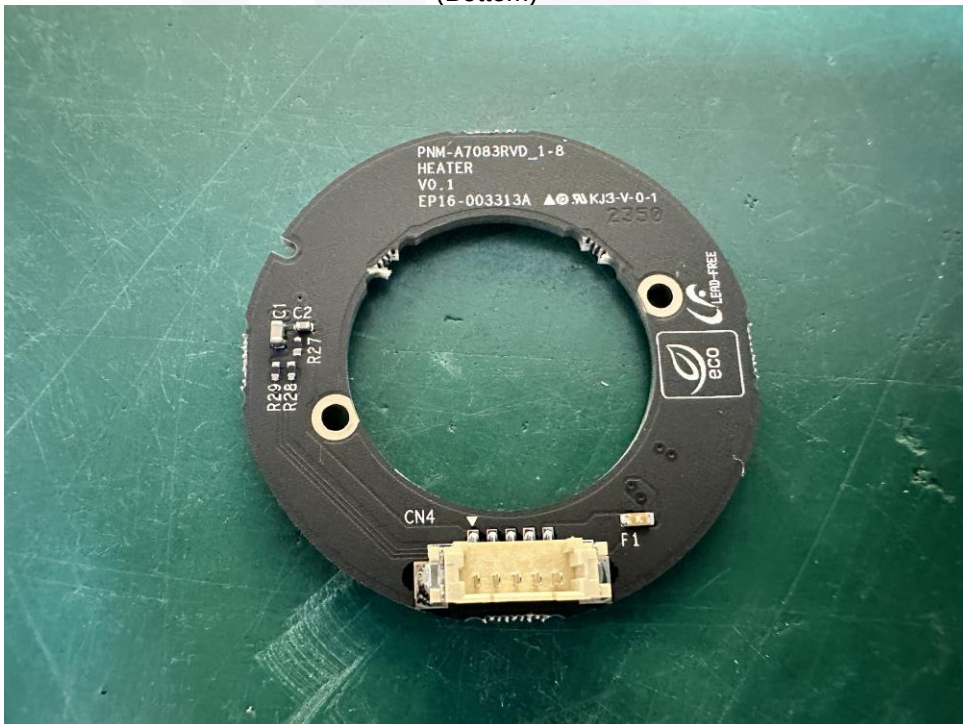



Label and Location

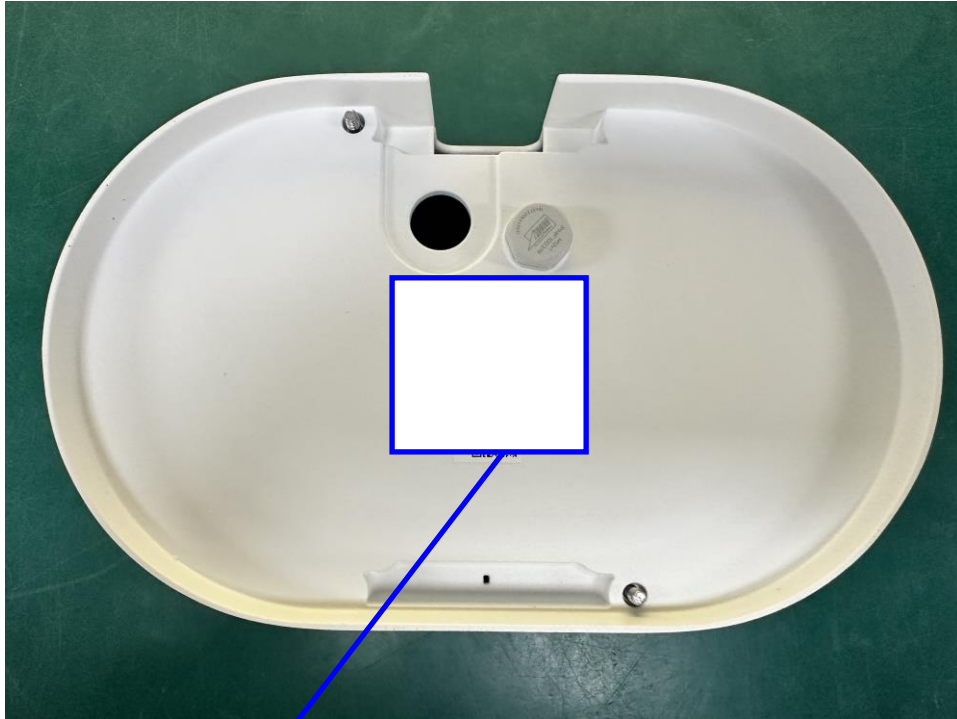

NETWORK CAMERA

Model No : PNM-C7083RVD

Manufacturer : HANWHA VISION VIETNAM COMPANY LIMITED

Made in Vietnam

UK CA **CE**