

SLA-F2480WA

5MP wasserdichtes Linsenmodul

Key Features

- Kompaktes zylindrisches Design
- 2,4 mm feste Brennweite
- 128° horizontales Sichtfeld (HFoV)
- IP66 und NEMA 4X für robuste Umweltdauerhaftigkeit
- 8 m Kabel für flexible Installation
- Kompatibel mit PNM-C20000QB

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

SLA-F2480WA

5MP wasserdichtes Linsenmodul



Specifications

Video

Bildgebungsgerät	Größe	1/2.8"
	Typ	CMOS
Min. Beleuchtung (Lux)	Farbe (1/30 Sekunde, 30 IRE)	0.1
	S/W (1/30 Sekunde, 30 IRE)	0.1

Linse

Brennweite (mm)		2.4
Max. Öffnungsverhältnis (F-Zahl)	Weit	2.4
	Tele	2.4
Winkel-Sichtfeld	Horizontal	128°
	Vertikal	92°
	Diagonal	172°
Halterungstyp		RJ12 connected with main unit
Fokussteuerung		Fixed

Umwelt & Elektrik

Betriebsbedingung	Temperatur	-30°C~+55°C(-22°F~+131°F)
	Luftfeuchtigkeit	0~95% RH
Lagerbedingung	Temperatur	-50°C~+60°C(-58°F~+140°F)
	Luftfeuchtigkeit	Less than 90% RH

Mechanisch

Farbe	Black
Material	Metal
Produktabmessungen	Lens: ø35x63.2mm(ø1.38x2.49"), Cable: 8m(26.2ft)
Produktgewicht	Lens: 102.3g(0.23lb), Cable: 350g(0.77lb)
Supported Products	PNM-C20000QB

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.

Zertifizierung & Standards

EMC	FCC 47 CFR 15 Subpart B Class A, ICES-3(A)/NMB-3(A), CE/UKCA EN 55032 Class A, EN 50130-4, EN 61000-3-2, EN 61000-3-3, VCCI CISPR 32 Class A, RCM AS/NZS CISPR 32 Class A, KS C 9832 Class A, KS C 9835
Sicherheit	UL 62368-1, CAN/CSA C22.2 NO. 62368-1
Umwelt	IEC 60529 IP66, NEMA 250 type 4X, IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.


SLA-F2480WA

5MP wasserdichtes Linsenmodul



CAD

Unit: mm [inch]

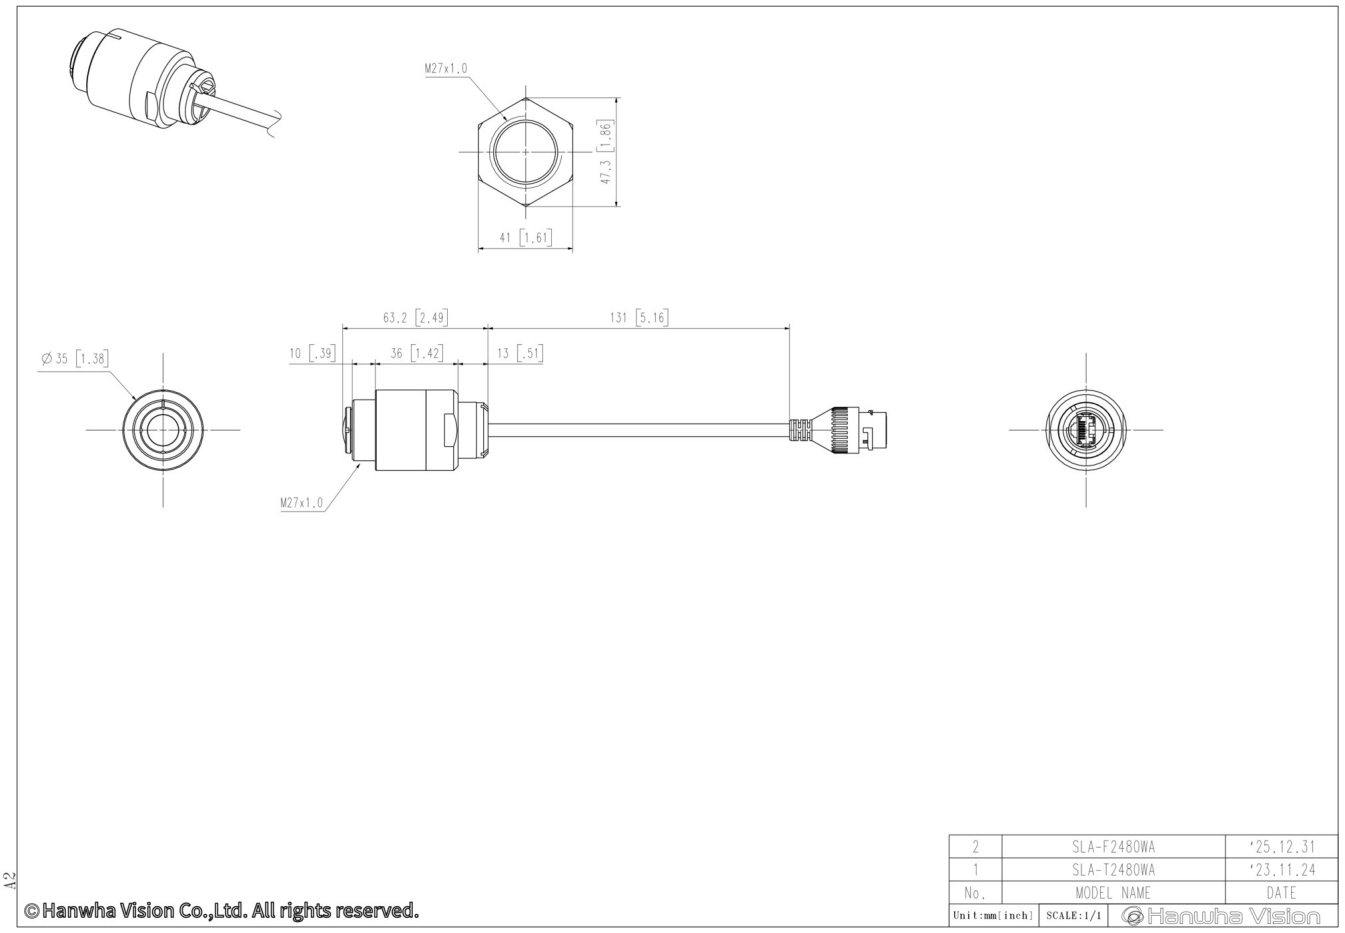

Design and specifications are subject to change without notice. The latest product information / specification can be found at HanwhaVision.com
Hanwha Vision is formerly known as Hanwha Techwin.

© Hanwha Vision CO., LTD. All rights reserved.