

TESTING CERTIFICATE

EMC Compliance Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-390, Korea TEL: 82 31 336 9919 FAX: 82 505 299 8311	Certificate No.: EMC-CE-4565 Page(1) / (45) Pages	 
---	--	---

1. Applicant

Name: Samsung Techwin Co., Ltd.
 Address: 84, Jeongdong-ro, Seongsan-gu, Changwon-si,
 Gyeongsangnam-do, Korea
 Date of Receipt: January 15, 2014

2. Manufacturer

Name#1: Samsung Techwin Co., Ltd.
 Name#2: TIANJIN SAMSUNG TECHWIN
 OPTO-ELECTRONIC CO., LTD

3. Use of Report:

Completed report

4. Test Sample:

Network Camera, SNO-7084RP

5. Date of Test:

January 23, 2014

6. Test method used:

AS/NZS CISPR 22:2009+A1:2010, Class A

7. Testing Environment:

Temperature: $(19.8 \pm 1.0) ^\circ\text{C}$,
 Relative Humidity: $(15.65 \pm 0.35) \% \text{ R.H.}$

8. Test Results:

Refer to page 16 ~ page 36
 (Measurement uncertainty: Refer to page 6)

This result shown in this report refer only to the sample(s) tested unless otherwise stated.

This Test Report cannot be reproduced, except in full, without the written approval of
 EMC Compliance Laboratory.

Affirmation	Tested by  Name: PARK, GUN-SU	Technical Manager  Name: YEOM, HAN-SEOK
-------------	--	---

The above test certificate is the accredited test results by Korea Laboratory Accreditation Scheme, which signed the ILAC-MRA.

2014.02.04
EMC Compliance Ltd.

Accredited by KOLAS, Republic of KOREA

Contents

1. Applicant information	3
2. Laboratory information	4
3. Test system configuration	5
3.1 Operation environment	5
3.2 Measurement Uncertainty	6
4. Description of E.U.T.	7
4.1 General information.....	7
4.2 Product description.....	10
4.3 Auxiliary equipments.....	10
4.4 Test configuration	11
4.5 Operating conditions	14
5. Summary of test results	15
5.1 Summary of EMI emission test results.....	15
6. Test results	16
6.1 Conducted Emission.....	16
6.2 Radiated Emission	25
7. E.U.T. photographs	37

1. Applicant information

Applicant: Samsung Techwin Co., Ltd.
Address: 84, Jeongdong-ro, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, Korea
Telephone: +82-70-7147-8361
Fax: +82-31-277-2784
E-mail: js2002.kang@samsung.com
Contact name: **Kang Jei Soon**

Manufacturer#1: Samsung Techwin Co., Ltd.
Address: 84, Jeongdong-ro, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, Korea
Telephone: +82-70-7147-8361
Fax: +82-31-277-2784
E-mail: js2002.kang@samsung.com
Contact name: **Kang Jei Soon**

Manufacturer#2: TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONIC CO., LT
Address: No.11 Weiliu Road, Micro-Electronic Industrial Park
Jingang Road Tianjin 300385, China

2. Laboratory information

Address

EMC compliance Ltd.

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-390, Korea

Telephone Number: 82 31 336 9919

Facsimile Number: 82 505 299 8311


FCC CAB.: KR0040

VCCI Registration No. : R-3327, G-198, C-3706, T-1849

Industry Canada Registration No.: 8035A

KOLAS NO.: 231

SITE MAP

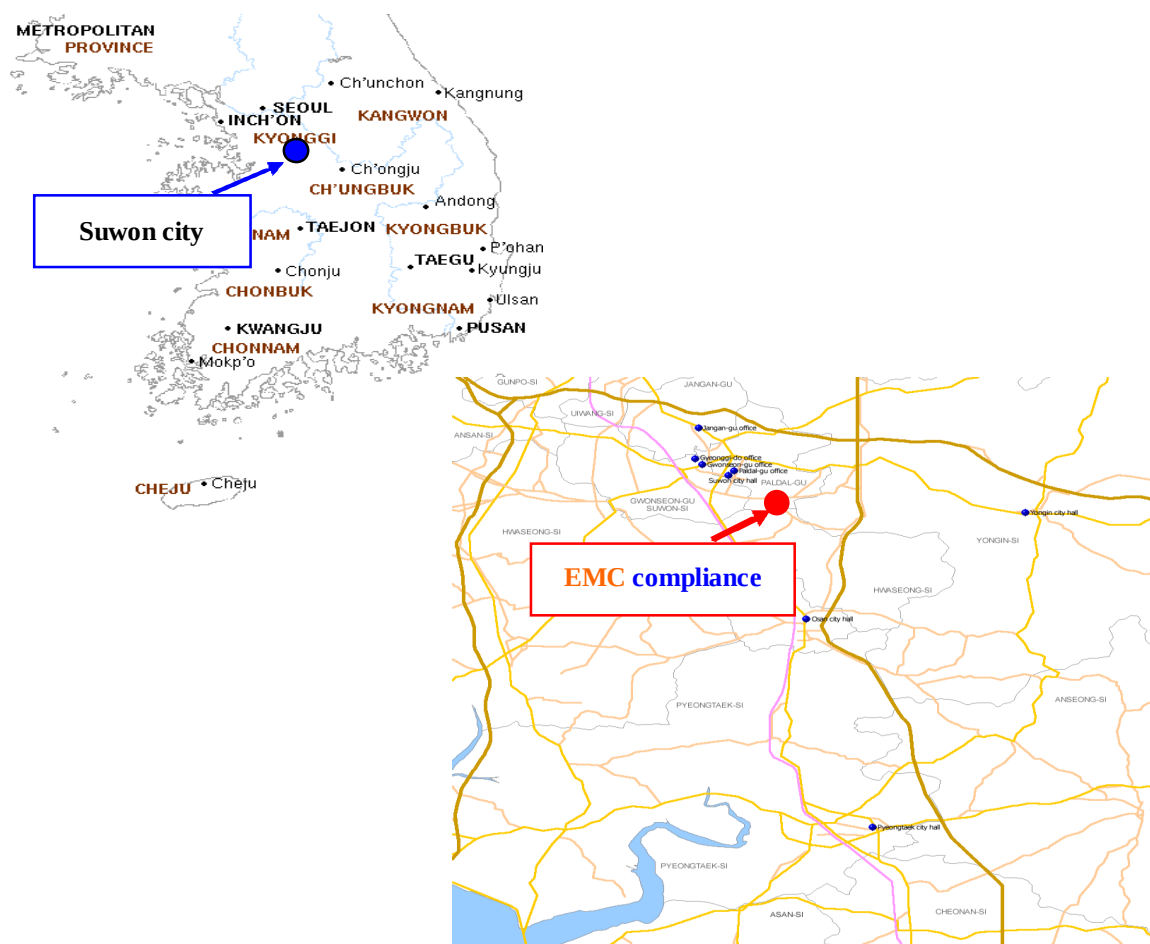

3. Test system configuration

3.1 Operation environment

	Temperature	Humidity	Pressure
Chamber(10 m)	: 18.8 °C	15.3 % R.H.	-
Shielded room(CE)	: 20.8 °C	16.0 % R.H.	-

Test site

These testing items were performed following locations;

Test item	Test site
Conducted Emission	Shielded Room
Radiated Emission	10 m Chamber

3.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability. Based on CISPR 16-4-2, the measurement uncertainty level with a 95 % confidence level was applied.

Conducted emission measurement (C.L: Approx 95 %, k = 2)		
Shielded Room (CE#1)	9 kHz ~ 150 kHz: ± 3.82 dB 150 kHz ~ 30 MHz: ± 3.43 dB	
Shielded Room (CE#2)	9 kHz ~ 150 kHz: ± 3.82 dB 150 kHz ~ 30 MHz: ± 3.43 dB	
Shielded Room (CE#3)	9 kHz ~ 150 kHz: ± 4.00 dB 150 kHz ~ 30 MHz: ± 3.63 dB	
Radiated Emission measurement (C.L: Approx 95 %, k = 2)		
10 m Chamber (#F4)	30 MHz ~ 300 MHz	3 m: + 4.56 dB, - 4.58 dB 10 m: + 4.56 dB, - 4.56 dB
	300 MHz ~ 1 000 MHz	3 m: + 4.84 dB, - 4.85 dB 10 m: + 4.71 dB, - 4.72 dB
	1 GHz ~ 6 GHz	3 m: + 6.19 dB, - 6.20 dB
10 m Chamber (#F2)	30 MHz ~ 300 MHz	3 m: + 4.86 dB, - 4.88 dB 10 m: + 4.86 dB, - 4.86 dB
	300 MHz ~ 1 000 MHz	3 m: + 4.98 dB, - 4.99 dB 10 m: + 4.85 dB, - 4.87 dB
	1 GHz ~ 6 GHz	3 m: + 6.19 dB, - 6.20 dB

4. Description of E.U.T.

4.1 General information

Video	
Imaging Device	1/2.8" PS Exmor 3.20M CMOS (IMX124)
Total Pixels	2,065(H) X 1,565(V)
Effective Pixels	2,065(H) X 1,553(V)
Scanning System	Progressive
Min. Illumination	Color : 0.1 Lux (F1.2, 50IRE), 0.01Lux (Sens-up 60x, 50IRE) B/W : 0 Lux (IR LED on)
S / N Ratio	50dB
Video Out	CVBS : 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P), for installation - connector type
Lens	
Focal Length (Zoom Ratio)	3 ~ 8.5mm (2.8x) Motorized Varifocal
Max. Aperture Ratio	F1.2
Angular Field of View	H : 100.12°(Wide) ~ 35.38°(Tele) / V : 73.76°(Wide) ~ 26.58°(Tele)
Min. Object Distance	0.5m(1.64ft)
Focus Control	Simple Focus (Motorized V/F) / Manual - Remote control via network (Manual, Simple Focus)
Lens Type	DC Auto Iris
Mount Type	Board-in type
Pan / Tilt / Rotate	
Pan Range	0 ° ~ +355 °
Tilt Range	0 ° ~ +67 °
Rotate Range	0 ° ~ +355 °
Operational	
IR LED	12ea
Viewable Length	25m(82.02ft)
Camera Title	Off / On (Displayed up to 45 characters)
Day & Night	Auto (ICR) / Color / B/W / External / Schedule
Backlight Compensation	Off / BLC
Wide Dynamic Range	Max. 120dB
Contrast Enhancement	SSDR (Samsung Super Dynamic Range) (Off / On)
Digital Noise Reduction	SSNR III (2D+3D Noise Filter) (Off / On)
Digital Image Stabilization	Off / On
Defog	Auto/Manual/Off
Motion Detection	Off / On (4 zones with 4 points Polygon)
Privacy Masking	Off / On (32 zones with 4 points of polygon)
Sens-up (Frame Integration)	-
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (1 ~ 1/12,000sec)
Digital PTZ	-

Flip / Mirror	Off / On
Intelligent Video Analytics	Tampering, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Face Detection with Metadata
Alarm I/O	Input 1ea / Output 1ea
Alarm Triggers	Motion detection, Tampering Detection , Audio Detection, Face Detecton, Video Loss, Video Analytics, Alarm Input
Alarm events	File upload via FTP and E-Mail Notification via E-Mail, TCP and HTTP local storage(SD/SDHC/SDXC) recording at Network disconnected & Event (Alarm Triggers) External output
Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.264 (MPEG-4 Part 10/AVC), Motion JPEG
Resolution	2048x1536 / 1920x1080 / 1600x1200 / 1280x1024 / 1280x960 / 1280x720 / 1024x768 / 800x600 / 800x450 / 640x480 / 640x360 / 320x240 / 320x180
Max. Framerate	H.264 : 3M Mode Max 30fps@2048x1536 / 1920x1080 / 1600x1200 / 1280x1024 / 1280x960 / 1280x720 / 1024x768 / 800x600 / 800x450 / 640x480 / 640x360 / 320x240 / 320x180 2M Mode Max 60fps @1920x1080 / 1600x1200 / 1280x1024 / 1280x960 / 1280x720 / 1024x768 / 800x600 / 800x450 / 640x480 / 640x360 / 320x240 / 320x180 MJPEG : Max 10fps@2048x 1536 / 1920x1080 / 1600x1200 / 1280x1024 / 1280x960 / 1280x720 / 1024x768 Max 30fps@ 800x600 / 800x450 / 640x480 / 640x360 / 320x240 / 320x180
Smart Codec	Built-in Area-Based : 5EA Face detection Mode
Video Quality Adjustment	H.264 : Compression Level, Target Bitrate Level Control MJPEG : Quality Level Control
Bitrate Control Method	H.264 : CBR or VBR, MJPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
Audio I/O	Mic(Line)-in Selectable via UI, Line-out (Mono, 1Vrms) 2.5VDC(4mA) powered 2K Ohm
Audio Compression Format	G.711 u-law /G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps
Audio Communication	Bi-directional
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1x Authentication

Streaming Method	Unicast / Multicast
Max. User Access	15 users at Unicast Mode
Memory Slot	micro SD/SDHC/SDXC - motion Images recorded in the SDX/SDHC/SD memory card can be downloaded.
Application Programming Interface	ONVIF Profile S SUNAPI(HTTP API) v2.0 SVNP 1.2
Webpage Language	English, French, German, Spanish, Italian, Chinese, Korean, Russian, Japanese, Swedish, Danish, Portuguese, Turkish, Polish, Czech, Rumanian, Serbian, Dutch, Croatian, Hungarian, Greek, Norwegian, Finnish
Web Viewer	Supported OS : Windows XP / VISTA / 7 / 8, MAC OS X 10.7 Supported Browser : Microsoft Internet Explorer (Ver. 10, 9, 8, 7), Mozilla Firefox (Ver. 19, 18, 17, 16, 15, 14, 13, 12, 11, 10, 9), Google Chrome (Ver. 25, 24, 23, 22, 21, 20, 19, 18, 17, 16, 15), Apple Safari (Ver. 6.0.2(Mac OS X 10.8, 10.7 only), 5.1.7) * Mac OS X only
Central Management Software	SmartViewer 4.x
Environmental	
Operating Temperature / Humidity	AC24V : -40°C to +55°C / Less than 90% RH DC12V, PoE (IEEE802.3af) : -10°C to +55°C / Less than 90% RH
Storage Temperature / Humidity	-30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Ingress Protection	IP66 Grade
Vandal Resistance	IK10
Electrical	
Input Voltage / Current	AC24V, DC12V, PoE(IEEE802.3af class 3)
Power Consumption	Max. 10.5W (DC 12V) Max. 11.5W (PoE) Max. 12.0W(AC24V, Heater Off), Max 15.0W(AC24V, Heater On)
Mechanical	
Color / Material	Ivory / Aluminum
Dimension (WxHxD)	Ø160 x H118.5
Weight	960g

4.2 Product description


Type of product	Network Camera
Model name (Basic)	SNO-7084RP
Model name (Variant)	-
Difference	-
Trade name	-
Serial no	Engineering Sample
Testing voltage	DC 12 V , AC 24 V , PoE
Product rating	DC 12 V , AC 24 V , PoE
Internal clock frequency	Above 108 Mhz
Note	* AC/AC adaptor was not provided by the manufacturer. * PoE Switch was not provided by the manufacturer.

4.3 Auxiliary equipments

Type	Model / Part #	Serial number	Manufacturer
Note PC	PSLQ0K-02N005	3A045920Q	TOSHIBA
Monitor	PM24KO	YER8HVDDBA00057E	SAMSUNG
USB Mouse	1088	8165906051224	Microsoft
Headset #1	SHS-250V	-	SAMSUNG
Headset #2	SHS-250V	-	SAMSUNG
JIG	-	-	-
Micro SD Card (1GB)	-	-	-
DC Power Supply	E3632A	MY40004594	Agilent
AC/AC Adaptor (AC 24V)	-	-	Samsung Techwin
PoE Switch	FS108P	1DL20C3N00544	NETGEAR


4.4 Test configuration

#1- DC 12V

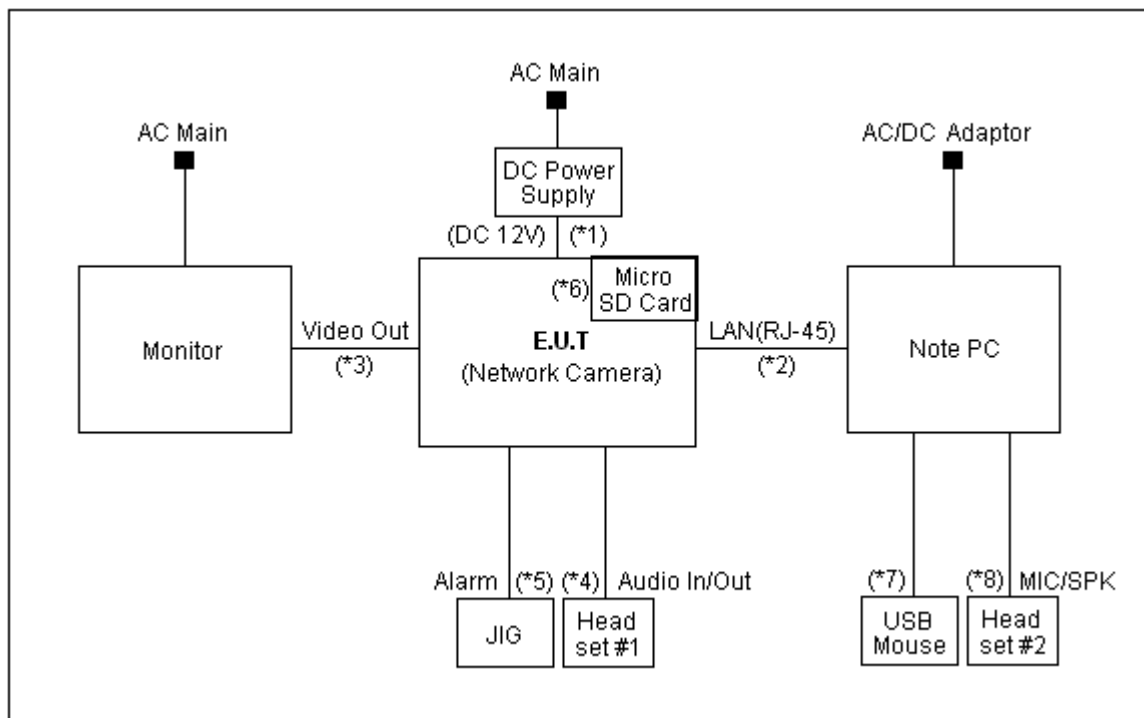


Note *	Start		End		Cable	
	Name	I/O port	Name	I/O port	Length (m)	Spec.
1	EUT (Network Camera)	Power	DC Power Supply	Power	1.5	Non-Shield
2		LAN(RJ-45)	Note PC	LAN(RJ-45)	3.0	Non-Shield
3		Video Out	Monitor	Video In	3.0	Shield
4		Audio In/Out	Headset #1	Audio In/Out	2.0	Non-Shield
5		Alarm	JIG	Alarm	3.0	Non-Shield
6		Micro SD Card	Micro SD Card	Micro SD Card	Direct	-
7	Note PC	USB	USB Mouse	USB	1.5	Shield
8		MIC/SPK	Headset #2	MIC/SPK	2.0	Non-Shield

#2- AC 24V

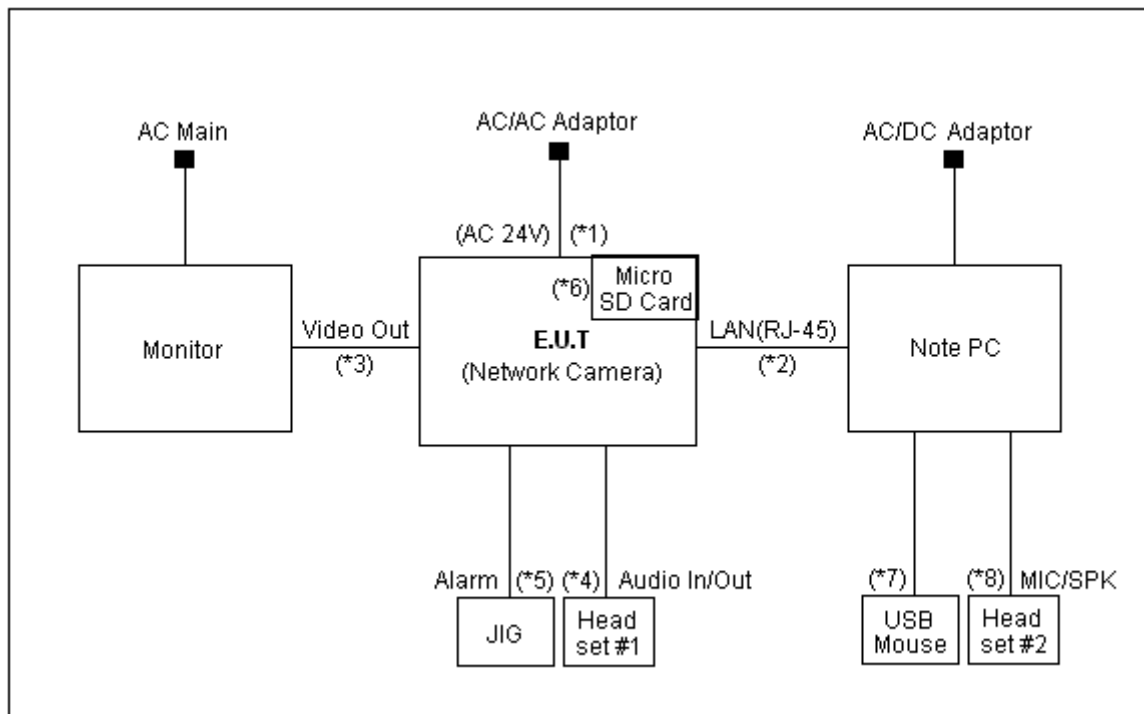

Note *	Start		End		Cable	
	Name	I/O port	Name	I/O port	Length (m)	Spec.
1	EUT (Network Camera)	Power	AC/AC Adaptor	Power	1.5	Non-Shield
2		LAN(RJ-45)	Note PC	LAN(RJ-45)	3.0	Non-Shield
3		Video Out	Monitor	Video In	3.0	Shield
4		Audio In/Out	Headset #1	Audio In/Out	2.0	Non-Shield
5		Alarm	JIG	Alarm	3.0	Non-Shield
6		Micro SD Card	Micro SD Card	Micro SD Card	Direct	-
7	Note PC	USB	USB Mouse	USB	1.5	Shield
8		MIC/SPK	Headset #2	MIC/SPK	2.0	Non-Shield

#3- PoE

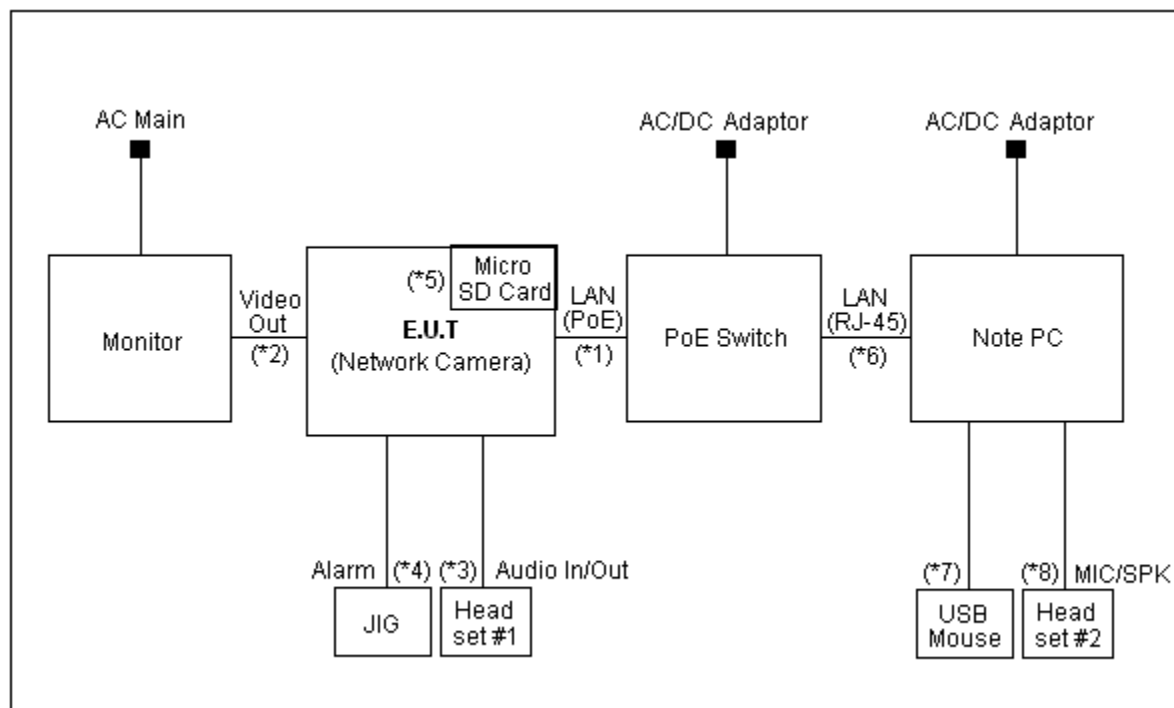

* Power supplied from PoE Switch

Note *	Start		End		Cable	
	Name	I/O port	Name	I/O port	Length (m)	Spec.
1	EUT (Network Camera)	LAN(PoE)	PoE Switch	LAN(PoE)	3.0	Non-Shield
2		Video Out	Monitor	Video In	3.0	Shield
3		Audio In/Out	Headset #1	Audio In/Out	2.0	Non-Shield
4		Alarm	JIG	Alarm	3.0	Non-Shield
5		Micro SD Card	Micro SD Card	Micro SD Card	Direct	-
6	Note PC	LAN(RJ-45)	PoE Switch	LAN(RJ-45)	2.0	Non-Shield
7		USB	USB Mouse	USB	1.5	Shield
8		MIC/SPK	Headset #2	MIC/SPK	2.0	Non-Shield

4.5 Operating conditions

The EUT was configured as normal intended use.

Test mode	Normal operating
1	Web view test.
	Ping test.
	Audio In/Out test.
	Alarm test.

* Note: 3 types of powers are available for the product, that are DC 12 V, AC 24 V, PoE.

Therefore, tests were performed for 3 different types of powers.

5. Summary of test results

5.1 Summary of EMI emission test results

Applied	Test items	Test method	Result
☒	Conducted Emission	AS/NZS CISPR 22:2009, Class A	16 Page ~ 24 Page
☒	Radiated Emission	AS/NZS CISPR 22:2009, Class A	25 Page ~ 36 Page

6. Test results

6.1 Conducted Emission

Test specification	AS/NZS CISPR 22:2009, Class A		
Testing voltage	DC 12 V, AC 24 V, PoE		
Test facility	Shielded room (CE#1)		
Date	2014. 01. 23		
Temperature (°C)	20.8 °C	Humidity (% R.H.)	16.0 % R.H.
Remarks	Complied		

6.1.1 Limits of conducted emission measurement

☐ AC main

Frequency MHz	Class A $\text{dB}\mu\text{V}$		Class B $\text{dB}\mu\text{V}$	
	Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.5	79	66	66 ~ 56 *	56 ~ 46*
0.5 ~ 5	73	60	56	46
5 ~ 30	73	60	60	50

*The limit decreases linearly with the logarithm of frequency.

☒ Telecommunication

Frequency MHz	Class A Voltage Limits $\text{dB}\mu\text{V}$		Current Limits $\text{dB}\mu\text{A}$	
	Quasi-Peak	Average	Quasi-Peak	Average
0.15 ~ 0.5	97 to 87	84 to 74	53 to 43	40 to 30
0.5 ~ 30	87	74	43	30
Frequency MHz	Class B Limits $\text{dB}\mu\text{V}$		Current Limits $\text{dB}\mu\text{A}$	
	Quasi-Peak	Average	Quasi-Peak	Average
0.15 ~ 0.5	84 to 74	74 to 64	40 to 30	30 to 20
0.5 ~ 30	74	64	30	20

* The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz

* The current and voltage disturbance limits are derived for use with an impedance stabilization Network (ISN) which presents a common mode (asymmetric mode) impedance of 150 Ω to the telecommunication port under test (conversion factor is $20 \log_{10} 150/I = 44 \text{ dB}$).

6.1.2 Measurement procedure

The measurements were performed in a shielded room. EUT was setup as shown in photograph and placed on a non-metallic table height of 0.8 m above the reference ground plane. The rear of table was located 0.4 m to the vertical conducted plane. EUT was power through the LISN, which was bonded to the ground plane. The LISN power was filtered. Each EUT power lead, except ground (safety) lead was individually connected through a LISN to input power source. EUT signal cables that hung closer than 0.4 m to the Horizontal metal ground 0.3 m ~ 0.4 m long. The power cord was bundles in the center. All peripheral equipment was powered from a sub LISN. The LISN and ISN were positioned 0.8 m from the EUT. Peak and Average detection were used in preliminary testing and Quasi-peak and Average detections were used at final measurement. Both lines of power cord, hot and neutral, were measured.


6.1.3 Used equipments

Equipment	Model	Serial No.	Makers	Next Cal. Date	Used
Test Receiver	ESCI7	100732	R&S	2015.01.27	☐
Test Receiver	ESCI	100001	R&S	2014.07.25	☒
Test Receiver	ESCI	100710	R&S	2014.10.28	☐
LISN	ENV216	101358	R&S	2014.10.04	☒
LISN	ESH3-Z5	100267	R&S	2014.07.08	☒
8-WIRE ISN	NTFM 8158 CAT5	CAT5-8158-0071	SCHWARZBECK	2014.04.02	☒
8-WIRE ISN	NTFM 8158 CAT3	CAT3-8158-0020	SCHWARZBECK	2014.04.13	☐
ISN	ST08	24342	TESEQ	2014.06.21	☐
ISN	ENY81	101545	R&S	2014.08.29	☐

6.1.4 Photographs of test setup

* Telecommunication

#1- DC 12V, #2- AC 24V

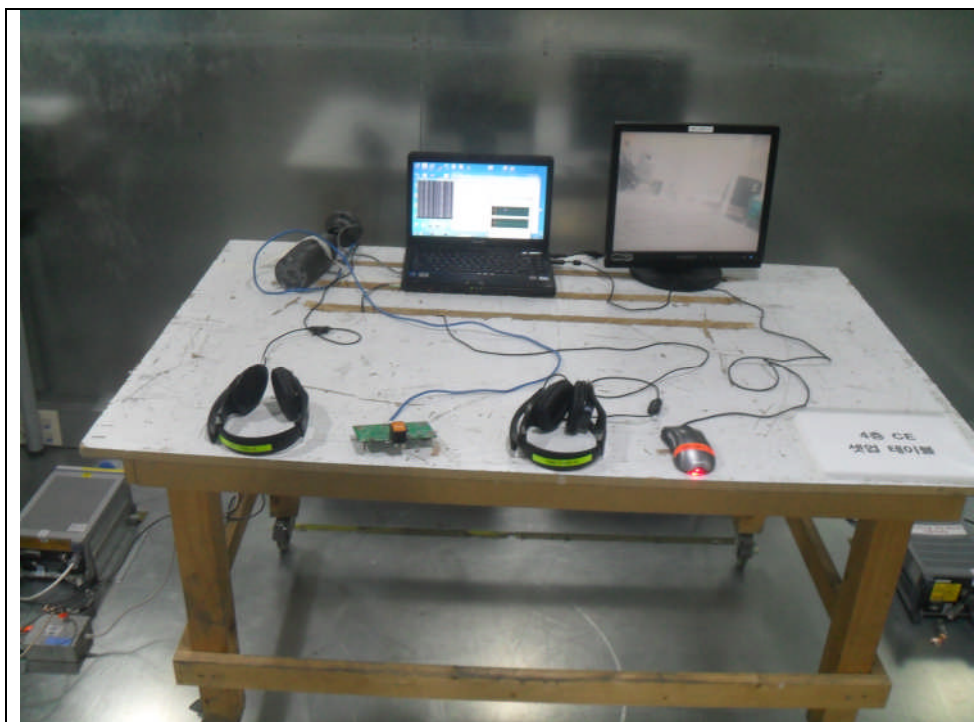


#3-PoE



6.1.5 Conducted emission measurement result

* Telecommunication port (SNO-7084RP)


#1- DC 12V _ LAN Port (LCL 65 dB)_10 Mbps

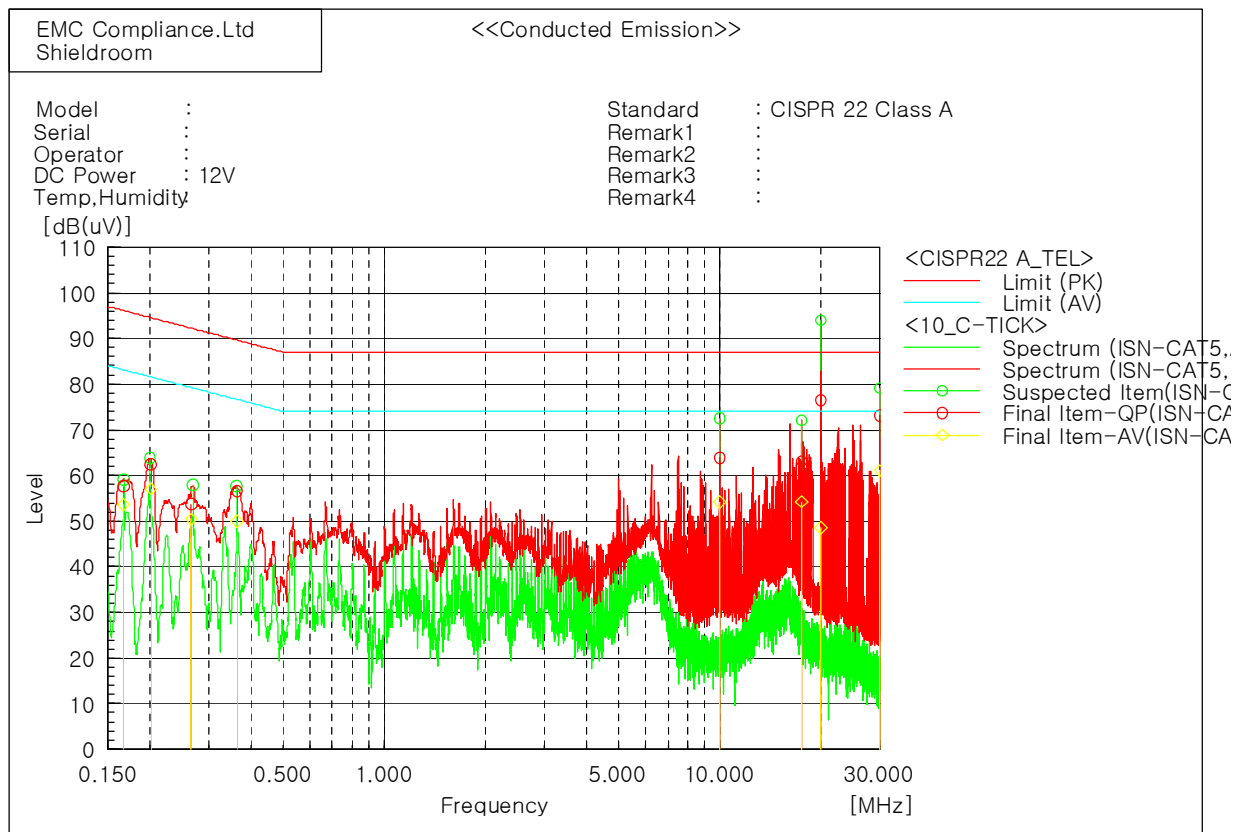

Final Result

--- ISN-CAT5 Phase ---											
No.	Frequency	Reading QP	Reading CAV	c.f	Result QP	Result CAV	Limit QP	Limit AV	Margin QP	Margin CAV	
	[MHz]	[dB(uV)]	[dB(uV)]	[dB]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB]	[dB]	
1	0.16771	47.8	43.8	9.8	57.6	53.6	96.1	83.1	38.5	29.5	
2	0.20155	52.7	47.4	9.7	62.4	57.1	94.5	81.5	32.1	24.4	
3	0.26684	44.0	40.7	9.7	53.7	50.4	92.2	79.2	38.5	28.8	
4	0.36445	46.9	40.4	9.6	56.5	50.0	89.6	76.6	33.1	26.6	
5	10.0006	54.4	44.6	9.5	63.9	54.1	87.0	74.0	23.1	19.9	
6	17.50013	53.8	44.8	9.4	63.2	54.2	87.0	74.0	23.8	19.8	
7	20.00025	67.1	39.1	9.4	76.5	48.5	87.0	74.0	10.5	25.5	
8	30.000	63.5	51.3	9.7	73.2	61.0	87.0	74.0	13.8	13.0	

#1- DC 12V _ LAN Port (LCL 65 dB)_100 Mbps

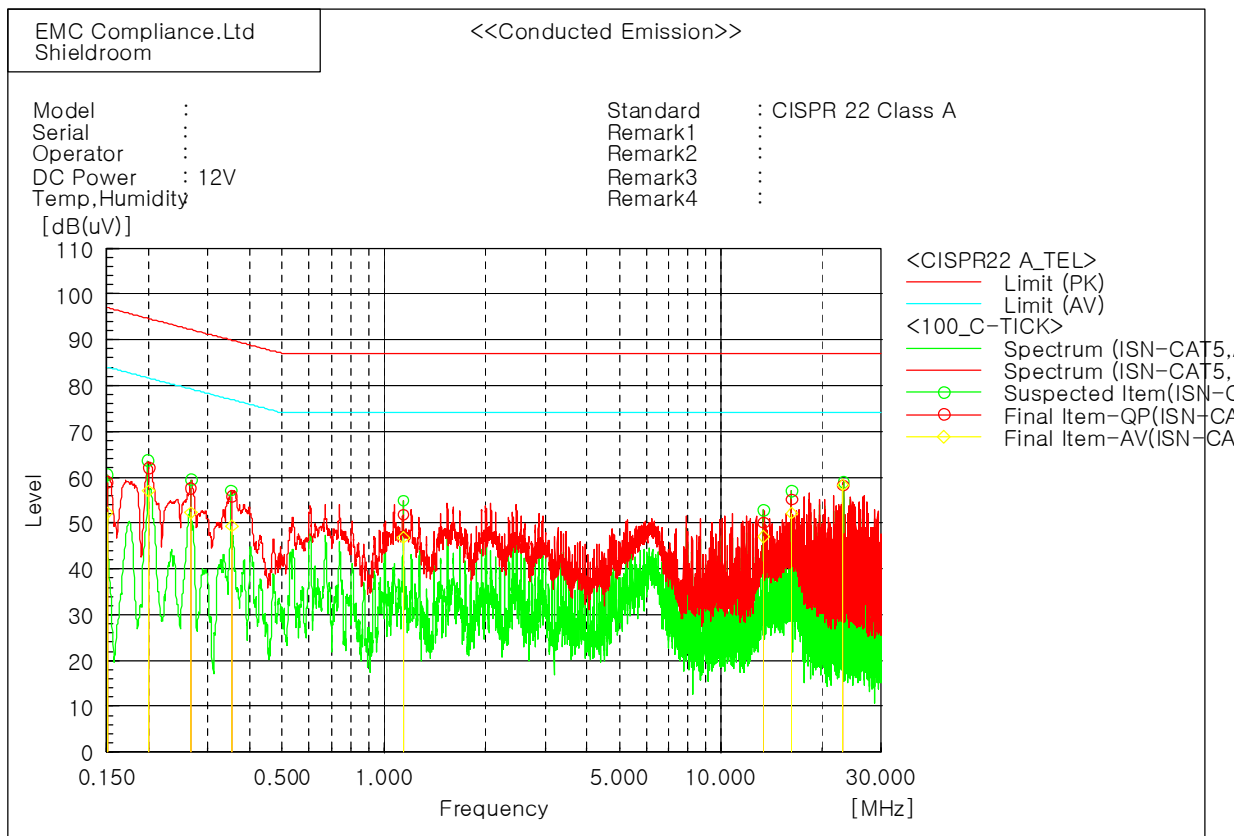


Final Result

--- ISN-CAT5 Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.15038	49.1	42.4	9.8	58.9	52.2	97.0	84.0	38.1	31.8
2	0.20026	52.3	47.2	9.7	62.0	56.9	94.6	81.6	32.6	24.7
3	0.26701	47.8	42.6	9.7	57.5	52.3	92.2	79.2	34.7	26.9
4	0.35348	46.2	39.8	9.6	55.8	49.4	89.9	76.9	34.1	27.5
5	1.13975	42.3	37.4	9.5	51.8	46.9	87.0	74.0	35.2	27.1
6	13.41975	40.6	37.5	9.5	50.1	47.0	87.0	74.0	36.9	27.0
7	16.22818	45.7	42.7	9.4	55.1	52.1	87.0	74.0	31.9	21.9
8	23.12878	48.7	48.8	9.5	58.2	58.3	87.0	74.0	28.8	15.7

#2- AC 24V _ LAN Port (LCL 65 dB)_10 Mbps

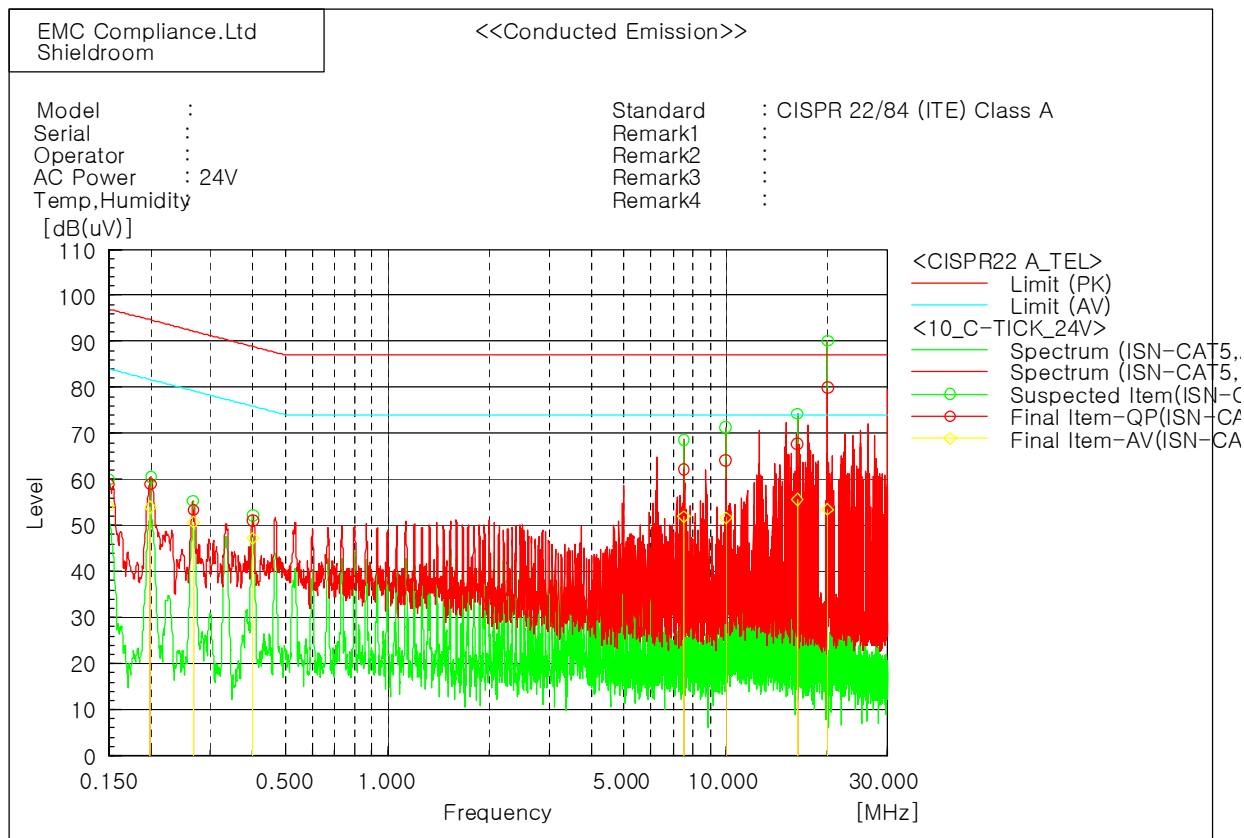


Final Result

--- ISN-CAT5 Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.15004	49.2	44.4	9.8	59.0	54.2	97.0	84.0	38.0	29.8
2	0.19998	49.2	44.1	9.8	59.0	53.9	94.6	81.6	35.6	27.7
3	0.26727	43.7	41.0	9.7	53.4	50.7	92.2	79.2	38.8	28.5
4	0.40033	41.4	37.6	9.6	51.0	47.2	88.8	75.8	37.8	28.6
5	7.49978	52.7	42.5	9.4	62.1	51.9	87.0	74.0	24.9	22.1
6	9.99985	54.6	42.1	9.5	64.1	51.6	87.0	74.0	22.9	22.4
7	16.25083	58.2	46.2	9.4	67.6	55.6	87.0	74.0	19.4	18.4
8	20.00062	70.5	44.1	9.4	79.9	53.5	87.0	74.0	7.1	20.5

#2- AC 24V _ LAN Port (LCL 65 dB)_100 Mbps

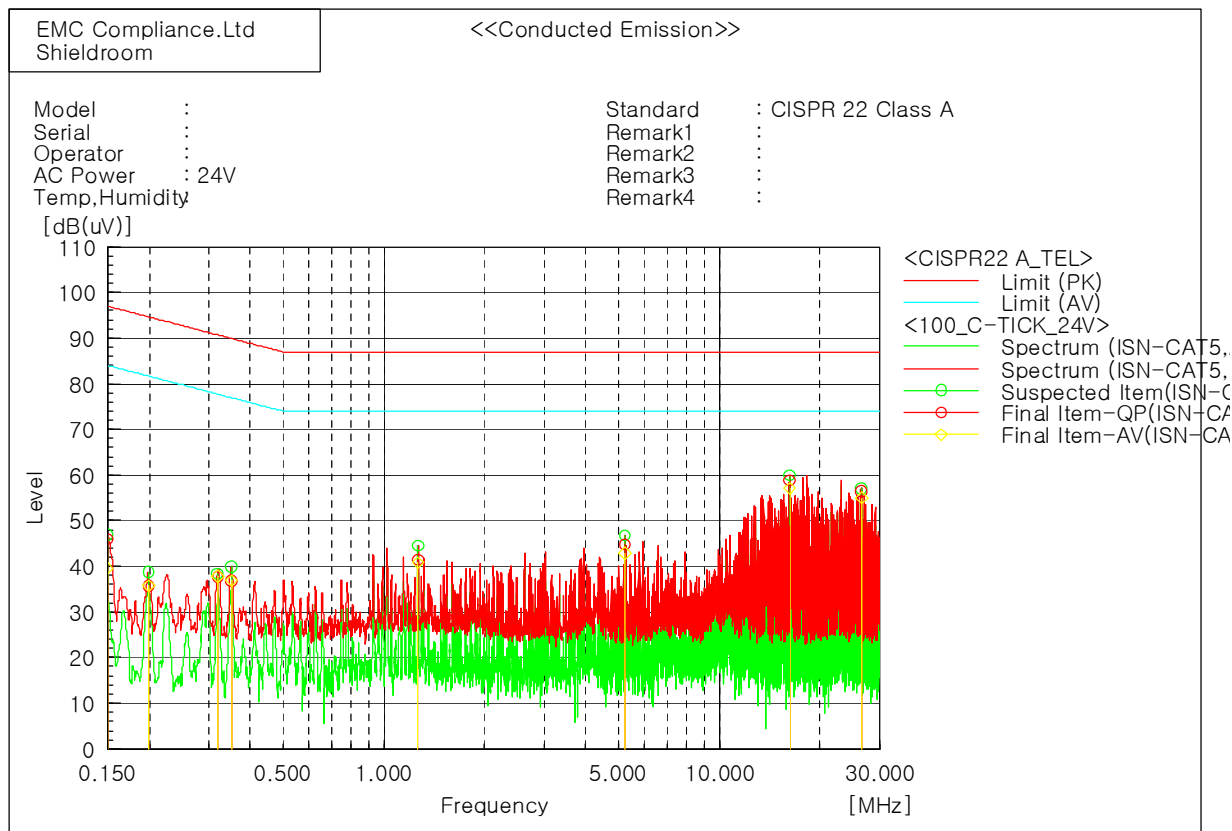


Final Result

--- ISN-CAT5 Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.15012	36.2	29.8	9.8	46.0	39.6	97.0	84.0	51.0	44.4
2	0.19896	25.8	26.0	9.8	35.6	35.8	94.7	81.7	59.1	45.9
3	0.32026	27.9	28.2	9.7	37.6	37.9	90.7	77.7	53.1	39.8
4	0.35135	27.1	27.2	9.6	36.7	36.8	89.9	76.9	53.2	40.1
5	1.26736	31.9	31.3	9.5	41.4	40.8	87.0	74.0	45.6	33.2
6	5.23613	35.3	33.4	9.4	44.7	42.8	87.0	74.0	42.3	31.2
7	16.22852	49.4	47.6	9.4	58.8	57.0	87.0	74.0	28.2	17.0
8	26.60992	46.8	45.4	9.6	56.4	55.0	87.0	74.0	30.6	19.0

#3- PoE _ LAN Port (LCL 65 dB)_10 Mbps

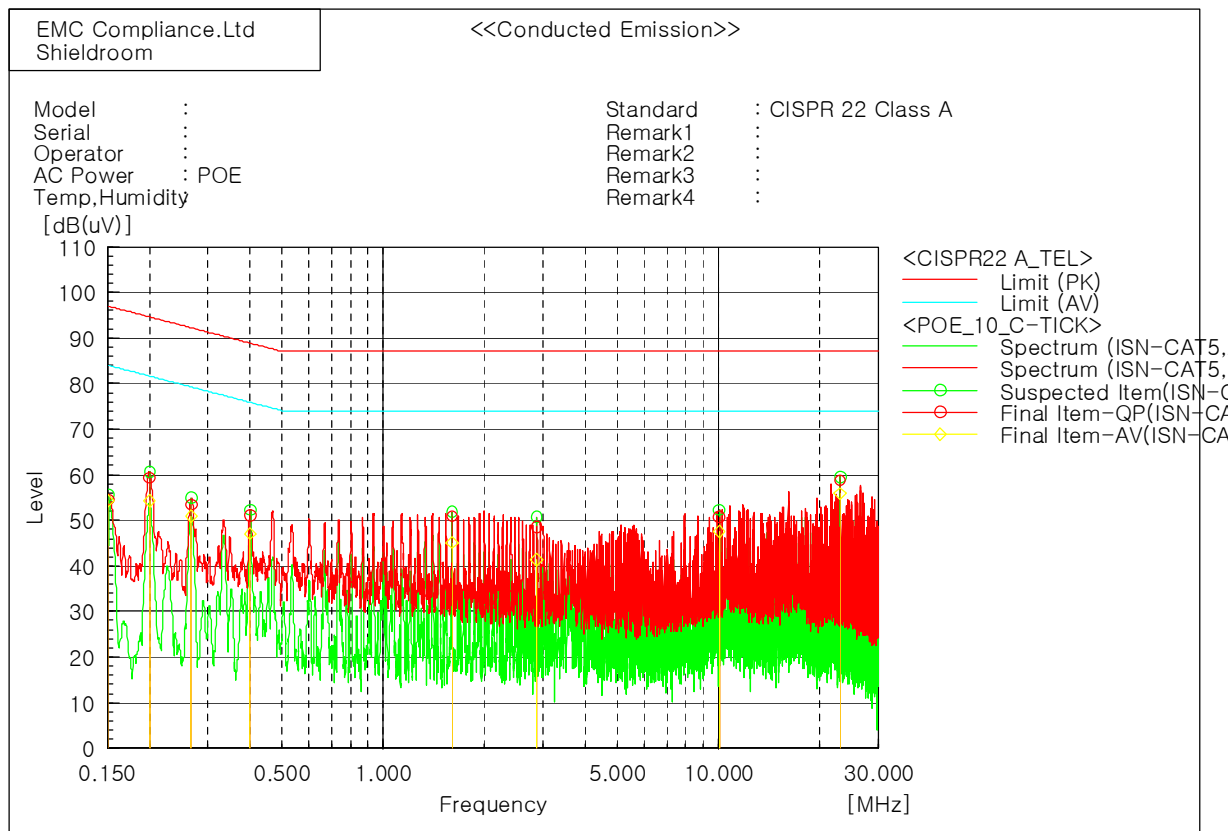


Final Result

--- ISN-CAT5 Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.1511	44.7	44.5	9.8	54.5	54.3	96.9	83.9	42.4	29.6
2	0.2004	49.6	44.5	9.7	59.3	54.2	94.6	81.6	35.3	27.4
3	0.26748	43.8	41.2	9.7	53.5	50.9	92.2	79.2	38.7	28.3
4	0.40078	41.5	37.5	9.6	51.1	47.1	88.8	75.8	37.7	28.7
5	1.60311	41.4	35.6	9.5	50.9	45.1	87.0	74.0	36.1	28.9
6	2.87192	39.1	31.9	9.4	48.5	41.3	87.0	74.0	38.5	32.7
7	10.06108	41.2	38.0	9.5	50.7	47.5	87.0	74.0	36.3	26.5
8	23.12938	49.2	46.4	9.5	58.7	55.9	87.0	74.0	28.3	18.1

#3- PoE _ LAN Port (LCL 65 dB)_100 Mbps

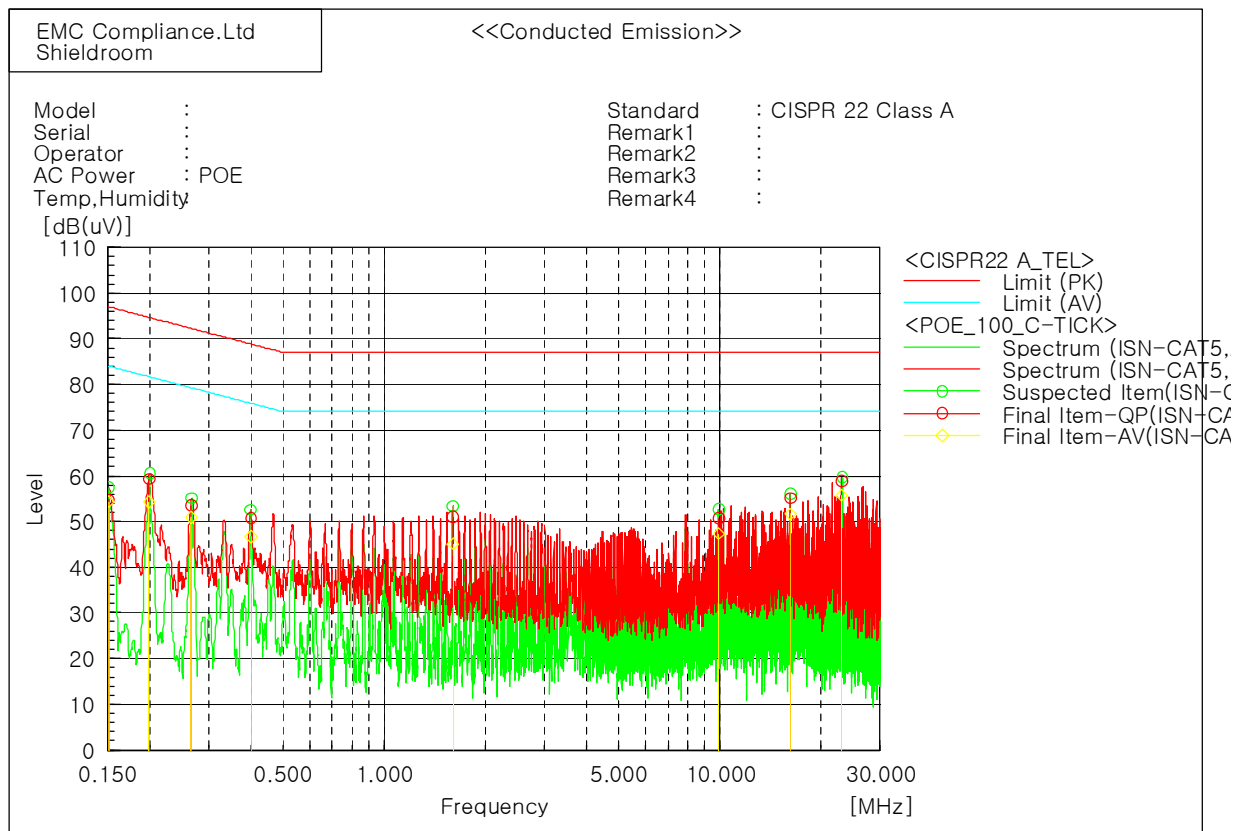

Final Result

--- ISN-CAT5 Phase ---										
No.	Frequency	Reading QP	Reading CAV	c.f	Result QP	Result CAV	Limit QP	Limit AV	Margin QP	Margin CAV
	[MHz]	[dB(uV)]	[dB(uV)]	[dB]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB]	[dB]
1	0.15093	44.9	44.5	9.8	54.7	54.3	96.9	83.9	42.2	29.6
2	0.19974	49.5	44.4	9.8	59.3	54.2	94.6	81.6	35.3	27.4
3	0.26686	43.7	41.2	9.7	53.4	50.9	92.2	79.2	38.8	28.3
4	0.40219	41.1	37.1	9.6	50.7	46.7	88.8	75.8	38.1	29.1
5	1.60388	41.4	35.6	9.5	50.9	45.1	87.0	74.0	36.1	28.9
6	9.93866	41.2	37.8	9.5	50.7	47.3	87.0	74.0	36.3	26.7
7	16.22786	45.7	42.2	9.4	55.1	51.6	87.0	74.0	31.9	22.4
8	23.12934	49.3	46.2	9.5	58.8	55.7	87.0	74.0	28.2	18.3

6.2 Radiated Emission

Test specification	AS/NZS CISPR 22:2009, Class A		
Testing voltage	DC 12 V, AC 24 V, PoE		
Test facility	10 m Chamber (#F2)		
Test distance	10 m, 3 m		
Date	2014. 01. 23		
Temperature (°C)	18.8 °C	Humidity (% R.H.)	15.3 % R.H.
Remarks	Complied		

6.2.1 Limits of radiated emission measurement

☒ Limits below 1 GHz

Frequency MHz	Class A dB μ V/m @ 10 m	Class B dB μ V/m @ 10 m
30 ~ 230	40	30
230 ~ 1 000	47	37

☒ Limits above 1 GHz

Frequency MHz	Class A @ 3 m		Class B @ 3 m	
	Average limit dB μ V/m	Peak limit dB μ V/m	Average limit dB μ V/m	Peak limit dB μ V/m
1 ~ 3	56	76	50	70
3 ~ 6	60	80	54	74

Note - The lower limit applies at the transition frequency.

6.2.2 Measurement procedure

The test was done at a 10 m chamber with a quasi-peak detector. EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane. Cables were folded back and forth forming a bundle 0.3 m to 0.4 m long and were hanged at a 0.4 m height to the ground plane. Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

6.2.3 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. Date	Used
Test Receiver	ESCI7	100732	R&S	2015.01.27	☒
Test Receiver	ESCI	100001	R&S	2014.07.25	☐
Test Receiver	ESCI	100710	R&S	2014.10.28	☐
Test Receiver	ESR	101078	R&S	2014.10.17	☐
Bi-Log Antenna	VULB 9168	440	SCHWARZBECK	2015.10.16	☒
Amplifier	310N	293004	SONOMA INSTRUMENT	2014.10.31	☒
3 dB Attenuator	8491B	22981	HP	2014.03.19	☒
Antenna Mast	MA4000-EP	303	Innco Systems	-	☒
Turn Table	DT2000S-1t	079	Innco Systems	-	☒
Amplifier	8449B	3008A02343	AGILENT	2014.10.31	☒
Horn ANT	3115	00155772	ETS	2014.03.20	☒
Spectrum Analyzer	FSP7	100289	R&S	2014.11.25	☐

6.2.4 Sample calculation

The field strength is calculated adding the antenna Factor, cable loss and, Antenna pad adding, subtracting the amplifier gain from the measured reading.

The sample calculation is as follow:

$$\text{Result} = \text{M.R} + \text{C.F}(\text{A.F} + \text{C.L} + 3 \text{ dB Att} - \text{A.G})$$

M.R = Meter Reading

C.F = Correction Factor

A.F = Antenna Factor

C.L = Cable Loss

A.G= Amplifier Gain

3 dB Att = 3 dB Attenuator



If M.R is 30 dB, A.F 12 dB, C.L 5 dB, 3 dB, A.G 35 dB

The result is



$$30 + 12 + 5 + 3 - 35 = 15 \text{ dB}\mu\text{V/m}$$

6.2.5 Photographs of test setup



* 30 MHz ~ 1 GHz (#1- DC 12V, #2- AC 24V)

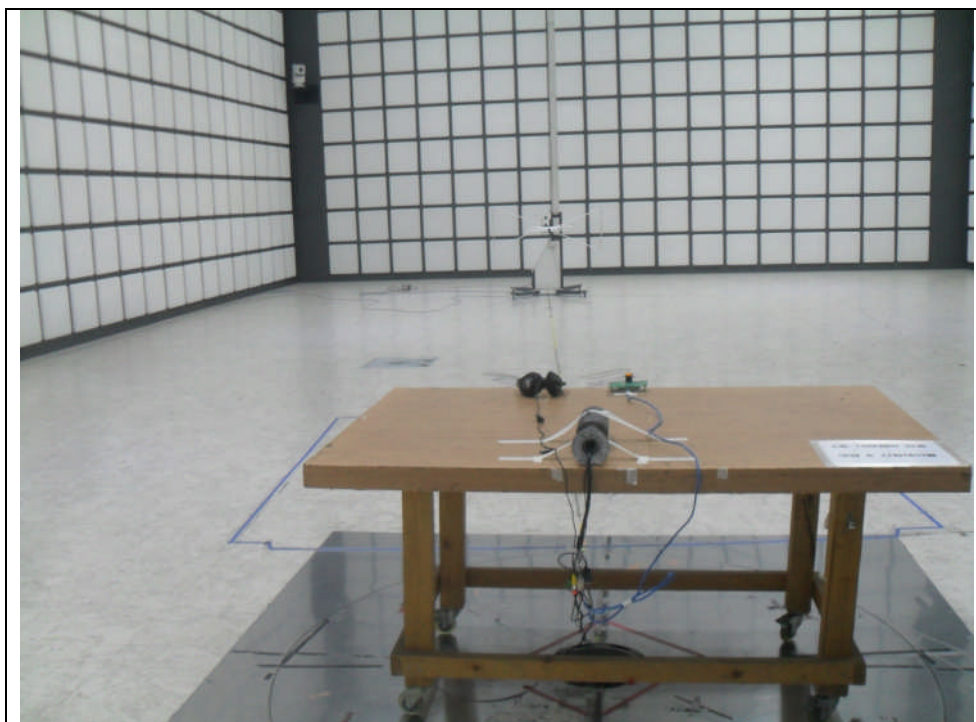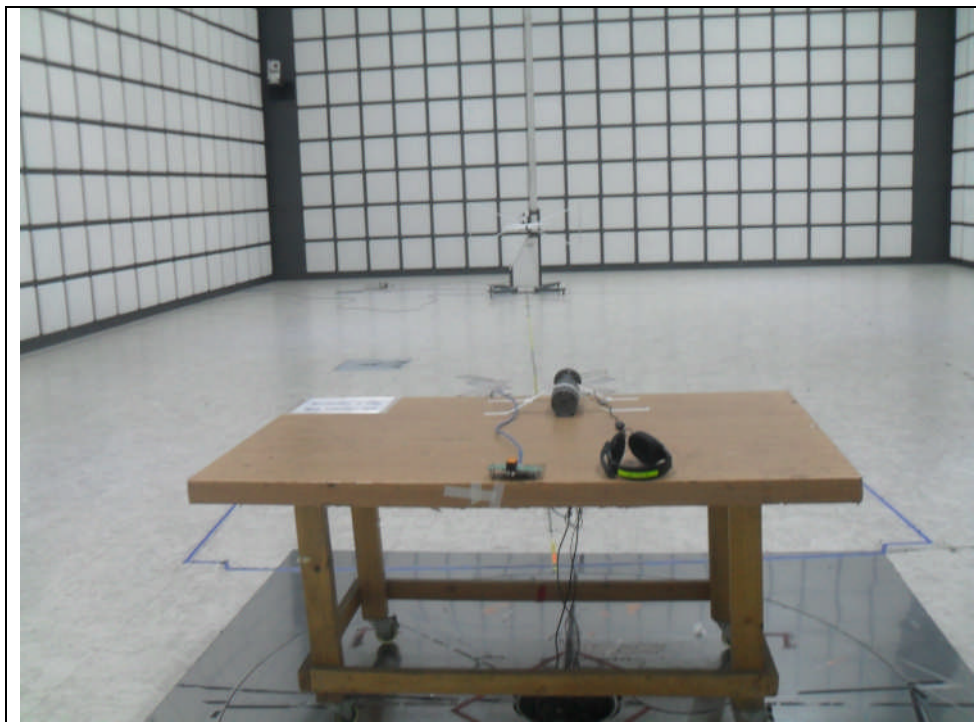



* 1 GHz ~ 6 GHz (#1- DC 12V, #2- AC 24V)

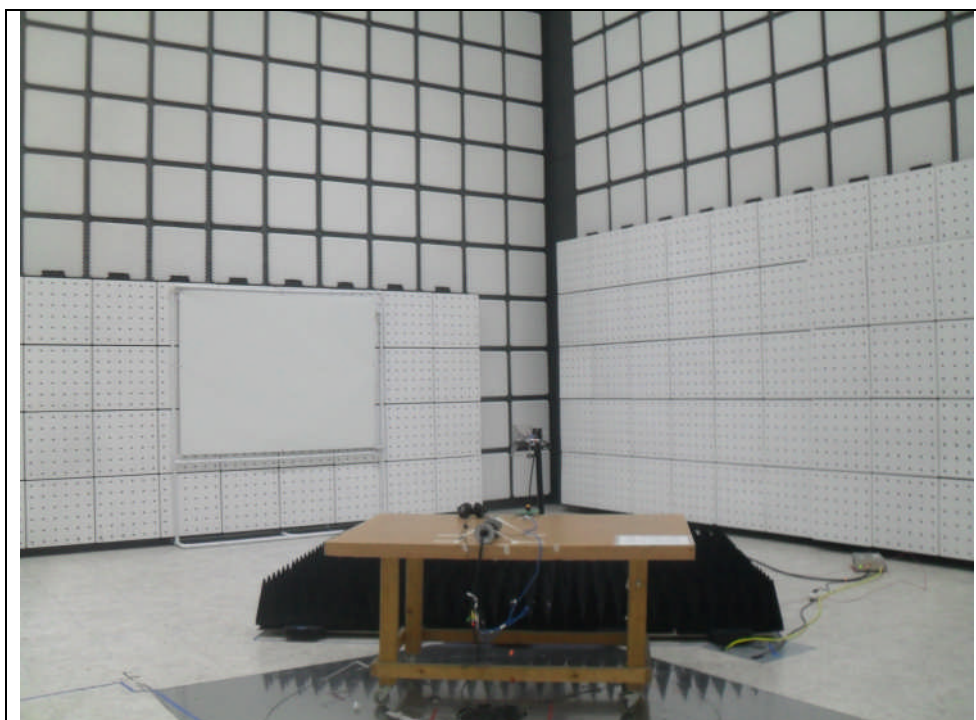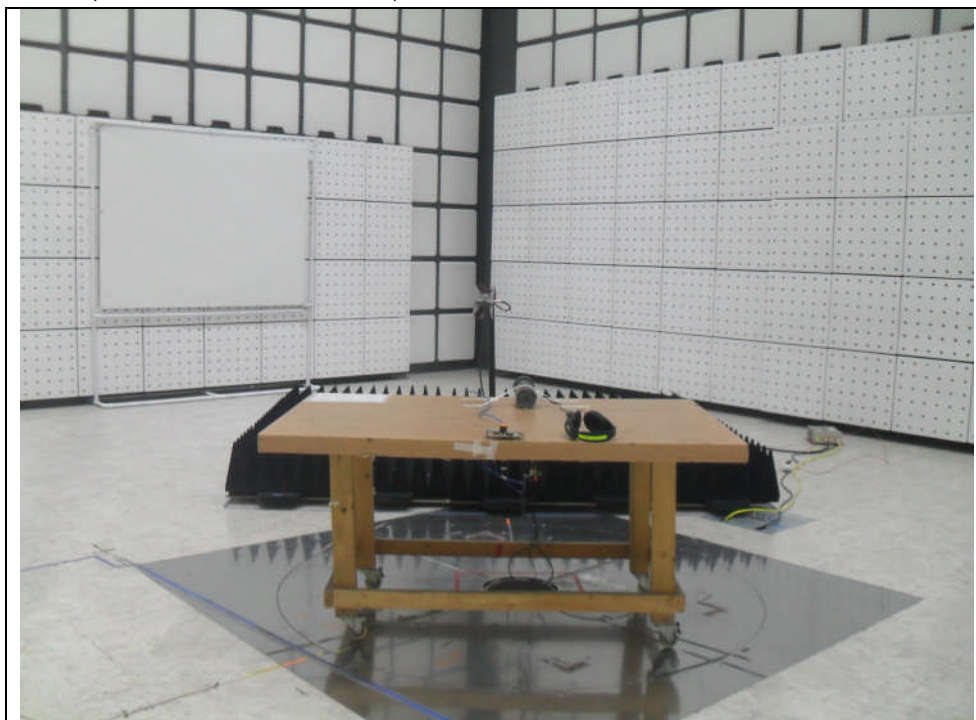

* 30 MHz ~ 1 GHz (#3-PoE)

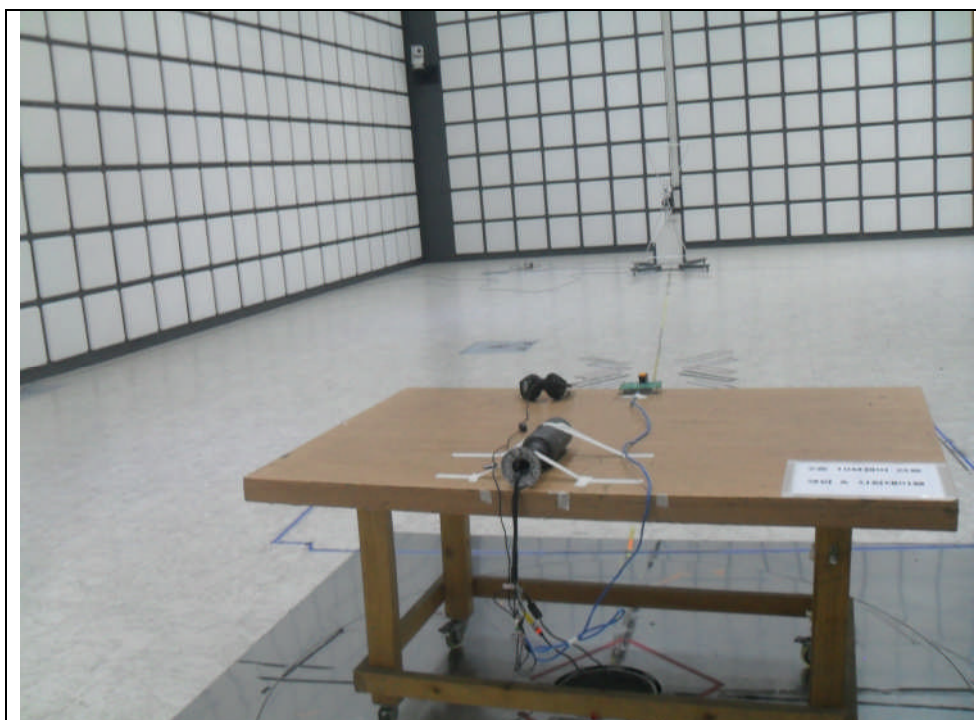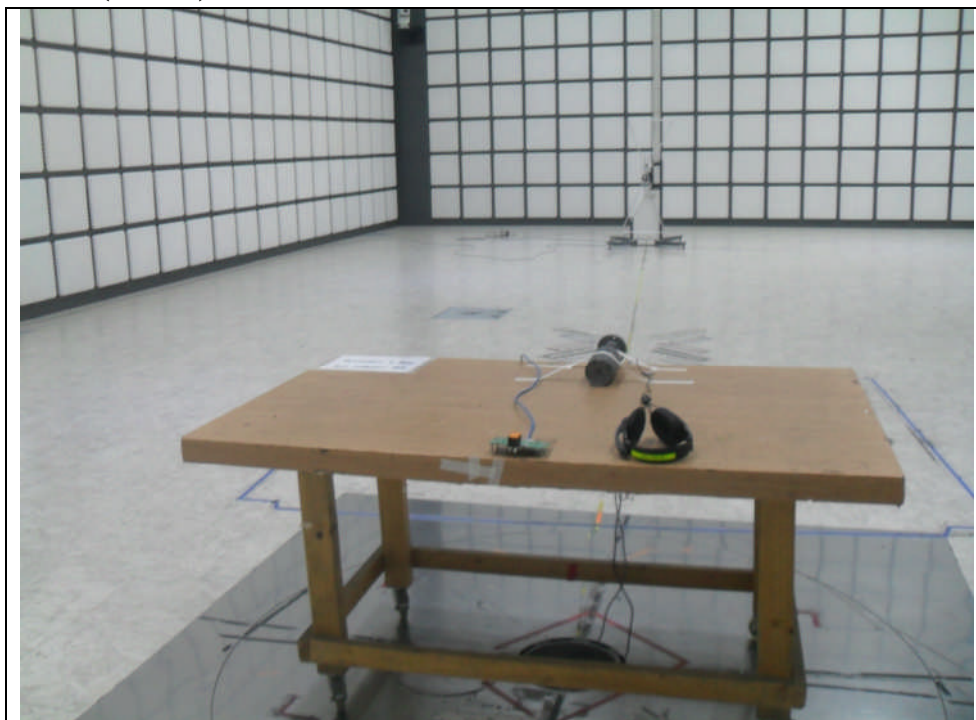


* 1 GHz ~ 6 GHz (#3-PoE)

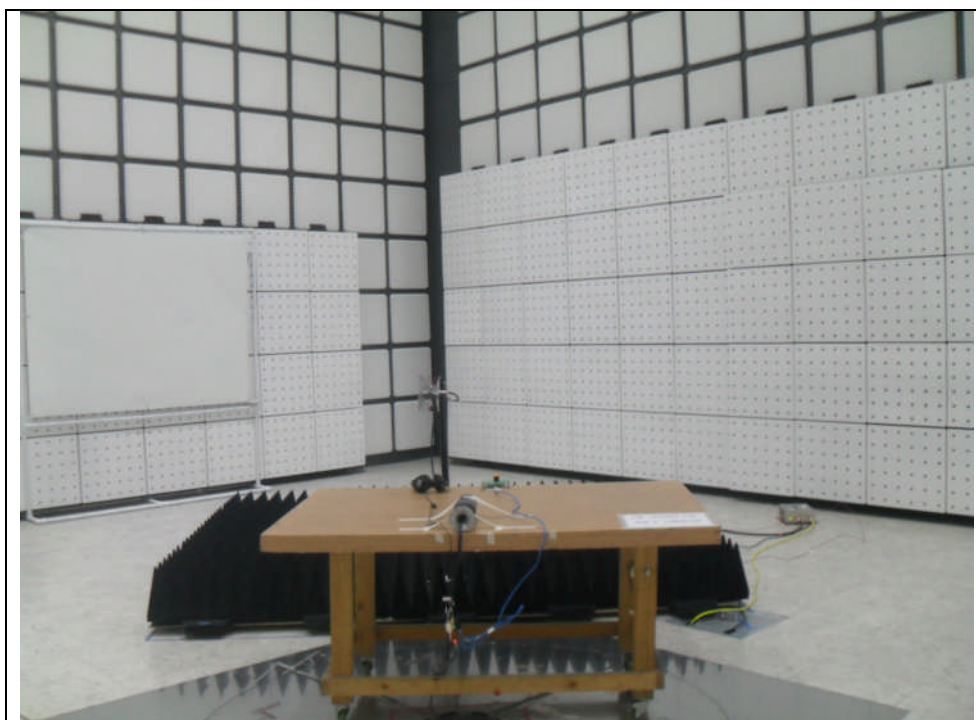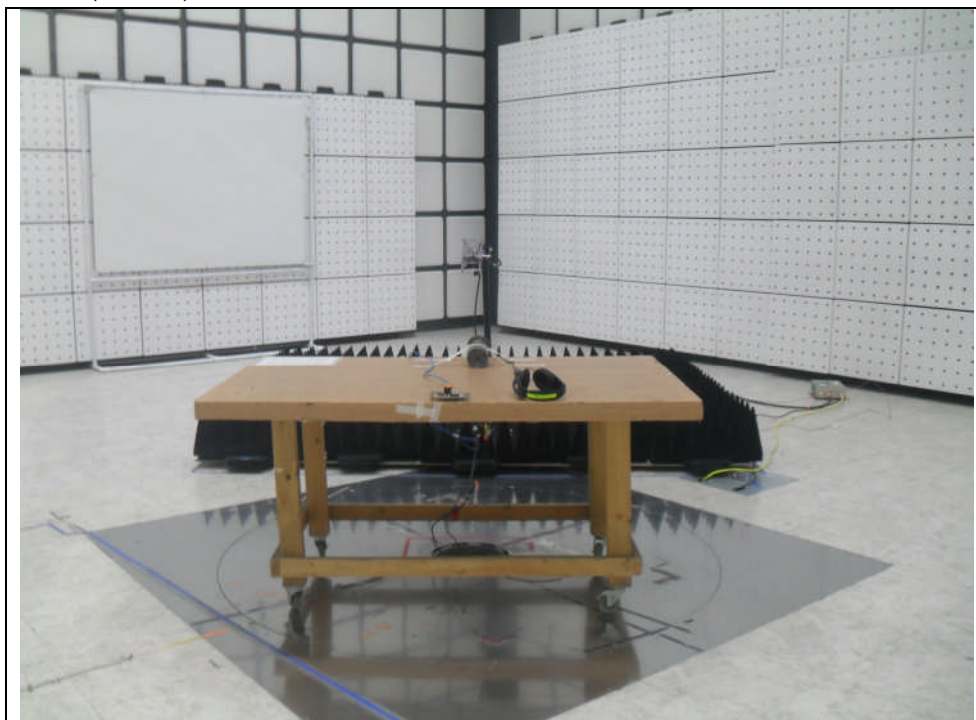

6.2.6 Radiated emission measurement result

* Graph and Data


* 30 MHz ~ 1 GHz (SNO-7084RP)_#1- DC 12V

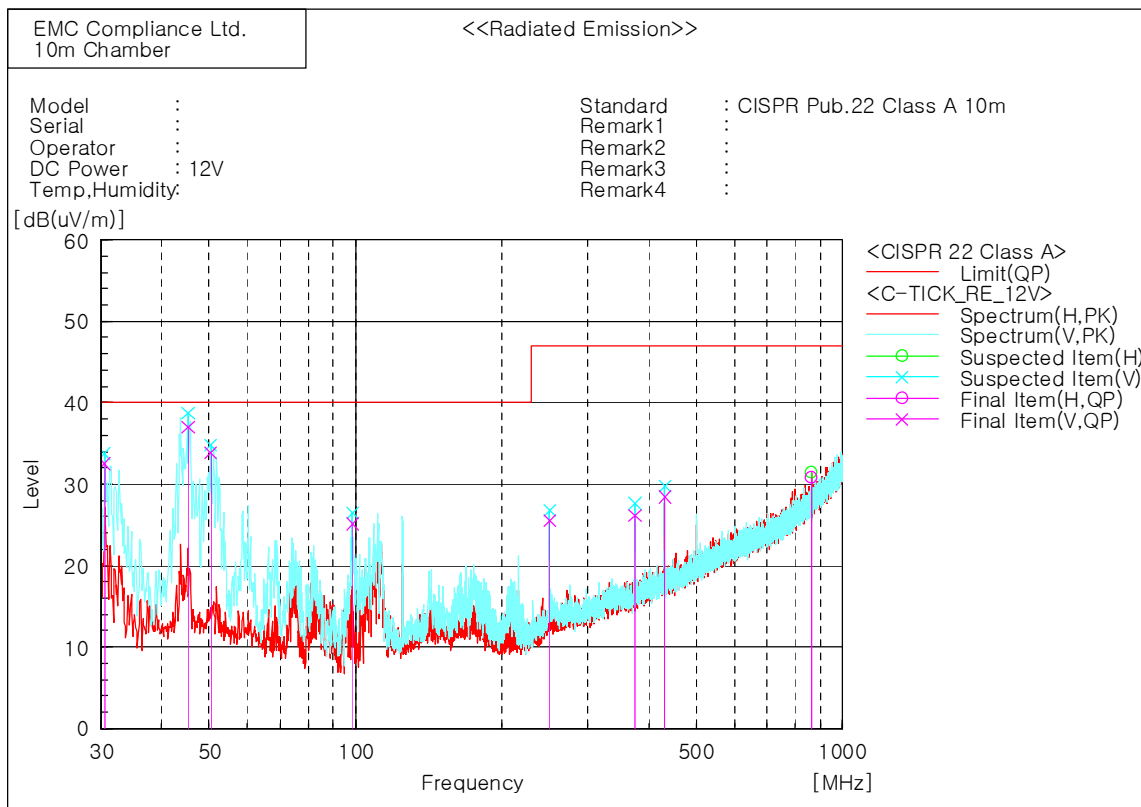

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	30.485	V	47.6	-15.1	32.5	40.0	7.5	100.0	144.4
2	45.278	V	50.3	-13.3	37.0	40.0	3.0	100.0	313.5
3	50.370	V	47.0	-13.2	33.8	40.0	6.2	100.0	43.3
4	98.385	V	42.7	-17.6	25.1	40.0	14.9	100.0	172.1
5	249.947	V	37.6	-12.1	25.5	47.0	21.5	100.0	61.0
6	374.956	V	34.2	-8.0	26.2	47.0	20.8	100.0	91.4
7	431.944	V	34.7	-6.3	28.4	47.0	18.6	400.0	133.0
8	864.079	H	27.5	3.3	30.8	47.0	16.2	100.0	44.5


* 1 GHz ~ 6 GHz (SNO-7084RP)_#1- DC 12V

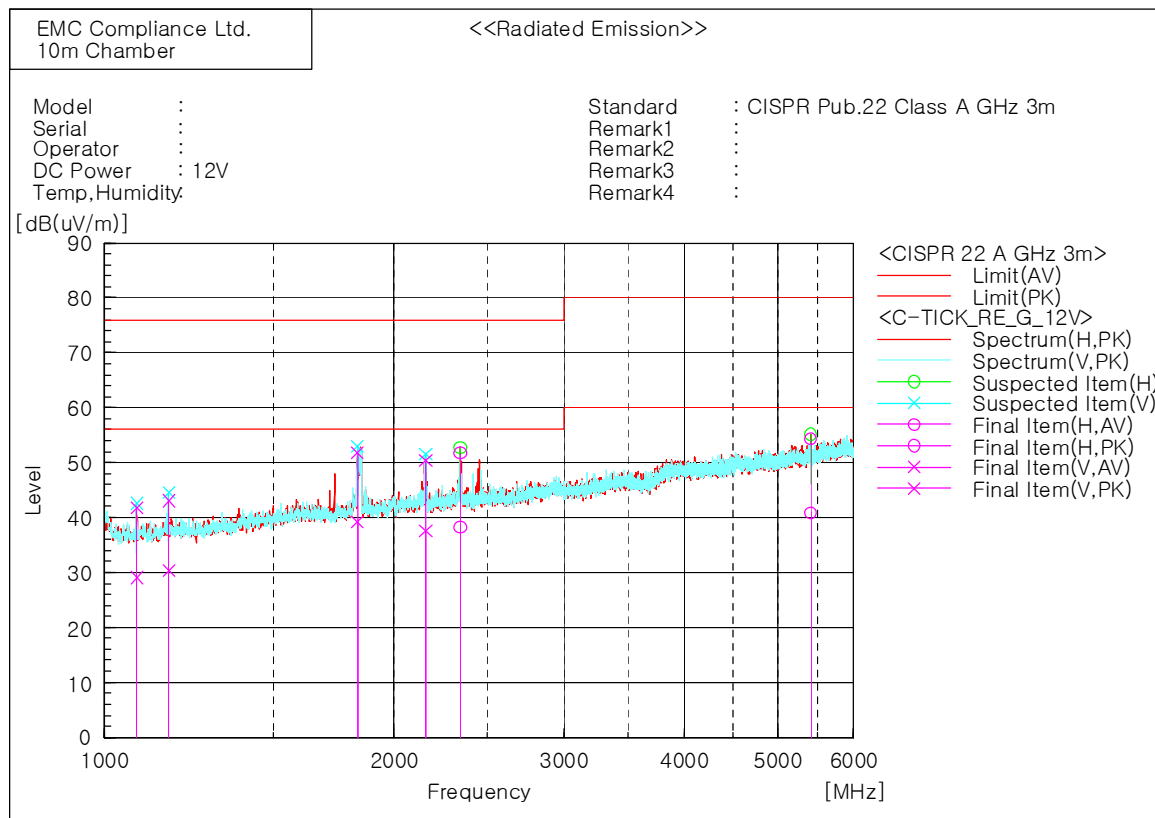

Final Result

No.	Frequency [MHz]	(P)	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
1	1080.000	V	35.2	47.9	-6.1	29.1	41.8	56.0	76.0	26.9	34.2	100.0	134.5
2	1165.625	V	35.4	48.2	-5.1	30.3	43.1	56.0	76.0	25.7	32.9	100.0	224.8
3	1831.250	V	38.8	51.3	0.5	39.3	51.8	56.0	76.0	16.7	24.2	100.0	187.2
4	2156.250	V	35.8	48.7	1.8	37.6	50.5	56.0	76.0	18.4	25.5	100.0	19.6
5	2342.500	H	35.7	49.2	2.5	38.2	51.7	56.0	76.0	17.8	24.3	100.0	122.2
6	5416.250	H	26.9	40.3	14.0	40.9	54.3	60.0	80.0	19.1	25.7	100.0	76.9


* 30 MHz ~ 1 GHz (SNO-7084RP)_#2- AC 24V

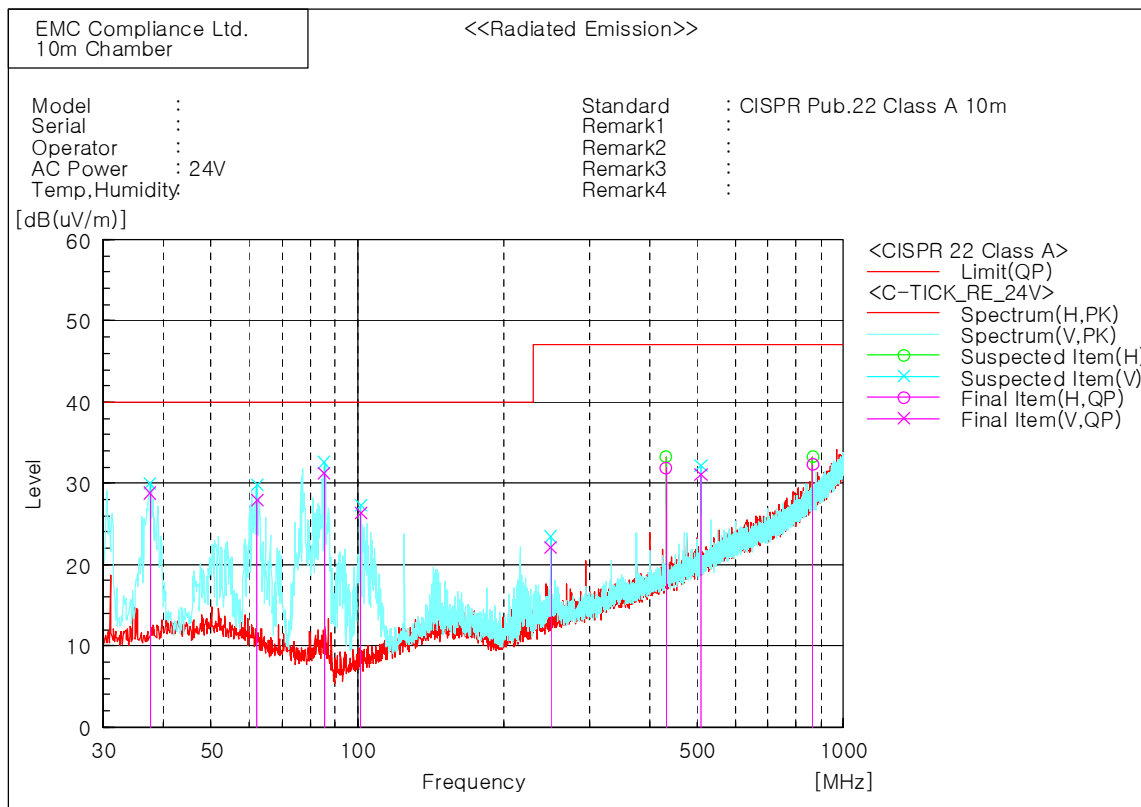

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	37.518	V	43.1	-14.3	28.8	40.0	11.2	400.0	141.2
2	62.253	V	42.4	-14.5	27.9	40.0	12.1	400.0	48.5
3	85.411	V	49.3	-18.1	31.2	40.0	8.8	400.0	83.5
4	101.901	V	43.6	-17.2	26.4	40.0	13.6	400.0	176.2
5	249.947	V	34.2	-12.1	22.1	47.0	24.9	100.0	59.1
6	432.065	H	38.2	-6.3	31.9	47.0	15.1	200.0	296.5
7	509.301	V	35.5	-4.4	31.1	47.0	15.9	400.0	261.3
8	864.079	H	29.0	3.3	32.3	47.0	14.7	100.0	206.1


* 1 GHz ~ 6 GHz (SNO-7084RP)_#2- AC 24V

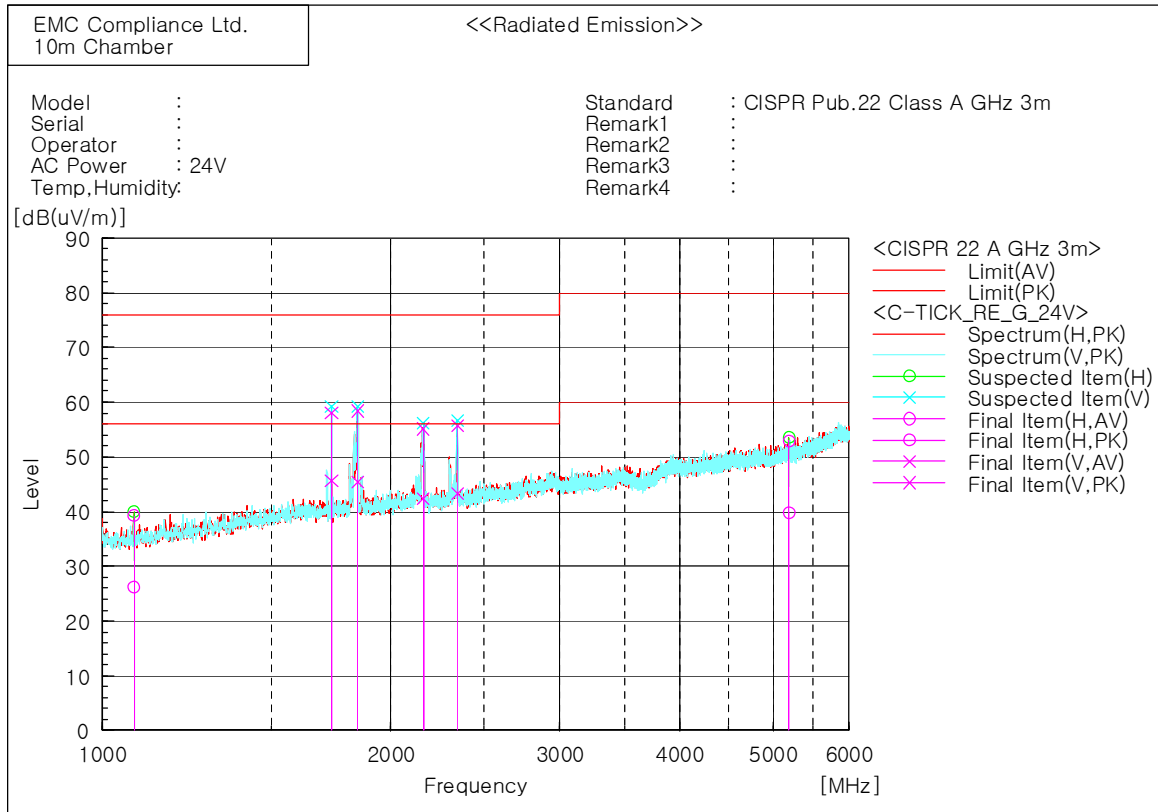

Final Result

No.	Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	c. f [dB(1/m)]	Result AV [dB(uV/m)]	Result PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
1	1080.000	H	32.3	45.4	-6.1	26.2	39.3	56.0	76.0	29.8	36.7	100.0	306.9
2	1733.750	V	46.0	58.5	-0.4	45.6	58.1	56.0	76.0	10.4	17.9	100.0	294.8
3	1847.500	V	45.0	57.9	0.5	45.5	58.4	56.0	76.0	10.5	17.6	100.0	149.9
4	2161.250	V	40.5	53.3	1.8	42.3	55.1	56.0	76.0	13.7	20.9	100.0	15.3
5	2346.250	V	40.7	53.2	2.5	43.2	55.7	56.0	76.0	12.8	20.3	100.0	201.2
6	5200.625	H	27.0	40.1	12.8	39.8	52.9	60.0	80.0	20.2	27.1	100.0	27.4


* 30 MHz ~ 1 GHz (SNO-7084RP)_#3- PoE

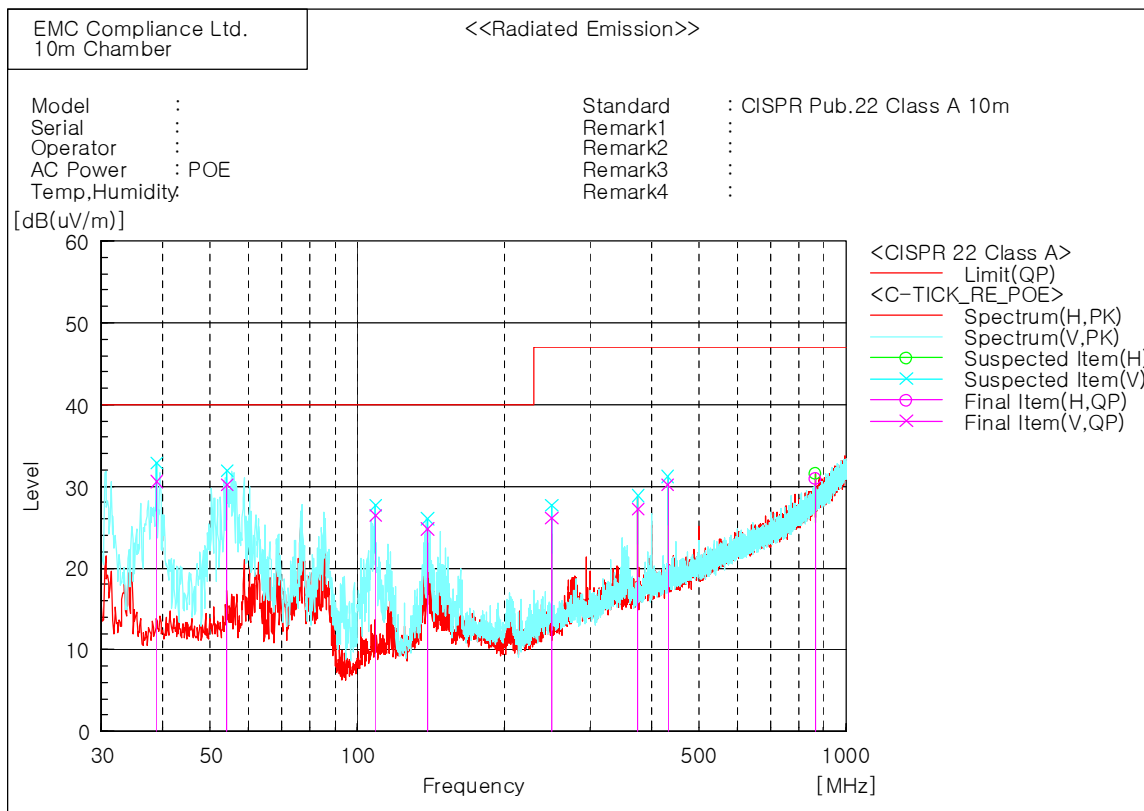

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	38.851	V	44.6	-14.0	30.6	40.0	9.4	400.0	81.3
2	54.129	V	43.5	-13.3	30.2	40.0	9.8	100.0	340.5
3	108.813	V	42.8	-16.4	26.4	40.0	13.6	100.0	248.7
4	139.246	V	38.3	-13.5	24.8	40.0	15.2	400.0	9.4
5	249.947	V	38.2	-12.1	26.1	47.0	20.9	100.0	60.2
6	374.956	V	35.2	-8.0	27.2	47.0	19.8	100.0	233.6
7	432.065	V	36.5	-6.3	30.2	47.0	16.8	100.0	248.7
8	864.079	H	27.6	3.3	30.9	47.0	16.1	100.0	288.8

* 1 GHz ~ 6 GHz (SNO-7084RP)_#3- PoE

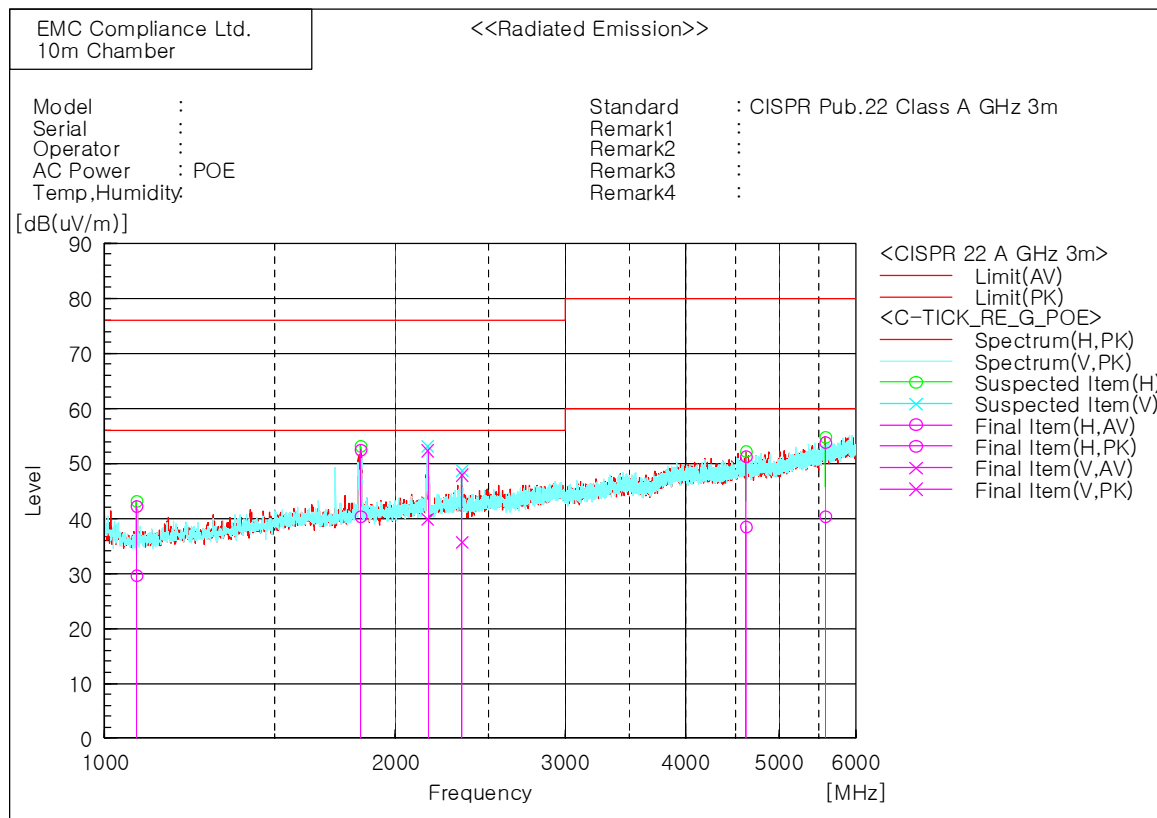

Final Result


No.	Frequency [MHz]	(P)	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
1	1079.375	H	35.7	48.4	-6.2	29.5	42.2	56.0	76.0	26.5	33.8	100.0	180.6
2	1843.750	H	39.8	51.9	0.5	40.3	52.4	56.0	76.0	15.7	23.6	100.0	296.5
3	2163.125	V	38.0	50.5	1.8	39.8	52.3	56.0	76.0	16.2	23.7	100.0	168.6
4	2345.000	V	33.1	45.4	2.5	35.6	47.9	56.0	76.0	20.4	28.1	100.0	327.6
5	4620.625	H	27.4	40.2	11.0	38.4	51.2	60.0	80.0	21.6	28.8	100.0	238.6
6	5588.750	H	25.8	39.2	14.5	40.3	53.7	60.0	80.0	19.7	26.3	100.0	115.1

7. E.U.T. photographs

Front View



Rear View

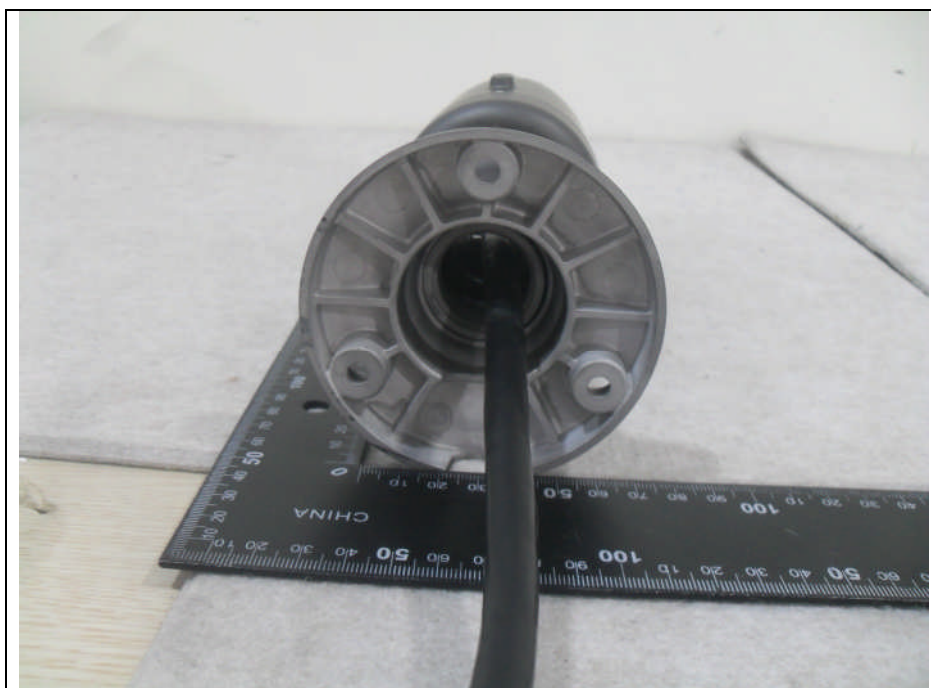

Left View



Right View




Top View





Bottom View





Inside

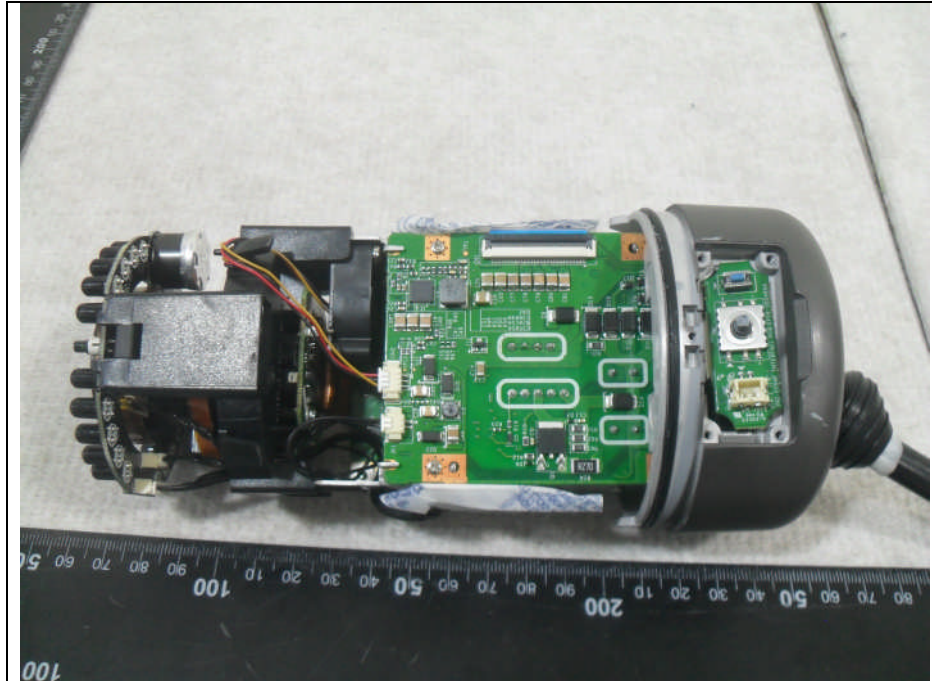


SUB Board

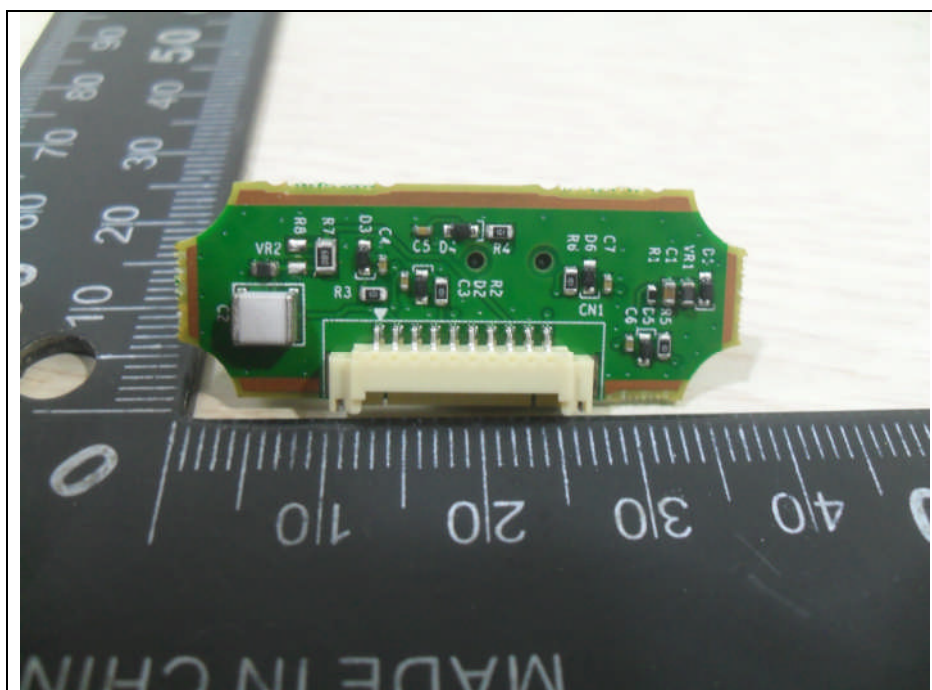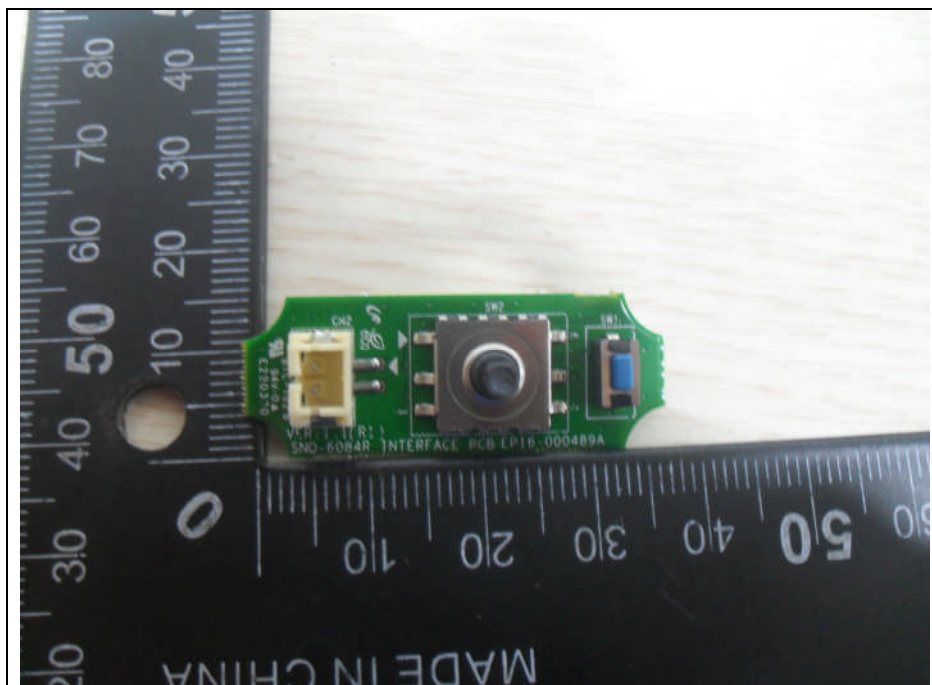

CCD Board

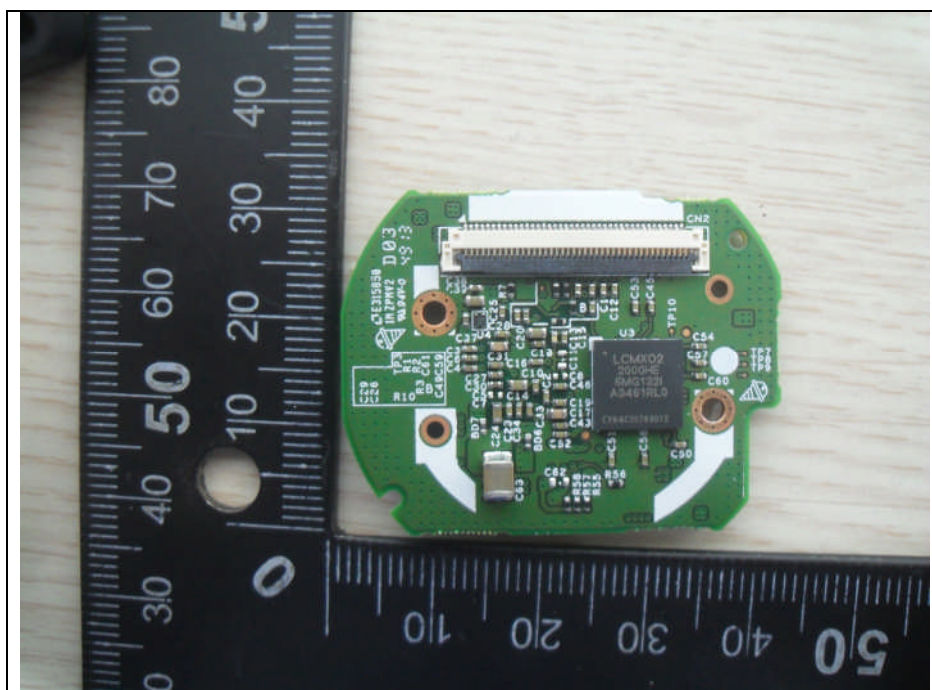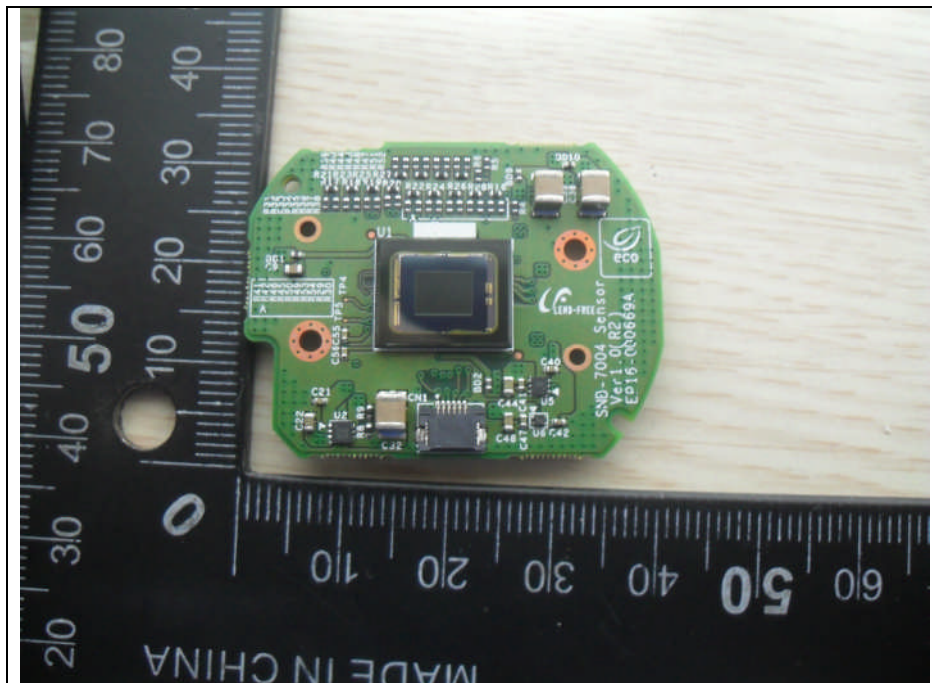

IR Board

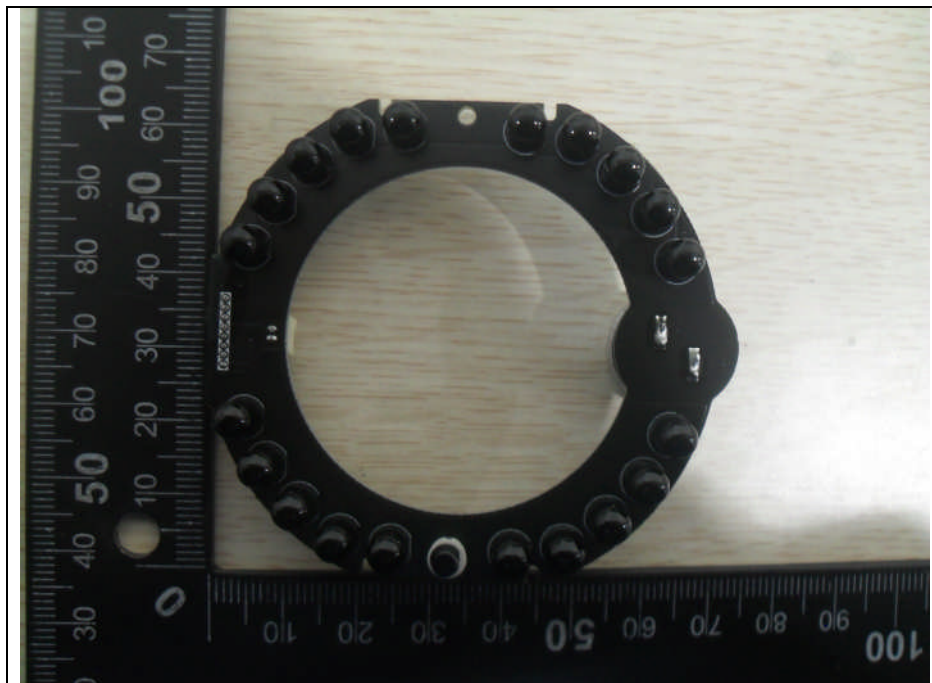

Power Board

