

TESTING CERTIFICATE

EMC Compliance Ltd.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do,
443-390, Korea
TEL: 82 31 336 9919
FAX: 82 505 299 8311

Certificate No.: EMC-CE-4712

Page(1) / (40) Pages

**1. Applicant**

Name: Samsung Techwin Co., Ltd.
Address: 84, Jeongdong-ro, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, Korea
Date of Receipt: March 04, 2014

2. Manufacturer

Name#1: Samsung Techwin Co., Ltd.
Name#2: TIANJIN SAMSUNG TECHWIN
OPTO-ELECTRONIC CO., LTD

3. Use of Report:

Completed report

4. Test Sample:

Digital Video Recorder, SRD-476DP

5. Date of Test:

March 13 ~ 17, 2013

6. Test method used:

AS/NZS CISPR 22:2009+A1:2010, Class A

7. Testing Environment:

Temperature: $(20.15 \pm 0.15) ^\circ\text{C}$,
Relative Humidity: $(28.75 \pm 1.05) \% \text{ R.H.}$

8. Test Results:

Refer to page 12 ~ page 24
(Measurement uncertainty: Refer to page 6)

This result shown in this report refer only to the sample(s) tested unless otherwise stated.

This Test Report cannot be reproduced, except in full, without the written approval of
EMC Compliance Laboratory.

Affirmation	Tested by	Technical Manager
	 Name: PARK, GUN-SU	 Name: YEOM, HAN-SEOK

The above test certificate is the accredited test results by Korea Laboratory Accreditation Scheme, which signed the ILAC-MRA.

2014.03.21
EMC Compliance Ltd.

Accredited by KOLAS, Republic of KOREA

Contents

1. Applicant information	3
2. Laboratory information	4
3. Test system configuration.....	5
3.1 Operation environment	5
3.2 Measurement Uncertainty.....	6
4. Description of E.U.T.	7
4.1 General information.....	7
4.2 Product description	8
4.3 Auxiliary equipments.....	8
4.4 Test configuration	9
4.5 Operating conditions.....	10
5. Summary of test results	11
5.1 Summary of EMI emission test results	11
6. Test results	12
6.1 Conducted Emission	12
6.2 Radiated Emission	19
7. E.U.T. photographs.....	25

1. Applicant information

Applicant: Samsung Techwin Co., Ltd.
Address: 84, Jeongdong-ro, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, Korea
Telephone: +82-70-7147-8361
Fax: +82-31-277-2784
E-mail: js2002.kang@samsung.com
Contact name: **Kang Jei Soon**

Manufacturer#1: Samsung Techwin Co., Ltd.
Address: 84, Jeongdong-ro, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, Korea
Telephone: +82-70-7147-8361
Fax: +82-31-277-2784
E-mail: js2002.kang@samsung.com
Contact name: **Kang Jei Soon**

Manufacturer#2: TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONIC CO., LTD
Address: No.11 Weiliu Road. Micro-Electronic Industrial Park
Jingang Road Tianjin 300385, China

2. Laboratory information

Address

EMC compliance Ltd.

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-390, Korea

Telephone Number: 82 31 336 9919

Facsimile Number: 82 505 299 8311


FCC CAB.: KR0040

VCCI Registration No. : R-3327, G-198, C-3706, T-1849

Industry Canada Registration No.: 8035A

KOLAS NO.: 231

SITE MAP

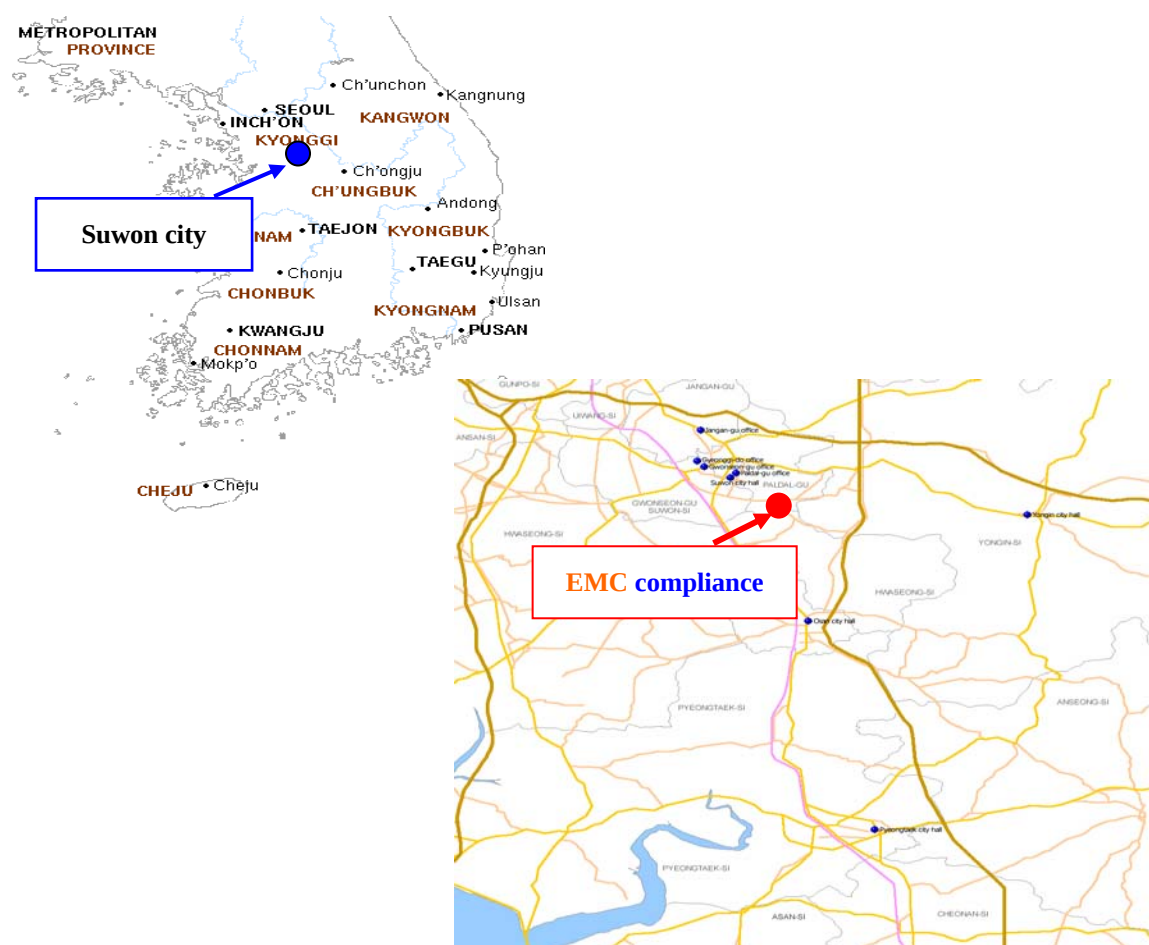

3. Test system configuration

3.1 Operation environment

	Temperature	Humidity	Pressure
Chamber(10 m)	: 20.3 °C	29.8 % R.H.	-
Shielded room(CE)	: 20.0 °C	27.7 % R.H.	-

Test site

These testing items were performed following locations;

Test item	Test site
Conducted Emission	Shielded Room
Radiated Emission	10 m Chamber

3.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability. Based on CISPR 16-4-2, the measurement uncertainty level with a 95 % confidence level was applied.

Conducted emission measurement (C.L: Approx 95 %, k = 2)		
Shielded Room (CE#1)	9 kHz ~ 150 kHz	± 3.82 dB
	150 kHz ~ 30 MHz	± 3.43 dB
Shielded Room (CE#2)	9 kHz ~ 150 kHz	± 3.82 dB
	150 kHz ~ 30 MHz	± 3.43 dB
Shielded Room (CE#3)	9 kHz ~ 150 kHz	± 4.00 dB
	150 kHz ~ 30 MHz	± 3.63 dB
Radiated Emission measurement (C.L: Approx 95 %, k = 2)		
10 m Chamber (#F4)	30 MHz ~ 300 MHz	3 m: + 4.56 dB, - 4.58 dB 10 m: + 4.56 dB, - 4.56 dB
	300 MHz ~ 1 000 MHz	3 m: + 4.84 dB, - 4.85 dB 10 m: + 4.71 dB, - 4.72 dB
	1 GHz ~ 6 GHz	3 m: + 6.19 dB, - 6.20 dB
10 m Chamber (#F2)	30 MHz ~ 300 MHz	3 m: + 4.86 dB, - 4.88 dB 10 m: + 4.86 dB, - 4.86 dB
	300 MHz ~ 1 000 MHz	3 m: + 4.98 dB, - 4.99 dB 10 m: + 4.85 dB, - 4.87 dB
	1 GHz ~ 6 GHz	3 m: + 6.19 dB, - 6.20 dB

4. Description of E.U.T.

4.1 General information

SRD-476DP		
Video	Inputs	4 composite video 0.5~1 Vpp, 75 ohm automatic termination
	Resolution	1280x480 NTSC, 1280x576 PAL / 720x480 NTSC, 720x576 PAL
	Frame rate	120fps NTSC, 100fps PAL
Live	Resolution	1280x480 NTSC, 1280x576 PAL(704x480 NTSC, 704x576 PAL)
	Multi Screen display	1/4/PIP/Sequence
Performance		
Operating System	Embedded	Linux
Recording	Compression	H.264
	Record Rate	NTSC: Up to 120fps @ 1280x480 / PAL: Up to 100fps @ 1280x576 NTSC: Up to 120fps @ 928x480 / PAL: Up to 100fps @ 928x576 NTSC: Up to 120fps @ 704x480 / PAL: Up to 100fps @ 704x576 NTSC: Up to 120fps @ 704x240 / PAL: Up to 100fps @ 704x288 NTSC: Up to 120fps @ 352x240 / PAL: Up to 100fps @ 352x288
	Mode	NTSC: Manual, Schedule (Continuous/Event), Event(Pre/Post), Time lapse (1~30 fps) PAL: Manual, Schedule (Continuous/Event), Event(Pre/Post), Time lapse (1~25 fps)
	Event	Video Loss, Motion(Level 1~10), Alarm, Tampering(Level 1~3)
	Overwrite modes	Continuous
	Pre-alarm	Up to 30 sec (5,10,20,30 Sec)
	Post-Alarm	Up to 6 hour (5,10,20,30 sec,1,3,5,10,20 min,1,2,3,4,5,6 hour)
	Search mode	Date/time, Event, Back up, Pos, Motion (* All Search Included Preview Function)
	Playback Rate	NTSC: Up to 60fps @ 1280x480 / PAL: Up to 50fps @ 1280x576 NTSC: Up to 120fps @ 928x480 / PAL: Up to 100fps @ 928x576 NTSC: Up to 120fps @ 704x480 / PAL: Up to 100fps @ 704x576 NTSC: Up to 120fps @ 704x240 / PAL: Up to 100fps @ 704x288 NTSC: Up to 120fps @ 352x240 / PAL: Up to 100fps @ 352x288
	Playback function	Fast Forward/Backward (x2,x4,x8,x16,x32,x64) * Backward Play with I-frame Only, Slow Forward/Backward (x1/2,x1/4,x1/8) * Backward Play with I-frame Only Step Forward/Backward
	Network (IPv4)	Transmission speed Option 1) 1280H/W/1/4CIF/2CIF/CIF(120fps NTSC, 100fps PAL) Option 2) 4CIF/2CIF/CIF(30/60/120fps NTSC, 25/50/100fps PAL)
	Bandwidth	Up to (16)Mbps
	Bandwidth control	Selectable
	Stream	H.264(4CIF/2CIF/CIF Selectable)
	Remote users Maximum	Search(3)/Live Unicast(10)/Live Multicast(20)
	Protocol support	TCP/IP, DHCP, PPPoE, SMTP, RTP, HTTP, DDNS, RTSP, SNMP
	Monitoring	Smart viewer, Web viewer, SSM(CMS)
	Smart phone	Platform: Android, iOS Protocol support: RTP, RTSP, HTTP, CGI, HTTPS Remote users Maximum: Live(4), Search(1)
Storage	Internal HDD	Up to 1 SATA HDDs
	External (e-SATA Interface)	N/A
	DVD Writer (Back-up)	YES
	USB (Back-up)	2 USB Ports
Security	File Format (Back-up)	BU(DVR Player), EXE(Include Player), AVI
	Password Protection	1 Admin, 10 Group, 10 User per 1 Group
Interface		
Monitors	Data Authentication	Watermark
	VGA	1 VGA (1280x720, 1280x1024, 1920x1080)
	HDMI	1 HDMI (1280x720, 1280x1024, 1920x1080)
	Main Composite	N/A
Audio	Spot(Composite)	2CH(Digital Spot 1CH/Analog Spot 1CH) * Included OSD On Screen, Multi mode Support
	Loop Outputs	4CH
	Inputs/Output	4CH line in / 1CH line out
Alarm	Compression	G.711
	Sampling rate	8KHz
	Inputs/Outputs	Terminal 4 Inputs (NO/NC) / Terminal 2 relay Outputs (NO/NC), Rating : 30V DC/2A, 250V AC/0.25A
Connections	Remote notification	Notification via e-mail
	Ethernet	1 RJ45 10/100/1000 Base-T
	Serial interface	RS-232/RS-485(Half Duplex) for PTZ, Samsung System Keyboard
	USB	USB 2.0, 2 ports
	e-SATA	N/A
	Application Support	Remote Controller
	Protocol support	Samsung-E/Samsung-T/Pelco-D/Pelco-p/Panasonic/ Phillips/ AD/ DIAMOND/ ERNA/ KALATEL/ VCL PTZ Control via Coaxial Cable (Samsung CCVC, Pelco-C (Coaxitron))
General		
Electrical	Input Voltage/Current	DC12V Adaptor, 4A, 100~240VAC, 50~60Hz, 55watt
	Power consumption	Max.20W (with 1x HDD)
Environmental	Operating Temperature/Humidity	+0°C to +40°C (+32°F to +104°F) / 20% to 85% RH
Mechanical	Dimension (W x H x D)	215 x 88 x 352 mm
	Weight (With hard disks)	Approx. 3.7 kg
	Rack mount kit	N/A
Lauguage		English, French, German, Spanish, Italian, Russian, Polish, Czech, Turkish, Netherlands Portuguese, Swedish, Danish, Rumania, Serbia, Croatia, Hungary, Greek, Finnish, Norwegian, Korean, Japanese, Chinese(Traditional), Thai, Taiwanese(25 Language)


4.2 Product description

Type of product	Digital Video Recorder
Model name (Basic)	SRD-476DP
Model name (Variant)	SRD-476P, SRD-456P
Difference	Buyer model names
Trade name	-
Serial no	Engineering Sample
Testing voltage	240 V, 50 Hz
Product rating	* AC/DC Adaptor (APN-4812) Input: 100 - 240 V, 50/60 Hz, 1.2 A Output: DC 12 V, 4.0A
Internal clock frequency	Above 108 Mhz
Note	* AC/DC Adaptor was provided by the manufacturer.

4.3 Auxiliary equipments

Type	Model / Part #	Serial number	Manufacturer
Monitor #1	PM24KO	ZQ9XH1HBA01776V	SAMSUNG
Monitor #2	LT24B350	ZWP0HMCDD10771M	SAMSUNG
Monitor #3	SMT-2231P	YDQ03VDBB02500H	SAMSUNG
Camera	SCB-6000	C6PW6V3B80115Y	SAMSUNG
USB Memory(8GB)	JFV33	-	TRANSCEND
Controller	SCC-1000	EW089028913	SAMSUNG
JIG	-	-	-
MIC	-	-	-

4.4 Test configuration

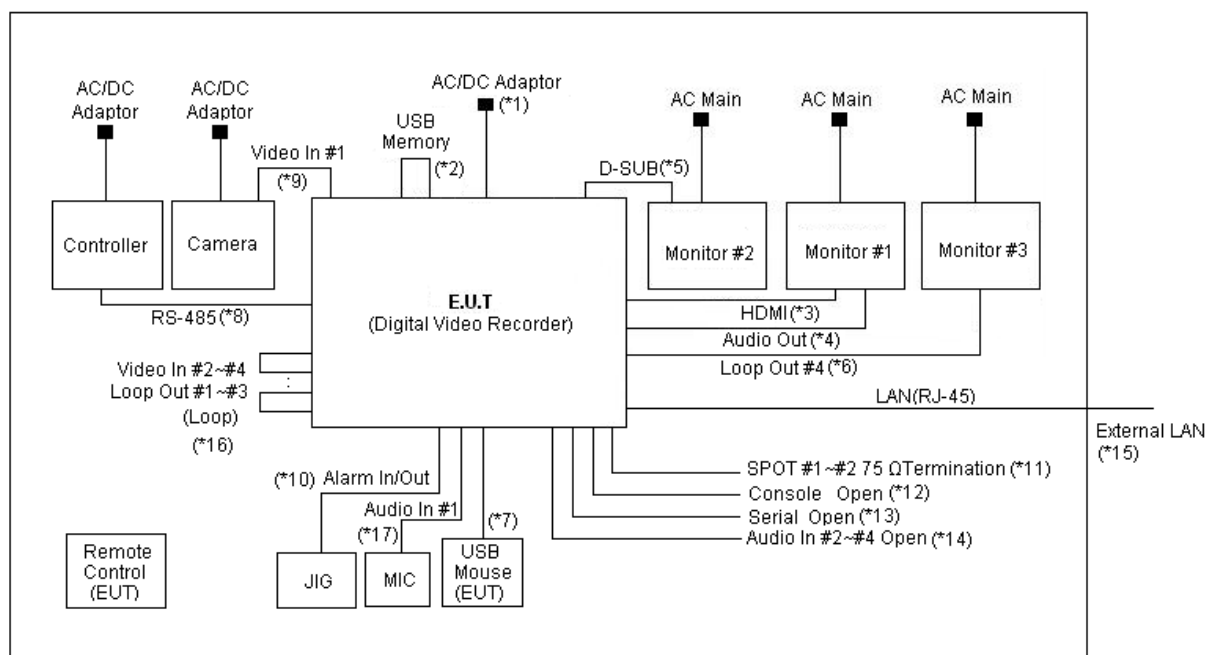

Note	Start		End		Cable	
*	Name	I/O port	Name	I/O port	Length (m)	Spec.
1	EUT (Digital Video Recorder)	Power	AC/DC Adaptor	Power	1.5	Non-Shield
2		USB	USB Memory	USB	Direct	-
3		HDMI	Monitor #1	HDMI	1.0	Shield
4		Audio Out	Monitor #1	Audio In	3.0	Shield
5		D-SUB	Monitor #2	D-SUB	1.5	Shield
6		Loop Out #4	Monitor #3	Loop In	3.0	Shield
7		USB	USB Mouse(EUT)	USB	1.0	Shield
8		RS-485	Controller	RS-485	3.0	Non-Shield
9		Video In #1	Camera	Video Out	3.0	Shield
10		Alarm In/Out	JIG	Alarm In/Out	3.0	Non-Shield
11		SPOT #1, #2	75 Ω Termination	-	3.0	Shield
12		Console	Open	-	1.0	Non-Shield
13		Serial	Open	-	1.0	Shield
14		Audio In #2~#4	Open	-	3.0	Shield
15		LAN(RJ-45)	External LAN	LAN(RJ-45)	3.0	Non-Shield
16		Video In #2~#4	Loop	Loop Out #1~#3	1.0	Shield
17		Audio In #1	MIC	Audio Out	3.0	Shield

4.5 Operating conditions

The EUT was configured as normal intended use.

Test mode	Normal operating
1	Monitoring test.
	Ping test.
	Alarm In/Out test.
	Audio In/Out test.
	RS-485 test.

5. Summary of test results

5.1 Summary of EMI emission test results

Applied	Test items	Test method	Result
☒	Conducted Emission	AS/NZS CISPR 22:2009+A1:2010, Class A	12 Page ~ 18 Page
☒	Radiated Emission	AS/NZS CISPR 22:2009+A1:2010, Class A	19 Page ~ 24 Page

6. Test results

6.1 Conducted Emission

Test specification	AS/NZS CISPR 22:2009+A1:2010, Class A		
Testing voltage	240 V, 50 Hz		
Test facility	Shielded room (CE#1)		
Date	2014. 03. 13		
Temperature (°C)	20.0 °C	Humidity (% R.H.)	27.7 % R.H.
Remarks	Complied		

6.1.1 Limits of conducted emission measurement

☒ AC main

Frequency MHz	Class A $\text{dB}\mu\text{V}$		Class B $\text{dB}\mu\text{V}$	
	Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.5	79	66	66 ~ 56 *	56 ~ 46*
0.5 ~ 5	73	60	56	46
5 ~ 30	73	60	60	50

*The limit decreases linearly with the logarithm of frequency.

☒ Telecommunication

Frequency MHz	Class A Voltage Limits $\text{dB}\mu\text{V}$		Current Limits $\text{dB}\mu\text{A}$	
	Quasi-Peak	Average	Quasi-Peak	Average
0.15 ~ 0.5	97 to 87	84 to 74	53 to 43	40 to 30
0.5 ~ 30	87	74	43	30
Frequency MHz	Class B Limits $\text{dB}\mu\text{V}$		Current Limits $\text{dB}\mu\text{A}$	
	Quasi-Peak	Average	Quasi-Peak	Average
0.15 ~ 0.5	84 to 74	74 to 64	40 to 30	30 to 20
0.5 ~ 30	74	64	30	20

* The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz

* The current and voltage disturbance limits are derived for use with an impedance stabilization Network (ISN) which presents a common mode (asymmetric mode) impedance of 150 Ω to the telecommunication port under test (conversion factor is $20 \log_{10} 150/I = 44 \text{ dB}$).

6.1.2 Measurement procedure



The measurements were performed in a shielded room. EUT was setup as shown in photograph and placed on a non-metallic table height of 0.8 m above the reference ground plane. The rear of table was located 0.4 m to the vertical conducted plane. EUT was power through the LISN, which was bonded to the ground plane. The LISN power was filtered. Each EUT power lead, except ground (safety) lead was individually connected through a LISN to input power source. EUT signal cables that hung closer than 0.4 m to the Horizontal metal ground 0.3 m ~ 0.4 m long. The power cord was bundles in the center. All peripheral equipment was powered from a sub LISN. The LISN and ISN were positioned 0.8 m from the EUT. Peak and Average detection were used in preliminary testing and Quasi-peak and Average detections were used at final measurement. Both lines of power cord, hot and neutral, were measured.

6.1.3 Used equipments

Equipment	Model	Serial No.	Makers	Next Cal. Date	Used
Test Receiver	ESCI7	100732	R&S	2015.01.27	☐
Test Receiver	ESCI	100001	R&S	2014.07.25	☒
Test Receiver	ESCI	100710	R&S	2014.10.28	☐
LISN	ENV216	101358	R&S	2014.10.04	☒
LISN	ESH3-Z5	100267	R&S	2014.07.08	☒
8-WIRE ISN	NTFM 8158 CAT5	CAT5-8158-0028	SCHWARZBECK	2014.04.13	☒
8-WIRE ISN	NTFM 8158 CAT3	CAT3-8158-0020	SCHWARZBECK	2014.04.13	☐
ISN	ST08	24342	TESEQ	2014.06.21	☐

6.1.4 Photographs of test setup

* AC Main

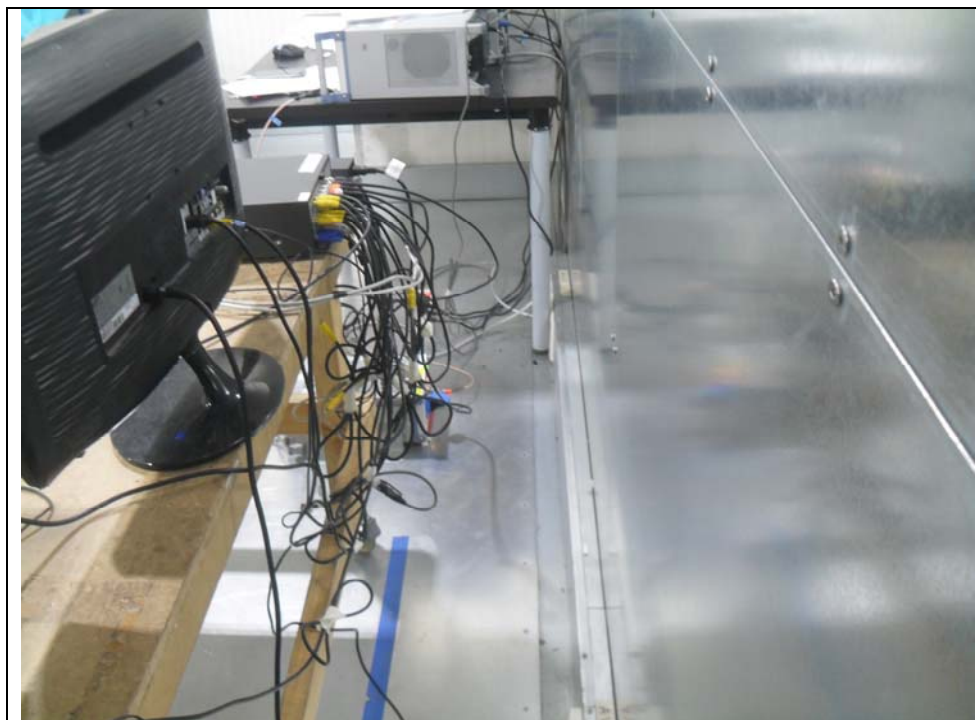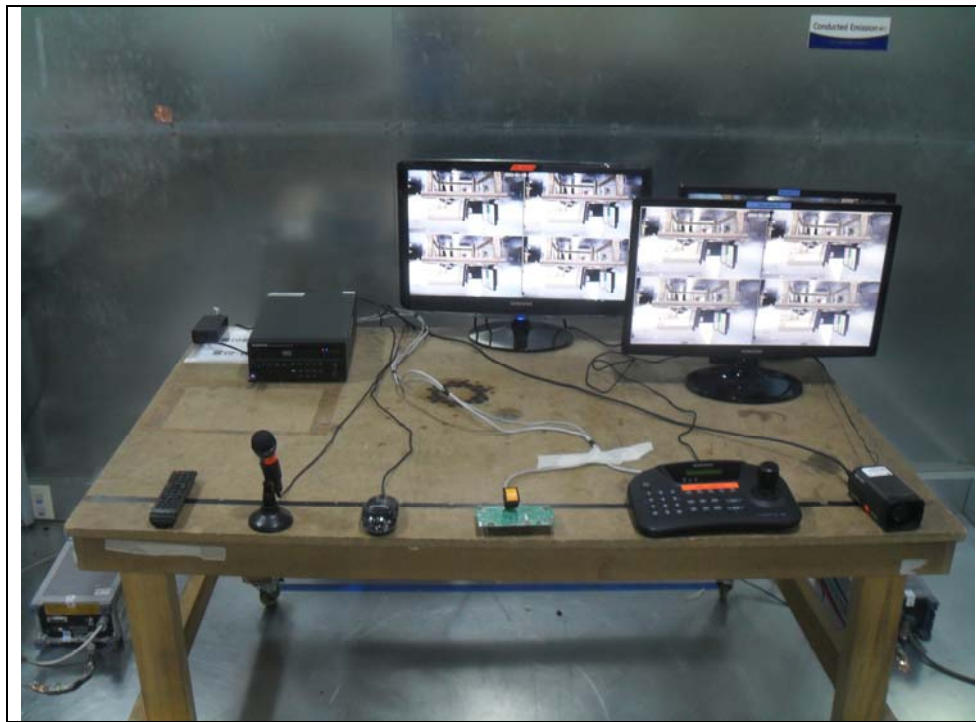


* Telecommunication



6.1.5 Conducted emission measurement result

* AC Main (SRD-476DP)

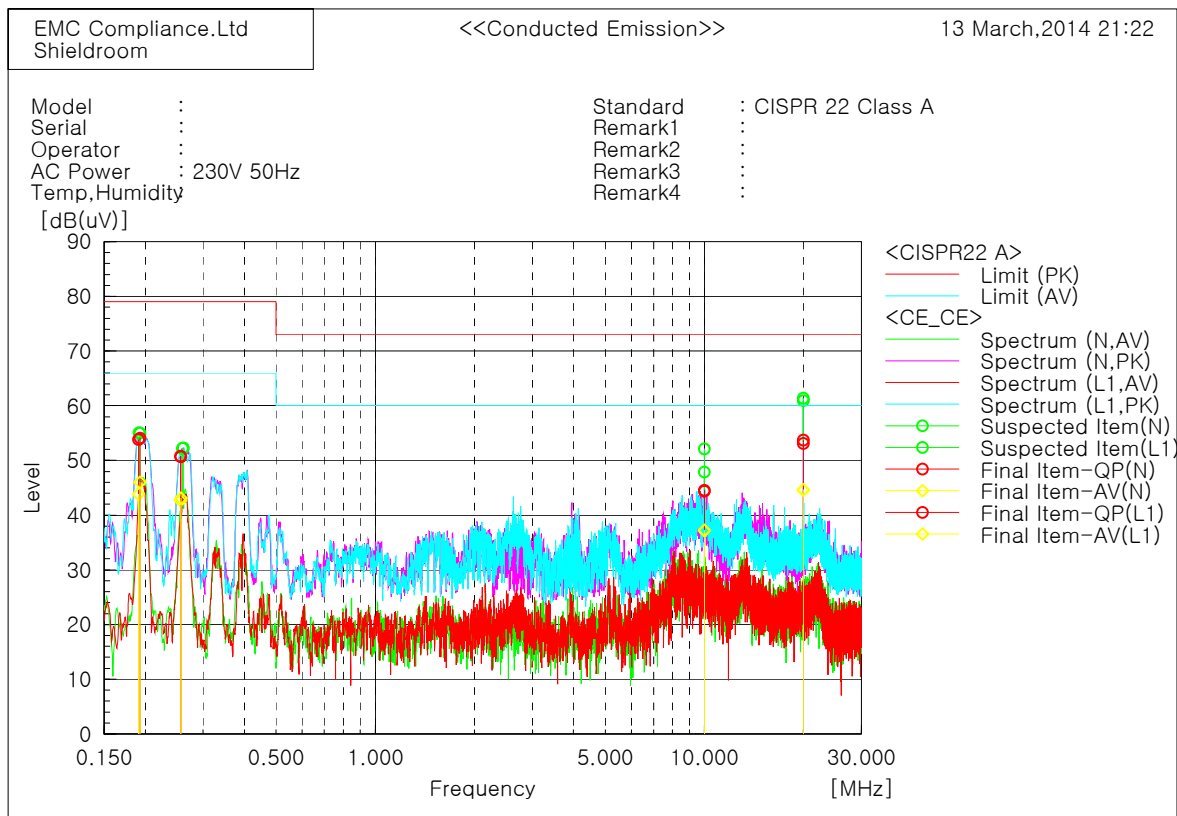

Final Result

--- N Phase ---


No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading CAV [dB(μV)]	c.f [dB]	Result QP [dB(μV)]	Result CAV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin CAV [dB]
1	0.19068	43.8	33.8	10.0	53.8	43.8	79.0	66.0	25.2	22.2
2	0.25599	41.0	32.8	9.8	50.8	42.6	79.0	66.0	28.2	23.4
3	9.9991	34.6	27.5	9.7	44.3	37.2	73.0	60.0	28.7	22.8
4	20.0002	43.9	34.7	9.9	53.8	44.6	73.0	60.0	19.2	15.4

--- L1 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading CAV [dB(μV)]	c.f [dB]	Result QP [dB(μV)]	Result CAV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin CAV [dB]
1	0.19259	43.9	35.9	10.1	54.0	46.0	79.0	66.0	25.0	20.0
2	0.25662	40.9	33.3	9.8	50.7	43.1	79.0	66.0	28.3	22.9
3	9.99939	34.8	27.6	9.7	44.5	37.3	73.0	60.0	28.5	22.7
4	19.99941	43.2	34.7	9.9	53.1	44.6	73.0	60.0	19.9	15.4

* Telecommunication port


LAN Port (LCL 65 dB)_10 Mbps (SRD-476DP)

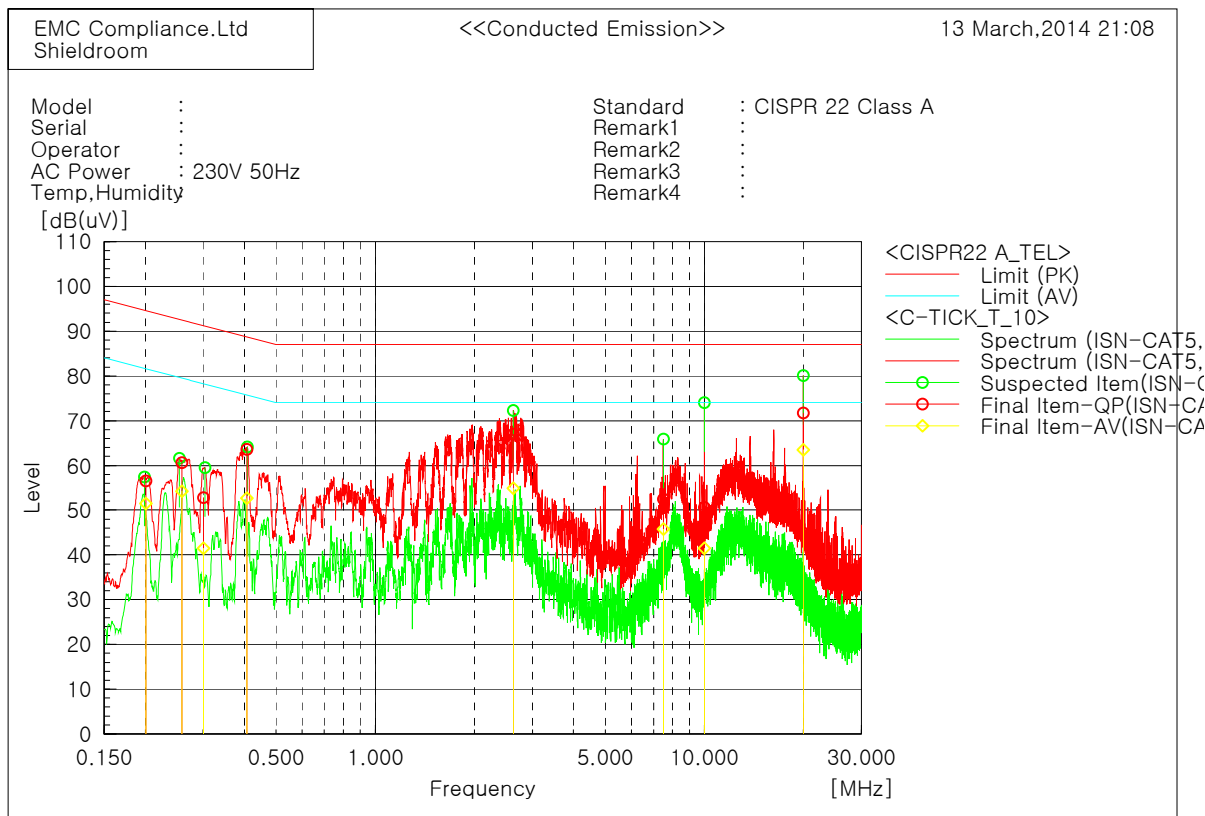

Final Result

--- ISN-CAT5 Phase ---											
No.	Frequency	Reading	Reading	c.f	Result	Result	Limit	Limit	Margin	Margin	
	[MHz]	QP	CAV		QP	CAV	QP	AV	QP	CAV	
		[dB(uV)]	[dB(uV)]	[dB]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB]	[dB]	
1	0.20104	46.2	41.2	10.3	56.5	51.5	94.6	81.6	38.1	30.1	
2	0.25835	50.5	44.1	10.1	60.6	54.2	92.5	79.5	31.9	25.3	
3	0.30063	42.7	31.4	10.1	52.8	41.5	91.2	78.2	38.4	36.7	
4	0.40791	53.6	42.6	10.0	63.6	52.6	88.7	75.7	25.1	23.1	
5	2.6265	57.3	45.2	9.7	67.0	54.9	87.0	74.0	20.0	19.1	
6	7.4981	42.8	36.1	9.6	52.4	45.7	87.0	74.0	34.6	28.3	
7	9.9985	41.0	31.9	9.6	50.6	41.5	87.0	74.0	36.4	32.5	
8	19.9996	62.0	53.7	9.7	71.7	63.4	87.0	74.0	15.3	10.6	

LAN Port (LCL 65 dB)_1000 Mbps (SRD-476DP)

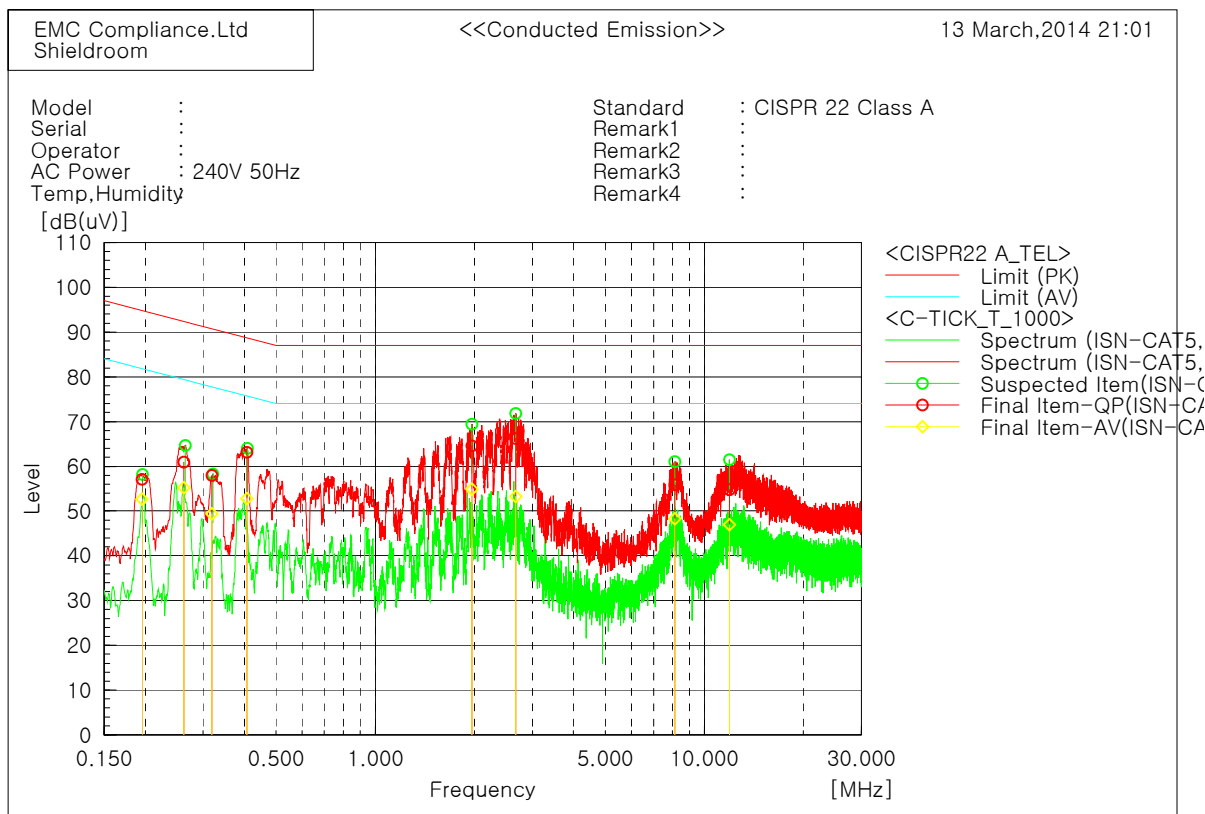

Final Result

--- ISN-CAT5 Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.19541	46.7	42.4	10.3	57.0	52.7	94.8	81.8	37.8	29.1
2	0.26244	50.8	45.1	10.1	60.9	55.2	92.4	79.4	31.5	24.2
3	0.31925	47.8	39.3	10.1	57.9	49.4	90.7	77.7	32.8	28.3
4	0.40752	53.1	42.8	10.0	63.1	52.8	88.7	75.7	25.6	22.9
5	1.96911	54.9	45.2	9.7	64.6	54.9	87.0	74.0	22.4	19.1
6	2.6687	56.6	43.5	9.7	66.3	53.2	87.0	74.0	20.7	20.8
7	8.13576	46.3	38.7	9.6	55.9	48.3	87.0	74.0	31.1	25.7
8	11.90142	45.2	37.4	9.6	54.8	47.0	87.0	74.0	32.2	27.0

6.2 Radiated Emission

Test specification	AS/NZS CISPR 22:2009+A1:2010, Class A		
Testing voltage	240 V, 50 Hz		
Test facility	10 m Chamber (#F2)		
Test distance	10 m, 3 m		
Date	2014. 03. 17		
Temperature (°C)	20.3 °C	Humidity (% R.H.)	29.8 % R.H.
Remarks	Complied		

6.2.1 Limits of radiated emission measurement

☒ Limits below 1 GHz

Frequency MHz	Class A dB μ V/m @ 10 m	Class B dB μ V/m @ 10 m
30 ~ 230	40	30
230 ~ 1 000	47	37

☒ Limits above 1 GHz

Frequency MHz	Class A @ 3 m		Class B @ 3 m	
	Average limit dB μ V/m	Peak limit dB μ V/m	Average limit dB μ V/m	Peak limit dB μ V/m
1 ~ 3	56	76	50	70
3 ~ 6	60	80	54	74

Note - The lower limit applies at the transition frequency.

6.2.2 Measurement procedure

The test was done at a 10 m chamber with a quasi-peak detector. EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane. Cables were folded back and forth forming a bundle 0.3 m to 0.4 m long and were hanged at a 0.4 m height to the ground plane.

Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

6.2.3 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. Date	Used
Test Receiver	ESCI7	100732	R&S	2015.01.27	☒
Test Receiver	ESCI	100001	R&S	2014.07.25	☐
Test Receiver	ESCI	100710	R&S	2014.10.28	☐
Test Receiver	ESR	101078	R&S	2015.02.24	☐
Bi-Log Antenna	VULB 9168	440	SCHWARZBECK	2015.10.16	☒
Amplifier	310N	293004	SONOMA INSTRUMENT	2014.10.31	☒
3 dB Attenuator	8491B	22981	HP	2014.03.19	☒
Antenna Mast	MA4000-EP	303	Innco Systems	-	☒
Turn Table	DT2000S-1t	079	Innco Systems	-	☒
Amplifier	8449B	3008A02343	AGILENT	2014.10.31	☒
Horn ANT	3115	00086706	ETS	2014.09.05	☒
Spectrum Analyzer	FSP7	100289	R&S	2014.11.25	☐

6.2.4 Sample calculation

The field strength is calculated adding the antenna Factor, cable loss and, Antenna pad adding, subtracting the amplifier gain from the measured reading.

The sample calculation is as follow:

$$\text{Result} = \text{M.R} + \text{C.F}(\text{A.F} + \text{C.L} + 3 \text{ dB Att} - \text{A.G})$$

M.R = Meter Reading

C.F = Correction Factor

A.F = Antenna Factor

C.L = Cable Loss

A.G= Amplifier Gain

3 dB Att = 3 dB Attenuator


If M.R is 30 dB, A.F 12 dB, C.L 5 dB, 3 dB, A.G 35 dB

The result is

$$30 + 12 + 5 + 3 - 35 = 15 \text{ dB}\mu\text{V/m}$$

6.2.5 Photographs of test setup

* 30 MHz ~ 1 GHz

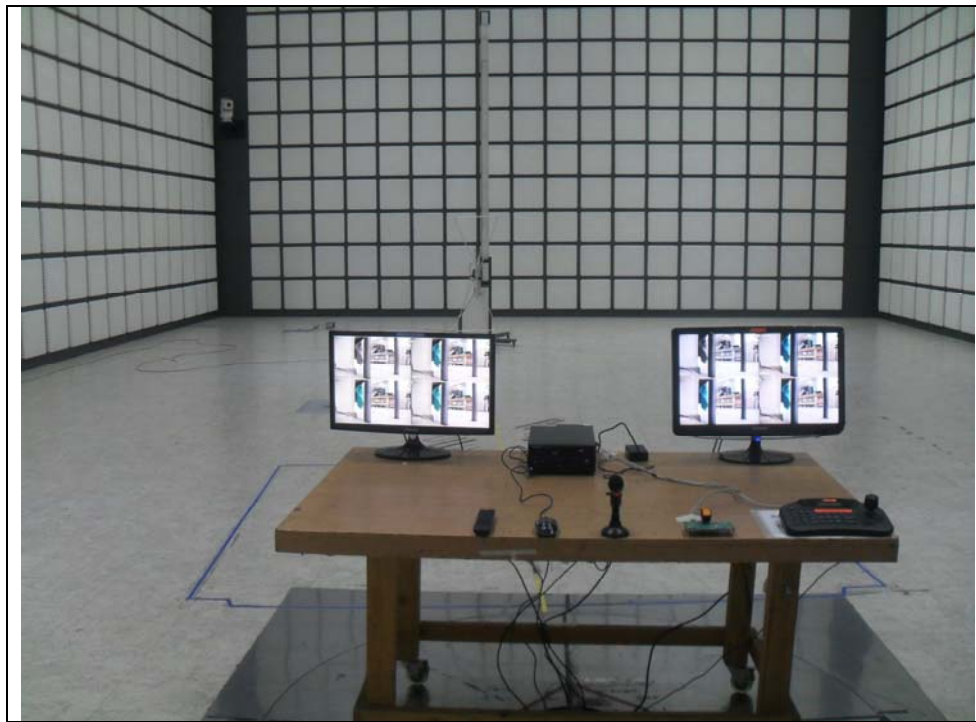


* 1 GHz ~ 6 GHz



6.2.6 Radiated emission measurement result

* Graph and Data


* 30 MHz ~ 1 GHz (SRD-476DP)

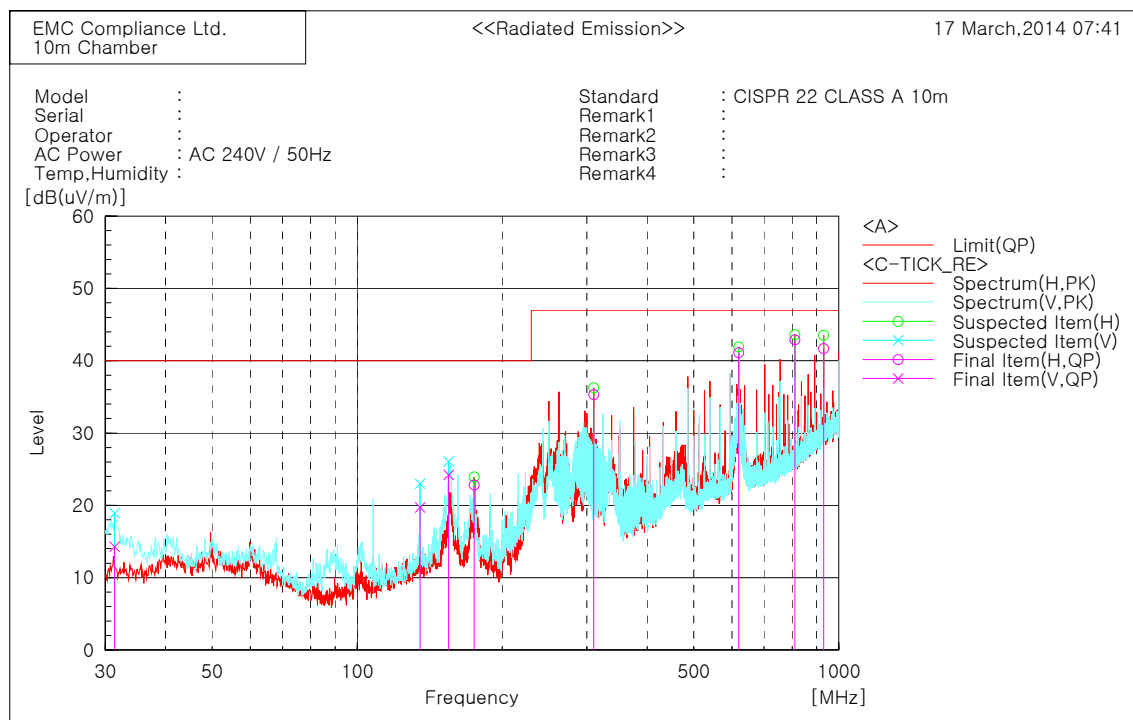

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	31.334	V	29.3	-15.0	14.3	40.0	25.7	100.0	222.8
2	135.003	V	33.6	-13.9	19.7	40.0	20.3	100.0	280.7
3	154.766	V	37.2	-13.0	24.2	40.0	15.8	100.0	353.1
4	175.015	H	35.9	-13.1	22.8	40.0	17.2	400.0	235.0
5	309.966	H	45.4	-10.1	35.3	47.0	11.7	200.0	210.0
6	620.003	H	42.6	-1.5	41.1	47.0	5.9	200.0	333.3
7	810.123	H	40.8	2.1	42.9	47.0	4.1	200.0	227.7
8	930.039	H	36.6	5.1	41.7	47.0	5.3	100.0	238.3

* 1 GHz ~ 6 GHz (SRD-476DP)

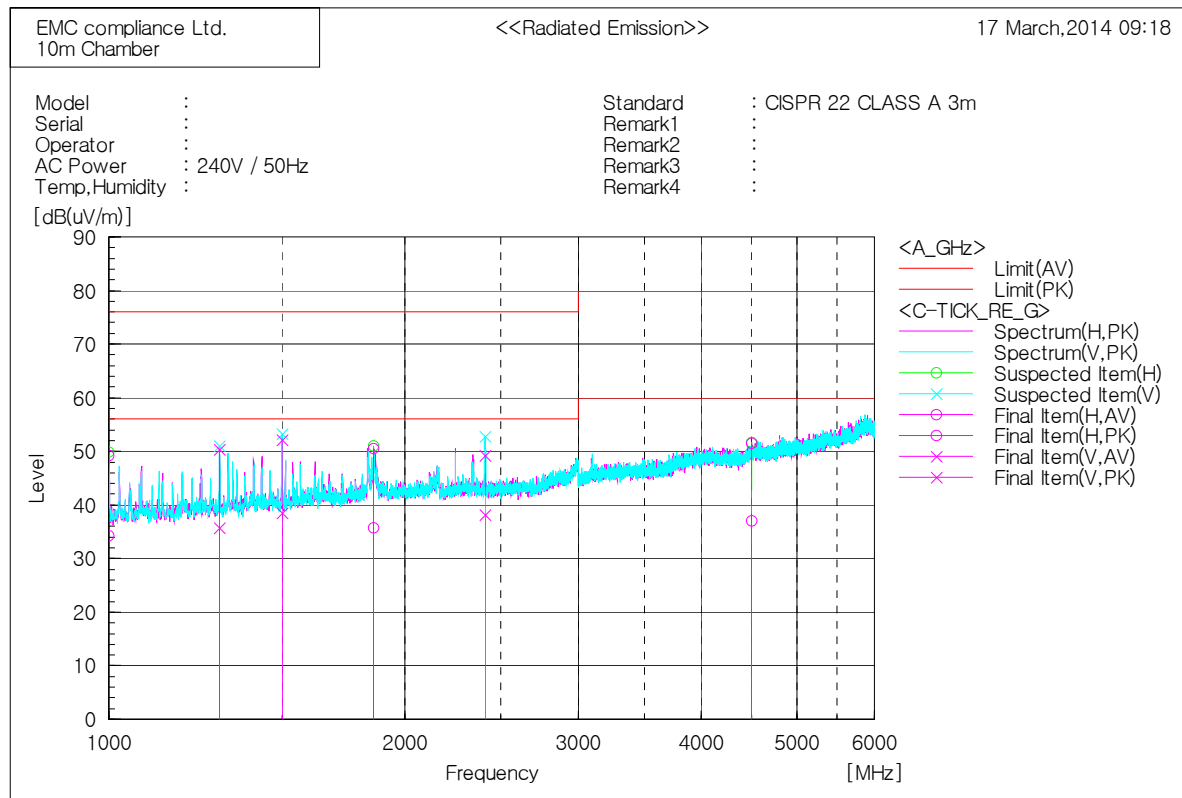

Final Result

No.	Frequency [MHz]	(P)	Reading AV [dB(μV)]	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result AV [dB(μV/m)]	Result PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [deg]
1	1000.000	H	40.3	55.2	-6.0	34.3	49.2	56.0	76.0	21.7	26.8	100.0	316.4
2	1295.625	V	39.7	54.3	-3.9	35.8	50.4	56.0	76.0	20.2	25.6	100.0	259.9
3	1500.000	V	40.8	54.4	-2.3	38.5	52.1	56.0	76.0	17.5	23.9	100.0	340.4
4	1860.000	H	35.5	50.4	0.2	35.7	50.6	56.0	76.0	20.3	25.4	100.0	123.8
5	2413.125	V	37.0	48.1	1.2	38.2	49.3	56.0	76.0	17.8	26.7	100.0	273.5
6	4500.000	H	27.3	41.7	9.8	37.1	51.5	60.0	80.0	22.9	28.5	100.0	10.8

7. E.U.T. photographs

Front View



Rear View



Left View



Right View



Top View





Bottom View





Inside





Main Board

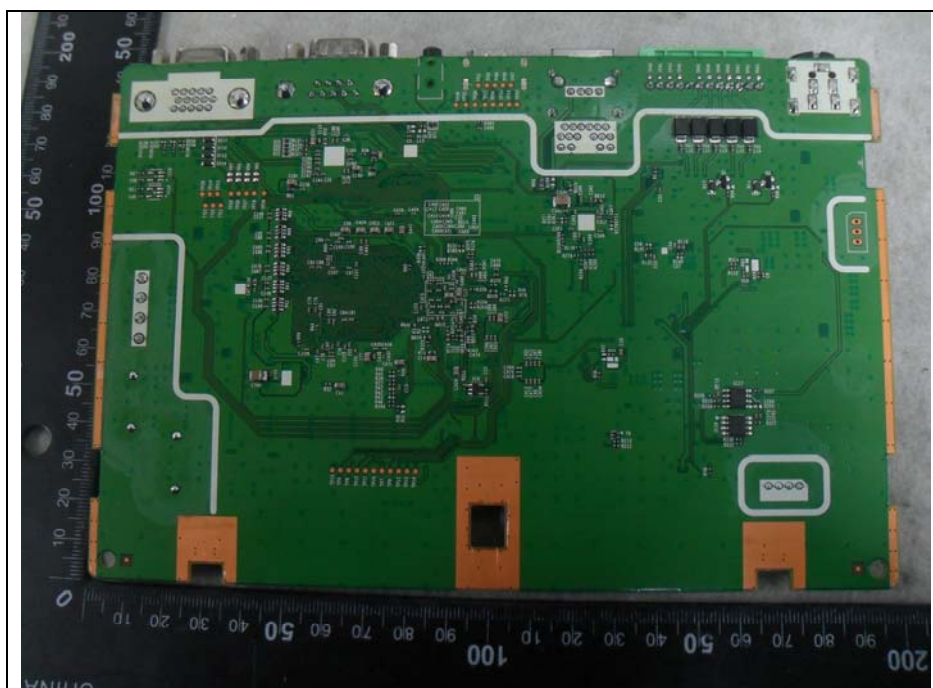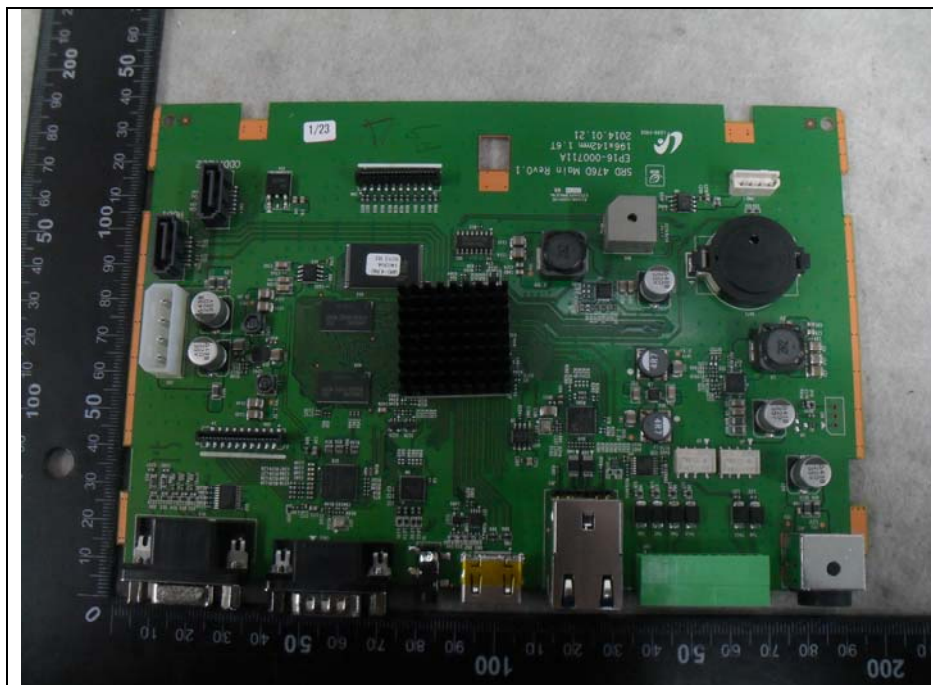

Button Board

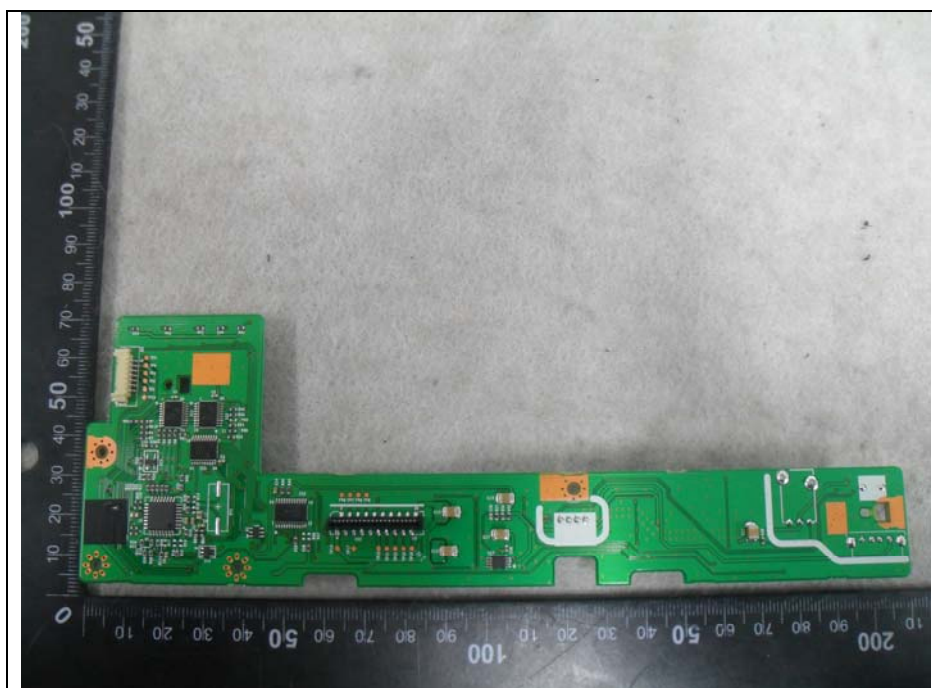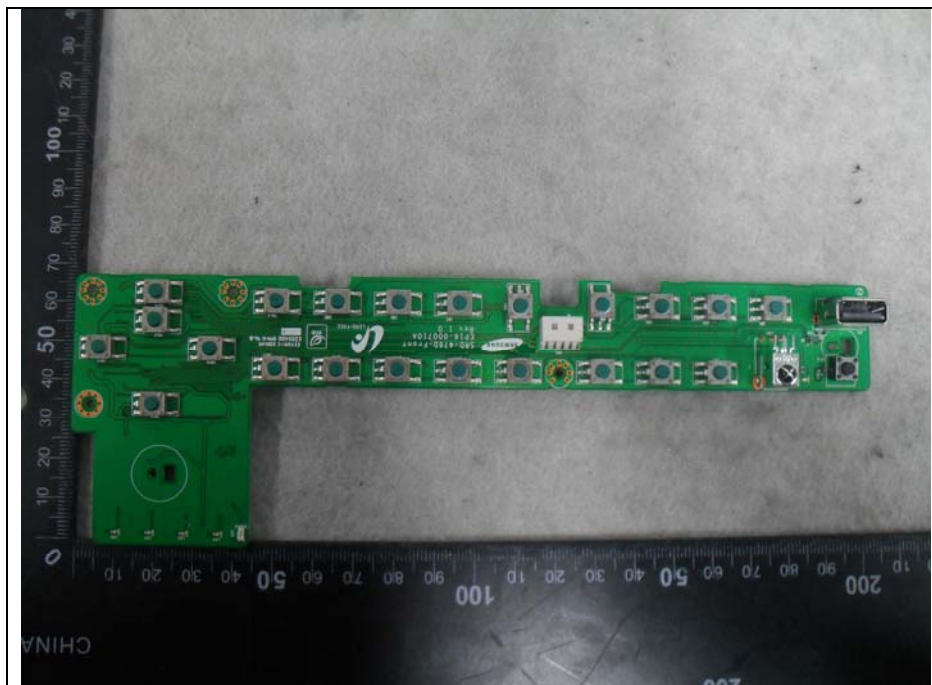

Port Board

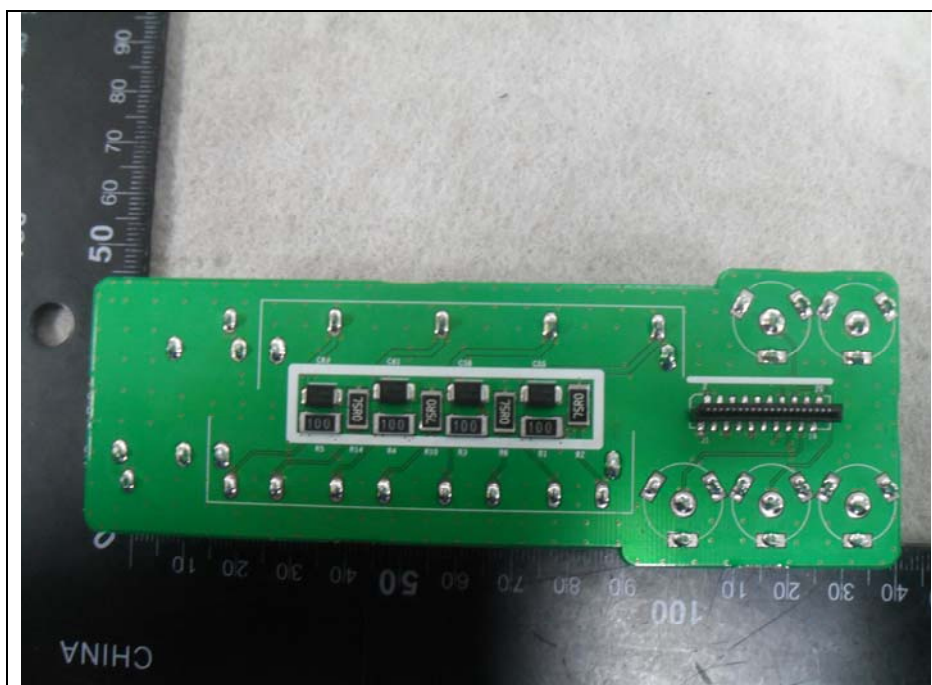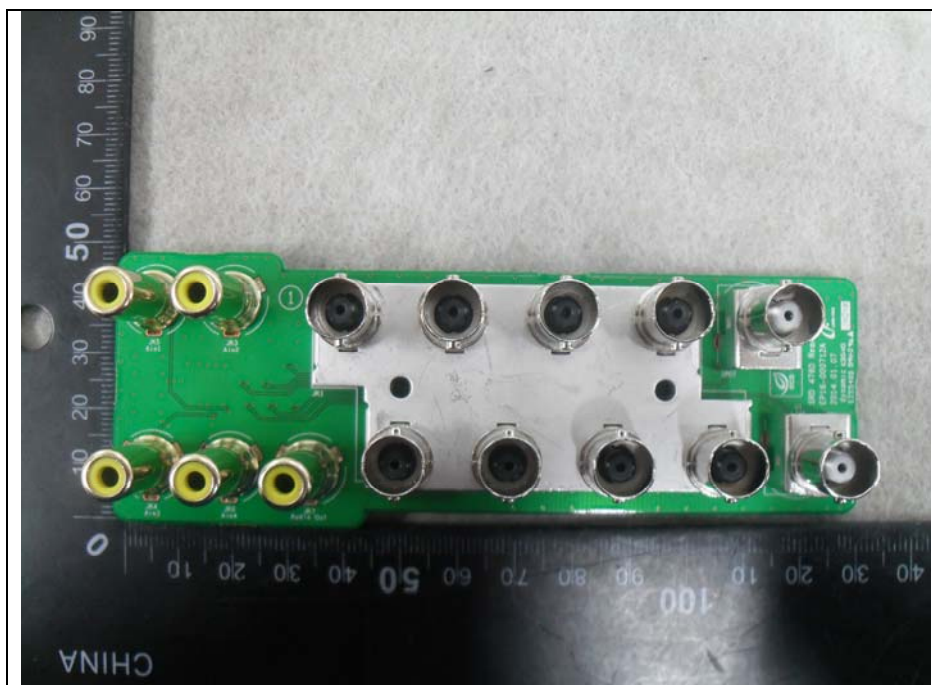


HDD(1 TB)





ODD

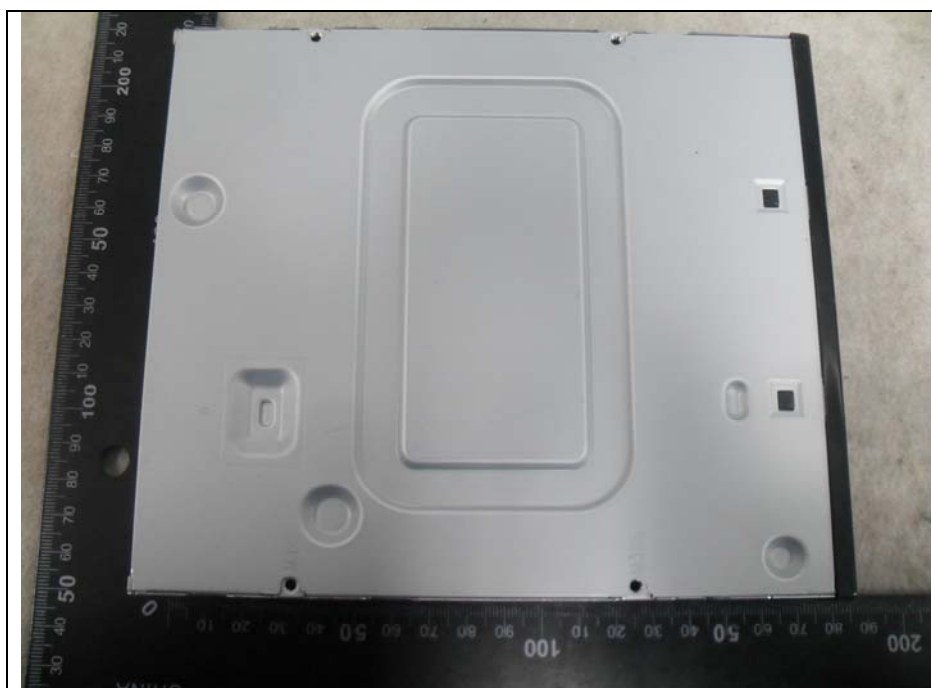




USB Mouse






Remote Control



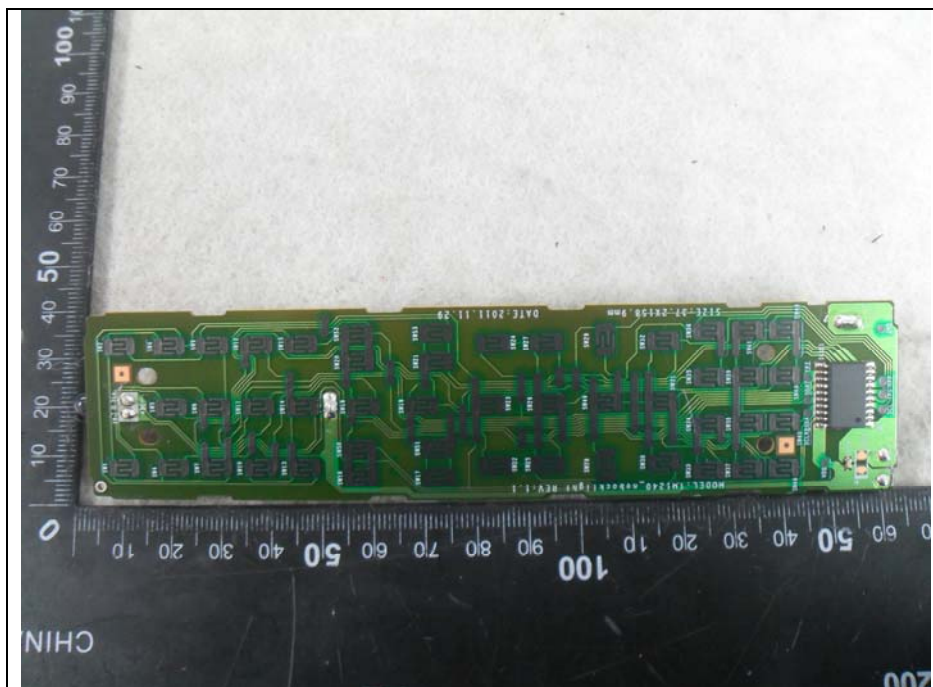

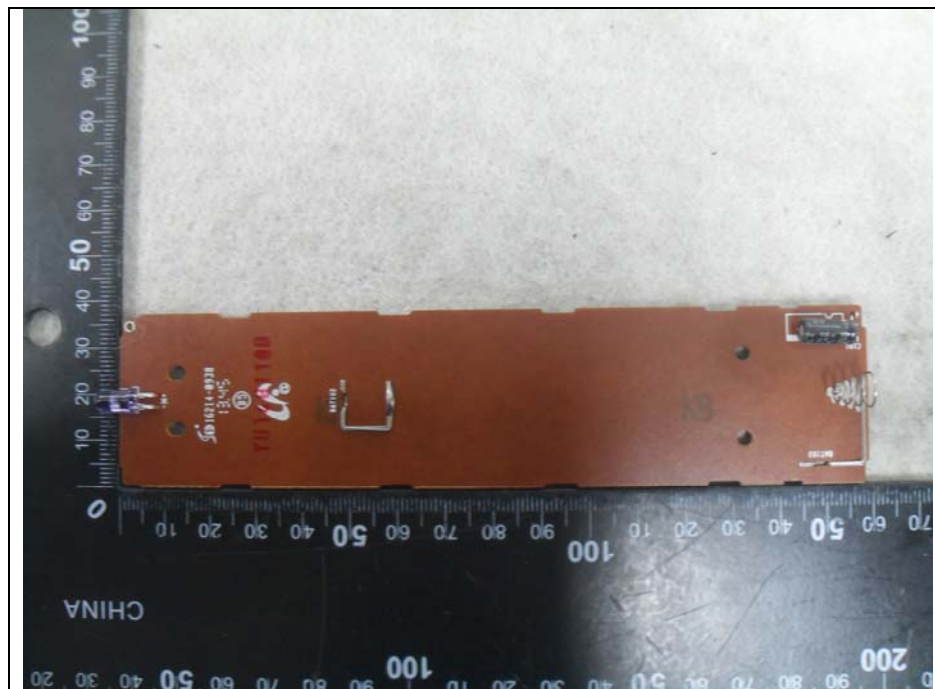

AC/DC Adaptor

