



TEST REPORT



Report No. : KES-EM252690

Page 1 / 30

KES Co., Ltd.

#3002, #3503, #3701, 40, Simin-daero365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Republic of Korea
Tel : +82-31-425-6200, Fax : +82-31-341-3838

1. Client

- Name : Hanwha Vision Co., Ltd.
- Address : 6, Pangyo-ro 319beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea

2. Sample Description

- Product item : NETWORK CAMERA
- Model name : TNP-A6550RW
- Variant model : TNP-A6550RWB
- Manufacturer etc. : HANWHA VISION VIETNAM COMPANY LIMITED
- Manufacturer address : Lot O-2, Que Vo Industrial Zone Extended Area, Nam Son Ward, Bac Ninh Province, Vietnam
- Manufacturer etc. : D-TECH CO.,LTD.
- Manufacturer address : 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea (Suwon Industrial Complex)

3. Date of test : 2025. 08. 04. ~ 2025. 08. 05.

4. Location of Test : Permanent Testing Lab

- Address : 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Republic of Korea

5. Test method used : FCC 47 CFR Part 15, Subpart B (ANSI C63.4a-2017),
IC ICES-003 Issue 7 (ANSI C63.4a-2017)

6. Test result : PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by	Technical Manager by
	Name : SeonHo Choi	Name : DongHun Jang

2025. 09. 03

KES Co., Ltd.

**REPORT REVISION HISTORY**

Date	Test Report No.	Revision History
2025. 09. 03	KES-EM252690	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

Use of uncertainty of measurement for decisions on conformity (decision rule):

- ☒ No decision rule is specified by the standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy method").
- ☐ Other (to be specified, for example when required by the standard or client)



TABLE OF CONTENTS

1	Laboratory Information	4
1.1	Test Location.....	4
1.2	Laboratory Accreditations and Listings	4
2	Test Summary	5
2.1	Class and Voltage.....	5
2.2	Summary of Test Results	5
2.3	Remarks when standards applied	5
2.4	Variant Model Differences	5
2.5	Device Modifications	5
3	General Product Description	6
4	EUT Setup and Operation Mode	11
4.1	EUT Configuration	11
4.2	System Configuration	11
4.3	External I/O Cabling	11
4.4	EUT Operating Mode(s)	11
4.5	Test operating S/W	12
4.6	Configuration	12
5	Measurement Procedure	13
6	Test Item	14
6.1	Conducted Emissions at Mains Power Ports	14
6.2	Radiated Emissions(Below 1 GHz)	17
6.3	Radiated Emissions(Above 1 GHz)	20
7	Test Setup Photos and EUT Photographs	23
7.1	Test Setup Photos	23
7.2	EUT Photographs	26
7.3	Label	30



1 Laboratory Information

1.1 Test Location

Category	Details
Address	473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Republic of Korea
Telephone Number	070-4910-6200
Facsimile Number	031-341-3838

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.2 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0008



2 Test Summary

2.1 Class and Voltage

Test Class	Test Voltage
Class A	AC 120 V, 60 Hz

2.2 Summary of Test Results

Regulation			
47 CFR Part 15, Subpart B, ICES-003 Issue 7			
Test Item	Test Standard	Test Result	Remark
Conducted Emissions at Mains Power Ports	ANSI C63.4a-2017	PASS	-
Radiated Emissions(Below 1 GHz)		PASS	-
Radiated Emissions(Above 1 GHz)		PASS	-
* N/A: Not Applicable			

2.3 Remarks when standards applied

N/A

2.4 Variant Model Differences

- Added derivative models due to color differences

2.5 Device Modifications

N/A



3 General Product Description

Division		Specificity
Internal maximum operating/clock frequency		1.78 GHz
Power	Rated power supply	PoE PoE Injector Information Input : AC(100 – 240)V, 2.0 A, (50 / 60)Hz Output : DC 55 V, 1.5 A
	Test Power	AC 120 V, 60 Hz
I/O Ports	User port	Main body : RJ-45 1 EA, Micro SD Card Slot 1 EA PoE Injector : RJ-45 2 EA, SFP 1 EA, GND 1 EA
	Unused/Administrator Port	N/A
function	Product features	NETWORK CAMERA
	Wireless function	N/A
Components		Main body 1 EA, PoE Injector 1 EA
Others		Please refer to the specifications listed below.

Video	
Imaging Device	1/2.8" CMOS
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264: Max. 60fps/50fps(60Hz/50Hz) MJPEG: Max. 30fps/25fps(60Hz/50Hz)
Lens	
Focal Length (Zoom Ratio)	4.75~261.4mm(55x) zoom
Optical Zoom	55x
Max. Aperture Ratio	F1.6 (Wide) ~ F6.5 (Tele)
Min. Object Distance	5m(16.4ft)
Focus Control	Auto, Manual, Oneshot AF, Focus save
Lens Type	DC auto iris
Pan / Tilt / Rotate	
Pan Range	360° Endless
Sequence	Preset(300ea), Swing, Group(6ea), Trace, Tour, Auto Run, Schedule
Preset Accuracy	±0.07° (±0.05° Challenge)
Operational	
Camera Title	Displayed up to 85 characters
Direction Indicator	Support
Day & Night	Auto(ICR)
Backlight Compensation	BLC, HLC, WDR, SSDR



Wide Dynamic Range	120dB
Digital Noise Reduction	WiseNR II (Based on AI engine), SSNR V
Digital Image Stabilization	Support (built-in gyro sensor)
Image Stabilization	DIS (Digital Image Stabilization)
Defog	Support
Motion Detection	8ea, 8point Polygonal zones
Privacy Masking	Setting area : 32ea, quadrangle zones - 8points(after R/C) - Color: Gray/Green/Red/Blue/Black/White - Mosaic Dynamic Privacy Mask (Based on AI engine) - Not supported during PTZ motion - Color: gray/green/red/blue/black/white/purple/yellow - Mosaic
Gain Control	Off / Max gain / Manual
White Balance	ATW / Narrow ATW / AWC / Manual / Indoor / Outdoor / Mercury / Sodium
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2~1/30,000sec) Prefer shutter control (Based on AI engine)
Video Rotation	Flip & Mirror
Analytics	Classified object type: Person/Face/Vehicle (Type: car/bus/truck/motorcycle/bicycle) / License plate Attributes: Person (Gender, Clothing top/bottom color, Bag), Face (Age, Gender, Mask, Glasses), Vehicle (Type: car/bus/truck/motorcycle/bicycle, Color) Support BestShot Support Re-ID (Person) Analytics events based on AI engine Motion detection, Object detection, Line crossing (Crossing/Direction), IVA area (Loitering/Intrusion/Enter/Exit/Appear/Disappear), Slip & fall detection Analytics events Tampering, Shock detection, , Audio detection, Frozen detection Support analytics by AI pack (WiseAI)
Alarm Triggers	Analytics, Network disconnect, Alarm input ((Via optional I/O box SPM-4210), Time schedule, MQTT subscription



Alarm Events	When alarm trigger occurred File upload(image): e-mail/FTP/SFTP File upload(video clip): FTP/SFTP Notification: e-mail Recording: SD/SDHC/SDXC or NAS recording at event triggers Alarm output Handover: PTZ preset, send message by HTTP/HTTPS/TCP Audio clip playback(WAV, MP3) MQTT: publication
Light Type	IR LED (850nm)
Water Removal	Support(Wiper)
Ice Removal	P/T moving parts, Defroster heater
Water pump system	Support (after R/C)
Auto Tracking	Support Object auto tracking(Person/Vehicle) Target lock tracking
Network	
Ethernet	RJ-45 Push-Pull Connector
Video Compression	H.265/H.264: Main/Baseline/High, MJPEG
Audio Compression	#REF!
Smart Codec	WiseStream(Based on AI engine)
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(20 users) / Multicast Multiple streaming(Up to 10 profiles)
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP/SFTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DN DDNS, QoS, UPnP, Bonjour, LLDP, CDP, SRTP(TCP, UDP Unicast) , NTCIP 1205, MQTT
SIP support (VoIP, Peer-to-peer, SIP/PBX integration)	Support
Application Programming Interface	ONVIF Profile S/G/T/M SUNAPI(HTTP API) Wisenet open platform
Security	
OS / Firmware Protect	Encrypted Firmware, Secure boot, Signed Firmware
User authentication	Digest Authentication, Prevent brute-force attack
Network authentication	802.1X Authentication(EAP-TLS, EAP-LEAP, EAP-PEAP MSCHAPv2),



	802.1AE(MACsec)
Secure Communication	HTTPS, SRTP, WSS(Websocket secure)
Access Control	IP-based access control, MAC-based access control, Auto logout
Data Protect	Encryption Credentials, Encrypt compress for live recording file export
Audit	Access / System / Event Log management
Device ID	Device Certificate(Hanwha Private Root CA)
Secure Storage	Secure element, SDcard partition encrypt
Supply Chain Security	SBOM
Security Certificate	ETSI EN 303 645, Secure element(FIPS 140-3 level3, CC EAL6+)
General	
Webpage Language	English, Korean, Simplified Chinese, Traditional Chinese, French, Italian, Spanish, German, Japanese, Russian, Portuguese, Czech, Polish, Turkish, Dutch, Hungaria Greek
Web Viewer	None
Edge Storage	Micro SD/SDHC/SDXC 1slot Max. 1TB * Hanwha Vision branded microSD cards have been certified and recommended for OnCloud edge recording.
Memory	4GB RAM, 16GB eMMC
Environmental & Electrical	
Operating Temperature / Humidity	-50°C~+60°(-58°F ~ +140°F) +74°C(165°F)(Max) based on NEMA TS-2(2.2.7) Start up should be done at above -30°C 0~100%RH(Condensing) Humidity control /w AIR vent
Storage Temperature / Humidity	-50°C~+60°C(-58°F~+140°F) / 0~90% RH
Certification	IP66/IP68, IK08(including Window), IK10(except window) NEMA4X Safety(UL, KC-SDOC), EMC(FCC, CE, VCCI, RCM, KC) NEMA-TS 2(2.2.7, 2.2.8, 2.2.9)
Input Voltage	HPoE(IEEE802.3bt type4, Class8, Injector included)
Power Consumption	PoE: Max. 71.0W, typical 28.3W Support Wisepower - Power monitoring(Max./Current/Avg.) Eco mode
Mechanical	
Color / Material	White, Black / Aluminum, PC, Glass



Material Management	RoHS(EU RoHS directive 2011/65/EU and IEC/EN 63000:2018) REACH(Regulation (EC) No. 1907/2006) Conflict mineral policy(Section 1502 of US Dodd Frank Act)
RAL Code	RAL9003 / RAL9005
Compatible Conduit hole / Gangbox	#REF!
Product Dimensions / Weight	WxDxH -. Upright Normal / Inverted, 293.4x205.6x399.9mm (11.55x8.09x15.74") -. Upright Canted, 293.4x301.9x363.6mm (11.55x11.89x14.31") 10.44kg (9.4kg : Excluding installation part)



4 EUT Setup and Operation Mode

4.1 EUT Configuration

Product Name	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	TNP-A6550RW	-	D-TECH CO.,LTD.	EUT
Laptop	LG15N54	410NZXE015458	LG Electronics Inc.	-
Laptop Adapter	ADP-90WH B	84ZW19F1747	DELTA ELECTRONICS(JIAN GSU) LTD.	-
Micro SD Card	-	-	SanDisk	-
PoE Injector 2	PT-PSE109GBRO- AH-S	-	Dongguan PROCET Network Technology Co.,Ltd	-

4.2 System Configuration

Product Name	Model Number	Serial Number	Manufacturer	Remarks
PoE Injector 1	PT-PSE109GBRO- AH-S	-	Dongguan PROCET Network Technology Co.,Ltd	-

4.3 External I/O Cabling

Start		End		Cable Spec.	
Product Name	I/O Port	Product Name	I/O Port	Length(m)	Shield
NETWORK CAMERA (EUT)	RJ-45(PoE)	PoE Injector 1 (EUT)	RJ-45(PoE)	3.1	U
	Micro SD Card Slot	Micro SD Card	Micro SD Card Slot	-	-
PoE Injector 1 (EUT)	RJ-45(LAN)	Laptop	RJ-45(LAN)	3.5	U
	GND	Ground plane	GND	2.0	-
	SFP	PoE Injector 2	SFP	5.0	U
Laptop	DC Jack	Laptop Adapter	DC Jack	1.4	U

* Unshielded=U, Shielded=S

4.4 EUT Operating Mode(s)


Category	Mode	Operating
Mode 1	Operation	The test equipment was connected to the laptop, and proper operation was verified via Web Viewer.



4.5 Test operating S/W

Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd.

4.6 Configuration

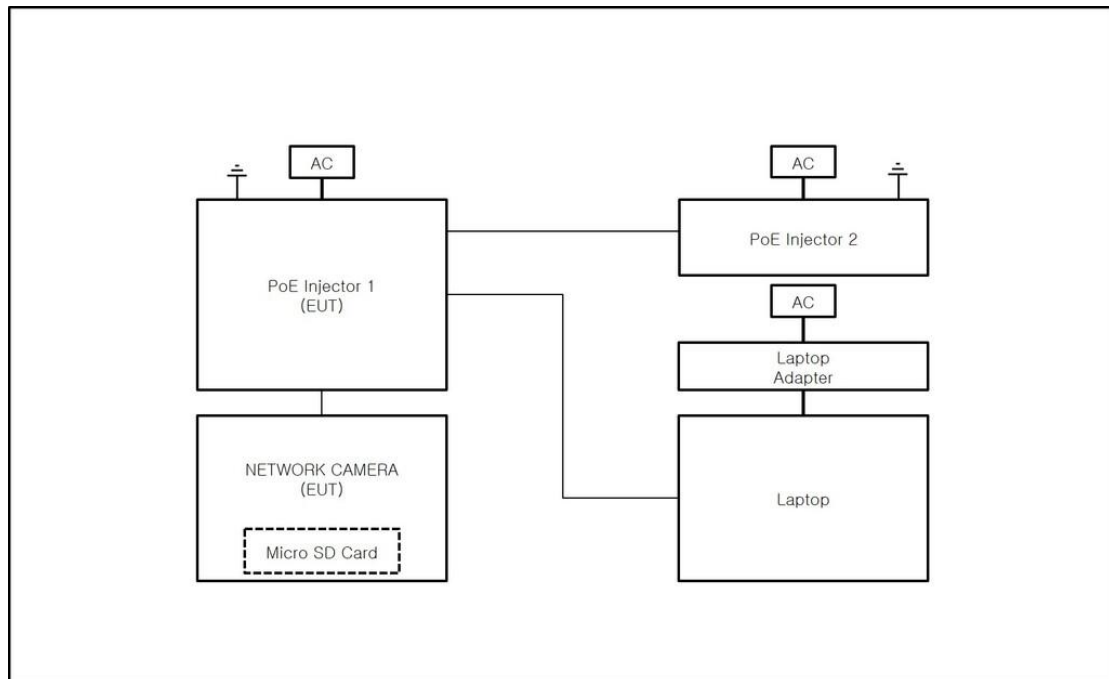

Mode 1



5 Measurement Procedure

- Conducted Emissions

The conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable). The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. If the conducted emission exceed the average limit with the instrument set to the quasi-peak mode, the measurements are made in the average mode. The emission spectrum was scanned from 150 kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limits were measured and have been recorded. Quasi-peak readings are distinguished with a "QP".

- Radiated Electric Field Emissions

The test was done at a SEMI ANECHOIC CHAMBER with quasi-peak detector. The final test data was measured using a Quasi-Peak detector below 1 GHz at 10 m or 3 m distance and a Peak and Average detector above 1 GHz at 3 m distance. Test was proceeded worst case test mode and cable configuration. Measurements were made with the antenna positioned in both the horizontal and vertical planes of polarization. The antenna height was varied from 1 m to 4 m and the EUT was rotated 360° to find the maximum emitting point for each frequency.

Measurement procedures was In accordance with ANSI C63.4 or CISPR 32.



6 Test Item

6.1 Conducted Emissions at Mains Power Ports

6.1.1 Test Equipment


Equipment Name	Model Number	Manufacturer	Serial No.	Cal. Date	Next Cal. Date	Used
SHIELD ROOM #6	-	DYMSTEC	-	-	-	■
EMC32 Measurement Software	EMC32	R&S	9.12.00	-	-	■
EMI TEST RECEIVER	ESR3	Rohde & Schwarz	101783	2024-11-06	2025-11-06	■
LISN	ENV216	Rohde & Schwarz	101786	2025-01-09	2026-01-09	■
ARTIFICIAL MAINS NETWORK	ESH2-Z5	Rohde & Schwarz	100450	2024-11-06	2025-11-06	■
PULSE LIMITER	ESH3-Z2	Rohde & Schwarz	101915	2024-11-06	2025-11-06	■

6.1.2 Test Location : SHIELD ROOM #6

6.1.3 Test Conditions :

Temperature	Relative Humidity
(25.3 ~ 25.5) °C	(55.8 ~ 56.1) % R.H.

6.1.4 Diagram of test setup

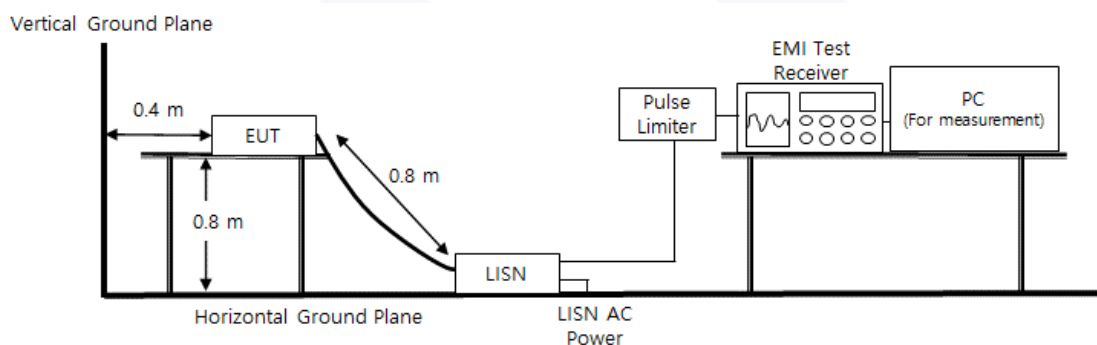




6.1.5 Test Result

- Test Date : 2025-08-05
- Test Mode : Mode 1

Test Report

1 / 1

Test Description: Conducted Emission
Job No.: KES-EM252690
Phase: L
Mode:
Operator Name: KES

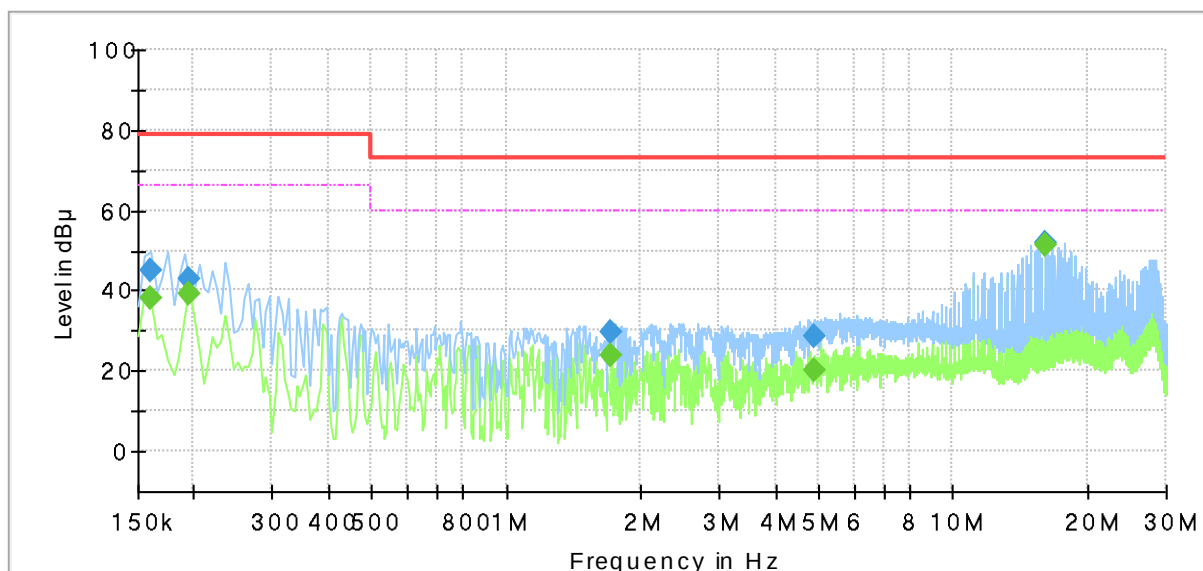

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	—	37.99	66.00	28.01	1000.0	9.000	L1	19.5
0.160000	44.78	—	79.00	34.22	1000.0	9.000	L1	19.5
0.195000	—	39.17	66.00	26.83	1000.0	9.000	L1	19.5
0.195000	42.86	—	79.00	36.14	1000.0	9.000	L1	19.5
1.715000	—	23.88	60.00	36.12	1000.0	9.000	L1	19.6
1.715000	29.85	—	73.00	43.15	1000.0	9.000	L1	19.6
4.910000	—	20.14	60.00	39.86	1000.0	9.000	L1	19.9
4.910000	28.39	—	73.00	44.61	1000.0	9.000	L1	19.9
16.030000	—	51.57	60.00	8.43	1000.0	9.000	L1	20.3
16.030000	51.70	—	73.00	21.30	1000.0	9.000	L1	20.3



Report No. : KES-EM252690

Page 16 / 30


○ Test Date : 2025-08-05

● Test Mode : Mode 1

Test Report

1 / 1

Test Description: Conducted Emission
Job No.: KES-EM252690
Phase: N
Mode:
Operator Name: KES

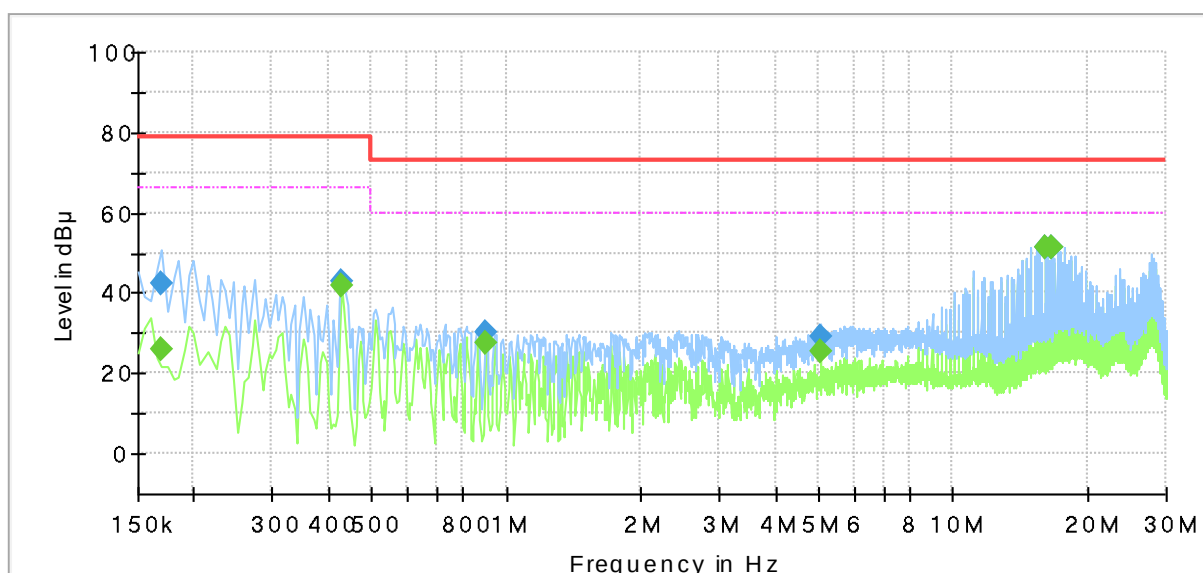

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.170000	—	26.21	66.00	39.79	1000.0	9.000	N	19.5
0.170000	42.45	—	79.00	36.55	1000.0	9.000	N	19.5
0.430000	—	41.75	66.00	24.25	1000.0	9.000	N	19.5
0.430000	42.74	—	79.00	36.26	1000.0	9.000	N	19.5
0.900000	—	27.71	60.00	32.29	1000.0	9.000	N	19.6
0.900000	30.11	—	73.00	42.89	1000.0	9.000	N	19.6
5.040000	—	25.22	60.00	34.78	1000.0	9.000	N	19.9
5.040000	29.30	—	73.00	43.70	1000.0	9.000	N	19.9
16.030000	—	51.40	60.00	8.60	1000.0	9.000	N	20.3
16.030000	51.52	—	73.00	21.48	1000.0	9.000	N	20.3
16.670000	—	51.38	60.00	8.62	1000.0	9.000	N	20.3
16.670000	51.57	—	73.00	21.43	1000.0	9.000	N	20.3

6.1.6 Remark

Complies with the test requirements.



6.2 Radiated Emissions(Below 1 GHz)

6.2.1 Test Equipment


Equipment Name	Model Number	Manufacturer	Serial No.	Cal. Date	Next Cal. Date	Used
SEMI ANECHOIC CHAMBER #4(10 m)	-	DYMSTEC	-	-	-	■
EP5/RE Software	EP5/RE	TOYO	6.0.0	-	-	■
EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100551	2025-02-13	2026-02-13	■
AMPLIFIER	SCU 01	Rohde & Schwarz	100603	2024-11-06	2025-11-06	■
BILOG ANTENNA	VULB 9168	SCHWARZBEC K	9168-461	2024-05-09	2026-05-09	■
ATTENUATOR	6806.17.A	HUBER+SUHNER	-	2025-02-13	2026-02-13	■

6.2.2 Test Location : SEMI ANECHOIC CHAMBER #4(10 m) Measurement Distance : □ 3 m, ■ 10 m

6.2.3 Test Conditions :

Temperature	Relative Humidity
(26.1 ~ 26.3) °C	(50.1 ~ 52.4) % R.H.


6.2.4 Diagram of test setup

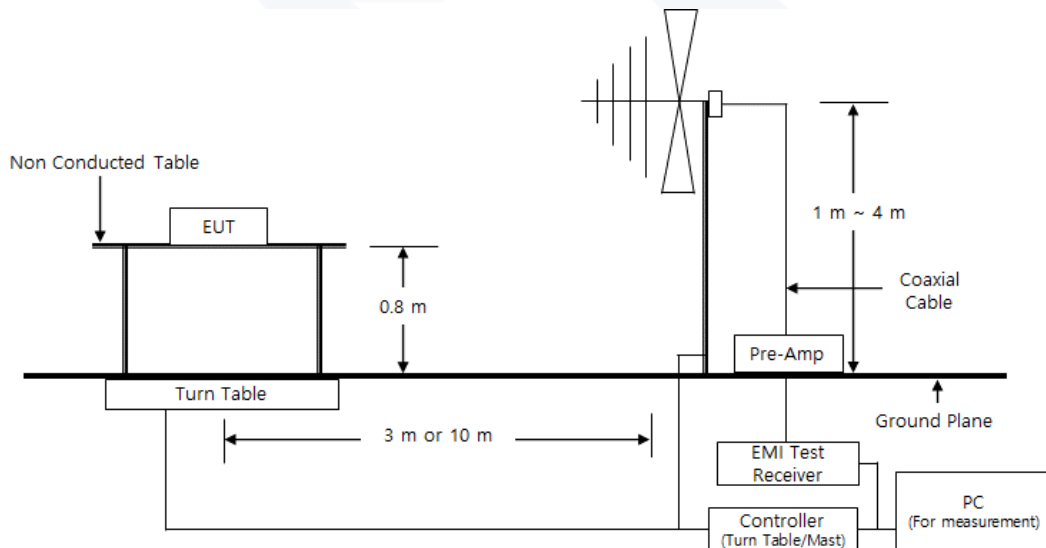



6.2.5 Test Result

- Test Date : 2025-08-05
- Test Mode : FCC

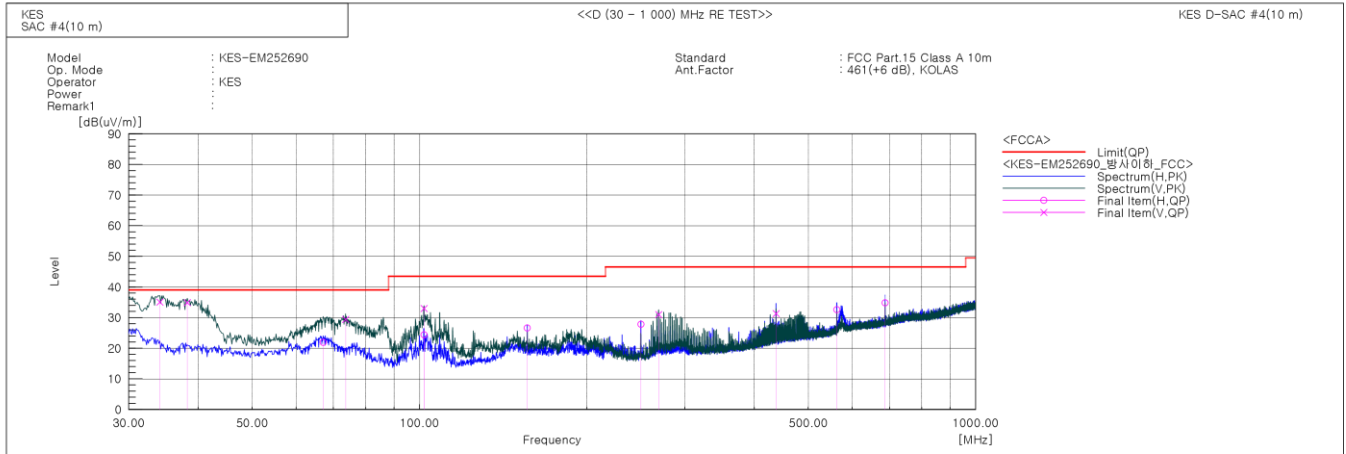

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	34.123	V	57.4	-22.3	35.1	39.0	3.9	100.0	293.0	
2	38.245	V	56.9	-22.0	34.9	39.0	4.1	100.0	350.0	
3	67.103	H	44.0	-22.1	21.9	39.0	17.1	305.0	207.0	
4	73.650	V	53.1	-23.7	29.4	39.0	9.6	104.0	80.0	
5	101.901	V	57.5	-24.5	33.0	43.5	10.5	189.0	133.0	
6	101.901	H	48.9	-24.5	24.4	43.5	19.1	400.0	23.0	
7	156.221	H	45.9	-19.3	26.6	43.5	16.9	393.0	222.0	
8	250.069	H	47.2	-19.4	27.8	46.5	18.7	400.0	353.0	
9	269.105	V	49.4	-18.4	31.0	46.5	15.5	100.0	218.0	
10	437.521	V	43.3	-12.0	31.3	46.5	15.2	101.0	7.0	
11	562.651	H	41.0	-8.4	32.6	46.5	13.9	300.0	347.0	
12	687.660	H	40.2	-5.4	34.8	46.5	11.7	312.0	62.0	

※ The data is the result measured by the detector in Quasi-Peak mode on the Peak graph.




Report No. : KES-EM252690

Page 19 / 30

○ Test Date : 2025-08-05

● Test Mode : IC

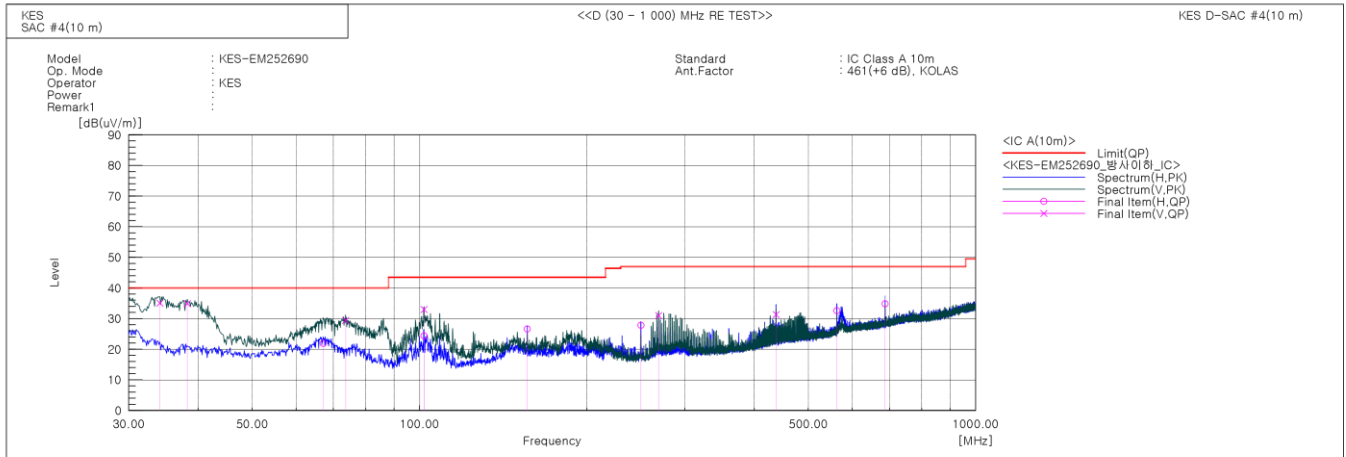

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	34.123	V	57.4	-22.3	35.1	40.0	4.9	100.0	293.0	
2	38.245	V	56.9	-22.0	34.9	40.0	5.1	100.0	350.0	
3	67.103	H	44.0	-22.1	21.9	40.0	18.1	305.0	207.0	
4	73.650	V	53.1	-23.7	29.4	40.0	10.6	104.0	80.0	
5	101.901	V	57.5	-24.5	33.0	43.5	10.5	189.0	133.0	
6	101.901	H	48.9	-24.5	24.4	43.5	19.1	400.0	23.0	
7	156.221	H	45.9	-19.3	26.6	43.5	16.9	393.0	222.0	
8	250.069	H	47.2	-19.4	27.8	47.0	19.2	400.0	353.0	
9	269.105	V	49.4	-18.4	31.0	47.0	16.0	100.0	218.0	
10	437.521	V	43.3	-12.0	31.3	47.0	15.7	101.0	7.0	
11	562.651	H	41.0	-8.4	32.6	47.0	14.4	300.0	347.0	
12	687.660	H	40.2	-5.4	34.8	47.0	12.2	312.0	62.0	

※ The data is the result measured by the detector in Quasi-Peak mode on the Peak graph.

6.2.6 Remark

Complies with the test requirements.



6.3 Radiated Emissions(Above 1 GHz)

6.3.1 Test Equipment


Equipment Name	Model Number	Manufacturer	Serial No.	Cal. Date	Next Cal. Date	Used
SEMI ANECHOIC CHAMBER #5	-	SY Corporation	-	-	-	■
ES10/RE Software	ES10/RE	TOYO	2022.01.000	-	-	■
EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100552	2025-02-13	2026-02-13	■
PREAMPLIFIER	8449B	HP	3008A00538	2025-04-30	2026-04-30	■
ATTENUATOR	8491B	HP	23094	2025-02-13	2026-02-13	■
HORN ANTENNA	BBHA 9120D	SCHWARZBEC K	9120D-1802	2024-11-04	2025-11-04	■

6.3.2 Test Location : SEMI ANECHOIC CHAMBER #5

6.3.3 Test Conditions :

Temperature	Relative Humidity
(25.4 ~ 25.6) °C	(58.1 ~ 58.5) % R.H.


6.3.4 Diagram of test setup

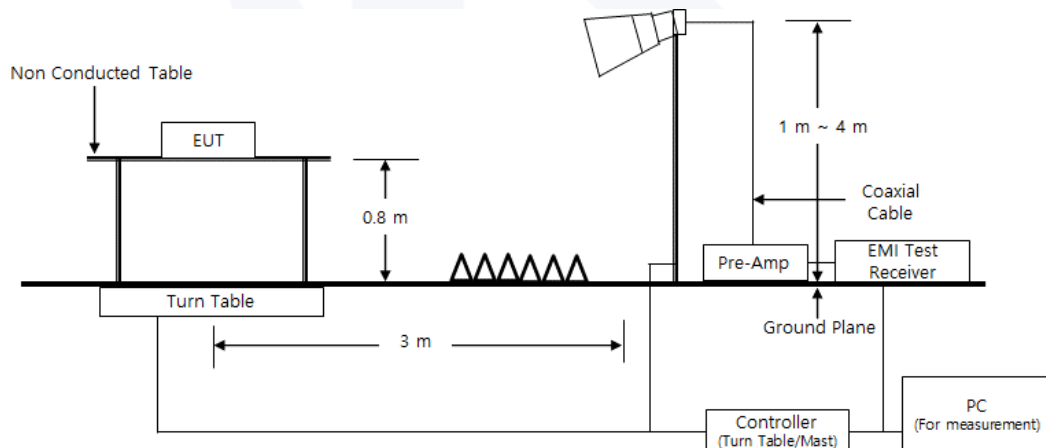



6.3.5 Test Result

- Test Date : 2025-08-04
- Test Mode : Mode 1

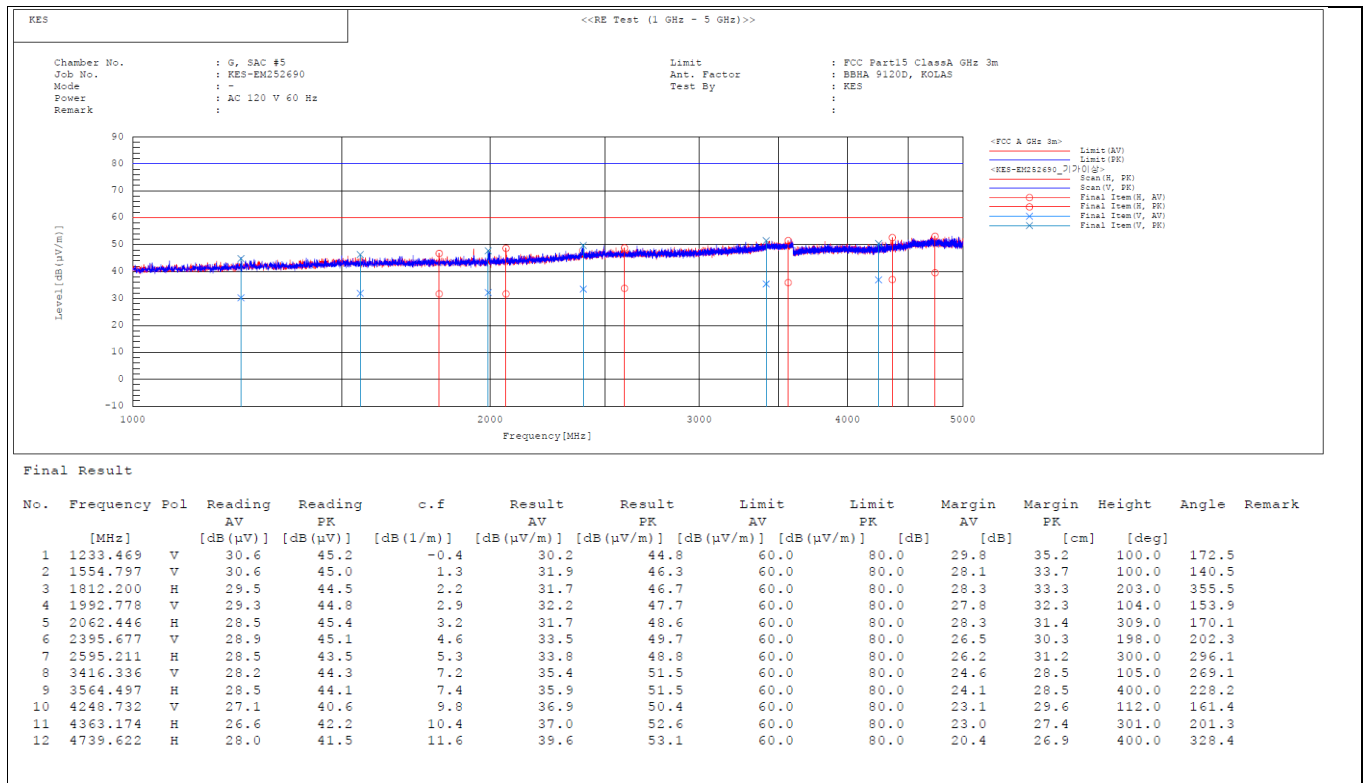

- ※ The data is the result of measured by the detector in PK and CISPR Average on the Peak graph.
- ※ The Average of the test data is the cispr average result.



Report No. : KES-EM252690

Page 22 / 30

○ Test Date : 2025-08-04

● Test Mode : Mode 1

(5 ~ 9) GHz

PK

Frequency (MHz)	Reading PK (dBuV)	Polarization	Height (m)	ANT Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
6 821.315	41.800	H	1.000	35.440	9.960	34.730	52.470	80.000	27.530
7 814.511	41.200	V	1.000	36.490	11.300	33.750	55.240	80.000	24.760

Cispr-AV

Frequency (MHz)	Reading CISPR AV (dBuV)	Polarization	Height (m)	ANT Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
6 821.315	27.800	H	1.000	35.440	9.960	34.730	38.470	60.000	21.530
7 814.511	27.600	V	1.000	36.490	11.300	33.750	41.640	60.000	18.360

※ No spurious emission were detected above 9 GHz

6.3.6 Remark

Complies with the test requirements.



7 Test Setup Photos and EUT Photographs


7.1 Test Setup Photos



<Conducted Emissions at Mains Power Ports - Front>




<Conducted Emissions at Mains Power Ports - Rear>

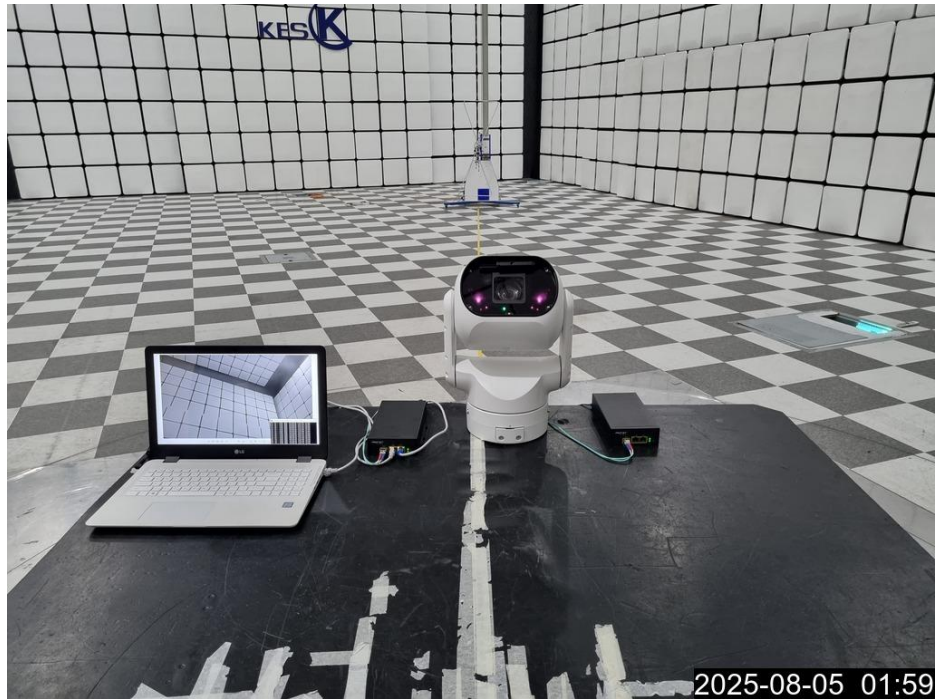

<Radiated Emissions(Below 1 GHz) - Front>



<Radiated Emissions(Below 1 GHz) - Rear>

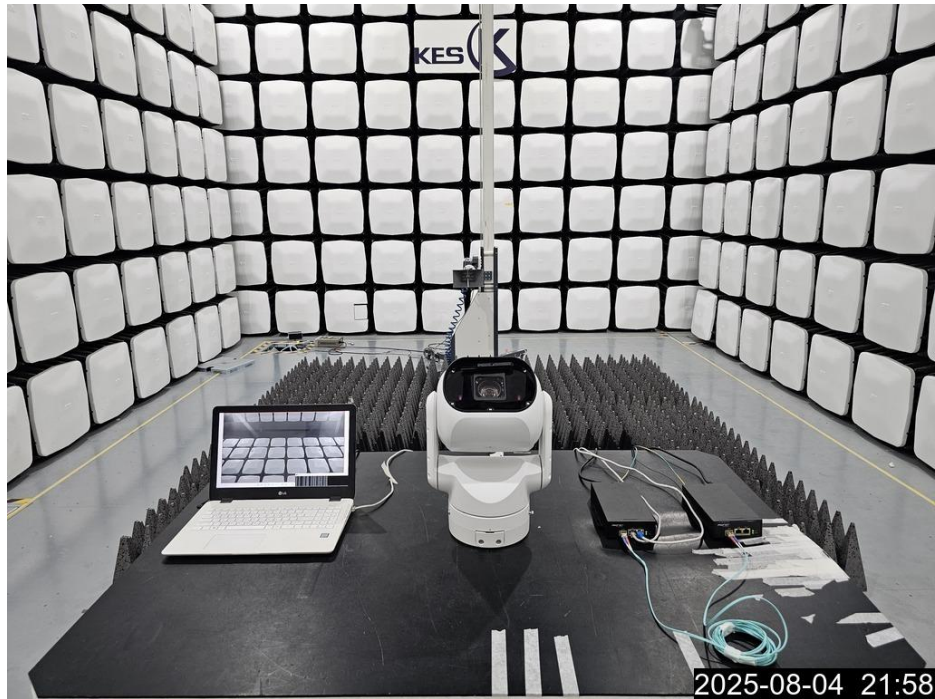

<Radiated Emissions(Above 1 GHz) - Front>



<Radiated Emissions(Above 1 GHz) - Rear>



7.2 EUT Photographs




<EUT External Photographs - Top>




<EUT External Photographs - Bottom>



<Components>

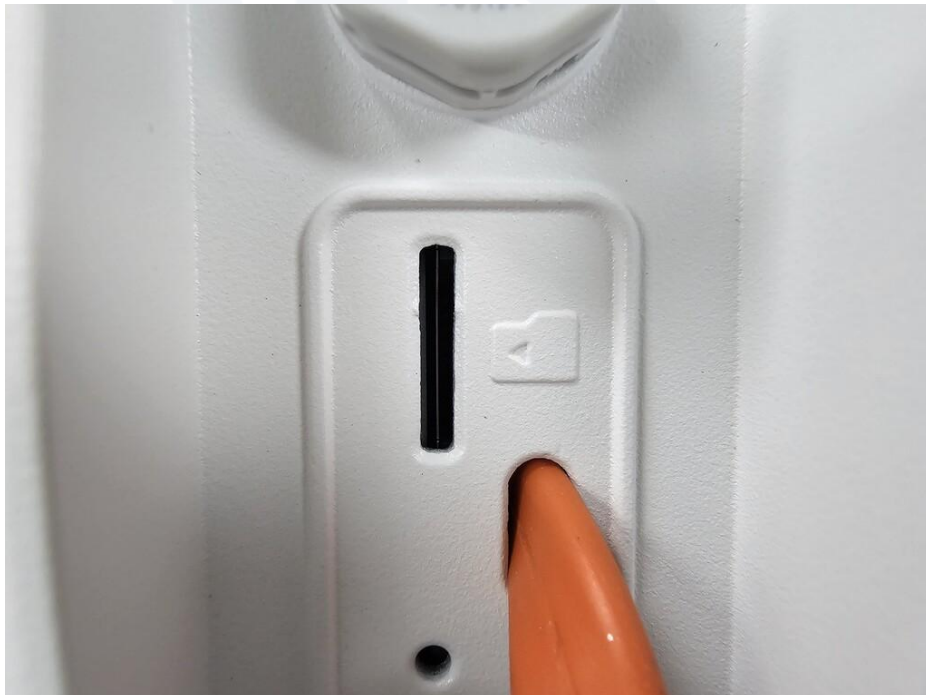

<Port-1>

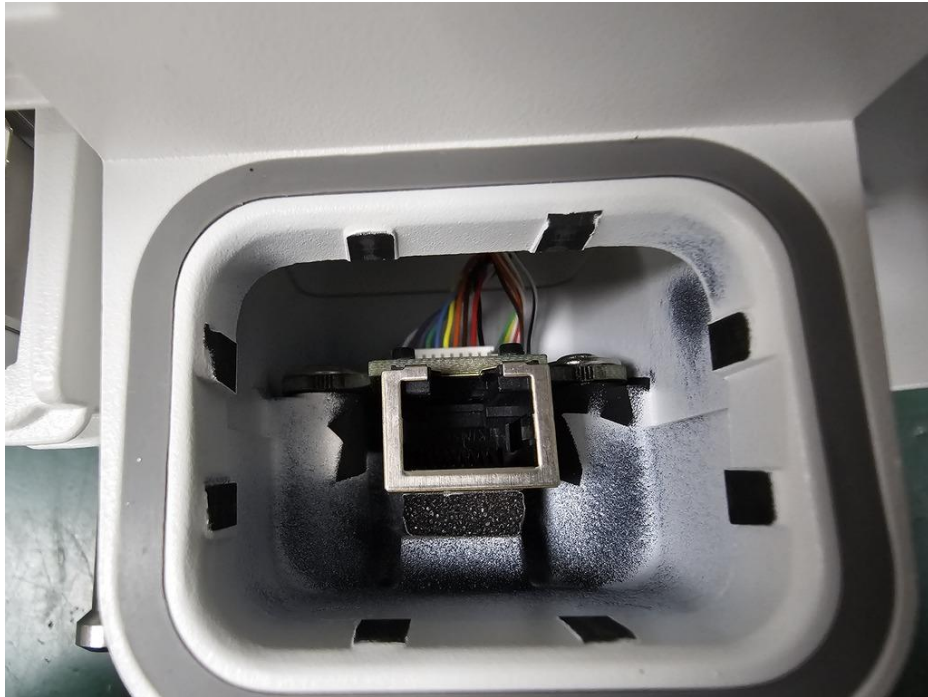

<Port-2>



<EUT Internal Photographs>



7.3 Label

	Name : Hanwha Vision Co., Ltd. Product item : NETWORK CAMERA Model name : TNP-A6550RW
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.	
The above label is only an example. The specific format is left to the manufacturer to decide, as long as the label includes the required information, in accordance with ICES-Gen. The requirements specified in ICES-Gen shall apply. An example ISED compliance label, to be placed on each unit of an equipment model (or in the user manual, if allowed), is given below:	
CAN ICES-003(A) / NMB-003(A)	

The End.