



EMC TEST REPORT For RCM

Test Report No. : KES-EM-21T0617
Date of Issue : Jul. 19, 2021
Product name : NETWORK CAMERA
Model/Type No. : XNB-8003
Variant Model : -
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Jun. 03, 2021
Test date : Jul. 07, 2021 ~ Jul. 13, 2021
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Dong Hyun, Won
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0617
Page (2) of (39)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Jul. 19, 2021	KES-EM-21T0617	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	8
1.6	External I/O Cabling	9
1.7	EUT Operating Mode(s)	10
1.8	Configuration.....	11
1.9	Remarks when standards applied	12
1.10	Calibration Details of Equipment Used for Measurement	12
1.11	Test Facility	12
1.12	Laboratory Accreditations and Listings	12
2.0	Test Regulations.....	13
2.1	Conducted Emissions at Mains Power Ports	15
2.2	Conducted Emissions at Telecommunication Ports.....	16
2.3	Radiated Electric Field Emissions(Below 1 GHz)	17
2.4	Radiated Electric Field Emissions(Above 1 GHz)	18
APPENDIX A – TEST DATA.....		19
Conducted Emissions at Mains Power Ports.....		19
Conducted Emissions at Telecommunication Ports		21
Radiated Electric Field Emissions(Below 1 GHz)		23
Radiated Electric Field Emissions(Above 1 GHz).....		25
Test Setup Photos and Configuration		27
Conducted Emissions at Mains Power Ports.....		27
Conducted Emissions at Telecommunication Ports		28
Radiated Electric Field Emissions(Below 1 GHz)		30
Radiated Electric Field Emissions(Above 1 GHz).....		32
EUT External Photographs		34
EUT Internal Photographs		35



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0617
Page (4) of (39)

1.0 General Product Description

Main Specifications of EUT are:

	XNB-8003
Video	
Imaging Device	1/1.8" progressive CMOS
Resolution	3328x1872, 3072x1728, 2592x1944, 2688x1520, 1920x1080, 1600x1200, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264: Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max. 15fps/12fps(60Hz/50Hz)
NETD	None
Pixel Size	None
Min. Illumination	(TBD) Color: 0.04Lux(F1.3, 1/30sec, 30IRE) B/W : 0.004Lux(F1.3, 1/30sec, 30IRE), 0Lux(IR LED on)
Video Out	CVBS: 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P) for installation USB: Micro USB Type B, 1280x720 for installation
Video Transmission Distance	None
Lens	
Focal Length (Zoom Ratio)	None
Max. Aperture Ratio	None
Angular Field of View	None
Min. Object Distance	None
Focus Control	Simple focus
Lens Type	DC auto iris, P-iris, Manual, I-CS
Mount Type	C mount, CS mount
Optional Lens	None
Pan / Tilt / Rotate	
Pan / Tilt / Rotate Range	None
Pan Range	None
Pan Speed	None
Tilt Range	None
Tilt Speed	None
Rotate Range	None
Sequence	None
Preset Accuracy	None
Operational	
Camera Title	Displayed up to 85 characters
Direction Indicator	None
Day & Night	Auto(ICR)
Backlight Compensation	BLC, HLC, WDR, SDR
Wide Dynamic Range	extremeWDR (120dB)
Digital Noise Reduction	WiseNR II (Based on AI engine), SSNR V
Digital Image Stabilization	Support(built-in gyro sensor)
Defog	Support
Motion Detection	8ea, 8point Polygonal zones
Privacy Masking	32ea, Quadrangle zones - Color : Gray, Green, Red, Blue, Black, White - Mosaic
Gain Control	Support

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0617

Page (5) of (39)

White Balance	ATW / Narrow ATW / AWC / Manual / Indoor / Outdoor
LDC	Support (Fill/stretch mode)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2~1/12,000sec) Auto prefer shutter control(Based on AI engine)
Digital PTZ	Support
Video Rotation	Flip, Mirror, Hallway view(90°/270°)
Analytics	- Analytics events based on AI engine(NPU) : Object detection (Person/Face/Vehicle/car/truck/bus/bicycle/motorcycle/Licence plate), IVA (Virtual line/Area, Enter/Exit, Loitering, direction, intrusion) - Analytics events : Defocus detection, Motion detection, Tampering, Fog detection, Audio detection, Sound classification, Shock detection, Appear/Disappear
Business Intelligence	Based on AI engine(NPU) : People counting, Queue management, Heatmap
Serial Interface	RS-485(Samsung-T, Pelco-D/P, Panasonic, Bosch, AD, GE, Vicon, Honeywell)
Alarm I/O	2 configurable I/O ports
Alarm Triggers	Analytics, Network disconnect, Alarm input, App event, Time schedule
Alarm Events	When alarm trigger occurred - File upload(image) : e-mail/FTP - Notification : e-mail - Recording : SD/SDHC/SDXC or NAS recording at event triggers - Alarm output - Handover(PTZ preset, Send message by HTTP/HTTPS/TCP) - Audio clip playback - PTZ preset
Audio In	Selectable(mic in/line in/Built-in MIC) Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm
Audio Out	Line out, Max.output level: 1Vrms
IR Viewable Length	None
IR Illuminator (Optional)	None
Water Removal	None
Auto Tracking	None
Coaxial Protocol	None
Color Palettes	None
Radiometry	
Temperature Detect Range	None
Temperature Accuracy	None
Temperature Detection	None
Additional	None
Network	
Ethernet	Metal shielded RJ-45(10/100/1000BASE-T)
Video Compression	H.265/H.264: Main/High, MJPEG
Audio Compression	G.711 u-law /G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz
Smart Codec	Manual(Sea area), WiseStreamⅡ, WiseStreamⅢ(Based on AI engine)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0617
Page (6) of (39)

Video Quality Adjustment	H.264/H.265: Target bitrate level control MJPEG: Target bitrate level control
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(20 users) / Multicast Multiple streaming(Up to 10 profiles, 3 virtual channel support)
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP (TCP, UDP Unicast)
Security	TPM 2.0 (TPM 1.40-2 level 2) HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP, EAP-PEAP MSCHAPv2) Device Certificate(Hanwha Techwin Root CA, pre-installed) Secure by default certificate(TBD) Secure OS/Boot/Storage, Verify firmware forgery
Application Programming Interface	ONVIF Profile S/G/T SUNAPI(HTTP API) Wisenet open platform
General	
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Greek, Hungarian
Web Viewer	None
Edge Storage	Micro SD/SDHC/SDXC 2slot Max. 1TB (512GB * 2)
Memory	4GB RAM, 512MB Flash
Environmental & Electrical	
Operating Temperature / Humidity	-10 °C ~ 55°C(-14°F ~ +131°F) less than 95%RH(non-condensing)
Storage Temperature / Humidity	-50°C ~ +60°C(-58°F ~ +140°F) / Less than 90% RH
Certification	None
Input Voltage	PoE(IEEE802.3af, Class3), 12VDC(TBD)
Power Consumption	TBD Power redundancy failover(TBD)
Mechanical	
Color / Material	Black / Aluminum
RAL Code	None
Product Dimensions / Weight	81(W)x67(H)x165(D)mm(3.19x2.64x6.48"), 0.88kg(1.94 lb) (TBD)
Compatible Conduit hole / Gangbox	None
Hanging Mount (Dome)	None
Skin Cover (Dome)	None
Weather Cap (Dome)	None
Power Module	None
Backbox	None
DORI (EN52676-4 standard)	
Detect (25PPM/ 8PPF)	None
Observe (63PPM/ 19PPF)	None
Recognize (125PPM/ 38PPF)	None
Identify (250PPM/ 76PPF)	None

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 240 V, 50 Hz ☒ PoE

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNB-8003	-	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.	EUT

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0617
Page (8) of (39)

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Lens	-	-	-	-
AC / DC Adapter	2ACB022F	-	Channel Well Technology (Guangzhou) Co., Ltd.	-
PoE Adapter	PT-PSE109GBRO-AH	-	Dongguan PROCET Network Technology Co.,Ltd	-
Notebook	P89F	P89F004	Wistron Infocom (Chengdu) Company Limited	-
Notebook Adapter	LA240PM190	0D0X04-LOC00-0AR-4104-A02	Lite-On Technology (Changzhou) Co., Ltd.	-
Controller	SPC-1010	C60E67WD601003	SamSung Techwin Co.,Ltd.	-
Controller Adapter	RS-AB1000	-	Dongguan Jinhuasheng Power Technology Co.,Ltd.	-
Alarm	SLE-0001 DO	C64167JDB601268 F	-	-
Button Alarm	SIP-1201DD D0	-	SAMSUNG TECHWIN CO., LTD.	-
Speaker	BR1000A Cuve Black 2	-	DONGGUAN EDIFIER TECHNOLOGY Co., Ltd	-
MIC	CMK-303	-	CAMAC	-
Smart Phone	SM-J500N0	-	Samsung Electronics Co., Ltd.	-
Micro SD Card	-	-	Sandisk	32 GB

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0617
Page (9) of (39)

1.6 External I/O Cabling

■ DC 12 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	IRIS	Lens	IRIS	0.2	U
	2 Pin	AC / DC Adapter	2 Pin	1.4	U
	RJ-45	Notebook	RJ-45	4.0	S
	RS-485	Controller	RS-485	4.0	U
	Alarm OUT	Alarm	Alarm IN	3.0	U
	Alarm IN	Button Alarm	Alarm OUT	3.0	U
	3.5 mm	Speaker	3.5 mm	1.4	U
	3.5 mm	MIC	3.5 mm	1.7	S
	Slot	Micro SD Card	Slot	-	-
Notebook	DC Jack	Notebook Adapter	DC Jack	2.0	S
	3.5 mm	Smart Phone	3.5 mm	1.8	U
Controller	DC Jack	Controller Adapter	DC Jack	2.2	U

* Unshielded=U, Shielded=S

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



■ PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	IRIS	Lens	IRIS	0.2	U
	RJ-45	PoE Adapter	RJ-45	4.0	S
	RS-485	Controller	RS-485	4.0	U
	Alarm OUT	Alarm	Alarm IN	3.0	U
	Alarm IN	Button Alarm	Alarm OUT	3.0	U
	3.5 mm	Speaker	3.5 mm	1.4	U
	3.5 mm	MIC	3.5 mm	1.7	S
	Slot	Micro SD Card	Slot	-	-
Notebook	RJ-45	PoE Adapter	RJ-45	2.5	S
	DC Jack	Notebook Adapter	DC Jack	2.0	S
	3.5 mm	Smart Phone	3.5 mm	1.8	U
Controller	DC Jack	Controller Adapter	DC Jack	2.2	U

* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)

Test Mode	operating
DC 12 V Mode	EUT Monitoring, Ping Test
PoE Mode	


EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Techwin Co., Ltd.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr


1.8 Configuration

■ AC Main
 □ DC Main

■ DC 12 V Mode

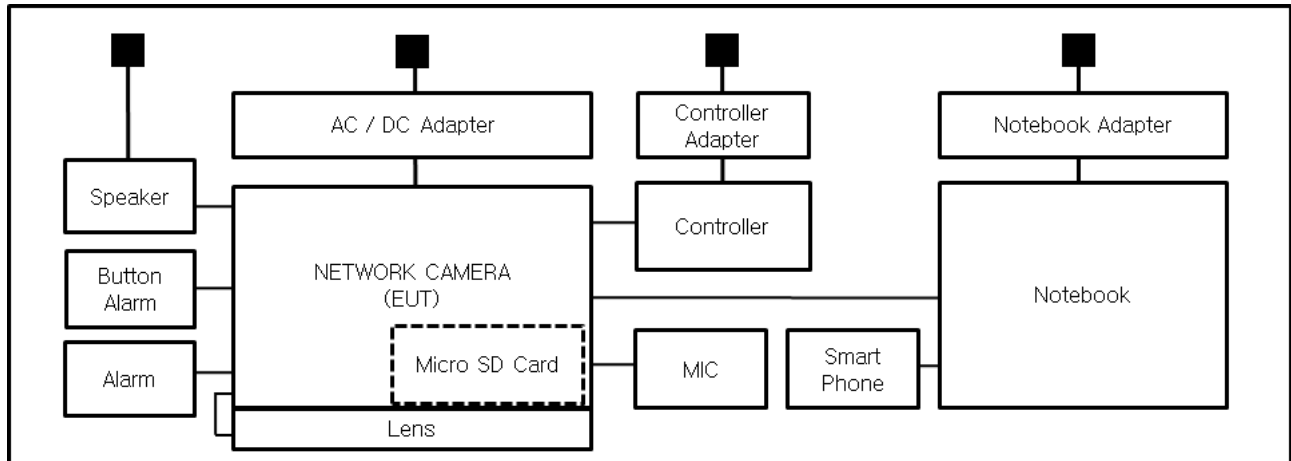

■ PoE Mode

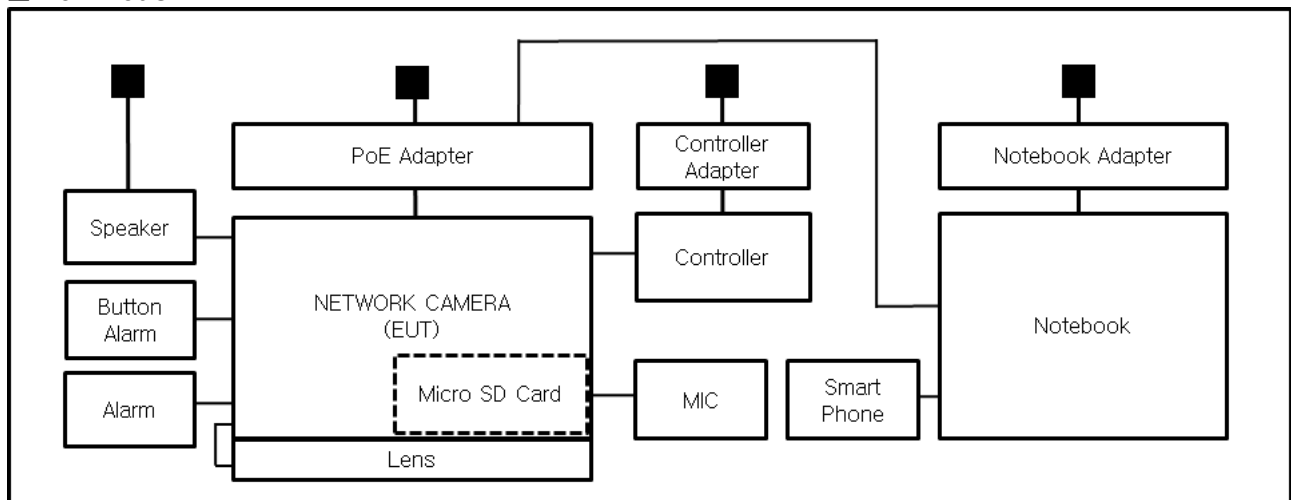

1.9 Remarks when standards applied

USB port and VIDEO port was excluded from the test as it is an unused port.

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-20056, C-20036, T-20040, G-20057
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55032:2015

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0617
Page (14) of (39)

-
- | | | |
|--|---|----------------------------------|
| ☐ VCCI-CISPR 32:2016 | ☐ Class A | ☐ Class B |
| ☒ AS/NZS CISPR32:2015 | ☒ Class A | ☐ Class B |
|
 | | |
| ☐ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2009 | | |
|
 | | |
| ☐ IC Regulation ICES-003 : 2016 | | |
| ☐ CAN/CSA CISPR 22-10 | ☐ Class A | ☐ Class B |
| ☐ ANSI C63.4-2014 | | |
|
 | | |
| ☐ RE- Directive 2014/53/EU | | |
|
 | | |
| ☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
|
 | | |
| ☐ EN 301 489-3 V1.6.1 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
| ☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



2.1 Conducted Emissions at Mains Power Ports

Test Date

Jul. 07, 2021

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	01, 15, 2022
☒	LISN	ENV216	R & S	101787	12, 29, 2021
☒	LISN	ESH2-Z5	R & S	100450	12, 29, 2021
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 29, 2021

Test Conditions

Temperature: (24,9 ± 0,2) °C

Relative Humidity: (46,8 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.2 Conducted Emissions at Telecommunication Ports

Test Date

Jul. 07, 2021

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	01, 15, 2022
☒	LISN	ENV216	R & S	101787	12, 29, 2021
☒	LISN	ESH2-Z5	R & S	100450	12, 29, 2021
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 29, 2021
☒	ISN	ISN S8	SCHWARZBECK	ISN-S8-0019	03, 10, 2022

Test Conditions

Temperature: (24,9 ± 0,2) °C

Relative Humidity: (46,8 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks- See Appendix A for test data.- For Ethernet interfaces, measurements are required at the highest data rate supported by the interface.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Jul. 13, 2021

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2022
☒	AMPLIFIER	SCU 01	R & S	100603	11, 25, 2021
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
☒	ATTENUATOR	8491A	HP	32173	03, 10, 2022

Test Conditions

Temperature: (24,7 ± 0,2) °C
Relative Humidity: (46,6 ± 0,1) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Jul. 12, 2021

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 05, 2021
☒	PREAMPLIFIER	8449B	AGILENT	2008A01967	04, 07, 2022
☐	ATTENUATOR	8491A	HP	35496	03, 10, 2022
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 11, 2022

Test Conditions

Temperature: (25,1 ± 0,2) °C

Relative Humidity: (46,8 ± 0,2) % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



APPENDIX A – TEST DATA


Conducted Emissions at Mains Power Ports

■ DC 12 V Mode

HOT LINE

Common Information

Test Description: Conducted Emission
Model No.: XNB-8003
Phase:
Mode: DC_H
Operator Name: KES

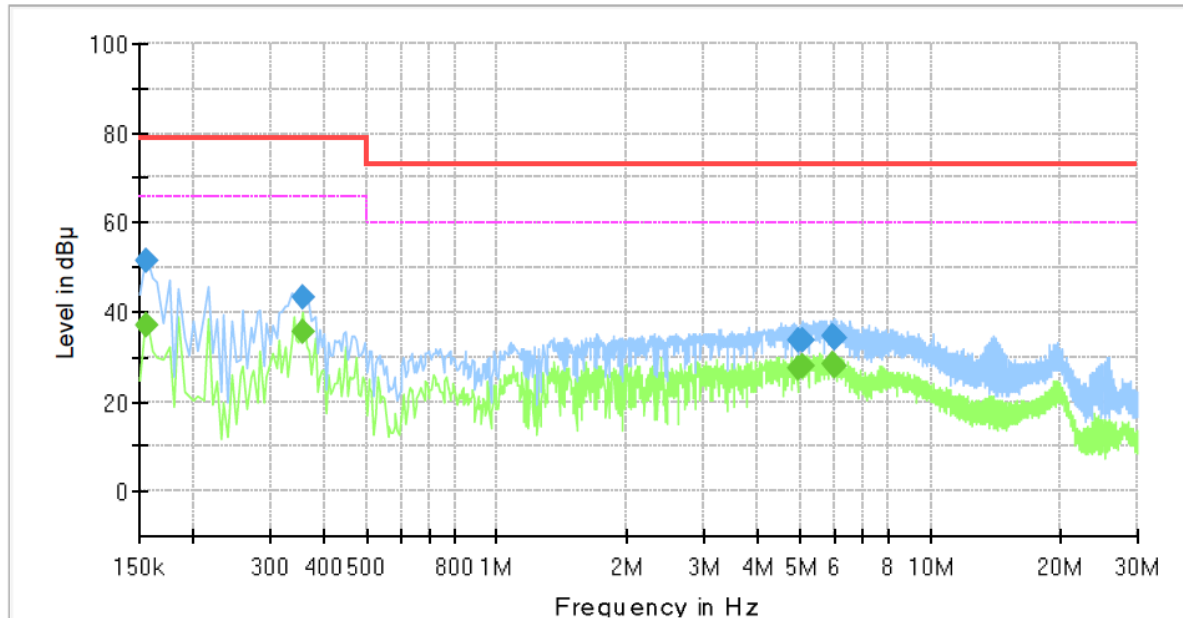

Final Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	36.99	66.00	29.01	1000.0	9.000	L1	19.4
0.155000	51.30	---	79.00	27.70	1000.0	9.000	L1	19.4
0.355000	---	35.72	66.00	30.28	1000.0	9.000	L1	19.6
0.355000	43.11	---	79.00	35.89	1000.0	9.000	L1	19.6
4.950000	---	27.39	60.00	32.61	1000.0	9.000	L1	19.7
4.950000	33.60	---	73.00	39.40	1000.0	9.000	L1	19.7
5.045000	---	27.97	60.00	32.03	1000.0	9.000	L1	19.6
5.045000	33.85	---	73.00	39.15	1000.0	9.000	L1	19.6
5.975000	---	28.52	60.00	31.48	1000.0	9.000	L1	19.5
5.975000	34.64	---	73.00	38.36	1000.0	9.000	L1	19.5
6.030000	---	28.04	60.00	31.96	1000.0	9.000	L1	19.5
6.030000	34.29	---	73.00	38.71	1000.0	9.000	L1	19.5

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

NEUTRAL LINE

Common Information

Test Description: Conducted Emission
 Model No.: XNB-8003
 Phase:
 Mode: DC_N
 Operator Name: KES

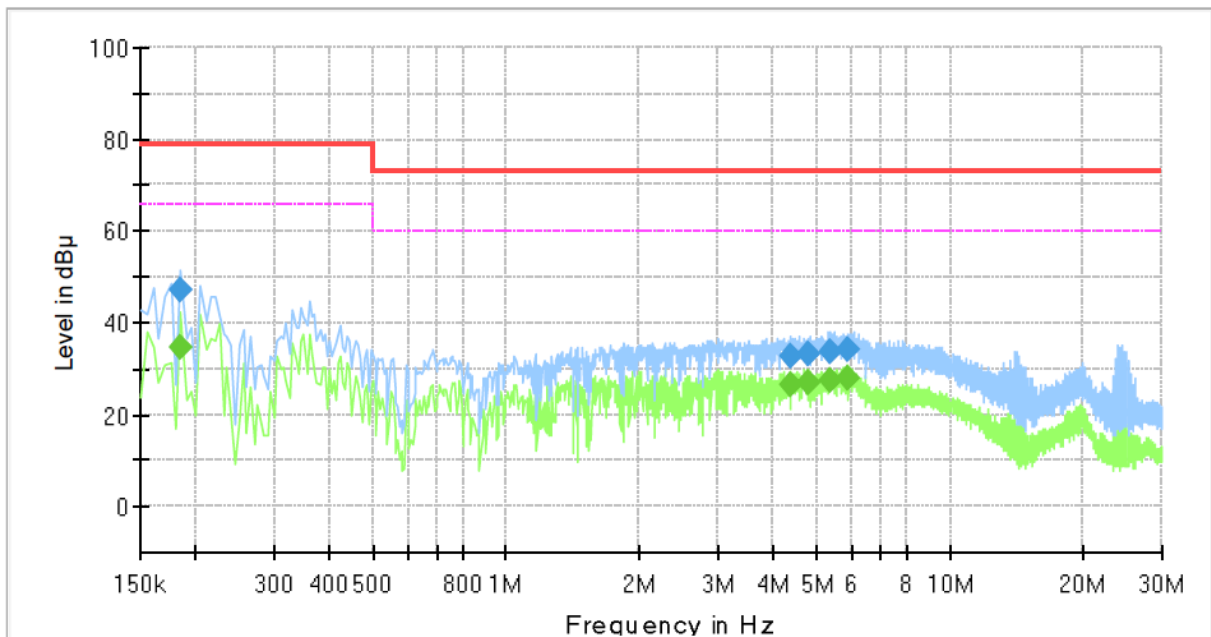

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.185000	---	34.90	66.00	31.10	1000.0	9.000	N	19.4
0.185000	47.22	---	79.00	31.78	1000.0	9.000	N	19.4
4.380000	---	26.64	60.00	33.36	1000.0	9.000	N	19.8
4.380000	32.94	---	73.00	40.06	1000.0	9.000	N	19.8
4.805000	---	27.17	60.00	32.83	1000.0	9.000	N	19.7
4.805000	33.14	---	73.00	39.86	1000.0	9.000	N	19.7
5.390000	---	27.53	60.00	32.47	1000.0	9.000	N	19.6
5.390000	33.50	---	73.00	39.50	1000.0	9.000	N	19.6
5.905000	---	27.87	60.00	32.13	1000.0	9.000	N	19.5
5.905000	34.11	---	73.00	38.89	1000.0	9.000	N	19.5

◆ Calculation

QuasiPeak [dBuV] / CAverage [dBuV] = Reading Value [dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0617
Page (21) of (39)


Conducted Emissions at Telecommunication Ports

■ DC 12 V Mode

[1 000 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNB-8003
Mode :
Speed : DC_1 000 Mbps
Operator Name: KES

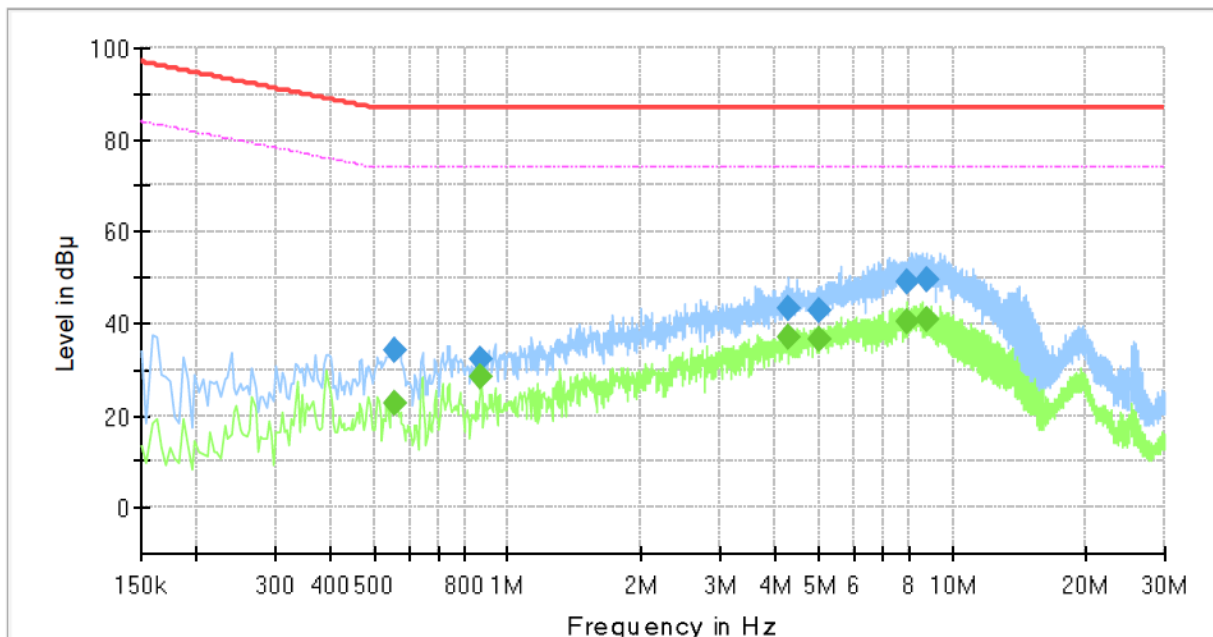

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.554000	---	22.64	74.00	51.36	1000.0	9.000	Single Line	19.7
0.554000	34.25	---	87.00	52.75	1000.0	9.000	Single Line	19.7
0.870000	---	28.31	74.00	45.69	1000.0	9.000	Single Line	19.9
0.870000	32.27	---	87.00	54.73	1000.0	9.000	Single Line	19.9
4.278000	---	36.88	74.00	37.12	1000.0	9.000	Single Line	19.7
4.278000	43.44	---	87.00	43.56	1000.0	9.000	Single Line	19.7
5.014000	---	36.44	74.00	37.56	1000.0	9.000	Single Line	19.5
5.014000	43.03	---	87.00	43.97	1000.0	9.000	Single Line	19.5
7.942000	---	40.58	74.00	33.42	1000.0	9.000	Single Line	19.4
7.942000	49.08	---	87.00	37.92	1000.0	9.000	Single Line	19.4
8.798000	---	40.85	74.00	33.15	1000.0	9.000	Single Line	19.6
8.798000	49.79	---	87.00	37.21	1000.0	9.000	Single Line	19.6

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:
KES-EM-21T0617
Page (22) of (39)

■ PoE Mode

[1 000 Mbps]

Common Information

Test Description: Telecommunication Emission
Model No.: XNB-8003
Mode :
Speed : PoE_ 1 000 Mbps
Operator Name: KES

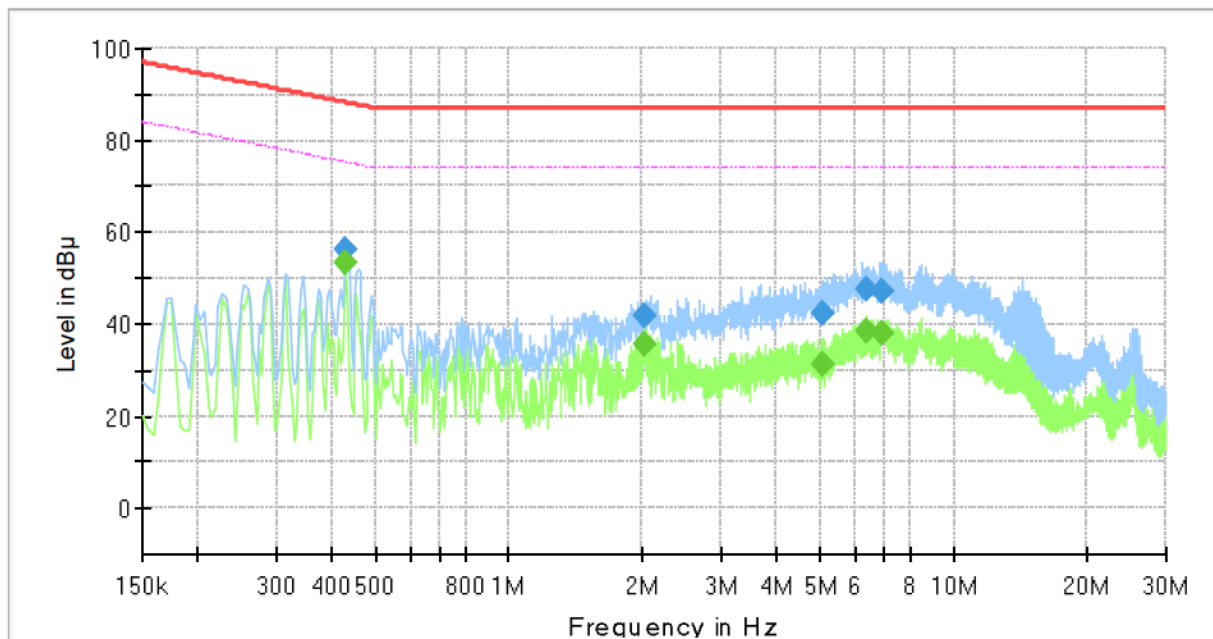

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.430000	---	53.62	75.25	21.63	1000.0	9.000	Single Line	19.6
0.430000	56.05	---	88.25	32.20	1000.0	9.000	Single Line	19.6
2.010000	---	35.68	74.00	38.32	1000.0	9.000	Single Line	20.2
2.010000	42.07	---	87.00	44.93	1000.0	9.000	Single Line	20.2
5.046000	---	31.15	74.00	42.85	1000.0	9.000	Single Line	19.5
5.046000	42.50	---	87.00	44.50	1000.0	9.000	Single Line	19.5
6.378000	---	38.52	74.00	35.48	1000.0	9.000	Single Line	19.3
6.378000	47.79	---	87.00	39.21	1000.0	9.000	Single Line	19.3
6.866000	---	38.11	74.00	35.89	1000.0	9.000	Single Line	19.3
6.866000	47.11	---	87.00	39.89	1000.0	9.000	Single Line	19.3

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr


Report No.:

KES-EM-21T0617

Page (23) of (39)

Radiated Electric Field Emissions(Below 1 GHz)

■ DC 12 V Mode

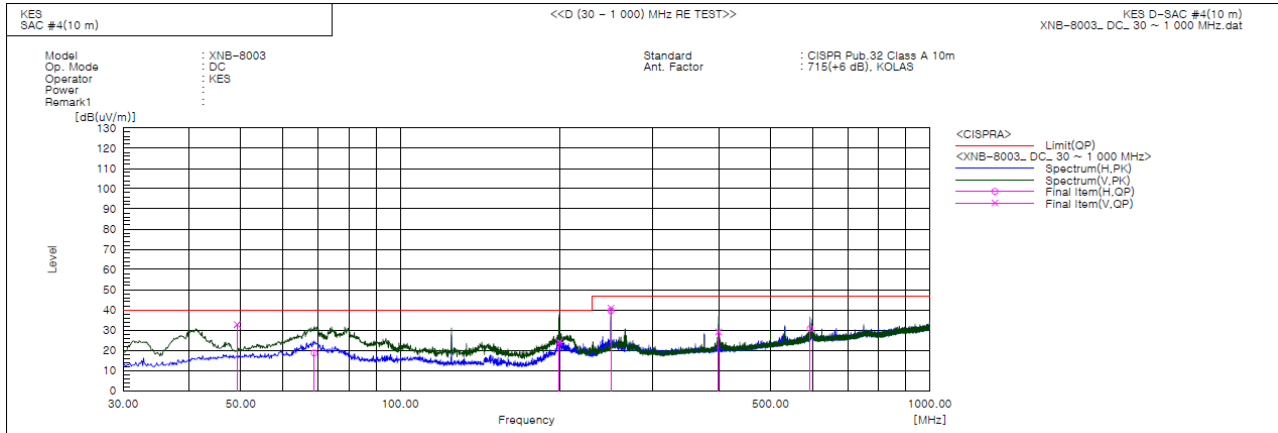

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	49.223	V	53.8	-21.1	32.7	40.0	7.3	152.0	274.0	
2	68.800	H	43.1	-24.4	18.7	40.0	21.3	100.0	175.0	
3	199.386	V	44.9	-20.8	24.1	40.0	15.9	125.0	352.0	
4	249.992	H	58.7	-19.1	39.6	47.0	7.4	368.0	22.0	
5	250.009	V	60.0	-19.1	40.9	47.0	6.1	119.0	4.0	
6	398.843	V	43.4	-14.3	29.1	47.0	17.9	400.0	194.0	
7	594.055	H	39.3	-8.6	30.7	47.0	16.3	296.0	86.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0617

Page (24) of (39)

PoE Mode

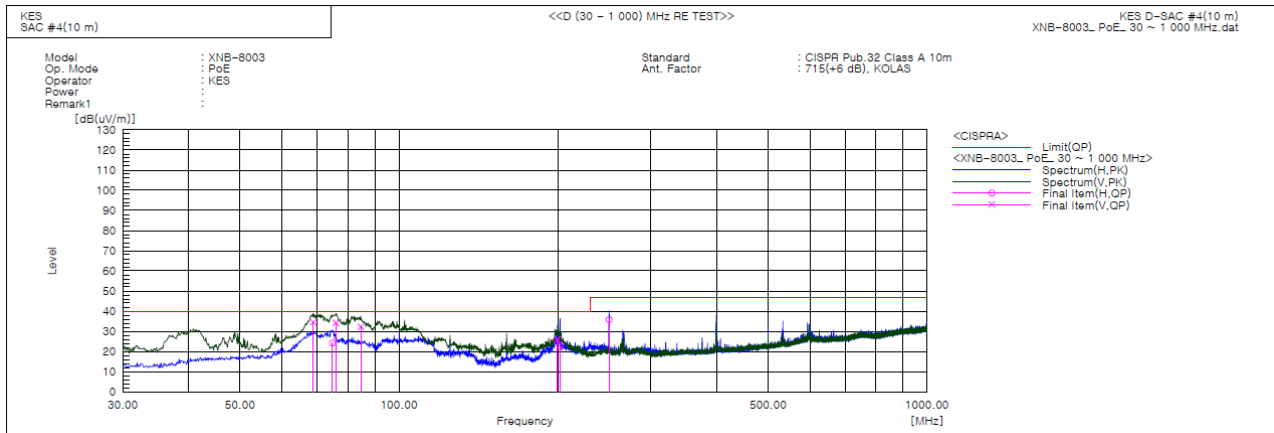

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	68.800	V	59.0	-24.4	34.6	40.0	5.4	115.0	11.0	
2	74.863	H	51.1	-26.8	24.3	40.0	15.7	369.0	5.0	
3	75.954	V	61.3	-27.1	34.2	40.0	5.8	128.0	31.0	
4	84.684	V	58.6	-26.3	32.3	40.0	7.7	154.0	51.0	
5	199.508	V	46.6	-20.8	25.8	40.0	14.2	149.0	202.0	
6	201.811	H	43.5	-20.7	22.8	40.0	17.2	392.0	110.0	
7	249.948	H	55.0	-19.1	35.9	47.0	11.1	400.0	87.0	

◆ Calculation

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-21T0617
Page (25) of (39)

Radiated Electric Field Emissions(Above 1 GHz)

■ DC 12 V Mode

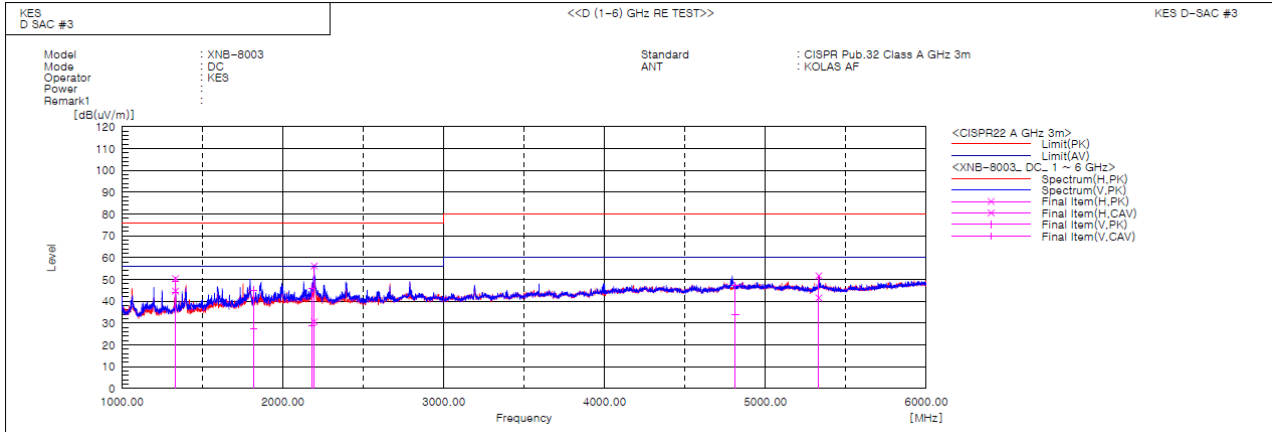

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1332.970	H	57.9	52.2	-7.5	50.4	44.7	76.0	56.0	25.6	11.3	100.0	36.6	
2	1333.000	V	56.8	51.3	-7.5	49.3	43.8	76.0	56.0	26.7	12.2	100.0	24.3	
3	1817.836	V	47.8	30.2	-2.7	45.1	27.5	76.0	56.0	30.9	28.5	100.0	215.4	
4	2182.453	V	46.7	29.6	-0.6	46.1	29.0	76.0	56.0	29.9	27.0	100.0	75.9	
5	2195.490	H	56.8	31.2	-0.6	56.2	30.6	76.0	56.0	19.8	25.4	100.0	131.9	
6	4813.606	V	38.8	25.2	8.6	47.4	33.8	80.0	60.0	32.6	26.2	100.0	143.6	
7	5331.851	H	43.5	33.3	8.3	51.8	41.6	80.0	60.0	28.2	18.4	100.0	348.8	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-21T0617

Page (26) of (39)

PoE Mode

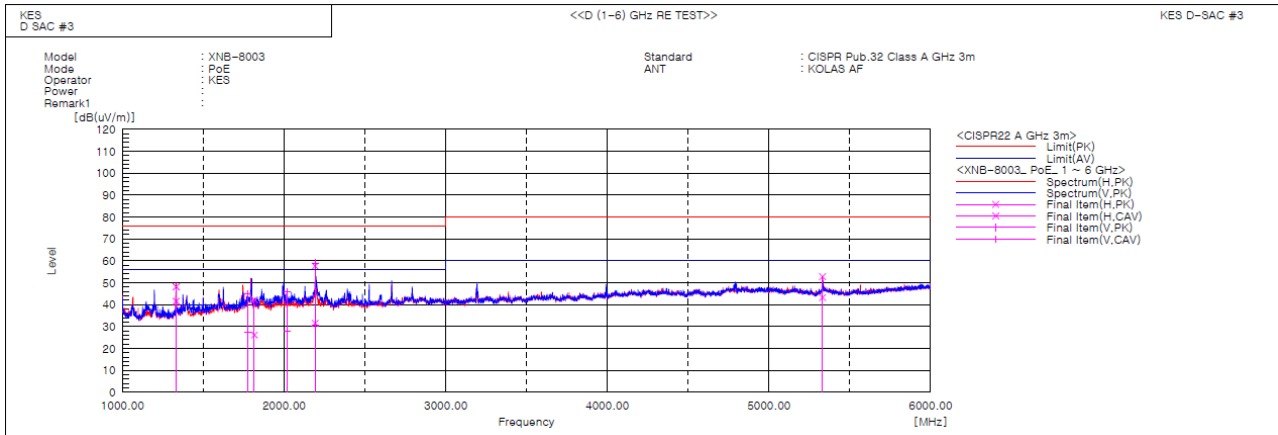

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1332.990	H	55.7	49.1	-7.5	48.2	41.6	76.0	56.0	27.8	14.4	100.0	6.3	
2	1775.395	V	48.2	30.5	-3.2	45.0	27.3	76.0	56.0	31.0	28.7	100.0	189.3	
3	1816.346	H	44.9	28.9	-2.7	42.2	26.2	76.0	56.0	33.8	29.8	100.0	42.2	
4	2018.256	V	46.7	28.9	-0.8	45.9	28.1	76.0	56.0	30.1	27.9	100.0	210.6	
5	2192.911	H	58.2	32.1	-0.6	57.6	31.5	76.0	56.0	18.4	24.5	100.0	73.5	
6	2194.681	V	59.6	31.3	-0.6	59.0	30.7	76.0	56.0	17.0	25.3	100.0	92.6	
7	5331.770	H	44.5	34.9	8.3	52.8	43.2	80.0	60.0	27.2	16.8	100.0	347.5	

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports

■ DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Conducted Emissions at Telecommunication Ports

■ DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



■ PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


Radiated Electric Field Emissions(Below 1 GHz)

■ DC 12 V Mode

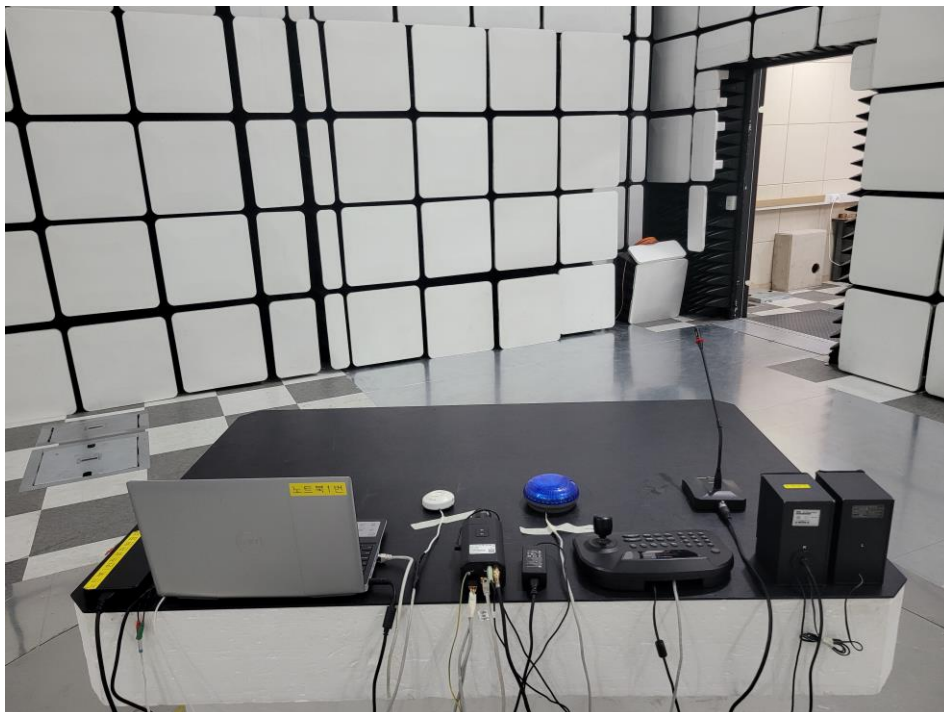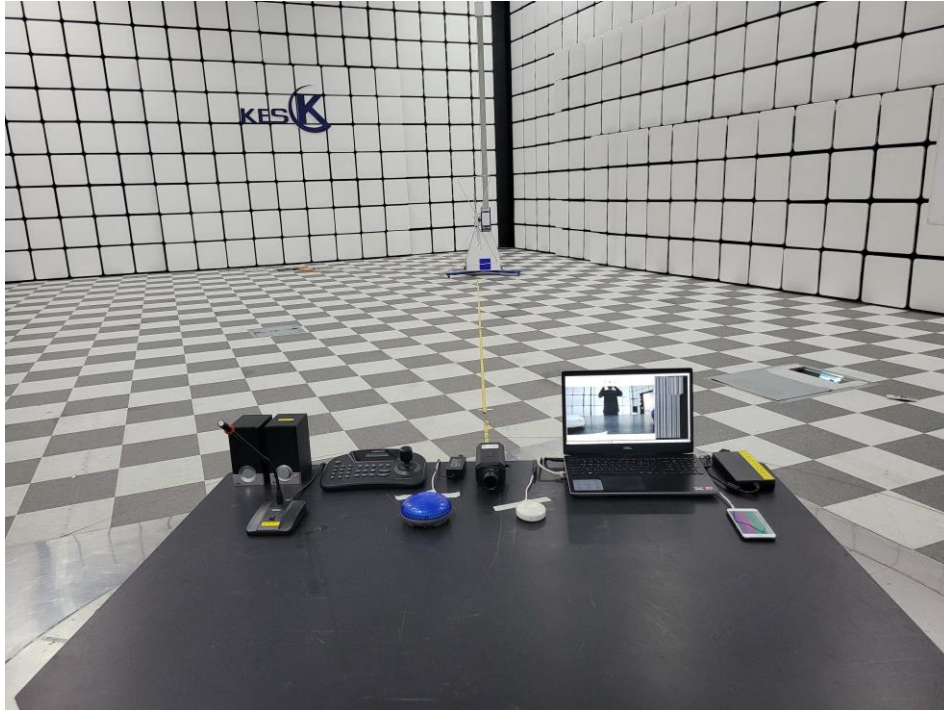

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

■ PoE Mode

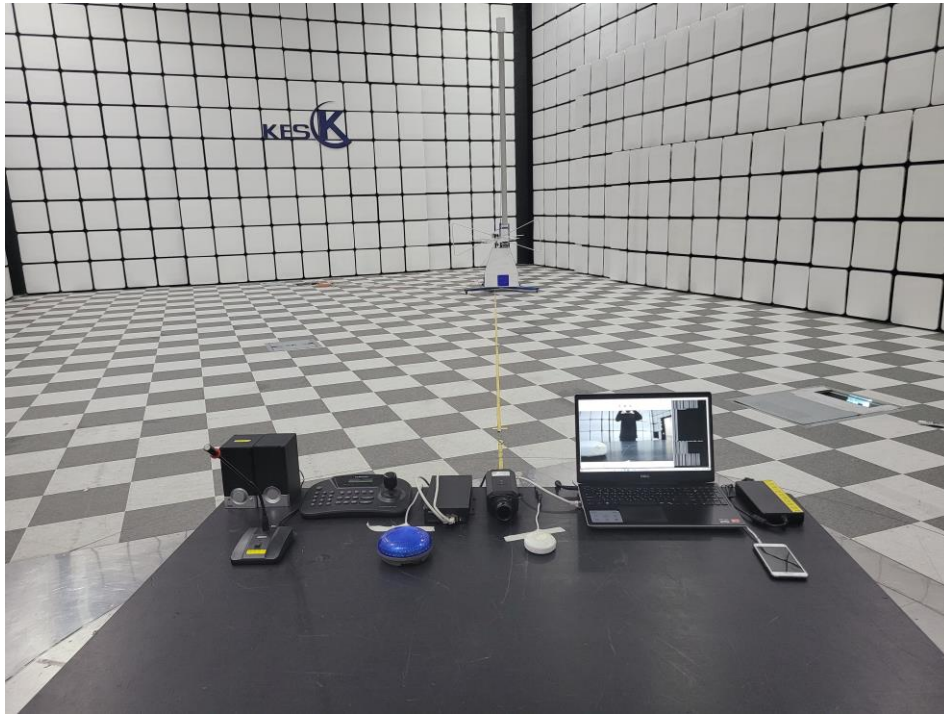

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

■ DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

■ PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT External Photographs

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal Photographs

(Internal View)

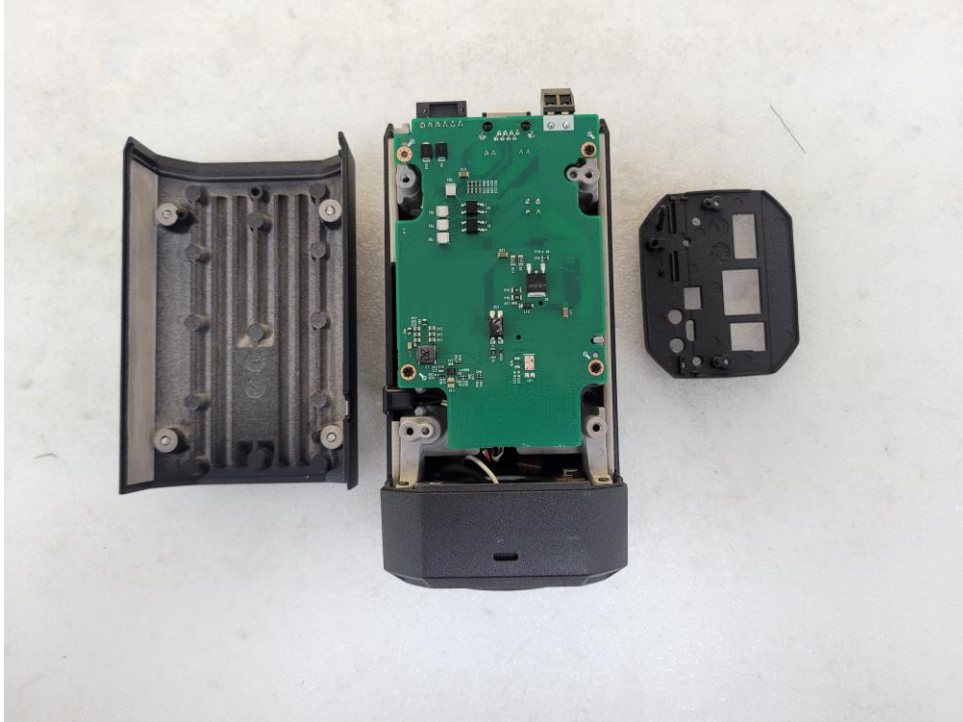


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Board

(Top)



(Bottom)

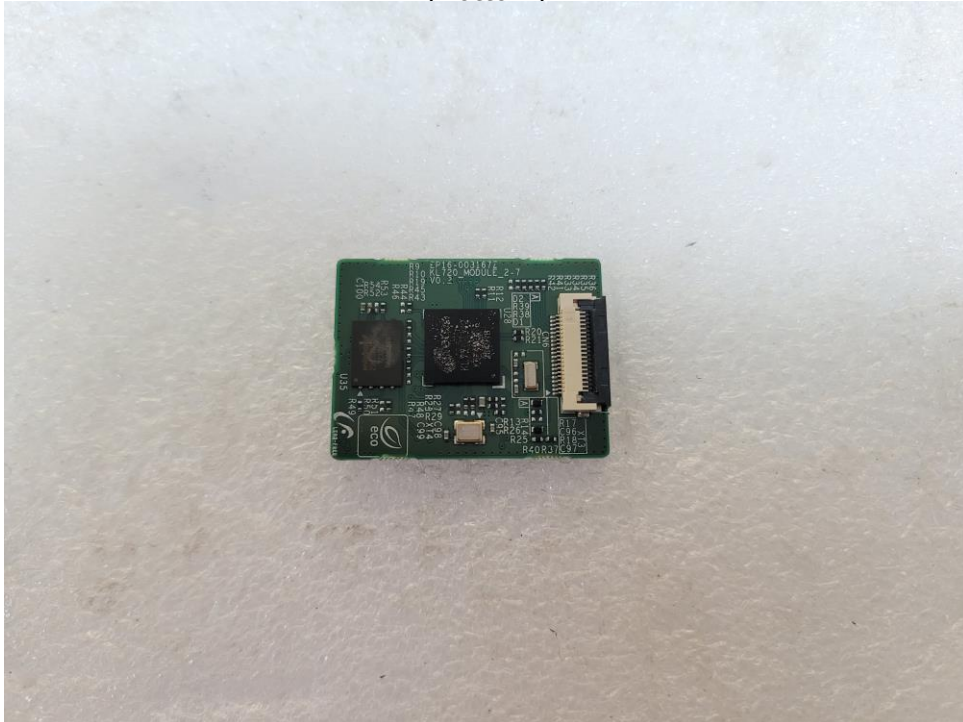


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Main Board

(Top)




(Bottom)

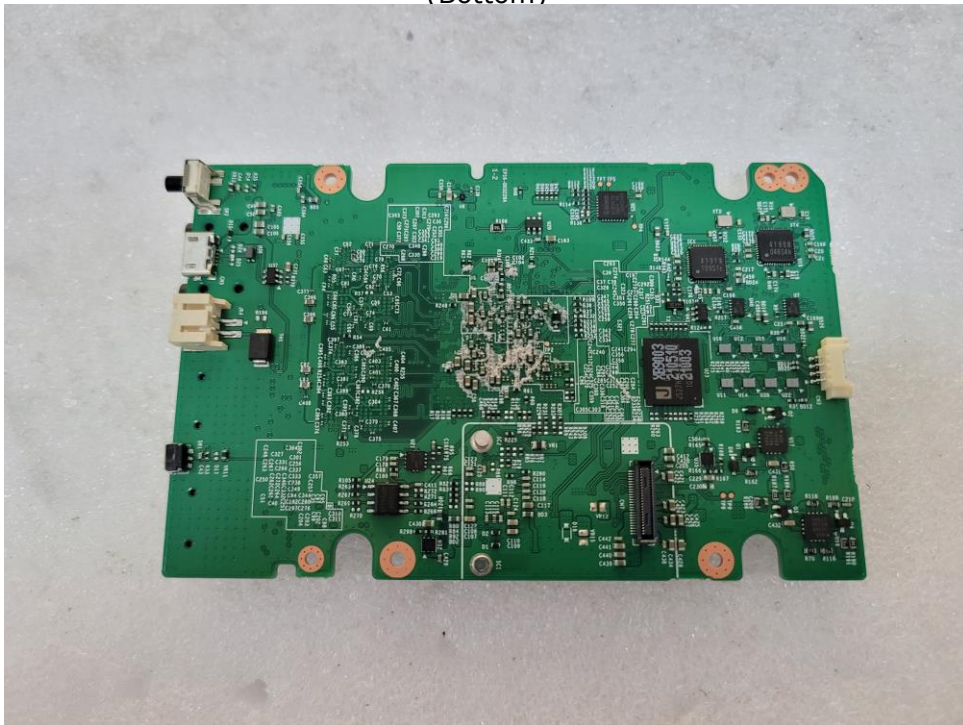


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View – Lens Board

(Top)

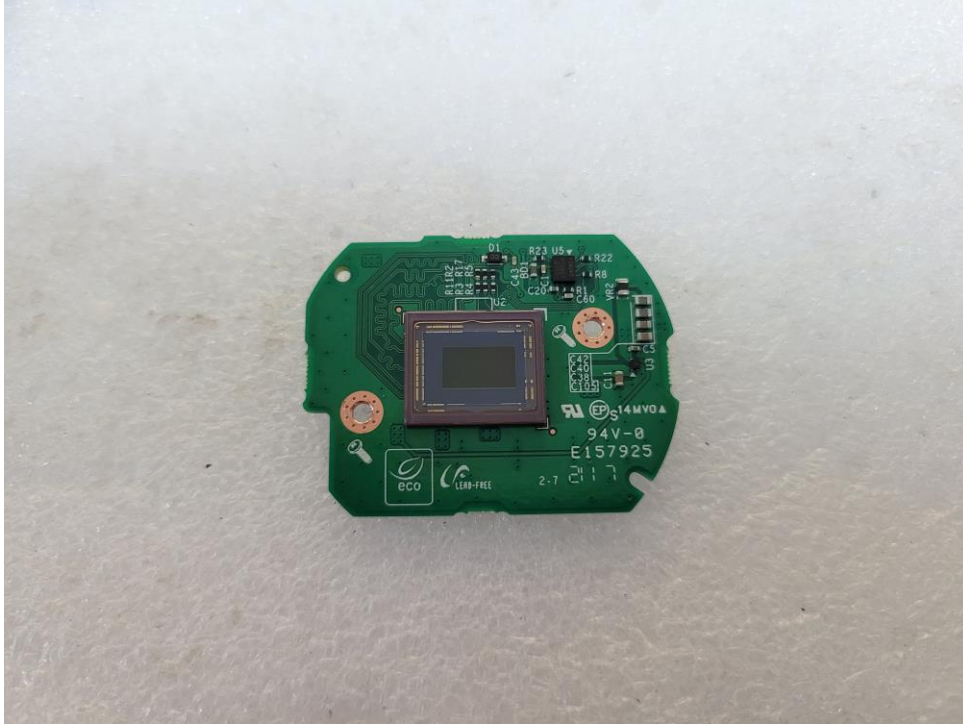


(Bottom)

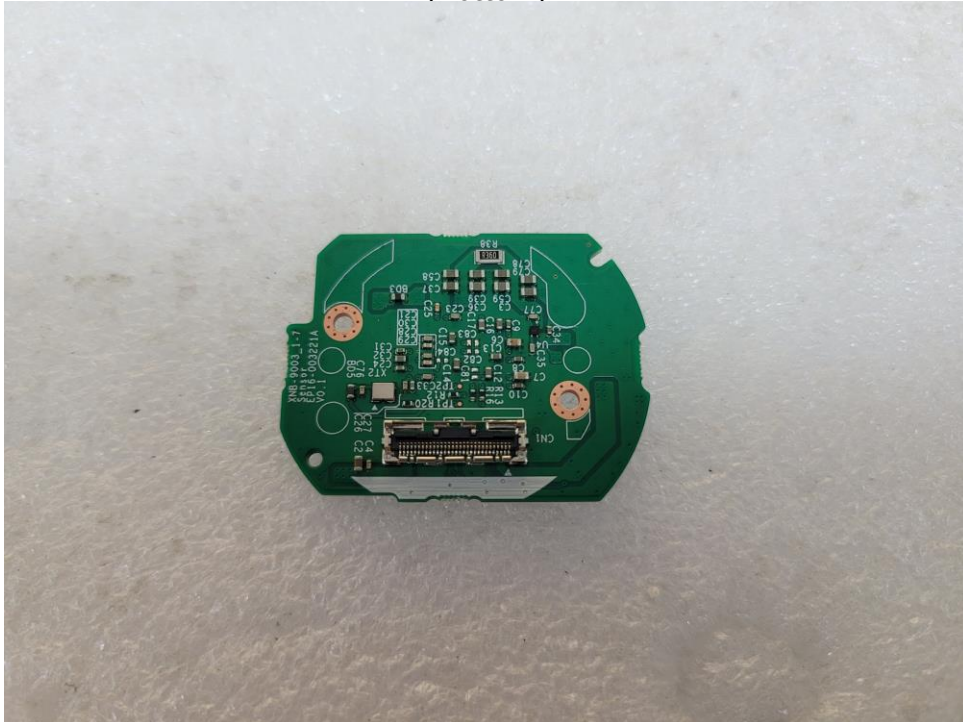


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

EUT Internal View –Power Board

(Top)

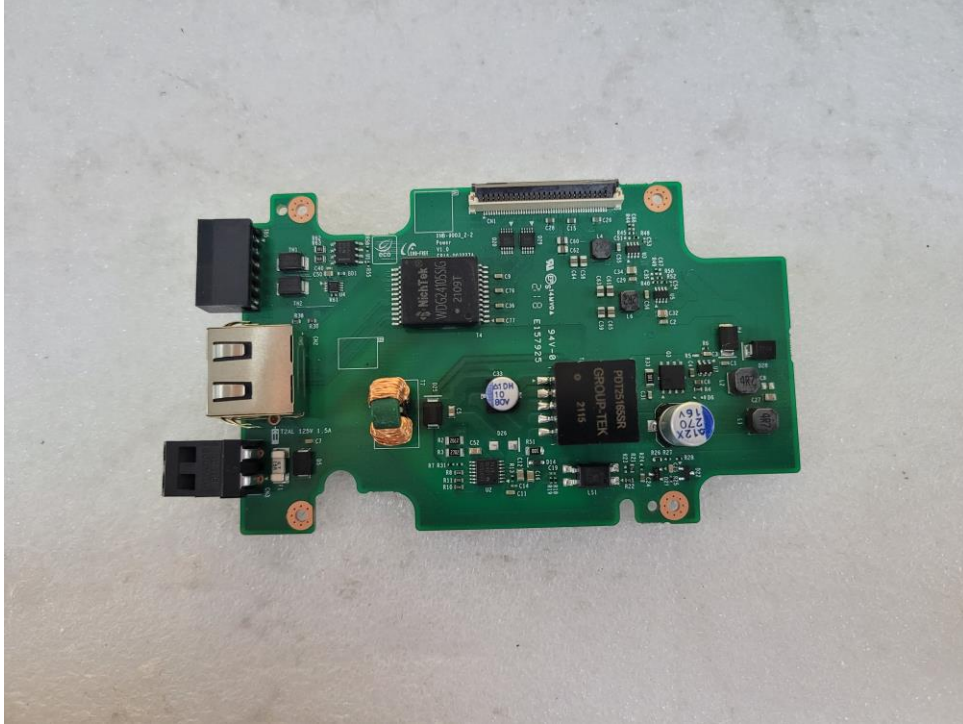

(Bottom)

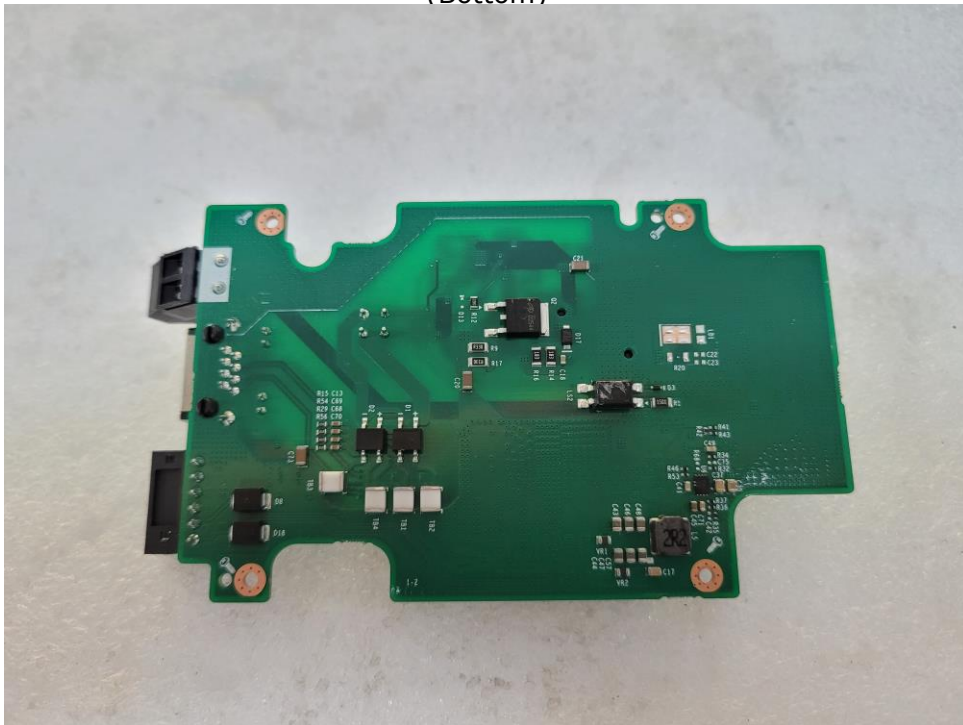

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr