



EMC TEST REPORT

Test Report No. : KES-E1-19T0113-R2
Date of Issue : Feb. 24, 2023
Product name : Network Camera
Model/Type No. : XNV-6081R
Variant Mode : -
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Equipment authorization : **Supply's Declaration of Conformity**
Date of Receipt : Jan. 21, 2019
Test date : Jan. 30, 2019 ~ Feb. 01, 2019
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Jun Soo, Jung
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0113-R2

Page (2) of (40)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Feb. 21, 2019	KES-E1-19T0113	Issued
Nov. 15, 2021	KES-E1-19T0113-R1	- Delete Manufacturer on Customer Request - IC Regulation ICES-003 Issue 7 Update ANSI C63.4-2014 or ANSI C63.4-2014 amended as per ANSI C63.4a-2017
Feb. 24, 2023	KES-E1-19T0113-R2	Change the Applicant and manufacturer at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0113-R2

Page (3) of (40)

TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	7
1.6	External I/O Cabling	8
1.7	EUT Operating Mode(s)	9
1.8	Configuration.....	9
1.9	Remarks when standards applied	11
1.10	Calibration Details of Equipment Used for Measurement	11
1.11	Test Facility	11
1.12	Laboratory Accreditations and Listings	11
2.0	Test Regulations.....	11
2.1	Conducted Emissions at Mains Power Ports	14
2.2	Radiated Electric Field Emissions(Below 1 GHz)	15
2.3	Radiated Electric Field Emissions(Above 1 GHz)	16
APPENDIX A – TEST DATA.....		17
Conducted Emissions at Mains Power Ports.....		17
Radiated Electric Field Emissions(Below 1 GHz)		23
Radiated Electric Field Emissions(Above 1 GHz)		26
Test Setup Photos and Configuration		28
Conducted Voltage Emissions		28
Radiated Electric Field Emissions(Below 1 GHz)		29
Radiated Electric Field Emissions(Above 1 GHz)		30
EUT External Photographs		31
EUT Internal Photographs		32

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0113-R2

Page (4) of (40)

1.0 General Product Description

Main Specifications of EUT are:

Items		Description		
		XNV-6081/XNV-6081R	XND-6081V/XND-6081RV	XND-6081F/XND-6081RF
Video	Imaging Device	1/2.8" 2MP CMOS		
	Effective Pixels	1945(H) x 1097(V)		
	NETD	None		
	Pixel Size	None		
	Min. Illumination	XNV-6081/XND-6081V/XND-6081F - Color : 0.015 Lux(F1.4, 1/30sec), B/W : 0.0015 Lux(F1.4, 1/30sec) XNV-6081R/XND-6081RV/XND-6081RF - Color : 0.015 Lux(F1.4, 1/30sec), B/W : 0 Lux(IR LED on)		
Lens	Video Out	CVBS: 1.0 Vp-p / 75Ω composite, 720x480(N), 720x576(P) for installation USB : Micro USB type B, 1280x720 for installation		
	Focal Length (Zoom Ratio)	2.8~12mm(4.3x) motorized varifocal		
	Max. Aperture Ratio	F1.4(Wide) ~ F3.6(Tele)		
	Angular Field of View	H : 119.5°(Wide) ~ 27.9°(Tele) V : 62.8°(Wide) ~ 15.7°(Tele) D : 142.1°(Wide) ~ 32.0°(Tele)		
	Min. Object Distance	0.5m (1.64ft)		
	Focus Control	Simple focus		
	Lens Type	DC Auto Iris, P-iris		
Pan / Tilt / Rotate	Mount Type	None		
	Optional Lens	None		
	Pan / Tilt / Rotate range	0°~360° / -45°~85° / 0°~355°		
	Pan Range	Remote adjustment (Max. 200 cycles)		
	Pan Speed	None		
	Tilt Range	None		
	Tilt Speed	None		
Operational	Rotate Range	None		
	Sequence	None		
	Preset Accuracy	None		
	Azimuth	None		
	Auto Tracking	None		
	IR Viewable Length	50m(164.04ft)		
	Camera Title	Displayed up to 85 characters		
	Day & Night	Auto (ICR)		
	Backlight Compensation	BLC, HLC, WDR, SDR		
	Wide Dynamic Range	150dB		
	Digital Noise Reduction	SSNR V		
	Digital Image Stabilization	Support (built-in Gyro Sensor)		
	Defog	Support		
	Motion Detection	8ea, 8point Polygonal zones		
	Privacy Masking	32ea, polygonal zones - Color : Gray, Green, Red, Blue, Black, White - Mosaic		
	Gain Control	Low / Middle / High		
	White Balance	ATW / AWC / Manual / Indoor / Outdoor		
	LDC	Support		
	Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec)		
	Video Rotation	Flip, Mirror, Halfway view(90°/270°)		
	Analytics	Defocus detection, Directional detection, Fog detection, Face detection, Motion detection, Digital auto tracking, Appear/Disappear, Enter/Exit, Loitering, Tampering, Virtual line, Audio detection, Sound classification, Shock detection		
	Business Intelligence	People counting, Queue management, Heatmap		
	Serial Interface	None		
	Alarm I/O	Input 1ea / Output 1ea		
	Alarm Triggers	Analytics, Network disconnect, Alarm input		

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-19T0113-R2
Page (5) of (40)

Items	Description		
	XNV-6081/XNV-6081R	XND-6081V/XND-6081RV	XND-6081F/XND-6081RF
Operational	Alarm events	- File upload via FTP, E-Mail - Notification via E-Mail - SD/SDHC/SDXC or NAS recording at event triggers - Alarm output - Handover - Audio playback	
	Audio In	Selectable (Mic IN/Line IN) Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm	Selectable (Mic IN/Line IN/Built-in mic) Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm
	Audio out	Line out, Max output level: 1 Vrms	
	Wiper	None	
	Coaxial Protocol	None	
	Video Transmission Distance	None	
Radiometry	Temperature detect range	None	
	Temperature accuracy	None	
	Temperature detection	None	
	Additional	None	
Network	Ethernet	RJ-45 (10/100BASE-T)	
	Video Compression	H.265/H.264: Main/Baseline/High, MJPEG	
	Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240	
	Max. Framerate	H.265/H.264: Max. 60fps/50fps(60Hz/50Hz) MJPEG: Max. 30fps/25fps(60Hz/50Hz)	
Network	Smart Codec	Manual(Sea area), WiseStream II	
	Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR	
	Streaming	Unicast(20 users) / Multicast Multiple streaming(Up to 10 profiles)	
	Audio Compression	G.711 μ -law /G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz	
	Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour, LLDP	
	Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1x Authentication (EAP-TLS, EAP-LEAP)	
	Edge Storage	Micro SD/SDHC/SDXC 2slot 512GB	
	Application Programming Interface	ONVIF Profile S/G/T SUNAPI(HTTP API) Wisenet Open Platform	
	Web Viewer	Supported OS: Windows 7 / 8.1 / 10, MAC OS X 10.10, 10.11, 10.12 Recommended Browser: Google Chrome Supported web browsers: MS Explorer11, MS Edge, Mozilla Firefox (Window 64bit only), Apple Safari (Mac OS X only)	
	Memory	1024MB RAM, 256MB Flash	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0113-R2

Page (6) of (40)

Items		Description		
		XNV-6081/XNV-6081R	XND-6081V/XND-6081RV	XND-6081F/XND-6081RF
Environmental	Operating Temperature / Humidity	-50°C ~ +60°C (-58°F ~ +140°F) / Less than 90% RH * Start up should be done at above -35°C	-25°C ~ +60°C (-13°F ~ +140°F) / Less than 90% RH	
	Storage Temperature / Humidity	-50°C ~ +60°C (-58°F ~ +140°F) / Less than 90% RH		
	Certification	IP66/IP67, IK10+, NEMA4X	IP52, IK10	IP52, Plenum rate(UL2820)
Electrical	Input Voltage	PoE(IEEE802.3af, Class3), 24VAC, 12VDC	PoE(IEEE802.3af, Class3), 12VDC	
	Power Consumption	XNV-6081 - PoE: Max 7.0W, typical 4.90W 12VDC: Max 5.4W, typical 3.70W 24VAC: Max 7.1W, typical 4.90W XNV-6081R - PoE: Max 12.95W, typical 10.30W 12VDC: Max 10.8W, typical 8.40W 24VAC: Max 13.3W, typical 10.40W XND-6081V/XND-6081F - PoE: Max 7.0W, typical 4.20W 12VDC: Max 5.4W, typical 3.10W XND-6081RV/XND-6081RF - PoE: Max 12.95W, typical 9.4W 12VDC: Max 10.8W, typical 7.6W		
Mechanical	Color / Material	White / Aluminum		
	RAL Code	RAL9003		
	Product dimensions / weight	XNV-6081 : Ø180x125mm(7.09x4.92"), 1.45kg(3.20 lb) XNV-6081R : Ø180x125mm(7.09x4.92"), 1.75kg(3.86 lb)	Ø160x125mm (6.30x4.92"), 1.45kg(3.20 lb)	Ø205x155mm(8.07x6.10"), 1.80kg(3.97 lb)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 230 Vac ☐ 120 Vac ☒ 24 Vac ☒ 12 Vdc ☒ PoE

Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
Network Camera	XNV-6081R	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT
AC module	SPC-100AC	-	-	AC 24 V

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
POE Adapter	PD-9501GR/AC	-	CHANGZHOU WUJIN HONGGUANG RADIO CO., LTD.	-
Notebook	X56K	HN11N5151FJ0045W	HANSUNG	-
Notebook Adapter	A12-120P1A	F180271552011758	CHICONY POWER TECHNOLOGY CO.,LTD.	-
Speaker	BR1000A Cuve Black 2	-	DONGGUAN EDIFIER TECHNOLOGY Co., Ltd	-
Mike	MP1000	-	-	-
Gpad	LG-V480	-	LG	-
Alarm button	-	-	-	-
Alarm	SIP-1201DD D0	-	SAMSUNG TECHWIN CO., LTD.	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.6 External I/O Cabling

■ AC 24 V, DC 12 V

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
Network Camera (EUT)	RJ-45	Notebook	RJ-45	4.0	U
	3.5 mm	Speaker	3.5 mm	1.4	U
	3.5 mm	Mike	3.5 mm	1.7	U
	2Pin	Alarm IN	2Pin	3.0	U
	2Pin	Alarm Out	2Pin	3.0	U
Notebook	3.5 mm	Gpad	3.5 mm	1.6	U

* Unshielded=U, Shielded=S

■ PoE

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
Network Camera (EUT)	RJ-45	POE Adapter	RJ-45	4.0	U
	3.5 mm	Speaker	3.5 mm	1.4	U
	3.5 mm	Mike	3.5 mm	1.7	U
	2Pin	Alarm IN	2Pin	3.0	U
	2Pin	Alarm Out	2Pin	3.0	U
Notebook	3.5 mm	Gpad	3.5 mm	1.6	U
	RJ-45	POE Adapter	RJ-45	4.0	U

* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)


Test mode	operating
AC 24 V, DC 12 V, POE	EUT Monitoring, Ping Test

EUT Test operating S/W		
Name	Version	Manufacture Company
-	-	-

1.8 Configuration


■ AC Main
 □ DC Main

■ AC 24 V

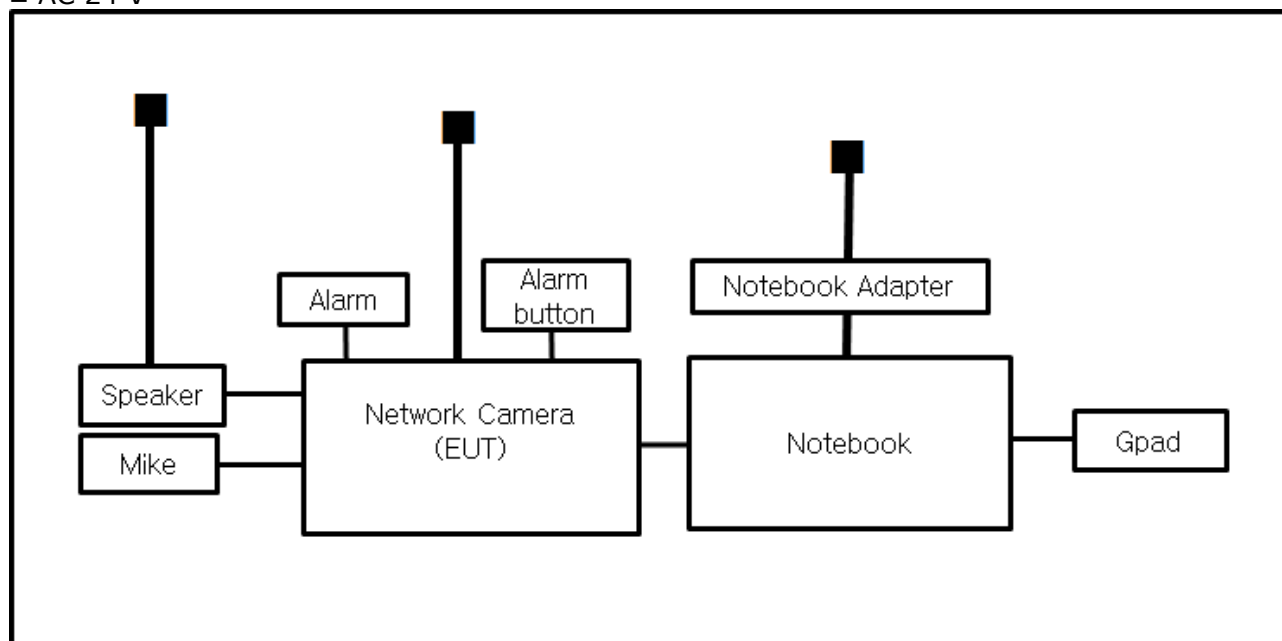


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

■ DC 12 V

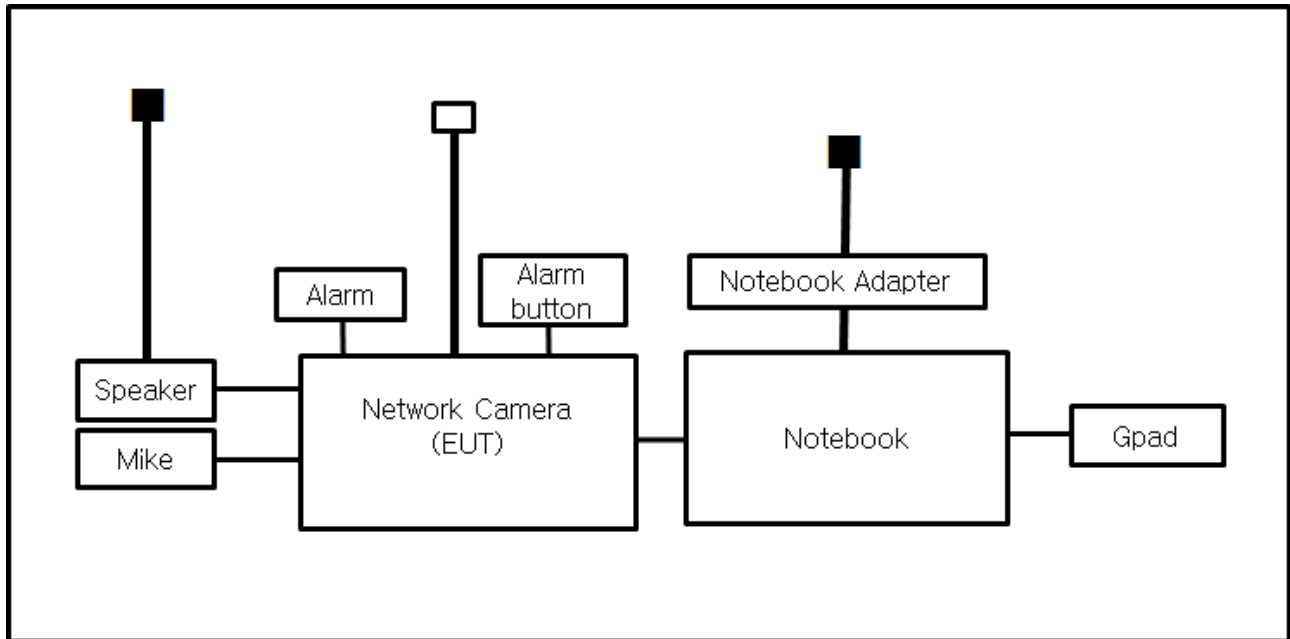

■ PoE

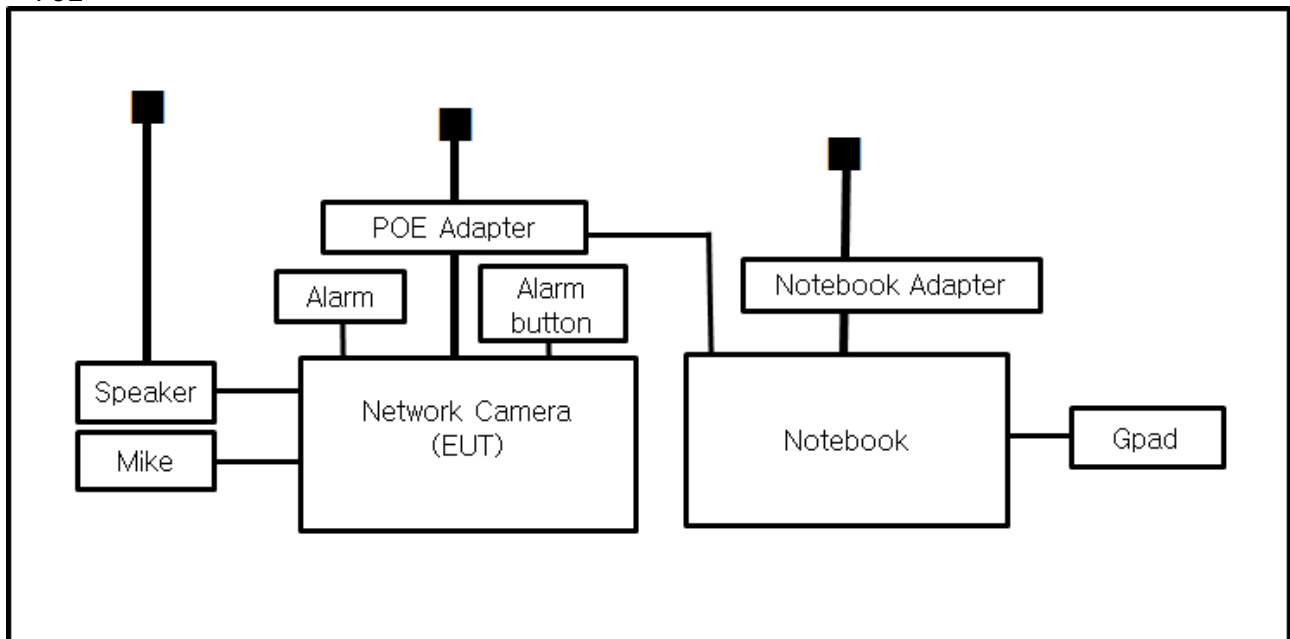

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55032:2015

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-19T0113-R2
Page (13) of (40)

- | | | |
|---|---|----------------------------------|
| ☐ VCCI-CISPR 32:2016 | ☐ Class A | ☐ Class B |
| ☐ AS/NZS CISPR32:2015 | ☐ Class A | ☐ Class B |
| ☒ 47 CFR Part 15, Subpart B | | |
| ☐ CISPR 22:2009 +A1:2010 | ☐ Class A | ☐ Class B |
| ☒ ANSI C63.4a-2017 | ☒ Class A | ☐ Class B |
| ☒ IC Regulation ICES-003 Issue 7 | | |
| ☐ CAN/CSA-CISPR 32:17 | ☐ Class A | ☐ Class B |
| ☒ ANSI C63.4a-2017 | ☒ Class A | ☐ Class B |
| ☐ RE- Directive 2014/53/EU | | |
| ☐ EN 301 489-1 V1.9.2 | | |
| ☐ Equipment for fixed use | | |
| ☐ Equipment for vehicular use | | |
| ☐ Equipment for portable use | | |
| ☐ EN 301 489-3 V1.6.1 | | |
| ☐ EN 301 489-17 V2.2.1 | | |
| ☐ EN 60945:2002 | | |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



2.1 Conducted Emissions at Mains Power Ports

Test Date

Jan. 30, 2019

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101781	04, 25, 2019
☒	LISN	ENV216	R & S	101787	01, 04, 2020
☒	LISN	ESH2-Z5	R & S	100450	04, 25, 2019
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 26, 2019

Test Conditions

Temperature: 24,1 °C
Relative Humidity: 54,0 % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.2 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Jan. 30, 2019

Test Location☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10 m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 11, 2019
☒	AMPLIFIER	SCU 01	R & S	100603	11, 26, 2019
☒	ATTENUATOR	8491A	HP	32173	03, 21, 2019
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	11, 29, 2020

Test ConditionsTemperature: 22,4 °C
Relative Humidity: 46,2 % R.H.**Frequency Range of Measurement**

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE**Remarks**See Appendix A for test data.

2.3 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Feb. 01, 2019

Test Location

SEMI ANECHOIC CHAMBER #4(10 m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	04, 11, 2019
☒	PREAMPLIFIER	8449B	AGILENT	3008A01742	01, 08, 2020
☐	ATTENUATOR	8491A	HP	35496	03, 21, 2019
☒	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	09, 04, 2019

Test ConditionsTemperature: 22,0 °C
Relative Humidity: 45,4 % R.H.**Frequency Range of Measurement**

1 GHz to 5 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

RemarksSee Appendix A for test data.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0113-R2

Page (17) of (40)

APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

■ AC 24 V

HOT LINE

Common Information

Test Description:

Conducted Emission

Model No.:


XNV-6081R

Mode

AC 24 V_H

Operator Name:

KES

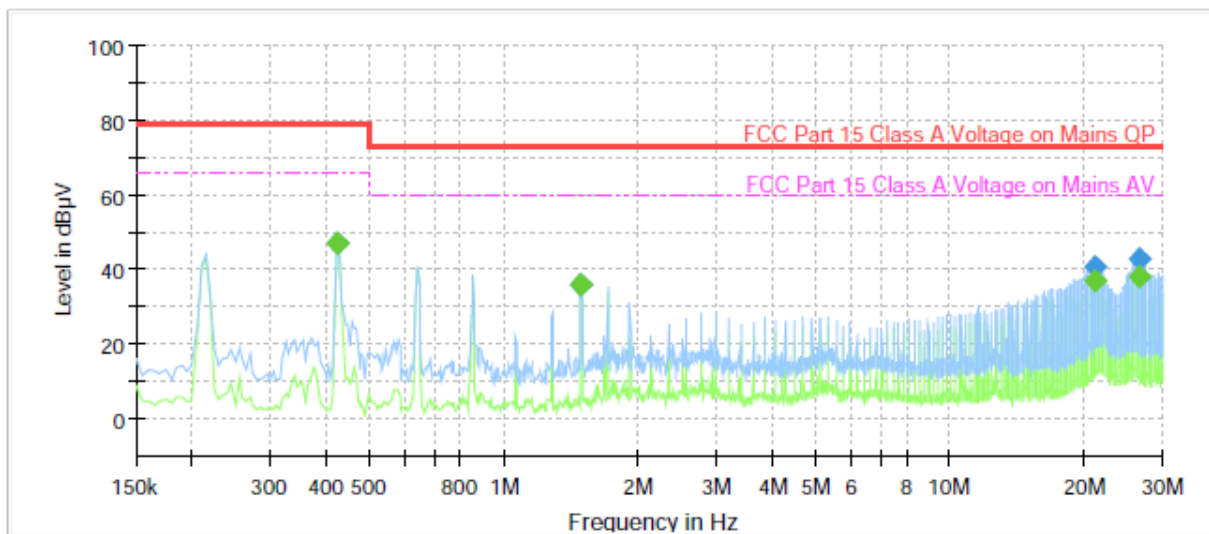

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.425000	---	47.25	66.00	18.75	1000.0	9.000	L1	19.6
0.425000	47.23	---	79.00	31.77	1000.0	9.000	L1	19.6
1.495000	---	35.91	60.00	24.09	1000.0	9.000	L1	19.7
1.495000	36.21	---	73.00	36.79	1000.0	9.000	L1	19.7
21.145000	---	37.26	60.00	22.74	1000.0	9.000	L1	20.2
21.145000	40.54	---	73.00	32.46	1000.0	9.000	L1	20.2
26.485000	---	38.23	60.00	21.77	1000.0	9.000	L1	20.3
26.485000	42.80	---	73.00	30.20	1000.0	9.000	L1	20.3

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0113-R2

Page (18) of (40)

NEUTRAL LINE

Common Information

Test Description:

Model No.:

Mode


Operator Name:

Conducted Emission

XNV-6081R

AC 24 V_N

KES

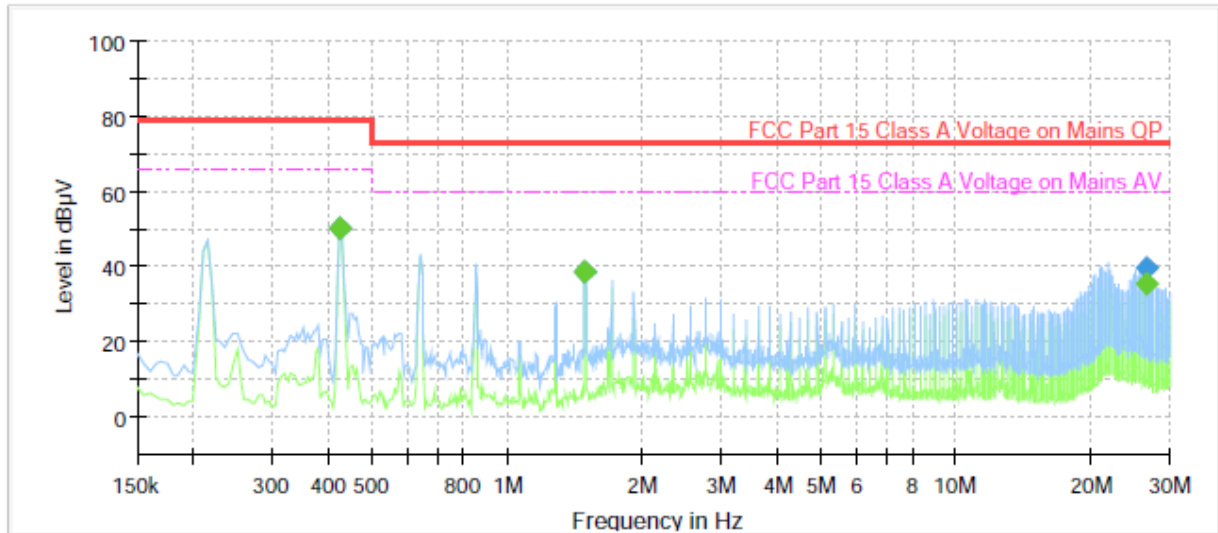

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.425000	---	50.37	66.00	15.63	1000.0	9.000	N	19.6
0.425000	50.36	---	79.00	28.64	1000.0	9.000	N	19.6
1.495000	---	38.51	60.00	21.49	1000.0	9.000	N	19.7
1.495000	38.85	---	73.00	34.15	1000.0	9.000	N	19.7
26.485000	---	35.43	60.00	24.57	1000.0	9.000	N	20.4
26.485000	39.60	---	73.00	33.40	1000.0	9.000	N	20.4

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0113-R2

Page (19) of (40)

■ DC 12 V

HOT LINE

Common Information

Test Description:

Model No.:

Mode


Operator Name:

Conducted Emission

XNV-6081R

DC 12 V_H

KES

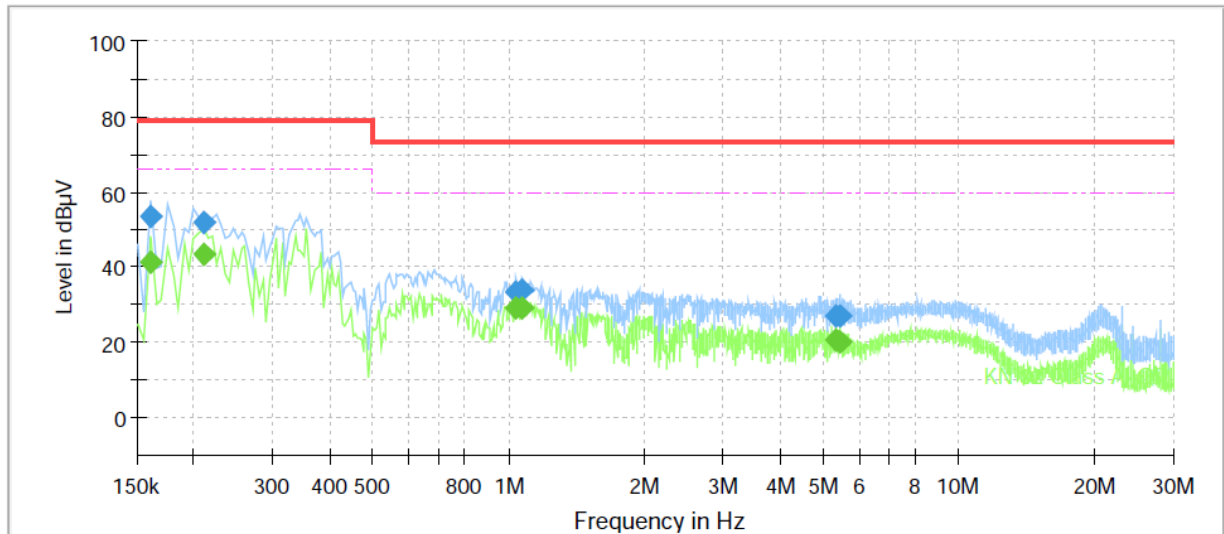

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	41.23	66.00	24.77	1000.0	9.000	L1	19.5
0.160000	53.59	---	79.00	25.41	1000.0	9.000	L1	19.5
0.210000	---	43.24	66.00	22.76	1000.0	9.000	L1	19.5
0.210000	52.10	---	79.00	26.90	1000.0	9.000	L1	19.5
1.040000	---	29.10	60.00	30.90	1000.0	9.000	L1	19.7
1.040000	33.49	---	73.00	39.51	1000.0	9.000	L1	19.7
1.075000	---	29.39	60.00	30.61	1000.0	9.000	L1	19.7
1.075000	33.82	---	73.00	39.18	1000.0	9.000	L1	19.7
5.345000	---	20.78	60.00	39.22	1000.0	9.000	L1	19.8
5.345000	27.20	---	73.00	45.80	1000.0	9.000	L1	19.8
5.460000	---	20.35	60.00	39.65	1000.0	9.000	L1	19.8
5.460000	26.99	---	73.00	46.01	1000.0	9.000	L1	19.8

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:


KES-E1-19T0113-R2

Page (20) of (40)

NEUTRAL LINE

Common Information

Test Description: Conducted Emission
Model No.: XNV-6081R
Mode: DC 12 V_N
Operator Name: KES

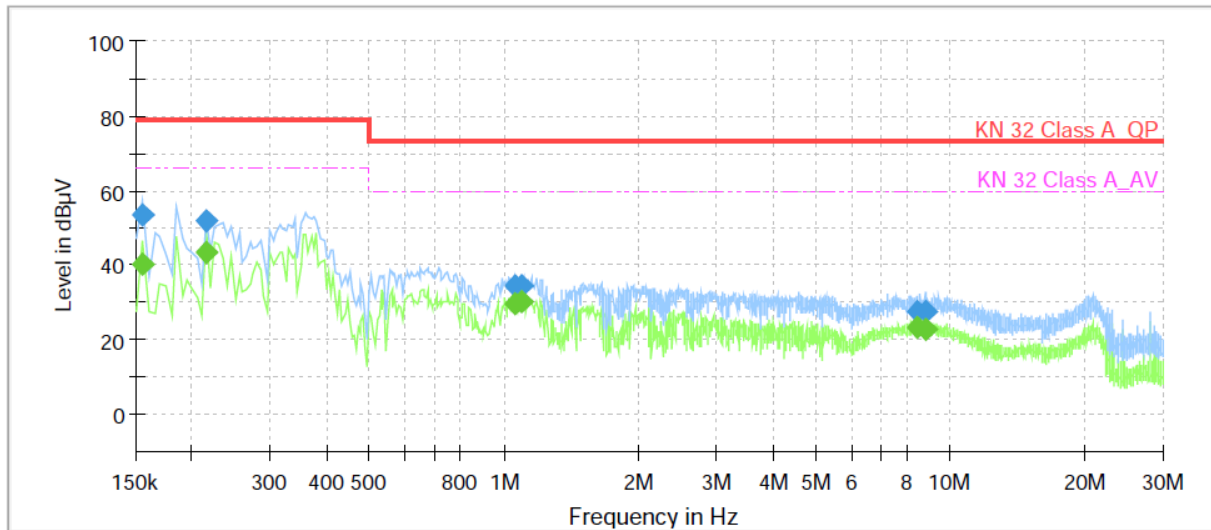

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	40.31	66.00	25.69	1000.0	9.000	N	19.6
0.155000	53.38	---	79.00	25.62	1000.0	9.000	N	19.6
0.215000	---	43.54	66.00	22.46	1000.0	9.000	N	19.5
0.215000	51.92	---	79.00	27.08	1000.0	9.000	N	19.5
1.060000	---	29.87	60.00	30.13	1000.0	9.000	N	19.7
1.060000	34.16	---	73.00	38.84	1000.0	9.000	N	19.7
1.095000	---	30.25	60.00	29.75	1000.0	9.000	N	19.7
1.095000	34.47	---	73.00	38.53	1000.0	9.000	N	19.7
8.445000	---	23.08	60.00	36.92	1000.0	9.000	N	19.9
8.445000	27.61	---	73.00	45.39	1000.0	9.000	N	19.9
8.780000	---	22.82	60.00	37.18	1000.0	9.000	N	19.9
8.780000	27.42	---	73.00	45.58	1000.0	9.000	N	19.9

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0113-R2

Page (21) of (40)

■ PoE

HOT LINE

Common Information

Test Description:

Conducted Emission

Model No.:

XNV-6081R

Phase:


L1

Mode:

PoE

Operator Name:

KES

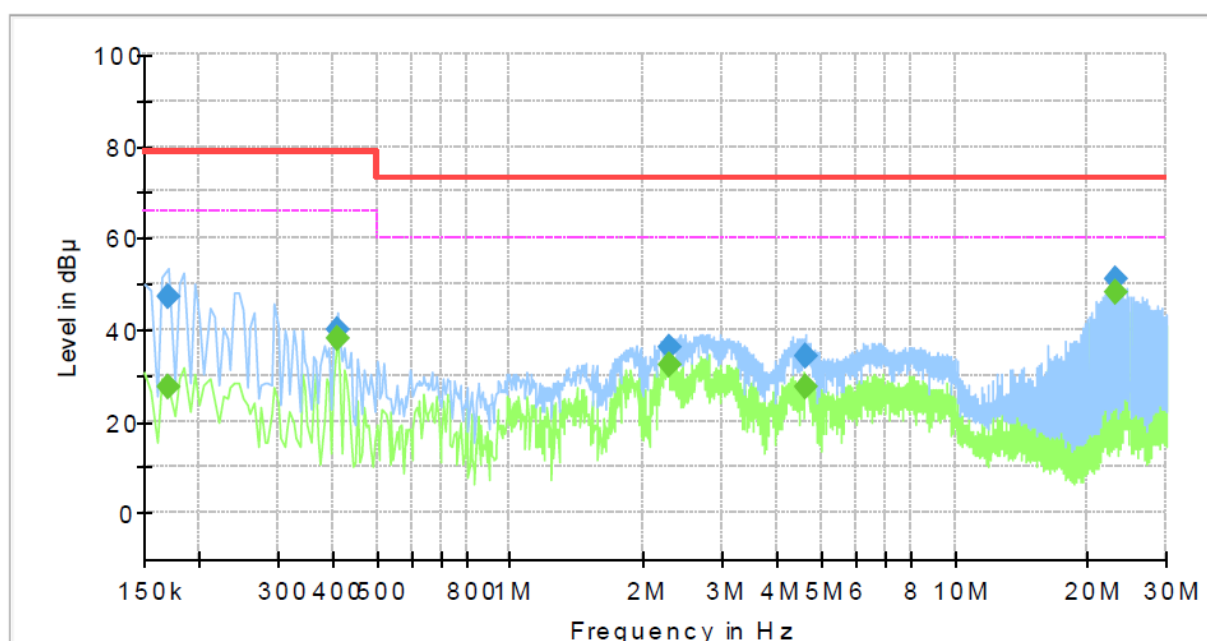

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.170000	---	27.30	66.00	38.70	1000.0	9.000	L1	19.5
0.170000	47.13	---	79.00	31.87	1000.0	9.000	L1	19.5
0.410000	---	38.00	66.00	28.00	1000.0	9.000	L1	19.6
0.410000	40.04	---	79.00	38.96	1000.0	9.000	L1	19.6
2.275000	---	32.10	60.00	27.90	1000.0	9.000	L1	19.7
2.275000	36.20	---	73.00	36.80	1000.0	9.000	L1	19.7
4.625000	---	27.61	60.00	32.39	1000.0	9.000	L1	19.8
4.625000	34.43	---	73.00	38.57	1000.0	9.000	L1	19.8
23.130000	---	47.95	60.00	12.05	1000.0	9.000	L1	20.2
23.130000	51.04	---	73.00	21.96	1000.0	9.000	L1	20.2

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

NEUTRAL LINE

Common Information

Test Description:	Conducted Emission
Model No.:	XNV-6081R
Phase:	N
Mode:	PoE
Operator Name:	KES

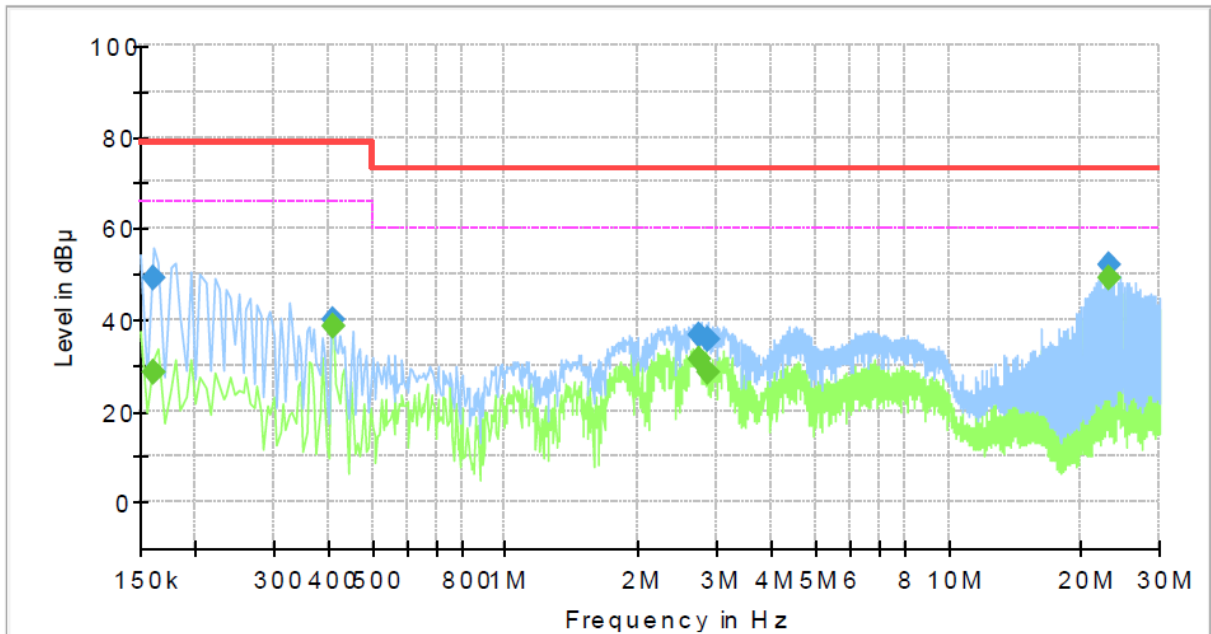

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	28.51	66.00	37.49	1000.0	9.000	N	19.6
0.160000	48.94	---	79.00	30.06	1000.0	9.000	N	19.6
0.410000	---	38.29	66.00	27.71	1000.0	9.000	N	19.7
0.410000	40.10	---	79.00	38.90	1000.0	9.000	N	19.7
2.745000	---	31.29	60.00	28.71	1000.0	9.000	N	19.8
2.745000	36.69	---	73.00	36.31	1000.0	9.000	N	19.8
2.870000	---	28.45	60.00	31.55	1000.0	9.000	N	19.8
2.870000	35.59	---	73.00	37.41	1000.0	9.000	N	19.8
23.130000	---	48.98	60.00	11.02	1000.0	9.000	N	20.4
23.130000	52.05	---	73.00	20.95	1000.0	9.000	N	20.4

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-19T0113-R2
Page (23) of (40)

Radiated Electric Field Emissions(Below 1 GHz)

■ AC 24 V

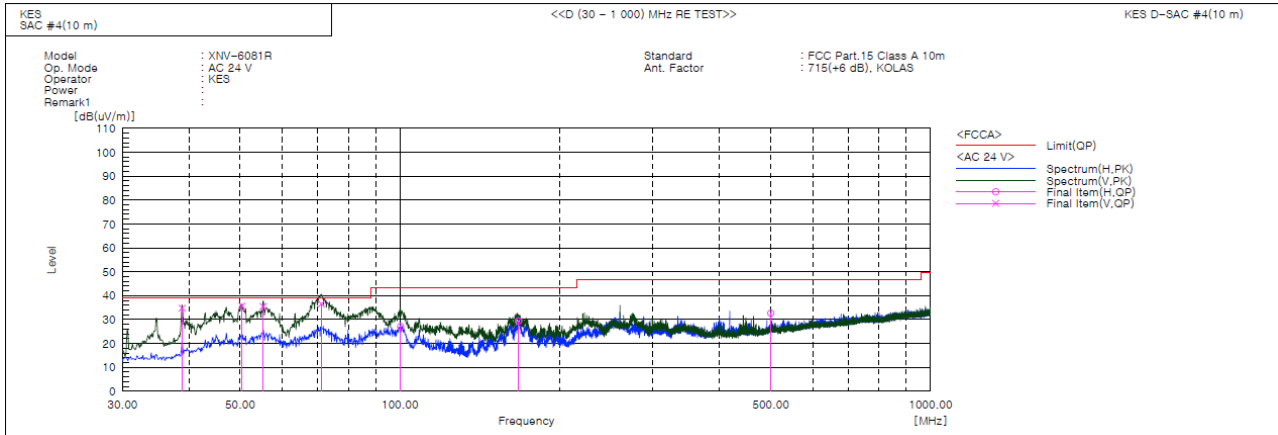

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	38.851	V	58.4	-23.6	34.8	39.0	4.2	100.0	290.0	
2	50.370	V	57.2	-21.5	35.7	39.0	3.3	121.0	309.0	
3	55.220	V	57.4	-21.9	35.5	39.0	3.5	155.0	281.0	
4	71.104	V	62.2	-25.6	36.6	39.0	2.4	149.0	70.0	
5	100.325	H	49.7	-22.6	27.1	43.5	16.4	400.0	293.0	
6	167.255	H	54.0	-24.6	29.4	43.5	14.1	400.0	70.0	
7	500.086	H	45.5	-12.8	32.7	46.5	13.8	193.0	63.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-19T0113-R2
Page (24) of (40)

■ DC 12 V

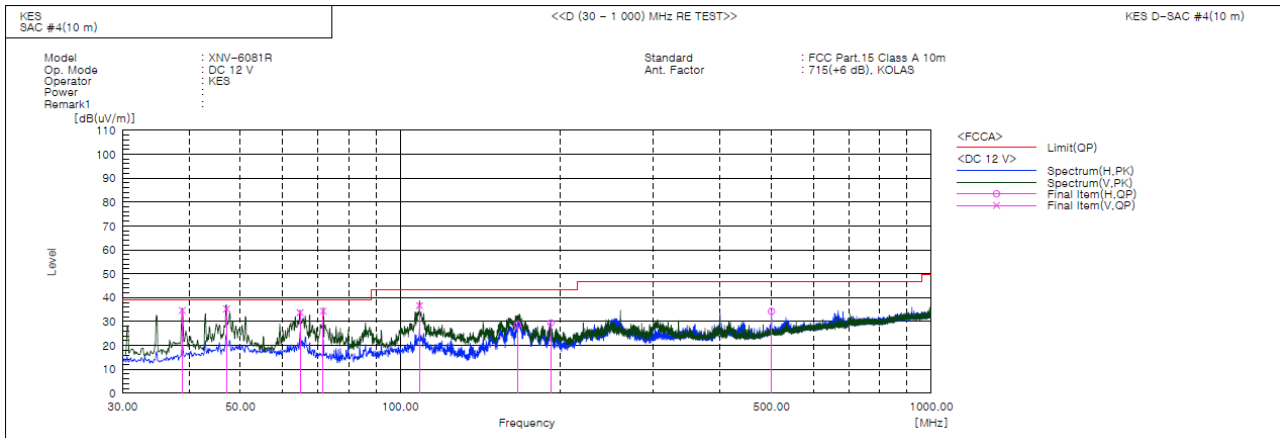

Final Result

No.	Frequency	(P)	Reading	c.f	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		QP [dB(uV)]	[dB(1/m)]	QP [dB(uV/m)]	QP [dB(uV/m)]	QP [dB]	[cm]	[deg]	
1	38.851	V	58.3	-23.6	34.7	39.0	4.3	100.0	306.0	
2	47.096	V	57.0	-21.7	35.3	39.0	3.7	116.0	241.0	
3	64.799	V	57.4	-23.6	33.8	39.0	5.2	108.0	62.0	
4	71.589	V	60.2	-25.8	34.4	39.0	4.6	155.0	90.0	
5	108.691	V	59.4	-22.7	36.7	43.5	6.8	100.0	124.0	
6	166.406	H	53.3	-24.7	28.6	43.5	14.9	399.0	69.0	
7	192.111	H	52.2	-22.7	29.5	43.5	14.0	396.0	22.0	
8	500.086	H	47.1	-12.8	34.3	46.5	12.2	200.0	255.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-E1-19T0113-R2
Page (25) of (40)

■ PoE

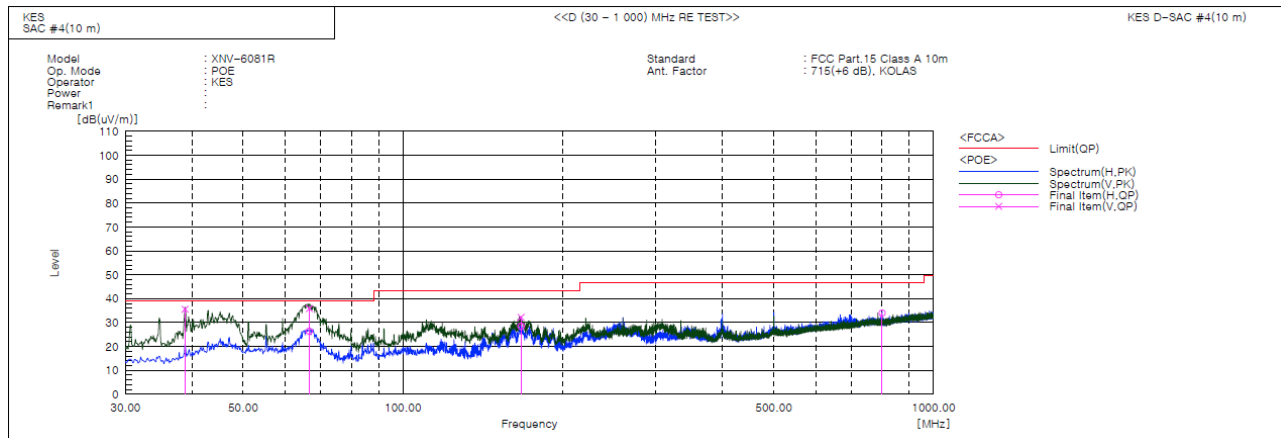

Final Result

No.	Frequency	(P)	Reading	c.f	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		QP		QP	QP	QP			
			[dB(uV)]	[dB(1/m)]	[dB(uV/m)]	[dB(uV/m)]	[dB]	[cm]	[deg]	
1	38.851	V	59.2	-23.6	35.6	39.0	3.4	105.0	334.0	
2	66.606	V	60.0	-24.1	35.9	39.0	3.1	100.0	53.0	
3	66.618	H	50.5	-24.1	26.4	39.0	12.6	254.0	163.0	
4	167.010	V	56.8	-24.6	32.2	43.5	11.3	117.0	342.0	
5	167.018	H	53.1	-24.6	28.5	43.5	15.0	400.0	58.0	
6	800.059	H	41.7	-7.7	34.0	46.5	12.5	397.0	251.0	

◆ Calculation – SAC #4(10 m)

Result(QP) [dB(μ V/m)] = (Reading(QP)[dB(μ V)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μ V/m)] - Result(QP) [dB(μ V/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value


Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



Radiated Electric Field Emissions(Above 1 GHz)


■ AC 24 V

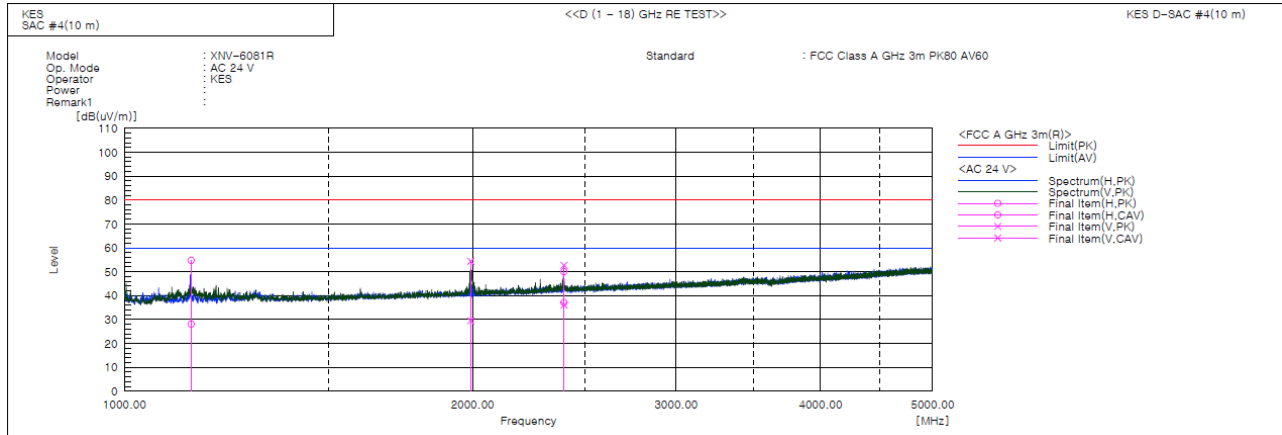

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1142.095	H	60.0	33.3	-5.2	54.8	28.1	80.0	60.0	25.2	31.9	168.0	71.0	
2	1993.000	V	54.8	29.9	-0.4	54.4	29.5	80.0	60.0	25.6	30.5	240.0	217.0	
3	2399.775	H	48.6	35.6	1.5	50.1	37.1	80.0	60.0	29.9	22.9	182.0	173.0	
4	2399.840	V	51.2	34.6	1.5	52.7	36.1	80.0	60.0	27.3	23.9	163.0	358.0	

■ DC 12 V

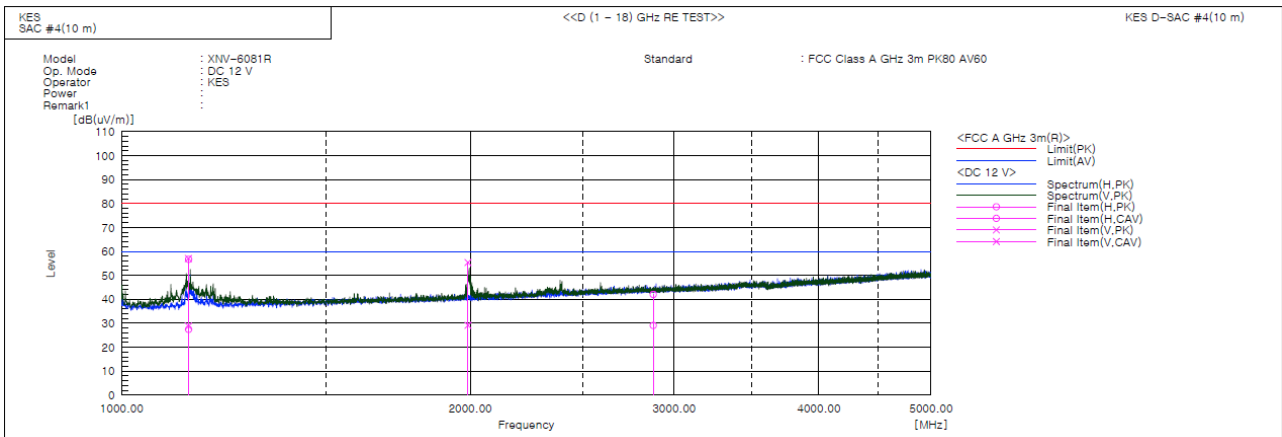

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1142.110	V	62.3	34.0	-5.2	57.1	28.8	80.0	60.0	22.9	31.2	109.0	339.0	
2	1142.465	H	61.9	32.7	-5.2	56.7	27.5	80.0	60.0	23.3	32.5	292.0	57.0	
3	1990.925	V	55.8	29.6	-0.4	55.4	29.2	80.0	60.0	24.6	30.8	101.0	327.0	
4	2878.455	H	38.8	25.8	3.3	42.1	29.1	80.0	60.0	37.9	30.9	400.0	148.0	



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-E1-19T0113-R2

Page (27) of (40)

■ PoE

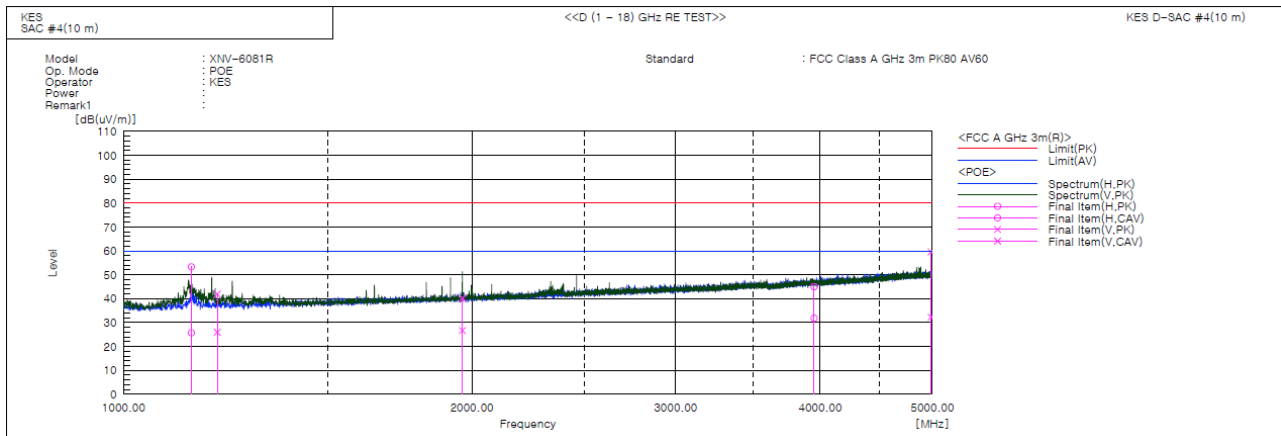

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1144.665	H	58.5	30.9	-5.2	53.3	25.7	80.0	60.0	26.7	34.3	400.0	274.0	
2	1205.065	V	46.7	30.7	-4.7	42.0	26.0	80.0	60.0	38.0	34.0	181.0	84.0	
3	1962.555	V	40.8	27.3	-0.6	40.2	26.7	80.0	60.0	39.8	33.3	101.0	86.0	
4	3951.965	H	37.5	24.4	7.5	45.0	31.9	80.0	60.0	35.0	28.1	350.0	32.0	
5	4988.054	V	48.5	21.2	11.1	59.6	32.3	80.0	60.0	20.4	27.7	100.0	18.0	

◆ Calculation

Result(PK/CAV) [dB(uV/m)] = (Reading(PK/CAV)[dB(uV)] + c.f[dB(1/m)]

Margin(PK/CAV)[dB] = Limit[dB(uV/m)] - Result(PK/CAV) [dB(uV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


Test Setup Photos and Configuration

Conducted Voltage Emissions





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

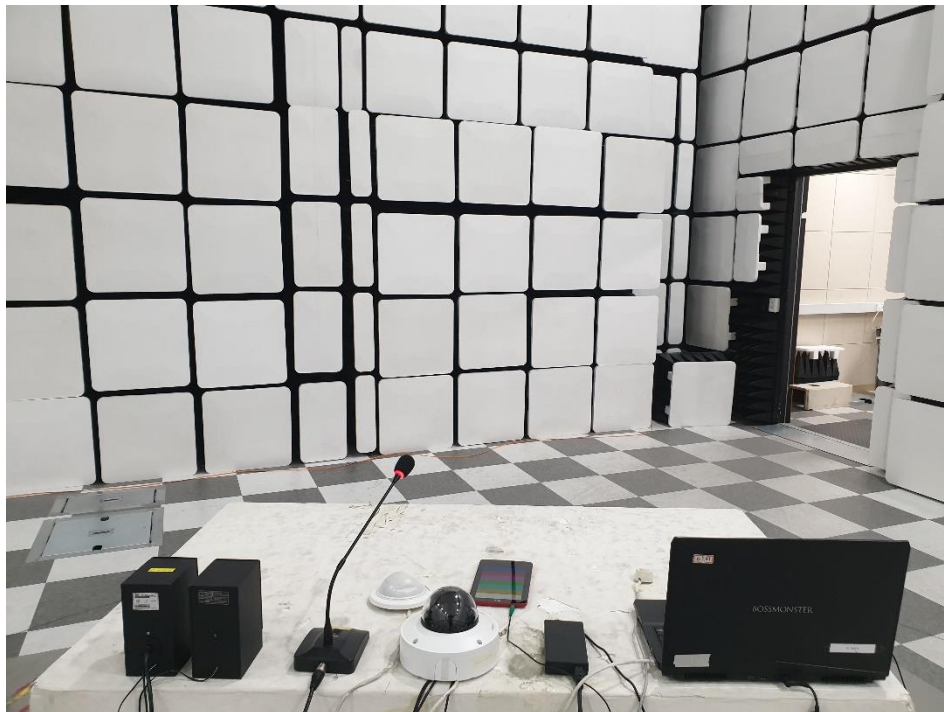

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

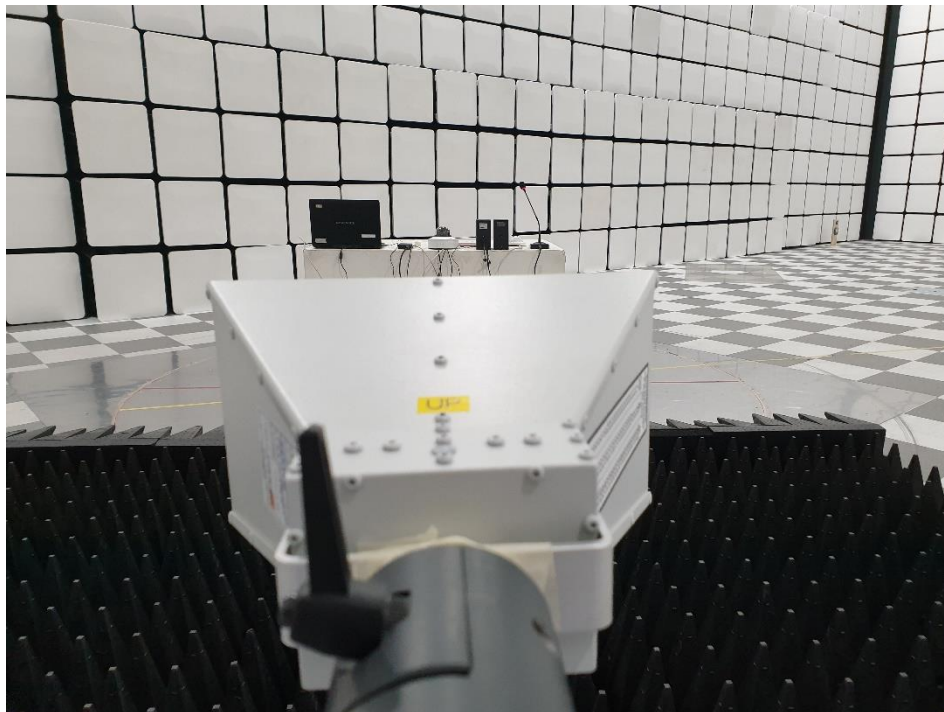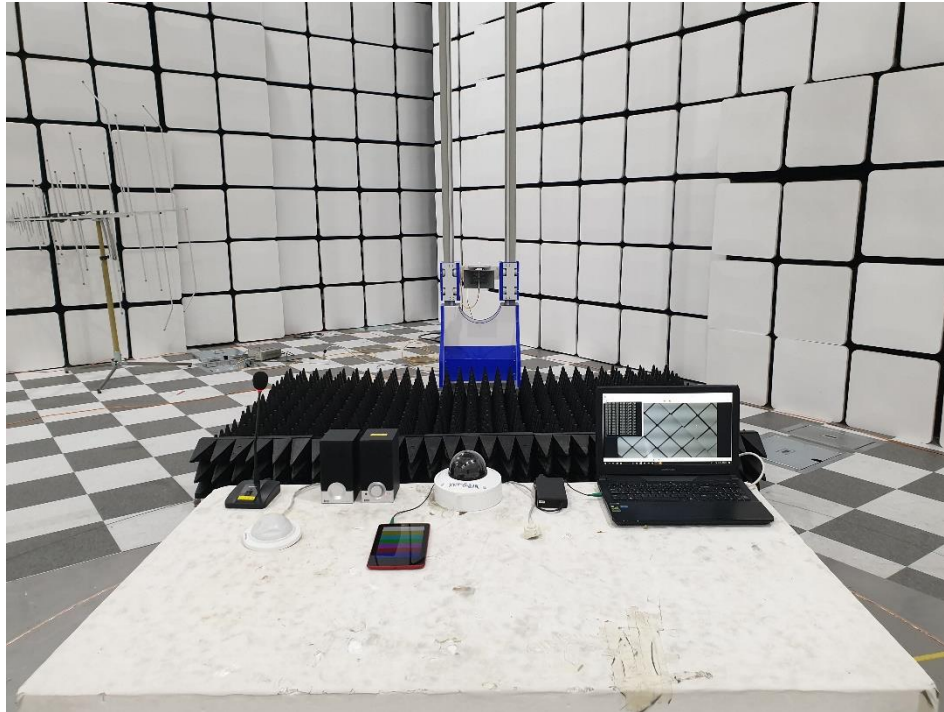

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


EUT Internal Photographs

(Internal View)




EUT Internal View – Board 1

(Top)

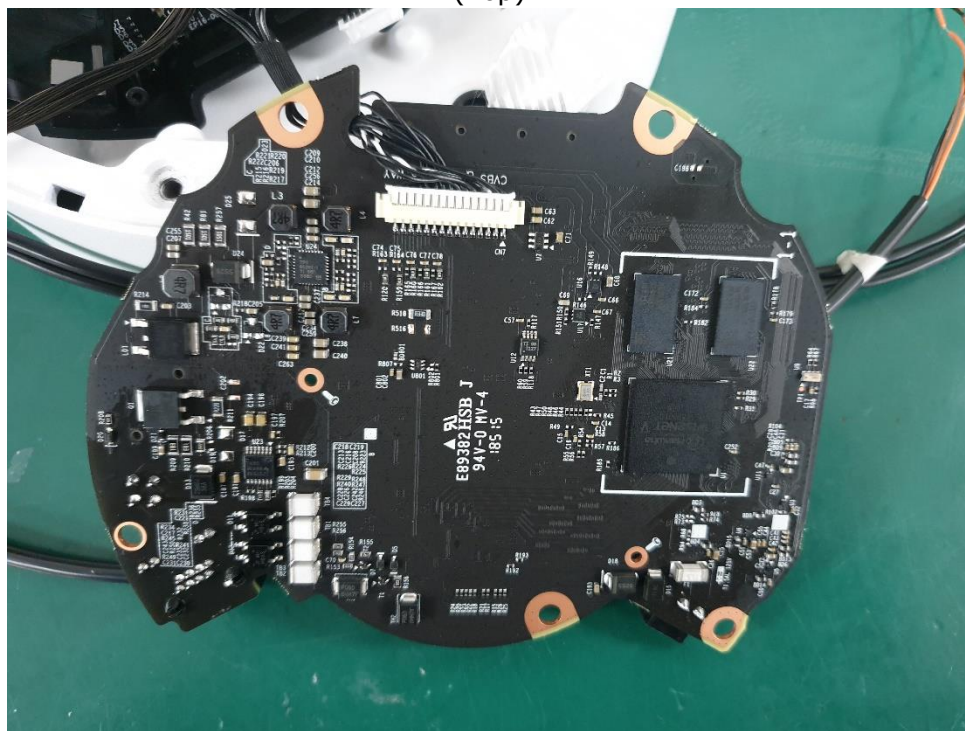


(Bottom)

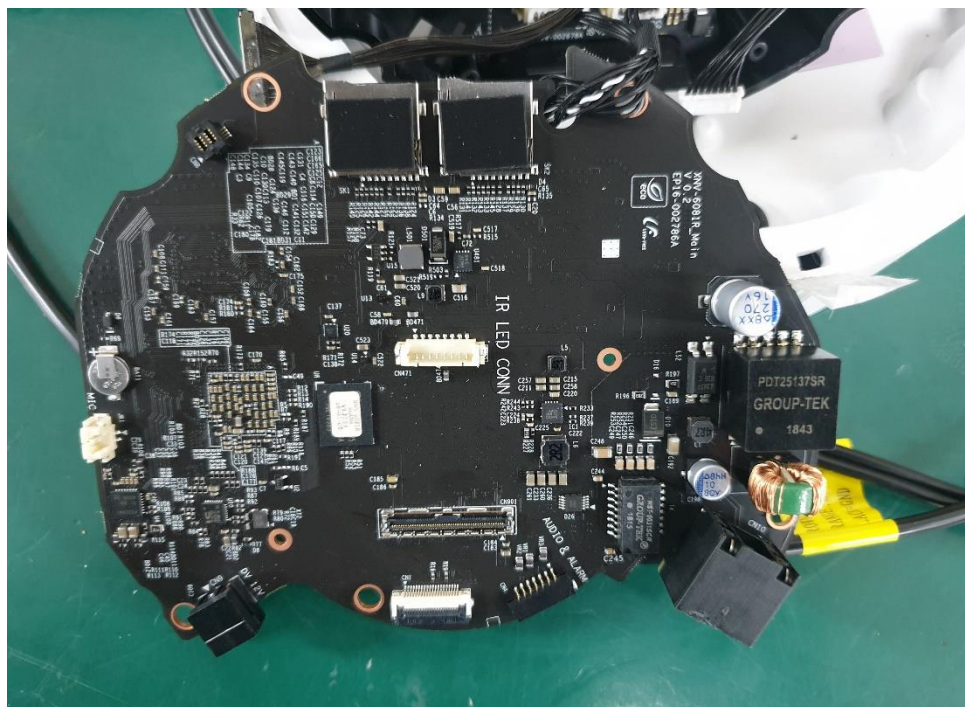

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 2

(Top)

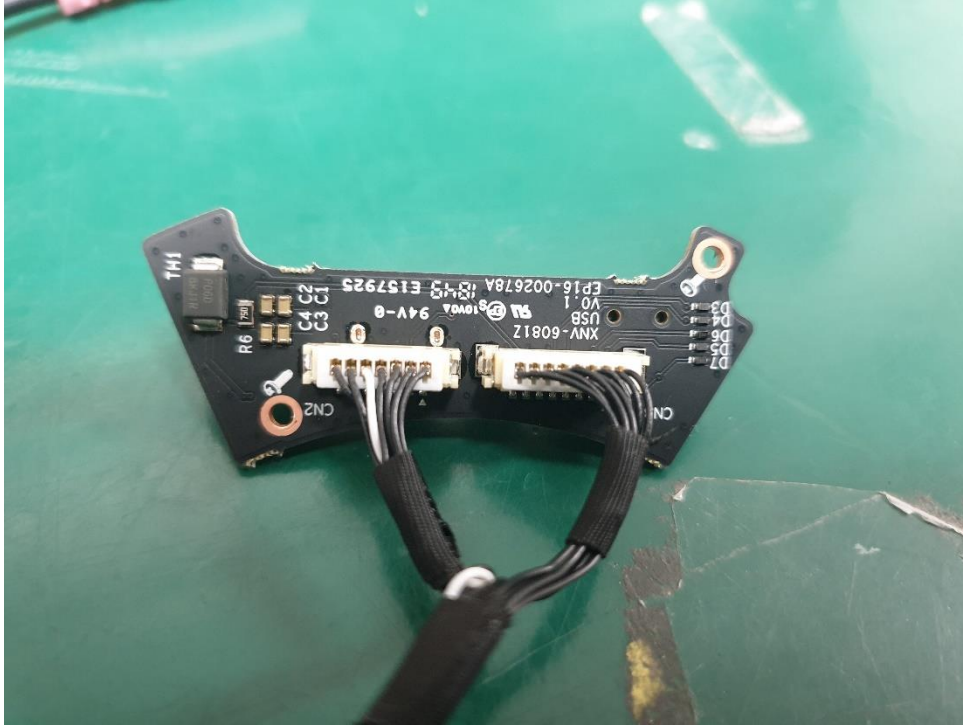

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 3

(Top)



(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 4

(Top)



(Bottom)

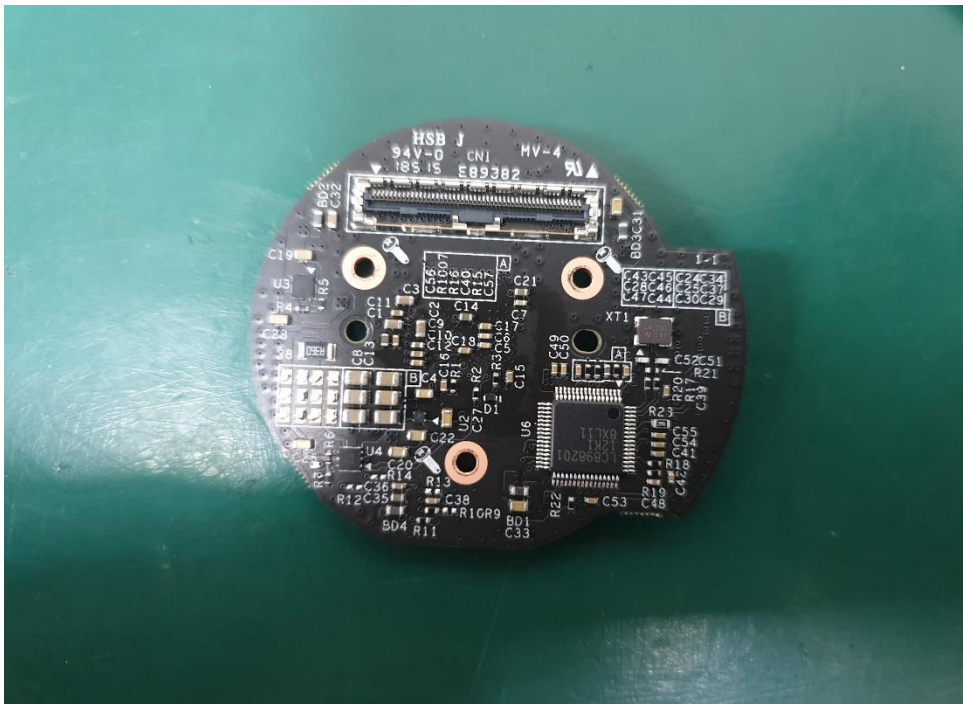


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Lens

(Top)




(Bottom)

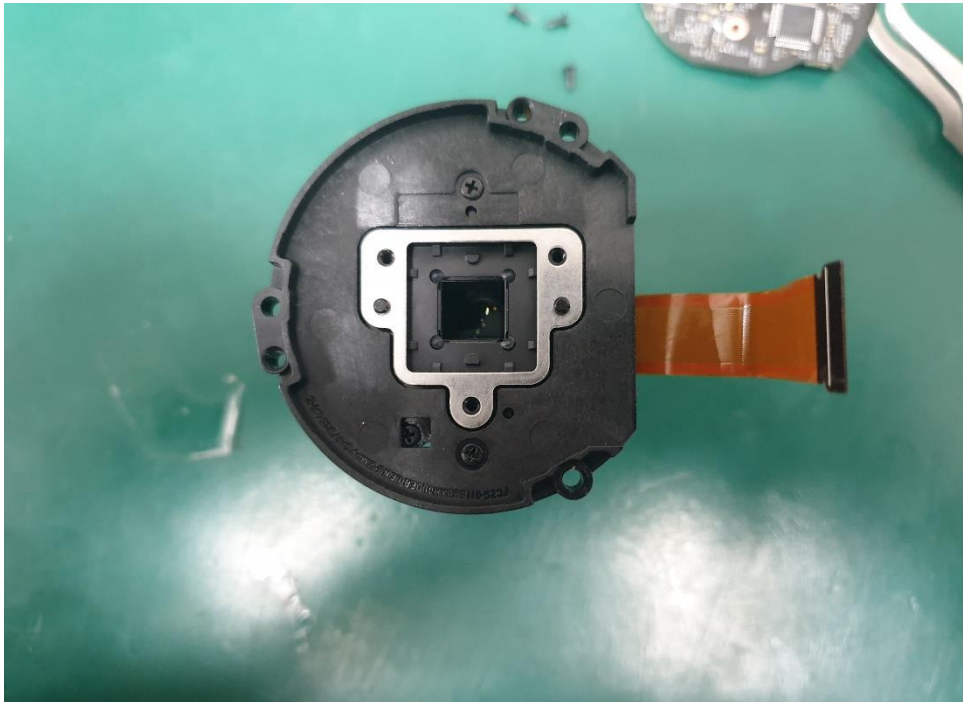

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – AC Borad

(Top)

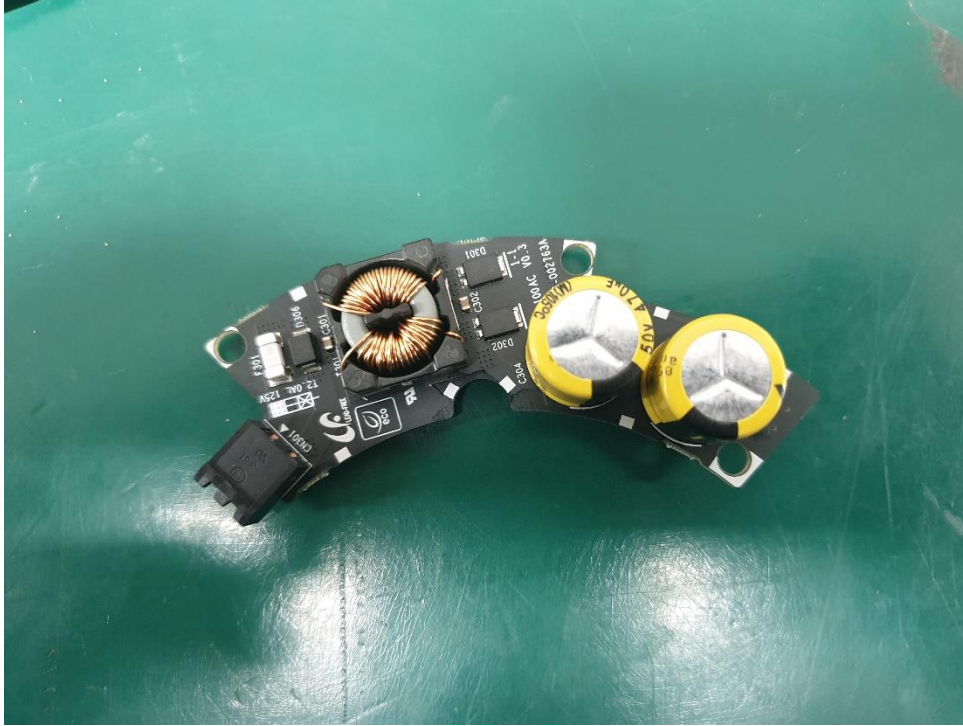

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – AC Module

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Label Photographs

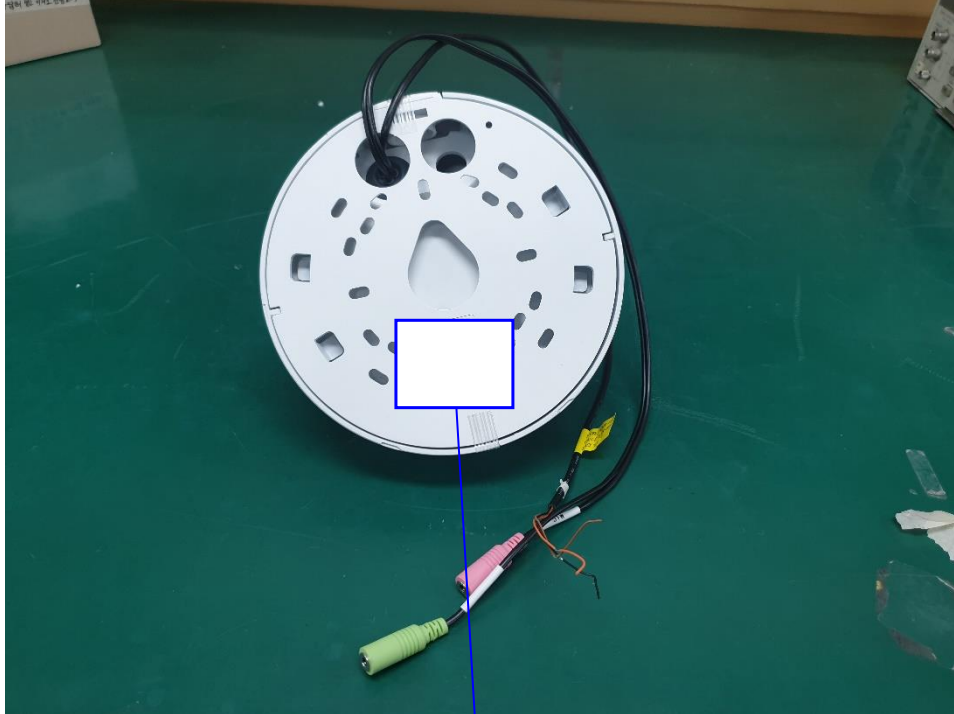

CAN ICES-3(A) / NMB-3(A)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.