



EMC TEST REPORT

Test Report No. : KES-EM-22T0727-R1
Date of Issue : Feb. 24, 2023
Product name : NETWORK CAMERA
Model/Type No. : XNV-6083RZ
Variant Model : -
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Jul. 29, 2022
Test date : Aug. 02, 2022 ~ Aug. 05, 2022
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Dae Hyun, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0727-R1
Page (2) of (64)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Aug. 25, 2022	KES-EM-22T0727	Issued
Feb. 24, 2023	KES-EM-22T0727-R1	Change the Applicant and manufacturer at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	5
1.2	Variant Model Differences	5
1.3	Device Modifications	5
1.4	Equipment Under Test	5
1.5	Support Equipments	5
1.6	External I/O Cabling	6
1.7	EUT Operating Mode(s)	6
1.8	Configuration	7
1.9	Remarks when standards applied	8
1.10	Calibration Details of Equipment Used for Measurement	8
1.11	Test Facility	8
1.12	Laboratory Accreditations and Listings	8
2.0	Test Regulations	9
2.1	Conducted Emissions at Mains Power Ports	10
2.2	Conducted Emissions at Telecommunication Ports	11
2.3	Radiated Electric Field Emissions(Below 1 GHz)	12
2.4	Radiated Electric Field Emissions(Above 1 GHz)	13
2.5	Harmonic Current Emissions	14
2.6	Voltage Fluctuations and Flicker	15
3.0	Criteria for compliance	16
3.1	Electrostatic Discharge	18
3.2	Radiated Electric Field Immunity	22
3.3	Electrical Fast Transients/Bursts	25
3.4	Surge Transients	27
3.5	Conducted Disturbance	30
3.6	Voltage Dips and Short Interruptions	33
APPENDIX A – TEST DATA		35
Conducted Emissions at Mains Power Ports		35
Conducted Emissions at Telecommunication Ports		37
Radiated Electric Field Emissions(Below 1 GHz)		38
Radiated Electric Field Emissions(Above 1 GHz)		39
Harmonic Current Emissions and Voltage Fluctuations and Flicker		40
Test Setup Photos and Configuration		43
Conducted Emissions at Mains Power Ports		43
Conducted Emissions at Telecommunication Ports		44
Radiated Electric Field Emissions(Below 1 GHz)		45
Radiated Electric Field Emissions(Above 1 GHz)		46
Harmonic Current Emissions and Voltage Fluctuations and Flicker		47
Electrostatic Discharge		48
Radiated Electric Field Immunity		48
Electrical Fast Transients/Bursts		49
Surge Transients		49
Conducted Disturbance		50
Voltage Dips and Short Interruptions		50
EUT External Photographs		51
EUT Internal Photographs		52



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0727-R1
Page (4) of (64)

1.0 General Product Description

Main Specifications of EUT are:

	XNV-6083RZ		Radiometry
Video		Temperature Detect Range	None
Imaging Device	1/2.8" progressive CMOS	Temperature Accuracy	None
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240	Temperature Detection	None
Max. Framerate	H.265/H.264: Max. 120fps/100fps(60Hz/50Hz)(WDR off) Max. 60fps/50fps(60Hz/50Hz)(WDR on) MPEG: Max. 30fps/25fps(60Hz/50Hz)	Additional	None
NETD	None	Network	
Pixel Size	None	Ethernet	Metal shielded RJ-45(10/100/1000BASE-T)
Min. Illumination	Color: 0.01Lux(F1.4, 1/30sec, 30IRE) B/W: 0.001Lux(F1.4, 1/30sec, 30IRE), 0Lux(IR LED on), 30/25fps Color: 0.02Lux(F1.4, 1/60sec, 30IRE) B/W: 0.002Lux(F1.4, 1/60sec, 30IRE), 0Lux(IR LED on), 60/50fps Color: 0.04Lux(F1.4, 1/120sec, 30IRE) B/W: 0.004Lux(F1.4, 1/120sec, 30IRE), 0Lux(IR LED on), 120/100fps	Video Compression	H.265/H.264: Main/High, MPEG
Video Out	None	Audio Compression	None
Video Transmission Distance	None	Smart Codec	Manual(Sea area), WiseStreamII, WiseStreamIII(Based on AI engine)
Lens		Video Quality Adjustment	H.264/H.265: Target bitrate level control MPEG: Target bitrate level control
Focal Length (Zoom Ratio)	2.8~12mm(4.3x) motorized varifocal	Bitrate Control	H.264/H.265: CBR or VBR MPEG: VBR
Max. Aperture Ratio	F1.4(Wide) ~ F3.6(Tele)	Streaming	Unicast(20 users) / Multicast Multiple streaming(Up to 10 profiles, 3 virtual channel support)
Angular Field of View	H: 120°(Wide) ~ 27°(Tele) V: 63°(Wide) ~ 15°(Tele) D: 143°(Wide) ~ 32°(Tele)	Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP/UDP, RTSP(TCP), RTSP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTCP (TCP, UDP Unicast)
Min. Object Distance	0.5m(1.64ft)	Security	TPM 2.0 (TPM 1.40-2 level 2) HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP, EAP-PEAP MSCHAPv2) Device Certificate(Hanwha Techwin Root CA, pre-installed) Secure by default certificate Secure OS/Boot/Storage, Verify firmware forgery
Focus Control	Simple focus, Manual	SIP support (VoIP, Peer-to-peer, SIP/P)	None
Lens Type	DC auto iris with hall sensor (IR corrected)	Application Programming Interface	ONVIF Profile S/G/T/M SUNAPI(HTTP API) Wisenet open platform
Mount Type	None	General	
Optional Lens	None	Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Portuguese, Czech, Polish, Turkish, Dutch, Greek, Hungarian
Pan / Tilt / Rotate		Web Viewer	None
Pan / Tilt / Rotate Range	Remote adjustment(Max. 200cycles) 0°~350° / 0°~85° / 0°~340°	Edge Storage	Micro SD/SDHC/SDXC 2slot Max. 1TB (512GB * 2)
Pan Range	None	Memory	2GB RAM, 512MB Flash
Pan Speed	None	Environmental & Electrical	
Tilt Range	None	Operating Temperature / Humidity	-50°C ~ +55°C(-58°F ~ +131°F) +74°C(165°F)(Max) based on NEMA TS-2(2.2.7) * Start up should be done at above -30°C 0~95%RH(non-condensing) Humidity control /w AIR vent
Tilt Speed	None	Storage Temperature / Humidity	-50°C ~ +60°C(-58°F ~ +140°F) / Less than 90% RH
Rotate Range	None	Certification	IP66/IP67/IP69K, NEMA4X, IK10+
Sequence	None	Input Voltage	PoE+ (IEEE802.3at, Class4)
Preset Accuracy	None	Power Consumption	PoE+ : Max 22.5W, typical 11W
Operational		Mechanical	
Camera Title	Displayed up to 85 characters	Color / Material	White / Aluminum
Direction Indicator	None	Hard-coated dome bubble	
Day & Night	Auto(ICR)	RAL Code	RAL9003
Backlight Compensation	BLC, HLC, WDR, SDR	Product Dimensions / Weight	Ø180x135mm(7.09x5.31"), 2000g(4.41 lb)
Wide Dynamic Range	extremeWDR (150dB)	Compatible Conduit hole / Gangbox	19.1mm(3/4")M25
Digital Noise Reduction	WiseNRII(Based on AI engine), SSNRV	Hanging Mount (Dome)	single, double, 4" octagon, 4" square
Digital Image Stabilization	Support	Skin Cover (Dome)	None
Defog	Support	Weather Cap (Dome)	include
Motion Detection	Box, 8-point Polygonal zones 32ea, 4-point Quadrangle zones	Power Module	None
Privacy Masking	- Color : Gray, Green, Red, Blue, Black, White - Mosaic	Backbox	None
Gain Control	Off / Max Gain / Manual	Certifications & Standards	
White Balance	ATW / Narrow ATW / AWC / Manual / Indoor / Outdoor	Network	None
LDC	Support (Fill/stretch mode)	EN 50121-4	
Electronic Shutter Speed	Minimum / Maximum / Prefer / Anti flicker (2~1/12,000sec) Auto Prefer shutter control(Based on AI engine)	FCC 47 CFR 15 Subpart B Class A	
Digital PTZ	Support(preset/group)	ICES-3(A)/NMB-3(A)	
Video Rotation	Flip, Mirror, Halfway view(90°/270°)	CE/UKCA	
Analytics	Classified object type : Person/Face/Vehicle/License plate Attributes : VehicleType(car/bus/truck/motorcycle/bicycle) Support DetectionShot Analytics events based on AI engine - Object detection, Virtual line(Crossing/Direction), Virtual area(Loitering/Intrusion/Enter/Exit) Analytics events - Defocus detection, Motion detection, Tampering, Fog detection, Virtual area(Appear/Disappear) * Audio detection, Sound classification(with NW I/O box SPM-4210)	- EN 55032 Class A, EN 50130-4, EN 61000-3-2, EN 61000-3-3 VCCI C1SPR 32 Class A ICM AS/NZS CISPR 32 Class A KS C 9832 Class A, KS C 9835	
Business Intelligence	None	Safety	UL 62368-1, CAN/CSA C22.2 NO. 62368-1
Serial Interface	None	Environment	EN IEC 63000
Alarm I/O	None	IEC 60529 IP66/IP67, ISO 20653 IP68/IK, IEC 62662 IK10+	
Alarm Triggers	Analytics, Network disconnect, App event, Time schedule * Alarm input(with NW I/O Box SPM-4210)	NEMA 250 type 4X	
Alarm Events	When alarm trigger occurred - File upload(image) : e-mail/FTP - Notification : e-mail - Recording : SD/SDHC/SDXC or NAS recording at event triggers - Alarm output(with NW I/O box SPM-4210) - Handover(PTZ preset, Send message by HTTP/HTTPS/TCP)	Video	None
Audio In	None	DORI (H265/H.264 standard)	
Audio Out	None	Detect (25PPM/ 8PPF)	Wide: 22.2m(72.74ft) / Tele: 159.9m(524.76ft)
IR Viewable Length	15m(49.21ft)	Observe (63PPM/ 18PPF)	Wide: 8.9m(29.09ft) / Tele: 64.0m(209.90ft)
IR Illuminator (Optional)	None	Recognize (125PPM/ 38PPF)	Wide: 4.4m(14.55ft) / Tele: 32.0m(104.95ft)
Water Removal	None	Identify (250PPM/ 76PPF)	Wide: 2.2m(7.27ft) / Tele: 16.0m(52.48ft)
Auto Tracking	None		
Coaxial Protocol	None		
Color Palettes	None		

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ PoE

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNV-6083RZ	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
PoE Adapter	PT-PSE109GBRO-AH	-	Dongguan PROCET Network Technology Co.,Ltd	-
Notebook	P95G001	8KM8HT2	DELL INC.	-
Notebook Adapter	HA65NM130	-	Chicony Power Technology(Suzhou) Co.,Ltd.	-
Micro SD Card	-	-	Sandisck	-

1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	Micro SD Card Slot	Micro SD Card	Micro SD Card Slot	-	-
	RJ-45 (PoE)	PoE Adapter	RJ-45 (PoE)	3.0	S
PoE Adapter	RJ-45 (LAN)	Notebook	RJ-45 (LAN)	1.5	U
Notebook	DC Jack	Notebook Adapter	DC Jack	1.8	U

* Unshielded=U, Shielded=S


1.7 EUT Operating Mode(s)

Test Mode	operating
Operating	Check the Normal Operation status. after testing, check if the recording is normally done on the Micro SD Card

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd

1.8 Configuration

■ AC Main
□ DC Main

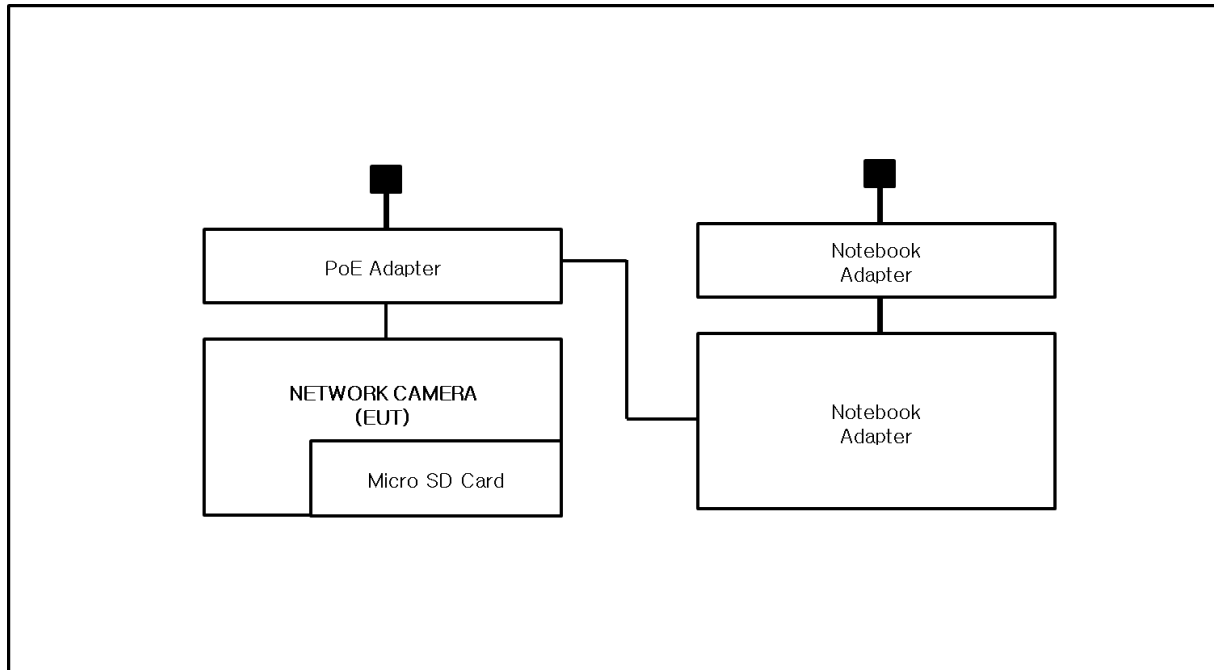

1.9 Remarks when standards applied

N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☒ **EMC – Regulations 2016**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013



2.1 Conducted Emissions at Mains Power Ports

Test Date

N/A

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	EMC32	R & S	9.12.00	-
☐	EMI TEST RECEIVER	ESR3	R & S	101783	12, 28, 2022
☐	LISN	ENV216	R & S	101787	12, 27, 2022
☐	LISN	ESH2-Z5	R & S	100450	12, 27, 2022
☐	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 27, 2022

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

It is not tested apply because it is powered by PoE.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Aug. 04, 2022

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EMC32	R & S	9.12.00	-
☒	EMI TEST RECEIVER	ESR3	R & S	101783	12, 28, 2022
☒	LISN	ENV216	R & S	101787	12, 27, 2022
☒	LISN	ESH2-Z5	R & S	100450	12, 27, 2022
☒	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 27, 2022
☐	8-WIRE ISN CAT3,5	ENY81	R & S	100174	12, 28, 2022
☒	ISN	ISN S8	SCHWARZBECK	ISN-S8-0019	03, 07, 2023

Test Conditions

Temperature: (24,6 ± 0,1) °C

Relative Humidity: (45,9 ± 0,1) % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

- See Appendix A for test data.

- For Ethernet interfaces, measurements are required at the highest data rate supported by the interface.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Aug. 03, 2022

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESU26	R & S	100551	03, 31, 2023
☒	AMPLIFIER	SCU 01	R & S	100603	11, 24, 2022
☒	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
☒	ATTENUATOR	8491A	HP	32173	03, 08, 2023

Test Conditions

Temperature: (24,5 ± 0,2) °C
Relative Humidity: (46,3 ± 0,1) % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Aug. 03, 2022

Test Location

SEMI ANECHOIC CHAMBER #5

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
☒	EMI TEST RECEIVER	ESR7	R & S	101190	08, 01, 2023
☒	PREAMPLIFIER	8449B	AGILENT	3008A01967	04, 01, 2023
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 03, 2023

Test Conditions

Temperature: (24,6 ± 0,1) °C

Relative Humidity: (45,9 ± 0,1) % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.5 Harmonic Current Emissions

Test Date

N/A

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	net.control	EM TEST	2.1.4	-
☐	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2023
☐	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Classification of Equipment for Harmonic Current Emissions

- ☐ Class A
- ☐ Class B
- ☐ Class C(Below 25 W)
- ☐ Class C(Above 25 W)
- ☐ Class D

Test Results

The requirements are:

- ☐ PASS
- ☐ NOT PASS
- ☒ NOT APPLICABLE

Remarks

It is not tested apply because it is powered by PoE.



2.6 Voltage Fluctuations and Flicker

Test Date

N/A

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMI Test S/W	net.control	EM TEST	2.1.4	-
☐	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2023
☐	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

It is not tested apply because it is powered by PoE.

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:
EN 50130-4:2011 Alarm systems-Part 4: Electromagnetic compatibility Product family
standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such
Flickering of indicators occurs at a field strength of 3 V/m.
For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

- (a) there is no permanent damage or change to EUT
(e.g. no corruption of memory or changes to programmable setting etc.)
- (b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used;
and
- (c) there is no observable deterioration of the picture at 1 V/m.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change,
and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.
For component of CCTV systems, where the status is monitored by observing the TV picture,
then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:
(a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
(b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could
still be used; and
(c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the conditioning is permissible, providing that there is no
residual
change in the EUT or any change in outputs, which could be interpreted by associated
equipment
as a change. The EUT shall meet the acceptance criteria for the functional test, after the
conditioning.



3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Aug. 15, 2022

Test Location

EMS-ESD: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	ESD SIMULATOR	ESS-2000	Noise Ken	ESS01Z0454	02, 24, 2023
☒	HCP	-	KES	-	-
☒	VCP	-	Noise Ken	-	-

Test Conditions

Temperature: (24,4 ± 0,2) °C
Relative Humidity: (45,3 ± 0,2) % R.H.
Atmospheric Pressure: (100,1 ± 0,1) kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge


Discharge Voltage:	Contact	Air	HCP	VCP
	☐ 2 kV	☒ 2 kV	☐ 2 kV	☐ 2 kV
	☐ 4 kV	☒ 4 kV	☐ 4 kV	☐ 4 kV
	☒ 6 kV	☐ 6 kV	☒ 6 kV	☒ 6 kV
	☐ 8 kV	☒ 8 kV	☐ 8 kV	☐ 8 kV
	☐ 15 kV	☐ 15 kV	☐ 15 kV	☐ 15 kV

Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane

Required Performance Criteria: ☒ Complied

Location of Discharge:

Air
Contact

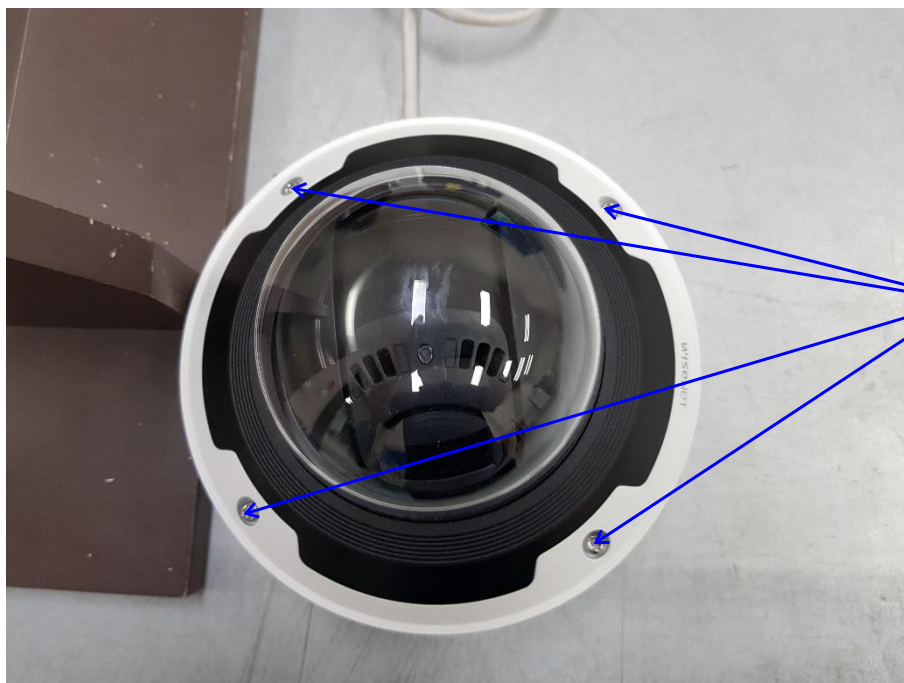



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0727-R1

Page (21) of (64)

Test Data

Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Lens	Air Discharge	Complied	-
2	Screws	Contact Discharge	Complied	-
3	Enclosrue	Contact Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

RemarksPASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

3.2 Radiated Electric Field Immunity

Reference Standard

EN IEC 61000-4-3:2020

Test Date

Aug. 02, 2022

Test Location

EMS-RS: ☐ SEMI ANECHOIC CHAMBER #2 ☒ SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	EMC32	R & S	10.10.02	-
☒	SIGNAL GENERATOR	SMB 100A	Rohde & Schwarz	108252	08, 01, 2023
☒	HIGH POWER DUAL AMP	SSA532	SUNGSAN	SSA532-001	-
☒	POWER METER	E4419B	Agilent	GB40203000	03, 31, 2023
☒	AVERAGE POWER SENSOR	E9301A	Agilent	MY52170007	04, 04, 2023
☒	AVERAGE POWER SENSOR	E9301A	Agilent	MY41498669	04, 04, 2023
☒	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
☒	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 03, 2023

Test Conditions

Temperature: (24,6 ± 0,2) °C
Relative Humidity: (45,5 ± 0,2) % R.H.
Atmospheric Pressure: (100,0 ± 0,1) kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0727-R1

Page (23) of (64)

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0727-R1

Page (24) of (64)

Test Data

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4:2012

Test Date

Aug. 05, 2022

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	12, 03, 2022
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	03, 31, 2023
☒	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	12, 03, 2022

Test Conditions

Temperature: (24,4 ± 0,1) °C
Relative Humidity: (45,3 ± 0,1) % R.H.
Atmospheric Pressure: (100,1 ± 0,1) kPa

Test Specifications

Pulse Amplitude & Polarity:
(AC Power Lines) ☐ ± 1.0 kV ☐ ± 2.0 kV
☐ ± 4.0 kV

Pulse Amplitude & Polarity:
(Other supply / Signal Lines) ☐ ± 0.5 kV ☒ ± 1.0 kV
☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☐ 5 kHz ☒ 100 kHz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ Complied

Test Data

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L	-	-
N	-	-
PE	-	-
L – N	-	-
L – PE	-	-
N – PE	-	-
L – N – PE	-	-

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45(PoE)	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0727-R1

Page (27) of (64)

3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014/A1:2017

Test Date

Aug. 05, 2022

Test Location

EMS-Surge: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☒	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	12, 03, 2022
☒	MOTOR VARIAC	MV2616	EM TEST	P1552169719	03, 31, 2023
☒	CDN	CNV 508N1	EM TEST	P1610176296	12, 03, 2022

Test Conditions

Temperature: (24,4 ± 0,2) °C
Relative Humidity: (45,3 ± 0,1) % R.H.
Atmospheric Pressure: (100,1 ± 0,1) kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0727-R1
Page (28) of (64)

Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common Mode and 2 ohm for differential Mode

Surge Amplitude :

Common Mode

☐ (0,5 / 1,0 / 2,0) kV

Differential Mode

☐ (0,5 / 1,0) kV

Number of Surges:

☐ 5 surges per angle

Angle:

☐ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☐ Positive & Negative

Repetition Rate:

☐ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☐ Complied

Other supply / Signal Lines

Source Impedance:

42 ohm for common Mode

Surge Amplitude:

Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☒ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0727-R1
Page (29) of (64)

Test Data

☐ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	-	-

☐ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – PE	-	-
N – PE	-	-

Signal Lines

☒ Line to Earth – Common Mode

Mode of Application	Coupling Method	Observations	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45(PoE)	CDN	Complied	Complied
	LINE	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria



3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Aug. 04, 2022

Test Location

EMS-CS: Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☒	EMS Test S/W	icd.control	EM TEST	5.3.12	-
☒	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	11, 24, 2022
☒	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 24, 2022
☒	CDN	CDN M016	TESEQ	43694	11, 24, 2022
☒	CDN	CDN M016	TESEQ	43697	11, 24, 2022
☒	CDN	CDN ST08A	TESEQ	43886	11, 24, 2022
☐	EM CLAMP	KEMZ 801A	TESEQ	44099	11, 25, 2022

Test Conditions

Temperature: (24,6 ± 0,2) °C
Relative Humidity: (45,9 ± 0,1) % R.H.
Atmospheric Pressure: (100,2 ± 0,1) kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0727-R1

Page (31) of (64)

Test Specifications

Frequency range:

☒ 150 kHz to 100 MHz

☐ 150 kHz to 80 MHz

Voltage Level:

☐ 1 Vrms

☐ 3 Vrms

☒ 10 Vrms

Modulation:

☒ AM, 80 %, 1 kHz sine wave

☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step:

☒ 1 % step

Dwell Time:

☐ 1 s

☒ 3 s

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0727-R1

Page (32) of (64)

Test Data☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L – N – PE	CDN	-

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45(PoE)	CDN	Complied

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

RemarksPASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



3.6 Voltage Dips and Short Interruptions

Reference Standard
EN IEC 61000-4-11:2020

Test Date
N/A

Test Location
EMS-Voltage dip: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
☐	EMS Test S/W	iec.control	EM TEST	5.4.8	-
☐	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	03, 31, 2023
☐	MOTOR VARIAC	MV2616	EM TEST	P1552169719	03, 31, 2023

Test Conditions

Temperature: °C
Relative Humidity: % R.H.
Atmospheric Pressure: kPa



Test Specifications & Observations/Remarks

- Voltage Dips and Short Interruptions

Test Level	Duration [in period/ms (50 Hz)]	Results
☐ 20 % dip	☐ 250 / 5 000	<u>N/A</u>
☐ 30 % dip	☐ 25 / 500	<u>N/A</u>
☐ 60 % dip	☐ 10 / 200	<u>N/A</u>
☐ 100 % dip	☐ 250 / 5 000	<u>N/A</u>

- Voltage variations

☐ Unom + 10 %	☐ 253.0 V (ac)	<u>N/A</u>
☐ Unom - 15 %	☐ 195.5 V (ac)	<u>N/A</u>

Observations:

Complied – No degradation of function

Degradation - See "Remarks "

Test Results

- ☐ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☒ NOT APPLICABLE

Remarks

It is not tested apply because it is powered by PoE.



APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

N/A



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0727-R1
Page (36) of (64)

[NEUTRAL]

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Emissions at Telecommunication Ports

[1 000 Mbps]

Common Information

Test Description: Telecommunication Emission
 Model No.: XNV-6083RZ
 Mode :
 Speed : 1 000 Mbps
 Operator Name: KES

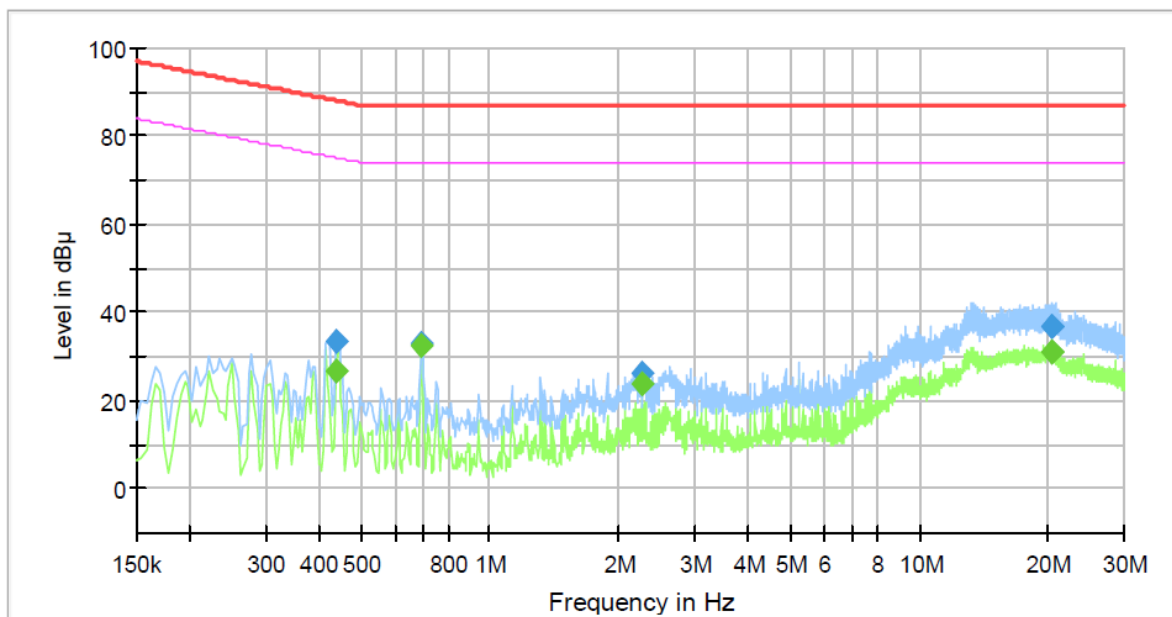

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.438000	---	26.69	75.10	48.41	1000.0	9.000	Single Line	19.5
0.438000	33.22	---	88.10	54.88	1000.0	9.000	Single Line	19.5
0.694000	---	32.55	74.00	41.45	1000.0	9.000	Single Line	19.8
0.694000	33.15	---	87.00	53.85	1000.0	9.000	Single Line	19.8
2.250000	---	23.70	74.00	50.30	1000.0	9.000	Single Line	20.2
2.250000	26.13	---	87.00	60.87	1000.0	9.000	Single Line	20.2
20.342000	---	31.22	74.00	42.78	1000.0	9.000	Single Line	20.2
20.342000	36.86	---	87.00	50.14	1000.0	9.000	Single Line	20.2
20.470000	---	31.01	74.00	42.99	1000.0	9.000	Single Line	20.2
20.470000	36.68	---	87.00	50.32	1000.0	9.000	Single Line	20.2

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0727-R1

Page (38) of (64)

Radiated Electric Field Emissions(Below 1 GHz)

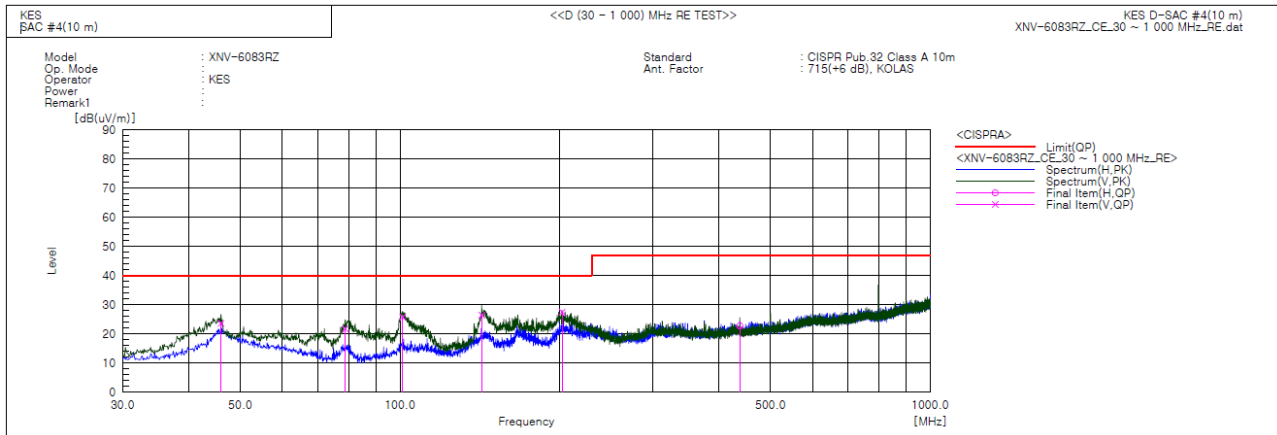

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	46.005	V	44.9	-21.3	23.6	40.0	16.4	108.0	152.0	
2	78.864	V	49.4	-27.7	21.7	40.0	18.3	116.0	288.0	
3	101.174	V	48.3	-22.5	25.8	40.0	14.2	139.0	36.0	
4	142.641	V	51.9	-25.5	26.4	40.0	13.6	100.0	297.0	
5	202.175	V	48.4	-20.9	27.5	40.0	12.5	103.0	305.0	
6	437.521	H	36.2	-13.4	22.8	47.0	24.2	400.0	59.0	

◆ Calculation – SEMI ANECHOIC CHAMBER #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)]

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-22T0727-R1

Page (39) of (64)

Radiated Electric Field Emissions(Above 1 GHz)

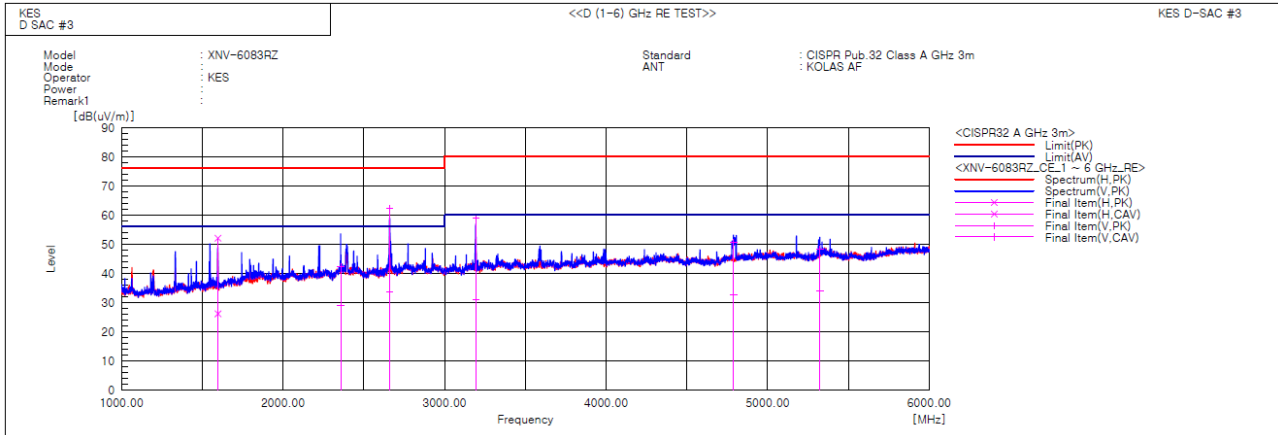

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1596.124	H	57.1	31.2	-5.0	52.1	26.2	76.0	56.0	23.9	29.8	100.0	45.4	
2	2356.000	V	41.2	27.9	1.0	42.2	28.9	76.0	56.0	33.8	27.1	100.0	81.5	
3	2660.326	V	61.0	32.4	1.3	62.3	33.7	76.0	56.0	13.7	22.3	100.0	327.5	
4	3193.110	V	55.9	28.1	3.1	59.0	31.2	80.0	60.0	21.0	28.8	100.0	157.0	
5	4789.556	V	43.2	25.0	7.6	50.8	32.6	80.0	60.0	29.2	27.4	100.0	177.3	
6	5323.824	V	39.1	24.7	9.3	48.4	34.0	80.0	60.0	31.6	26.0	100.0	226.6	

◆ Calculation

Result(PK/CAV) [dB(μ V/m)] = (Reading(PK/CAV)[dB(μ V)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μ V/m)] - Result(PK/CAV) [dB(μ V/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0727-R1
Page (42) of (64)

Test Data - Voltage Fluctuations
Maximum Flicker results

Flicker Measurements					
	Plt	Max Pst	Max Dc	Max Dmax	Max Tmax
Line 1:	N/A				
Limits:					
Results:					

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0727-R1
Page (43) of (64)


Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports

N/A


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Emissions at Telecommunication Ports

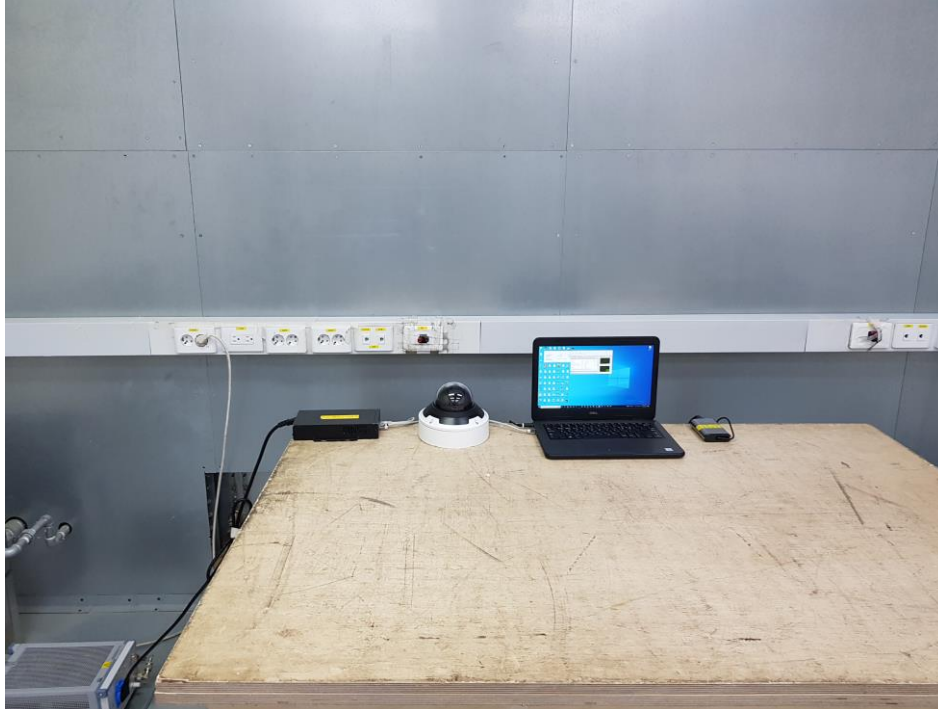


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

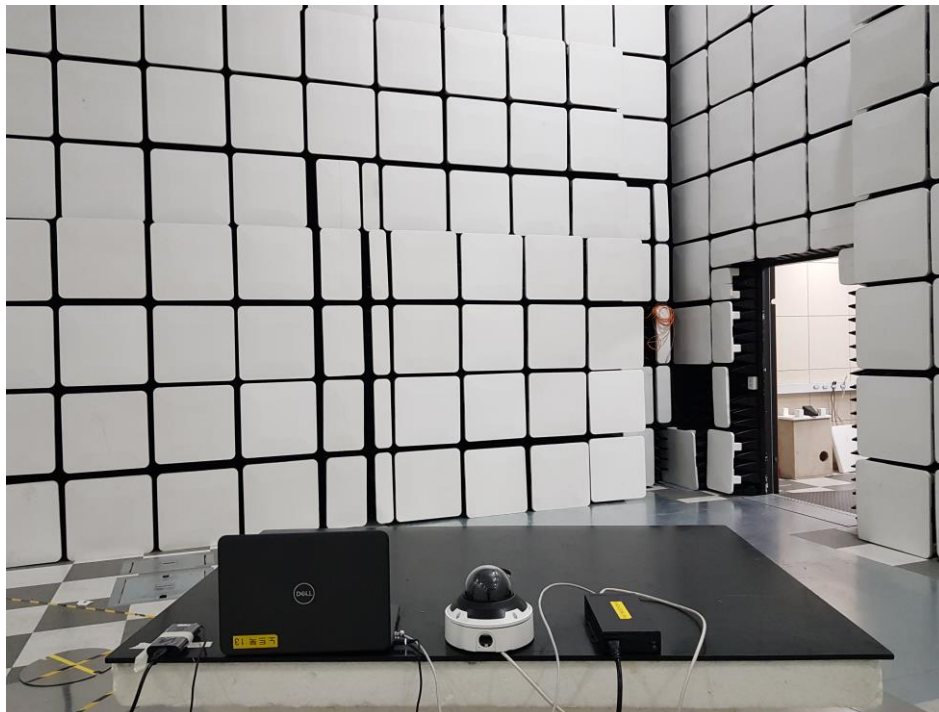

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

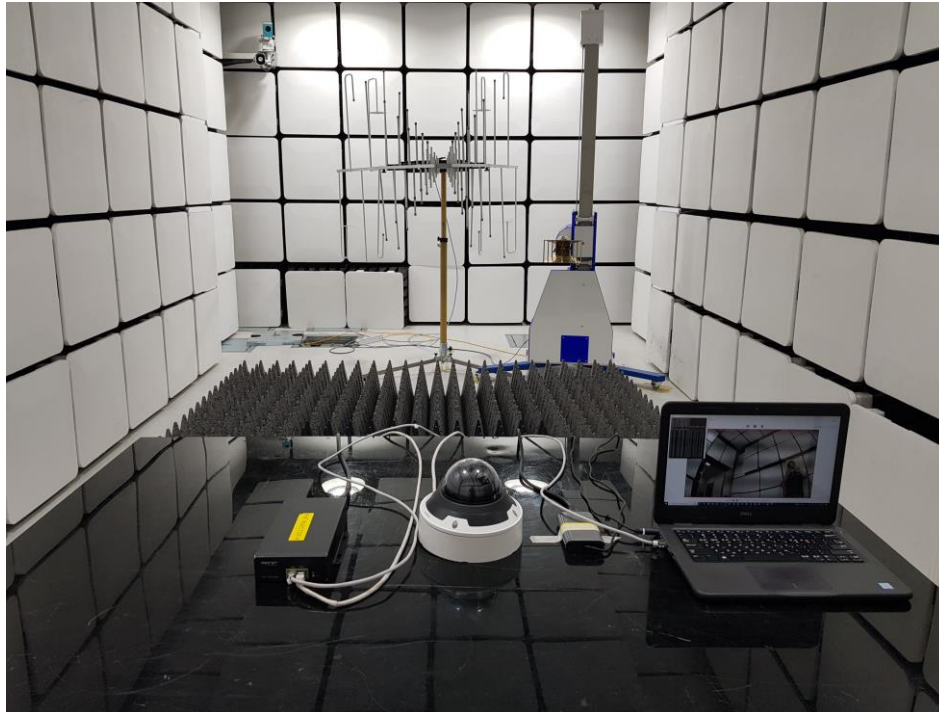

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-22T0727-R1
Page (47) of (64)

Harmonic Current Emissions and Voltage Fluctuations and Flicker

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Electrostatic Discharge



Radiated Electric Field Immunity



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Electrical Fast Transients/Bursts



Surge Transients



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Disturbance



Voltage Dips and Short Interruptions

N/A

EUT External Photographs

(Top)



(Bottom)




EUT Internal Photographs

(Internal View)




EUT Internal View – Board 1

(Top)

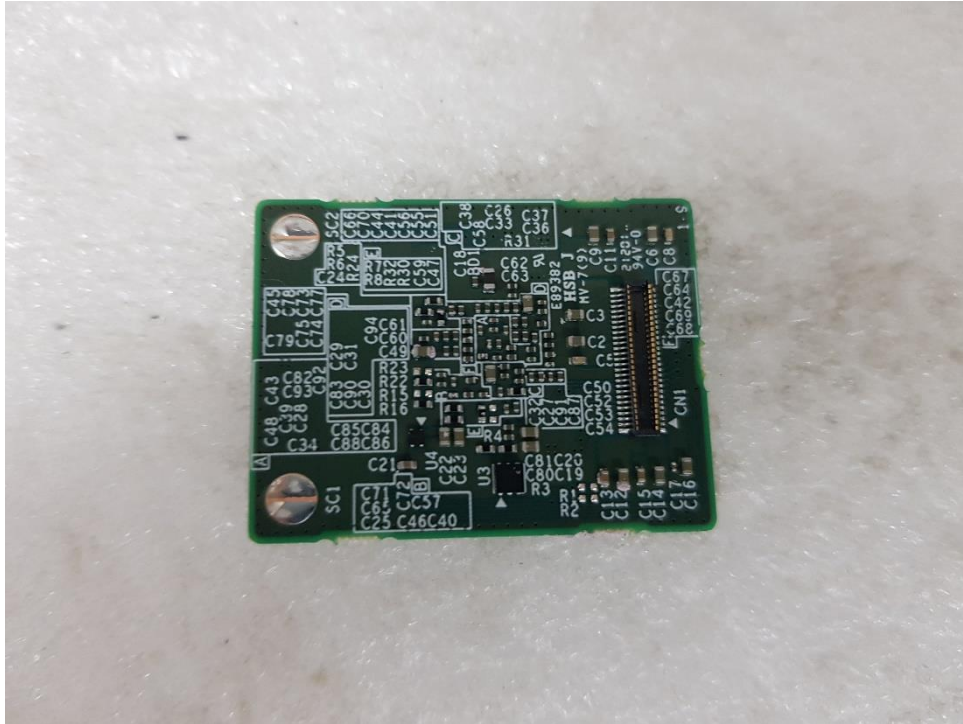


EUT Internal View – Board 2

(Top)

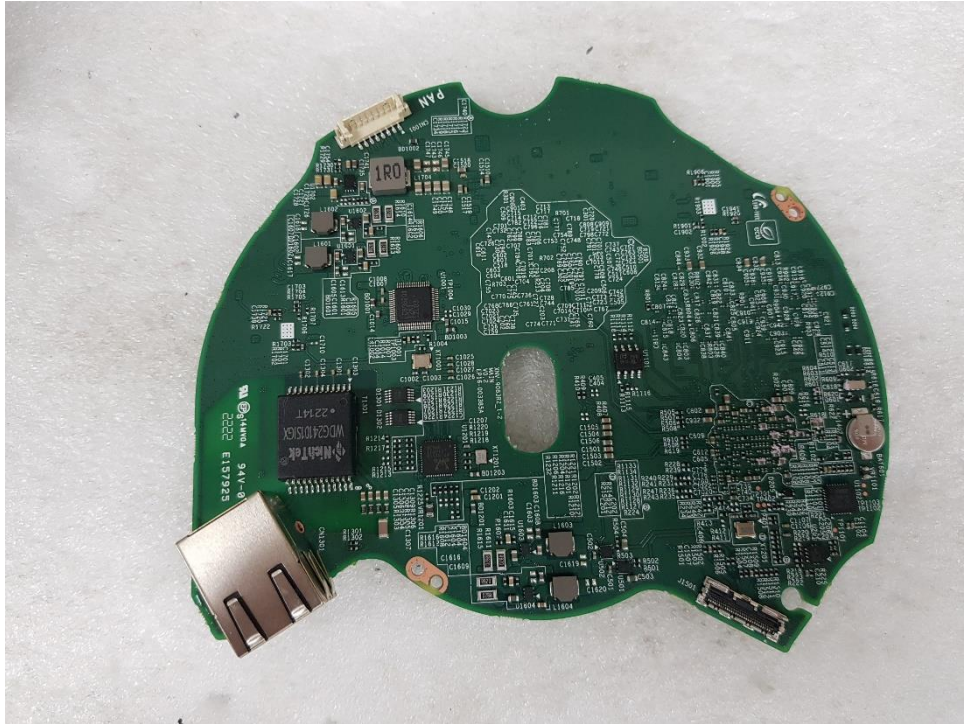


(Bottom)

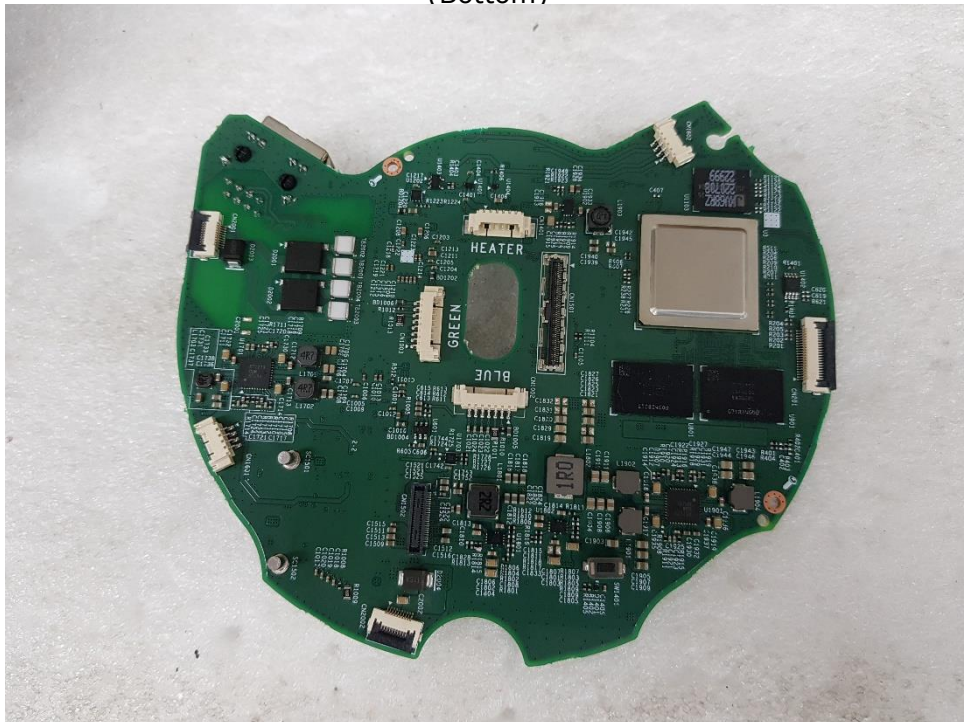


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 3

(Top)

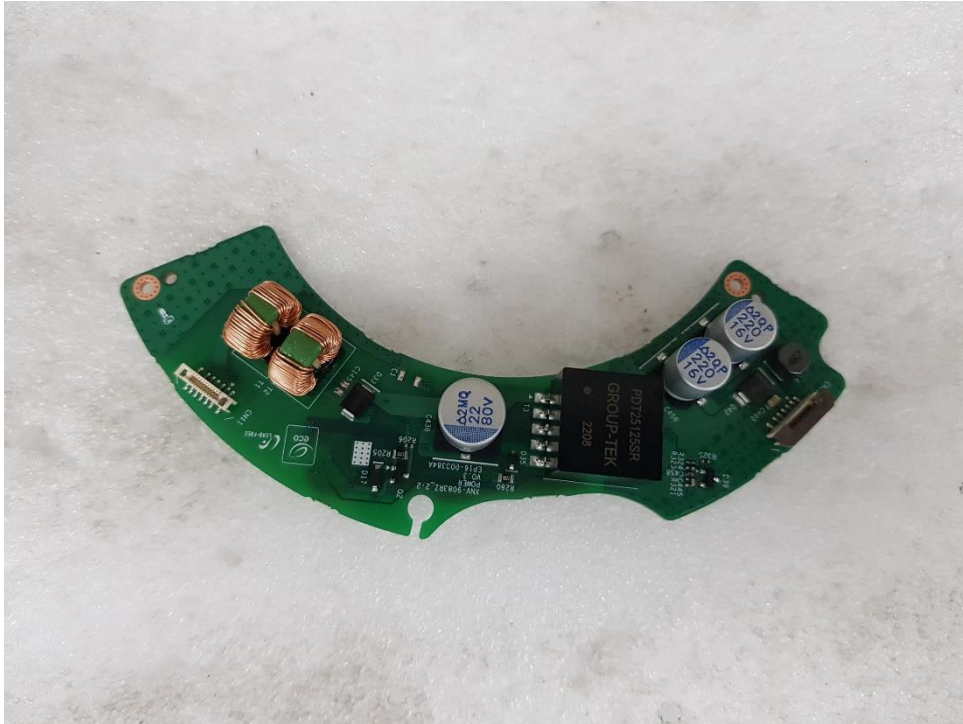

(Bottom)

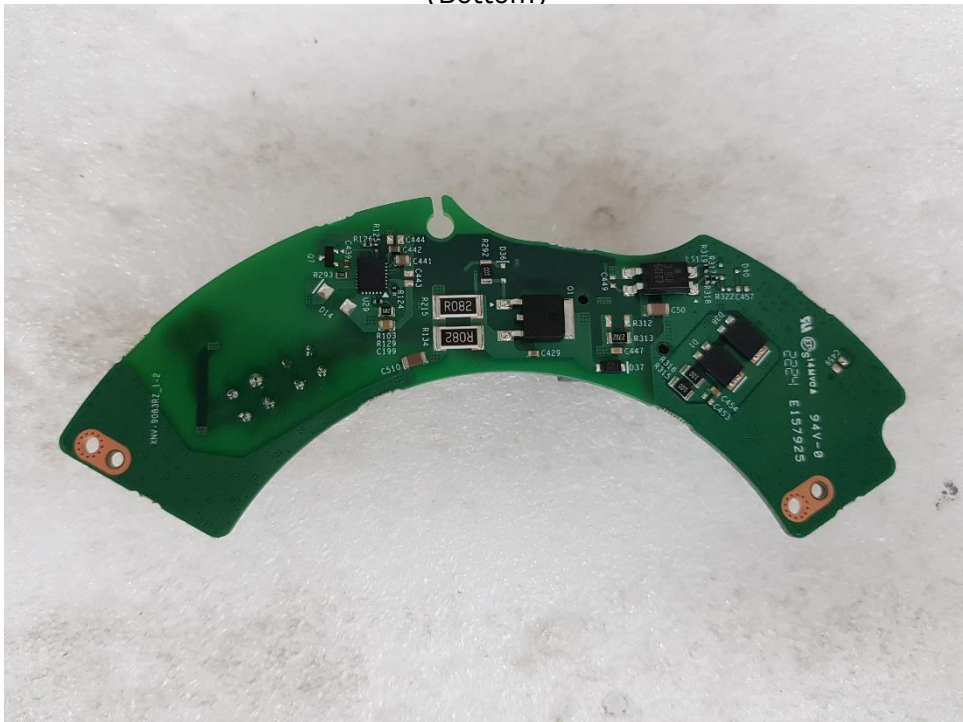


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 4

(Top)




(Bottom)

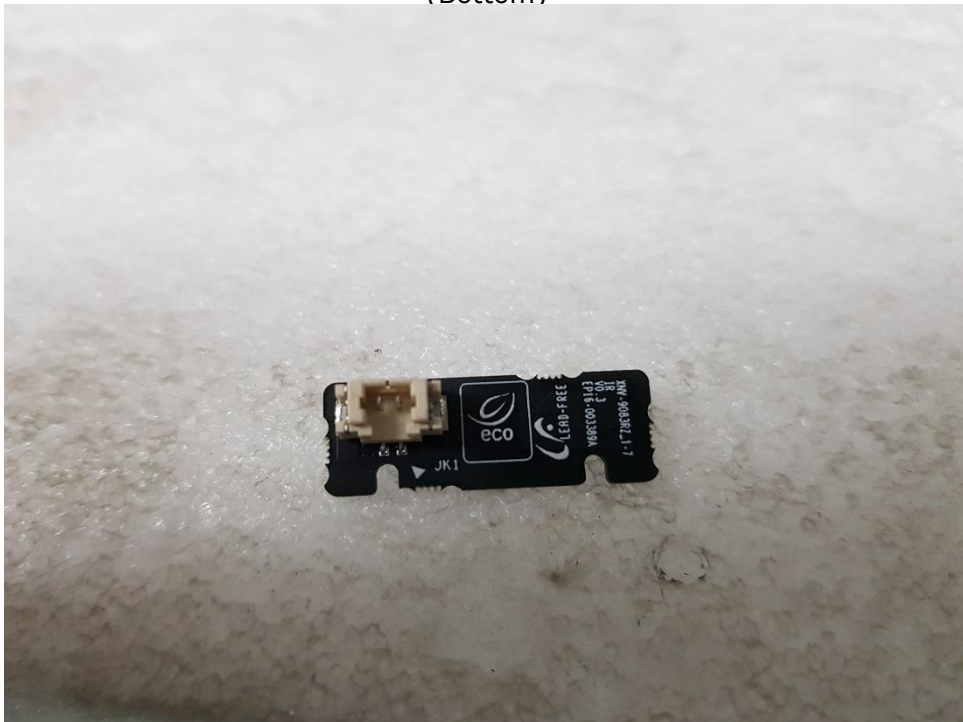

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 5

(Top)

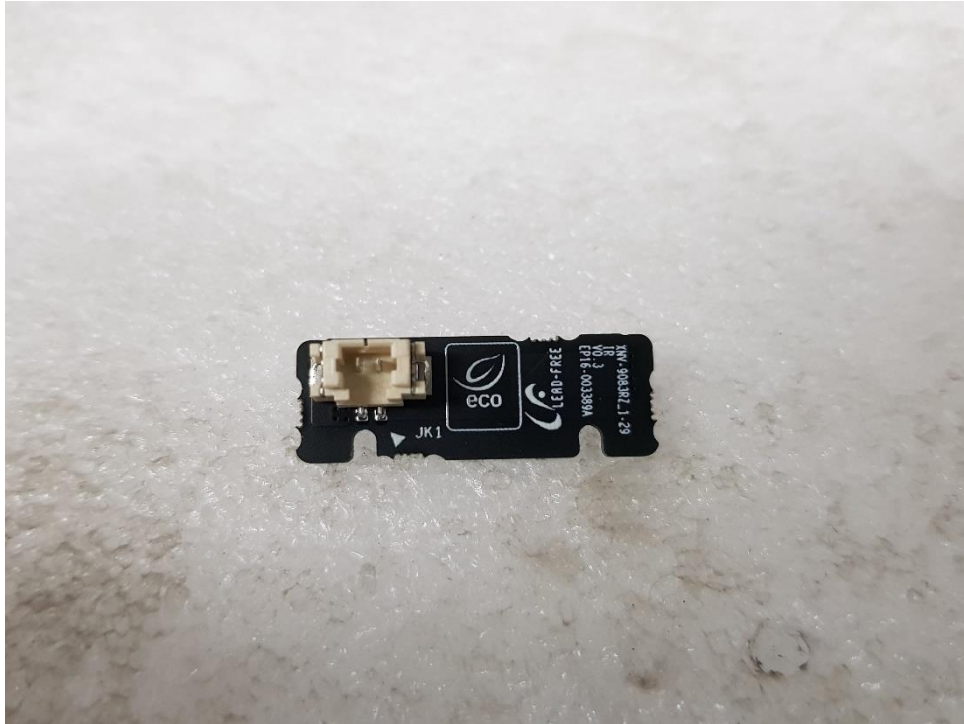


(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 6

(Top)

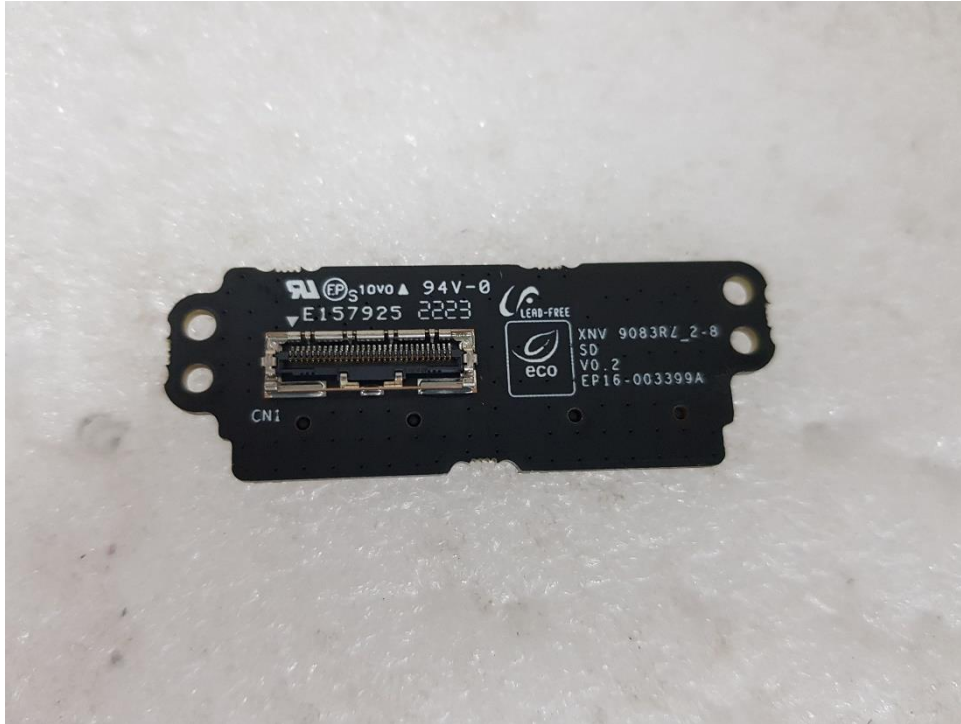

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 7

(Top)



(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 8

(Top)



(Bottom)

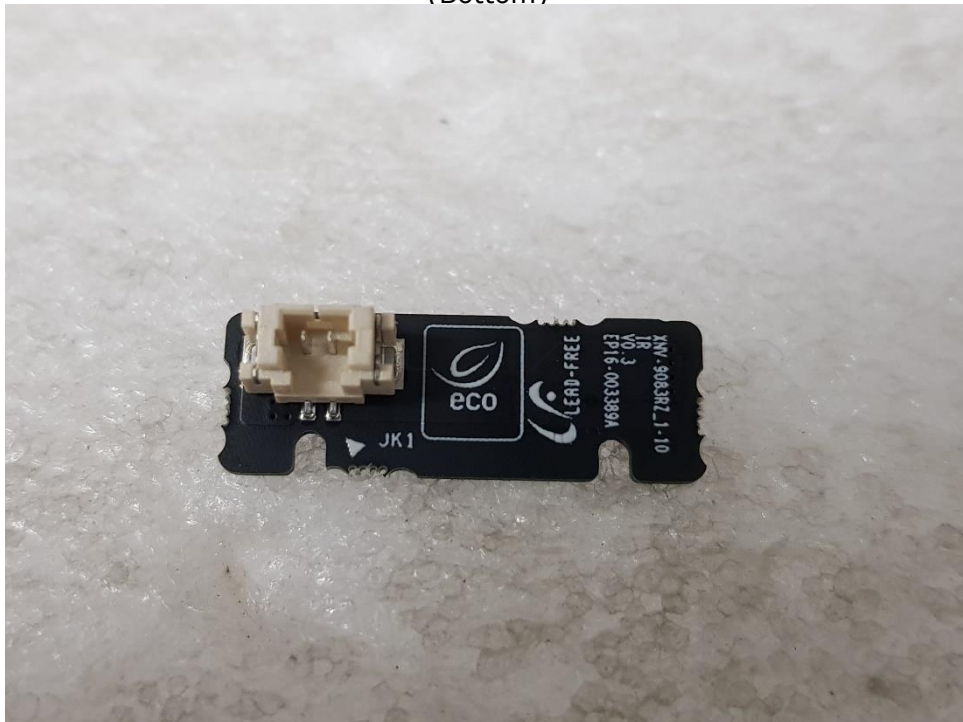

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 9

(Top)




(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Board 10

(Top)

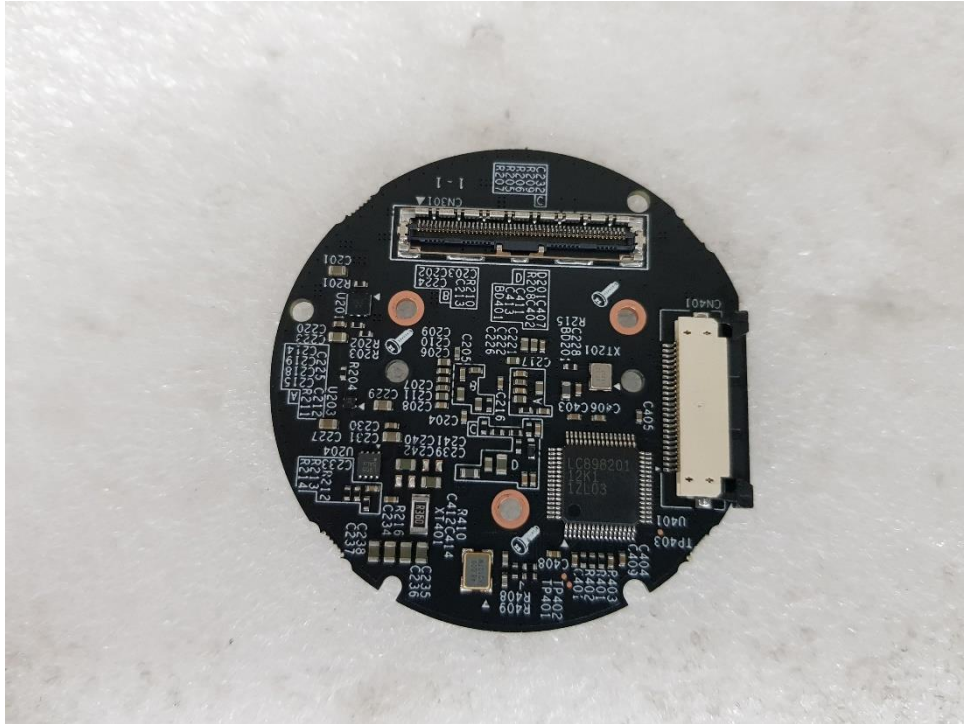

(Bottom)

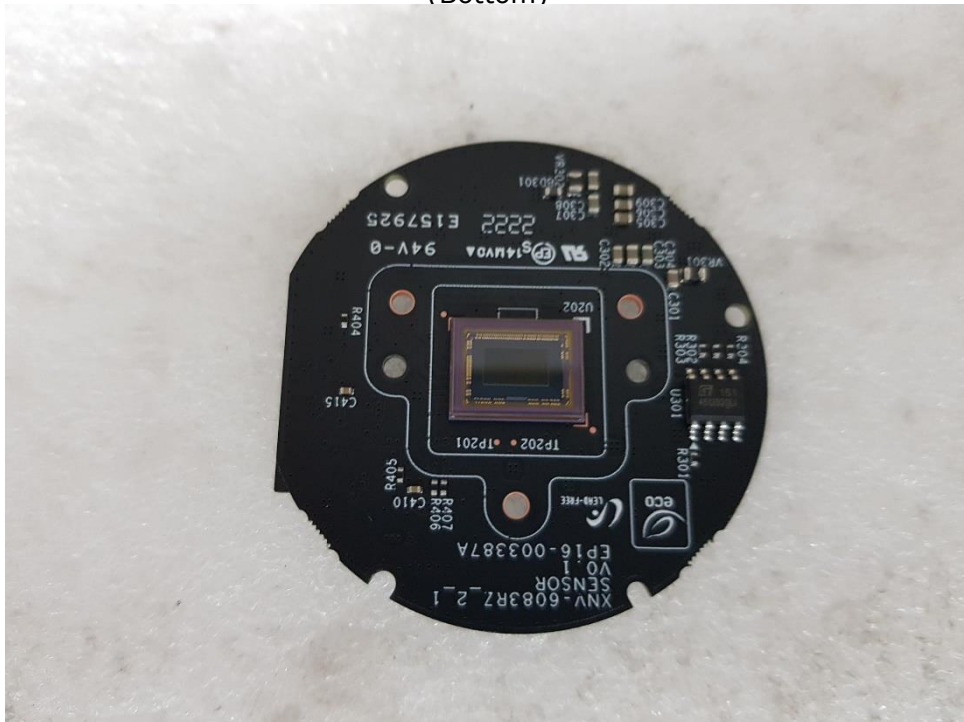


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Lens

(Top)




(Bottom)

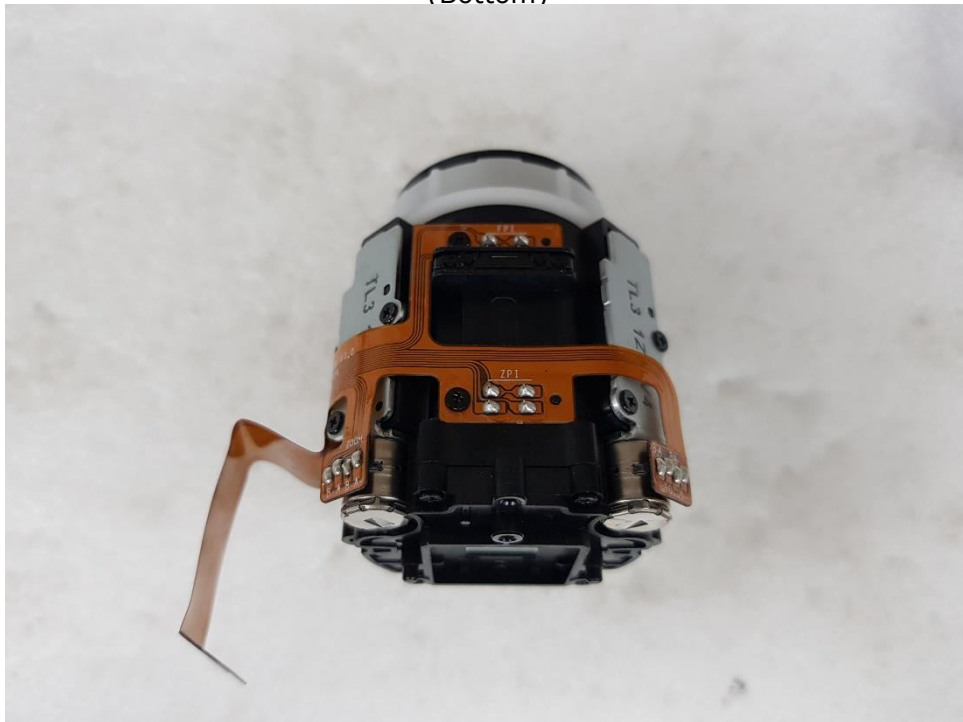

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Label and Location

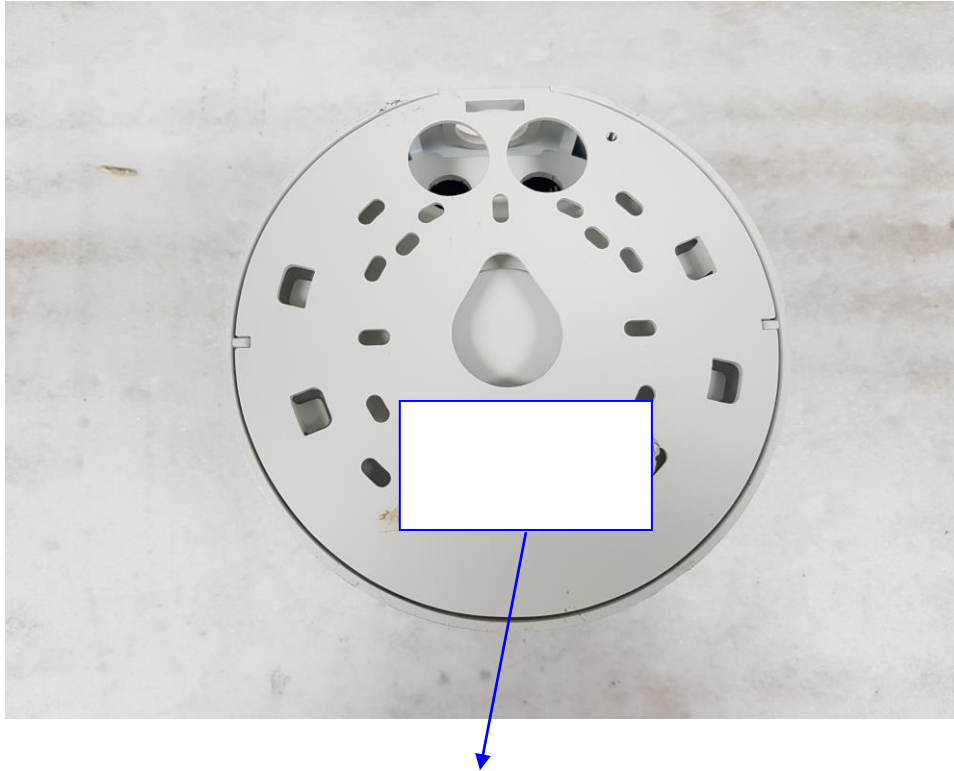

NETWORK CAMERA

Model No : XNV-6083RZ

Manufacturer : HANWHA VISION VIETNAM COMPANY LIMITED

Made in Vietnam

