



TEST REPORT



Report No. : KES-EM252924

Page 1 / 27

KES Co., Ltd.

#3002, #3503, #3701, 40, Simin-daero365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Republic of Korea
Tel : +82-31-425-6200, Fax : +82-31-341-3838

1. Client

- Name : Hanwha Vision Co., Ltd.
- Address : 6, Pangyo-ro 319beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea

2. Sample Description

- Product item : NETWORK CAMERA
- Model name : XNV-A6084R
- Variant model : -
- Manufacturer etc. : HANWHA VISION VIETNAM COMPANY LIMITED
- Manufacturer address : Lot O-2, Que Vo Industrial Zone Extended Area, Nam Son Ward, Bac Ninh Province, Vietnam
- Manufacturer etc. : D-TECH CO.,LTD.
- Manufacturer address : 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea (Suwon Industrial Complex)

3. Date of test : 2025. 08. 26. ~ 2025. 08. 28.

4. Location of Test : Permanent Testing Lab
○ Address : 473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, 12658, Republic of Korea

5. Test method used : VCCI-CISPR 32:2016

6. Test result : PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
This test report is not related to KOLAS accreditation.

Affirmation	Tested by	Technical Manager by
	Name : DongYun Lee	Name : DaeJung,Choi

2025. 09. 19.

KES Co., Ltd.



REPORT REVISION HISTORY

Date	Test Report No.	Revision History
2025. 09. 19.	KES-EM252924	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

Use of uncertainty of measurement for decisions on conformity (decision rule):

- ☒ No decision rule is specified by the 1 standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy method").
- ☐ Other (to be specified, for example when required by the standard or client)



TABLE OF CONTENTS

1	Laboratory Information	4
1.1	Test Location.....	4
1.2	Laboratory Accreditations and Listings	4
2	Test Summary	5
2.1	Class and Voltage.....	5
2.2	Summary of Test Results	5
2.3	Remarks when standards applied	5
2.4	Variant Model Differences	5
2.5	Device Modifications	5
3	General Product Description	6
4	EUT Setup and Operation Mode	11
4.1	EUT Configuration	11
4.2	System Configuration	11
4.3	External I/O Cabling	12
4.4	EUT Operating Mode(s).....	12
4.5	Test operating S/W	12
4.6	Configuration	13
5	Measurement Procedure.....	14
6	Test Item.....	15
6.1	Conducted Emissions at Telecommunication Ports	15
6.2	Radiated Emissions(Below 1 GHz)	17
6.3	Radiated Emissions(Above 1 GHz)	19
7	Test Setup Photos and EUT Photographs	21
7.1	Test Setup Photos	21
7.2	EUT Photographs	24
7.3	Label	27



1 Laboratory Information

1.1 Test Location

Category	Details
Address	473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Republic of Korea
Telephone Number	031-883-5092
Facsimile Number	031-883-5169

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.2 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0008



2 Test Summary

2.1 Class and Voltage

Test Class	Test Voltage
Class A	AC 100 V, 60 Hz

2.2 Summary of Test Results

Test Item	Test Standard	Test Result	Remark
Conducted Emissions at Mains Power Ports	VCCI CISPR 32:2016	N/A	NOTE 1
Conducted Emissions at Telecommunication Ports		PASS	-
Radiated Emissions(Below 1 GHz)		PASS	-
Radiated Emissions(Above 1 GHz)		PASS	-
* N/A: Not Applicable			
(NOTE 1) PoE port is considered to be wired network port, so power-related test items are excluded.			

2.3 Remarks when standards applied

N/A

2.4 Variant Model Differences

N/A

2.5 Device Modifications

N/A



3 General Product Description

Division		Specificity
Internal maximum operating/clock frequency		3.2 GHz
Power	Rated power supply	PoE
	Test Power	AC 100 V, 60 Hz
I/O Ports	User port	RJ-45 1 EA, Micro SD Card Slot 1 EA, 7 Pin 1 EA
	Unused/Administrator Port	USB Type-C 1 EA
function	Product features	NETWORK CAMERA
	Wireless function	N/A
Components		Main body 1 EA, 7 Pin Cable 1 EA
Others		Please refer to the specifications listed below.



Video	
Imaging Device	1/2.8" CMOS
Resolution	1920x1080, 1280x960, 1280x720, 1024x768, 800x600, 640x480, 640x360, 320x240, 320x180
Max. Framerate	H.265/H.264: Max. 60fps/50fps(60Hz/50Hz) MJPEG: Max. 30fps
NETD	None
Pixel Size	None
Video Out	USB: Micro USB Type C for installation
Video Transmission Distance	None
Lens	
Focal Length (Zoom Ratio)	2.8~12mm
Optical Zoom	None
Max. Aperture Ratio	F1.4(Wide)~F3.6(Tele)
Angular Field of View	H: 120°(Wide)~27°(Tele) V: 63°(Wide)~15°(Tele) D: 143°(Wide)~32°(Tele)
Min. Object Distance	0.5m
Focus Control	Simple focus, Manual
Lens Type	P-iris(IR corrected)
Mount Type	None
Optional Lens	None
Pan / Tilt / Rotate	
Pan / Tilt / Rotate Range	0°~360° / 0°~75° / 0°~355°
Pan Range	None
Pan Speed	None
Tilt Range	None
Tilt Speed	None
Rotate Range	None
Sequence	None
Preset Accuracy	None



Operational	
Camera Title	Displayed up to 85 characters
Direction Indicator	None
Day & Night	Auto(ICR)
Backlight Compensation	BLC, HLC, WDR, SDR
Wide Dynamic Range	150dB
Digital Noise Reduction	SSNRV, WiseNRⅡ(Based on AI engine/AI-ISP)
Digital Image Stabilization	Support
Defog	Support
Motion Detection	8ea, 8point polygonal zones
Privacy Masking	32ea, 8point polygonal zones - Color: gray/green/red/blue/black/white/purple/yellow - Mosaic Dynamic Privacy Mask(Based on AI engine) - Color: gray/green/red/blue/black/white/purple/yellow - Mosaic
Gain Control	Off / Max Gain / Manual
White Balance	ATW / NarrowATW / AWC / Manual / Indoor / Outdoor
LDC	Support(Fill/Stretch mode)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker(2~1/40,000sec) Prefer shutter control(Based on AI engine)
Digital PTZ	None
Video Rotation	Flip, mirror, hallway view(90°/270°)
Business Intelligence	Based on AI engine: People/Vehicle/Crowd/Object counting, Queue management, Heatmap
Serial Interface	None
Alarm I/O	2 configurable I/O ports *Support extra alarm I/O via optional I/O box
Alarm Triggers	Analytics, Network disconnection, Alarm input, App event, Time schedule, MQTT subscription, Day/Night change, SD/NAS disruption
Alarm Events	When alarm trigger occurred - File upload(image): e-mail/FTP/SFTP - File upload(video clip): FTP/SFTP - Notification: e-mail - Recording: SD/SDHC/SDXC or NAS recording at event triggers - Alarm output - Handover: PTZ preset, send message by HTTP/HTTPS/TCP - Audio clip playback(WAV, MP3) - MQTT: publication



Audio Streaming	None
Audio In	Selectable(mic in/line in)
Audio Out	Line out
Light Type	IR LED
Light Viewable Length	WiseIR 40m(131.23ft)
IR Viewable Length	None
IR Illuminator (Optional)	None
IR Radiation angle	None
IR LED	None
IR Wavelength	850nm
IR Operation	None
Water Removal	None
Auto Tracking	None
Coaxial Protocol	None
Color Palettes	None
Radiometry	
Temperature Detect Range	None
Temperature Accuracy	None
Temperature Detection	None
Additional	None
Network	
Ethernet	Metal shielded RJ-45(10/100BASE-T)
Video Compression	H.265/H.264: Main/Baseline/High MJPEG
Audio Compression	G.711(PCM): 8kHz(64Kbps) G.726(ADPCM): 8kHz(16/24/32/40Kbps) AAC-LC: 16(48Kbps) OPUS: 48kHz
Smart Codec	WiseStream(Based on AI engine)
Video Quality Adjustment	None
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(20 users) / Multicast Multiple streaming(Up to 5 profiles, 3 virtual channel support)
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP/SFTP, SMTP(StartTLS), ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTP(TCP, UDP Unicast), CDP, MQTT, Syslog
SIP support (VoIP, Peer-to-peer,	Support(TBD)
Security	None



Security	
OS / Firmware Protect	Encrypted Firmware, Secure boot, Signed Firmware
User authentication	Digest Authentication, Prevent brute-force attack
Secure Communication	HTTPS, SRTP, WSS(Websocket secure)
Access Control	IP-based access control, MAC-based access control, Auto logout
Data Protect	Encryption Credentials, Encrypt compress for live recording file export
Audit	Access / System / Event Log management
Device ID	Device Certificate(Hanwha vision Root CA)
Secure Storage	Secure element, SDcard partition encrypt
Security Certificate	ETSI EN 303 645, Secure element(FIPS 140-3 level3, CC EAL6+)
General	
Webpage Language	English, Korean, Simplified Chinese, Traditional Chinese, French, Italian, Spanish, German, Japanese, Russian, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	None
Edge Storage	Micro SD/SDHC/SDXC 1slot 1TB
Memory	4GB RAM, 8GB eMMC
Environmental & Electrical	
Operating Temperature / Humidity	-40°C~+55°C(-40°F~+131°F) +74°C(+165°F)(MAX) based on NEMA-TS 2(2.2.7) * Start up should be done at above -30°C 0~100%RH(Condensing) Humidity control with AIR vent
Storage Temperature / Humidity	-50°C~+60°C(-58°F~+140°F) / 0~90% RH
Wind Load	None
Certification	IP66/IP67, NEMA4X, IK10, NEMA-TS 2(2.2.7.2-6, 2.2.8, 2.2.9)
Input Voltage	PoE(IEEE802.3af, Class3)
Power Consumption	PoE: Max. 10.2W, typical 5.0W Support Wisepower - Power monitoring(Max./Current/Avg.) - ECO mode
Mechanical	
Color / Material	White / Aluminum Bubble: Hard-coated dome Recycled plastic: 4.49%
RAL Code	RAL9003
Product Dimensions / Weight	ø160x118mm(6.30x4.65"), 1,243g(2.74lb)
Compatible Conduit hole / Gang	12.7mm(1/2")(M20) Single, double, 4" octagon, 4" square



4 EUT Setup and Operation Mode

4.1 EUT Configuration

Product Name	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNV-A6084R	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT
Laptop	NT550XDZ	-	Samsung Electronics	-
Laptop Adapter	A13-040N2A	-	CHICONY POWER TECHNOLOGY (Chongqing) CO., LTD.	-
Micro SD Card	-	-	SanDisk	-
PoE Injector	PT-PSE109GBRO-AH	-	Dongguan PROCET Network Technology Co.,Ltd	-
Headset	K550	-	Britz®	-
LED Alarm	PRO-SL	-	SENSOR PRO	-
Button Alarm	-	-	-	-
Smart Phone	-	-	-	-

4.2 System Configuration

Product Name	Model Number	Serial Number	Manufacturer	Remarks
-	-	-	-	-



4.3 External I/O Cabling

Start		End		Cable Spec.	
Product Name	I/O Port	Product Name	I/O Port	Length(m)	Shield
NETWORK CAMERA (EUT)	RJ-45(PoE)	PoE Injector	RJ-45(PoE)	3.1	U
	Micro SD Card Slot	Micro SD Card	Micro SD Card Slot	-	-
	Alarm OUT	LED Alarm	Alarm IN	3.2	U
	Alarm IN	Button Alarm	Alarm OUT	3.1	U
	3.5 mm (Audio IN)	Headset	3.5 mm (Audio OUT)	1.4	U
	3.5 mm (Audio OUT)		3.5 mm (Audio IN)	1.4	U
PoE Injector	RJ-45(LAN)	Laptop	RJ-45(LAN)	1.5	U
Laptop	3.5 mm	Smart Phone	3.5 mm	1.0	U
	DC Jack	Laptop Adapter	DC Jack	1.4	U

* Unshielded=U, Shielded=S

4.4 EUT Operating Mode(s)


Category	Mode	Operating
Mode 1	Operation	- Monitoring EUT Using Web Viewer, Ping Test - When the Button Alarm is pressed, make sure the Alarm is working - Uploaded the 1 kHz tone sound to the Web Viewer and checked if the sound is output to the headset. - After the test, the recorded video stored on the Micro SD Card was checked and the microphone motion was also confirmed.

4.5 Test operating S/W

Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd.



4.6 Configuration

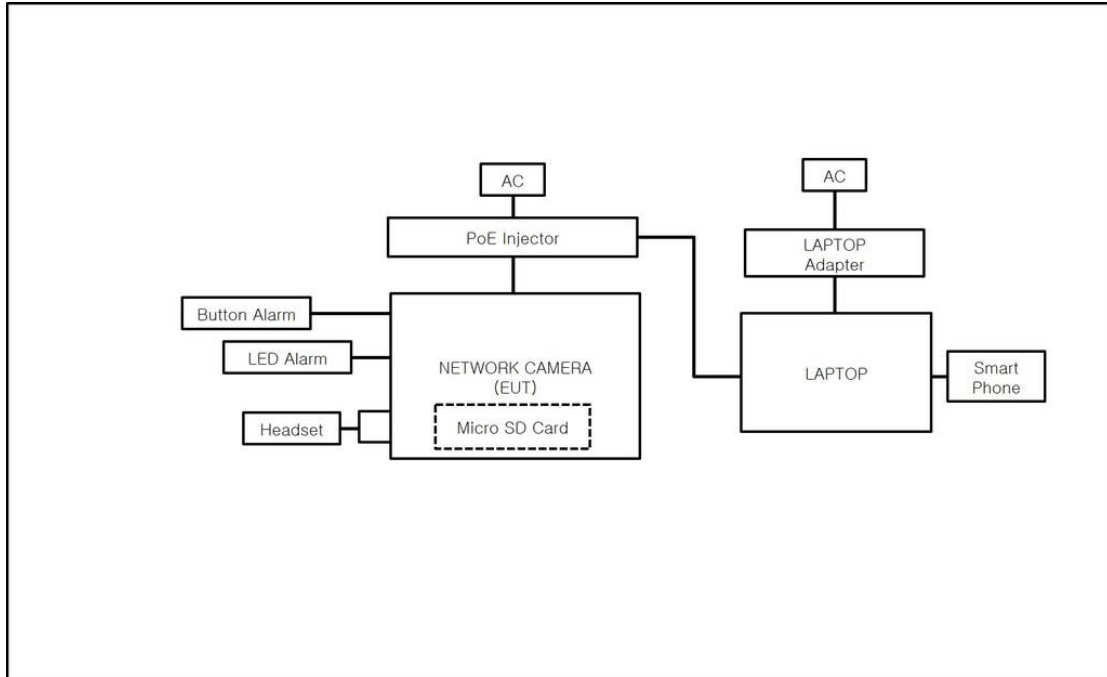

Mode 1



5 Measurement Procedure

- Conducted Emissions

The conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable). The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. If the conducted emission exceed the average limit with the instrument set to the quasi-peak mode, the measurements are made in the average mode. The emission spectrum was scanned from 150 kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limits were measured and have been recorded. Quasi-peak readings are distinguished with a "QP".

- Radiated Electric Field Emissions

The test was done at a SEMI ANECHOIC CHAMBER with quasi-peak detector. The final test data was measured using a Quasi-Peak detector below 1 GHz at 10 m or 3 m distance and a Peak and Average detector above 1 GHz at 3 m distance. Test was proceeded worst case test mode and cable configuration. Measurements were made with the antenna positioned in both the horizontal and vertical planes of polarization. The antenna height was varied from 1 m to 4 m (Radiated Emissions(Below 1 GHz)) and 1 m (Radiated Emissions(Above 1 GHz)) and the EUT was rotated 360° to find the maximum emitting point for each frequency.

Measurement procedures was In accordance with ANSI C63.4 or CISPR 32.

◆ Calculation

- Conducted Emissions

$\text{QuasiPeak[dBuV]} / \text{CAverage[dBuV]} = \text{Reading Value[dBuV]} + \text{Corr. [dB]}$

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

- Radiated Emissions(Below 1 GHz)

$\text{Result(QP) [dB(}\mu\text{V/m)}] = (\text{Reading(QP)[dB(}\mu\text{V)}] + \text{c.f[dB(1/m)}]$

$\text{Margin(QP)[dB]} = \text{Limit[dB(}\mu\text{V/m)}] - \text{Result(QP) [dB(}\mu\text{V/m)}]$

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

- Radiated Emissions(Above 1 GHz)

$\text{Result(PK/CAV) [dB(}\mu\text{V/m)}] = (\text{Reading(PK/CAV)[dB(}\mu\text{V)}] + \text{c.f[dB(1/m)}]$

$\text{Margin(PK/CAV)[dB]} = \text{Limit[dB(}\mu\text{V/m)}] - \text{Result(PK/CAV) [dB(}\mu\text{V/m)}]$

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(PK/CAV) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



6 Test Item

6.1 Conducted Emissions at Telecommunication Ports

6.1.1 Test Equipment

Equipment Name	Model Number	Manufacturer	Serial No.	Cal. Date	Next Cal. Date	Used
SHIELD ROOM #6	-	DYMSTEC	-	-	-	■
EMC32 Measurement Software	EMC32	R&S	9.12.00	-	-	■
EMI TEST RECEIVER	ESR3	Rohde & Schwarz	101783	2024-11-06	2025-11-06	■
LISN	ENV216	Rohde & Schwarz	101786	2025-01-09	2026-01-09	■
ARTIFICIAL MAINS NETWORK	ESH2-Z5	Rohde & Schwarz	100450	2024-11-06	2025-11-06	■
PULSE LIMITER	ESH3-Z2	Rohde & Schwarz	101915	2024-11-06	2025-11-06	■
8-WIRE ISN CAT3,5	ENY81	Rohde & Schwarz	100174	2024-11-12	2025-11-12	■

6.1.2 Test Location : SHIELD ROOM #6

6.1.3 Test Conditions :

Temperature	Relative Humidity
(27.1 ~ 27.1) °C	(55.9 ~ 55.9) % R.H.




6.1.4 Test Result

- Test Date : 2025-08-26
- Test Mode : Mode 1

Test Report

Test Description: Telecommunication Emission
Job No.: KES-EM252924
Mode :
Speed : 100 Mbps
Operator Name: KES

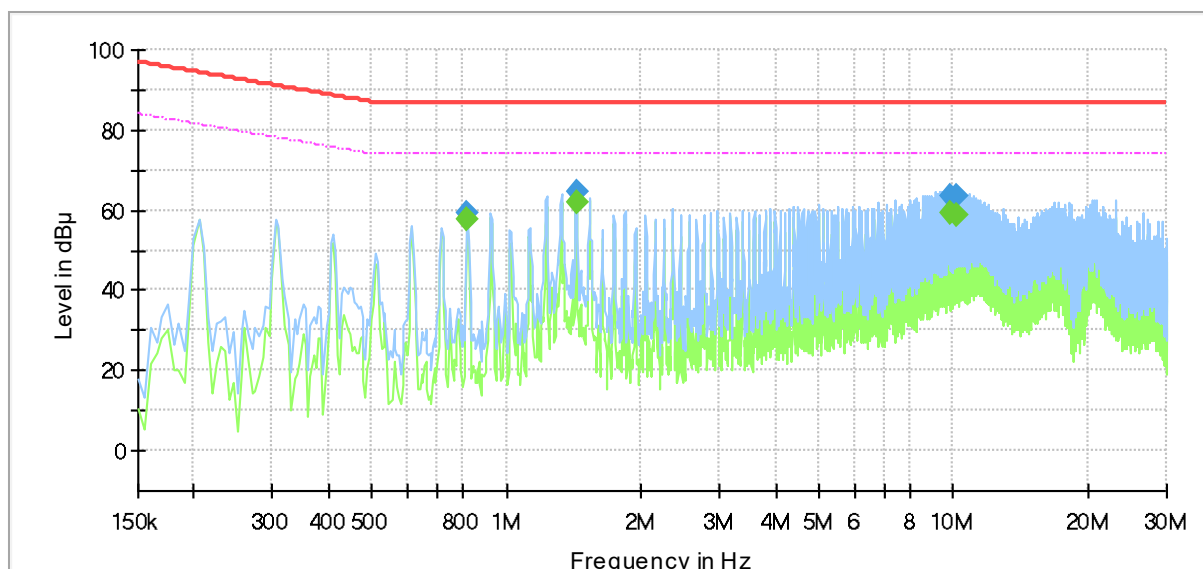

Final_Result

Frequency (MHz)	QuasiPeak (dB μV)	CAverage (dB μV)	Limit (dB μV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.820000	---	57.89	74.00	16.11	1000.0	9.000	Single Line	19.4
0.820000	59.32	---	87.00	27.68	1000.0	9.000	Single Line	19.4
1.435000	---	61.93	74.00	12.07	1000.0	9.000	Single Line	19.4
1.435000	64.80	---	87.00	22.20	1000.0	9.000	Single Line	19.4
9.830000	---	59.44	74.00	14.56	1000.0	9.000	Single Line	19.6
9.830000	63.60	---	87.00	23.40	1000.0	9.000	Single Line	19.6
10.140000	---	58.53	74.00	15.47	1000.0	9.000	Single Line	19.6
10.140000	63.36	---	87.00	23.64	1000.0	9.000	Single Line	19.6

6.1.5 Remark

Complies with the test requirements.



6.2 Radiated Emissions(Below 1 GHz)

6.2.1 Test Equipment

Equipment Name	Model Number	Manufacturer	Serial No.	Cal. Date	Next Cal. Date	Used
SEMI ANECHOIC CHAMBER #4(10 m)	-	DYMSTEC	-	-	-	■
EP5/RE Software	EP5/RE	TOYO	6.0.0	-	-	■
EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100551	2025-02-13	2026-02-13	■
AMPLIFIER	SCU 01	Rohde & Schwarz	100603	2024-11-06	2025-11-06	■
BILOG ANTENNA	VULB 9168	SCHWARZBEC K	9168-461	2024-05-09	2026-05-09	■
ATTENUATOR	6806.17.A	HUBER+SUHNE R	-	2025-02-13	2026-02-13	■

6.2.2 Test Location : SEMI ANECHOIC CHAMBER #4(10 m) Measurement Distance : □ 3 m, ■ 10 m


6.2.3 Test Conditions :

Temperature	Relative Humidity
(26.2 ~ 26.6) °C	(52.7 ~ 53.1) % R.H.



6.2.4 Test Result

- Test Date : 2025-08-26
- Test Mode : Mode 1

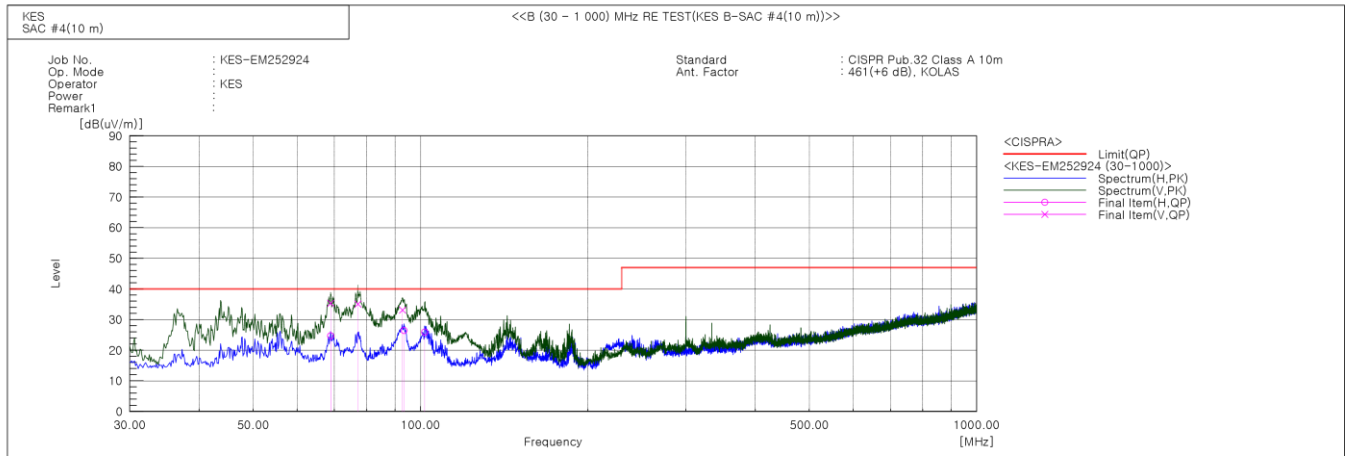

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	68.920	H	47.2	-22.5	24.7	40.0	15.3	396.0	288.0	
2	68.921	V	57.8	-22.5	35.3	40.0	4.7	113.0	272.0	
3	77.166	V	60.0	-24.9	35.1	40.0	4.9	105.0	200.0	
4	92.808	V	59.1	-26.0	33.1	40.0	6.9	110.0	253.0	
5	93.414	H	52.3	-25.9	26.4	40.0	13.6	389.0	134.0	
6	101.780	H	50.5	-24.6	25.9	40.0	14.1	396.0	119.0	

※ The data is the result measured by the detector in Quasi-Peak mode on the Peak graph.

6.2.5 Remark

Complies with the test requirements.



6.3 Radiated Emissions(Above 1 GHz)

6.3.1 Test Equipment

Equipment Name	Model Number	Manufacturer	Serial No.	Cal. Date	Next Cal. Date	Used
SEMI ANECHOIC CHAMBER #3	-	DYMSTEC	-	-	-	■
EP5/RE Software	EP5/RE	TOYO	6.0.0	-	-	■
EMI TEST RECEIVER	ESU26	Rohde & Schwarz	100517	2024-10-07	2025-10-07	■
PREAMPLIFIER	8449B	AGILENT	3008A01967	2025-03-05	2026-03-05	■
ATTENUATOR	8491A	HP	35496	2025-02-13	2026-02-13	■
DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H. SYSTEM,INC	781	2025-03-05	2026-03-05	■

6.3.2 Test Location : SEMI ANECHOIC CHAMBER #3


6.3.3 Test Conditions :

Temperature	Relative Humidity
(24.7 ~ 24.9) °C	(57.9 ~ 58.1) % R.H.



6.3.4 Test Result

- Test Date : 2025-08-28
- Test Mode : Mode 1

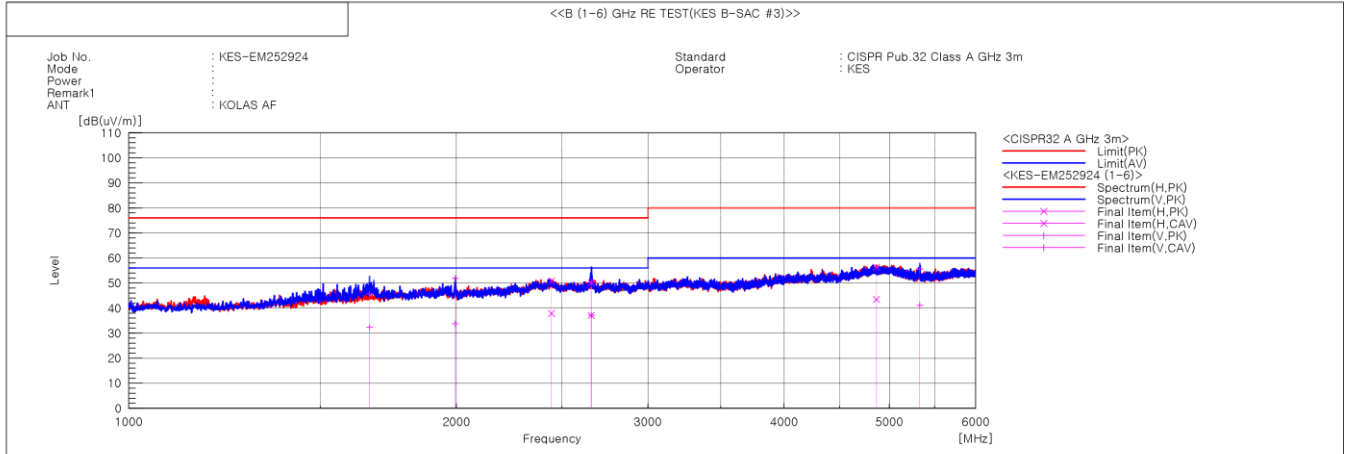

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1664.374	V	43.8	30.5	1.9	45.7	32.4	76.0	56.0	30.3	23.6	100.0	72.9	
2	1995.626	V	47.3	29.2	4.6	51.9	33.8	76.0	56.0	24.1	22.2	100.0	78.7	
3	2445.552	H	43.2	30.3	7.6	50.8	37.9	76.0	56.0	25.2	18.1	100.0	149.6	
4	2659.370	H	42.5	29.4	7.7	50.2	37.1	76.0	56.0	25.8	18.9	100.0	203.3	
5	2661.871	V	42.6	29.4	7.7	50.3	37.1	76.0	56.0	25.7	18.9	100.0	248.5	
6	4863.788	H	40.0	27.2	16.3	56.3	43.5	80.0	60.0	23.7	16.5	100.0	341.4	
7	5331.737	V	40.7	26.2	14.9	55.6	41.1	80.0	60.0	24.4	18.9	100.0	113.5	

※ The data is the result of measured by the detector in PK and CISPR Average on the Peak graph.

6.3.5 Remark

Complies with the test requirements.



7 Test Setup Photos and EUT Photographs


7.1 Test Setup Photos



<Conducted Emissions at Telecommunication Ports - Front>




<Conducted Emissions at Telecommunication Ports - Rear>

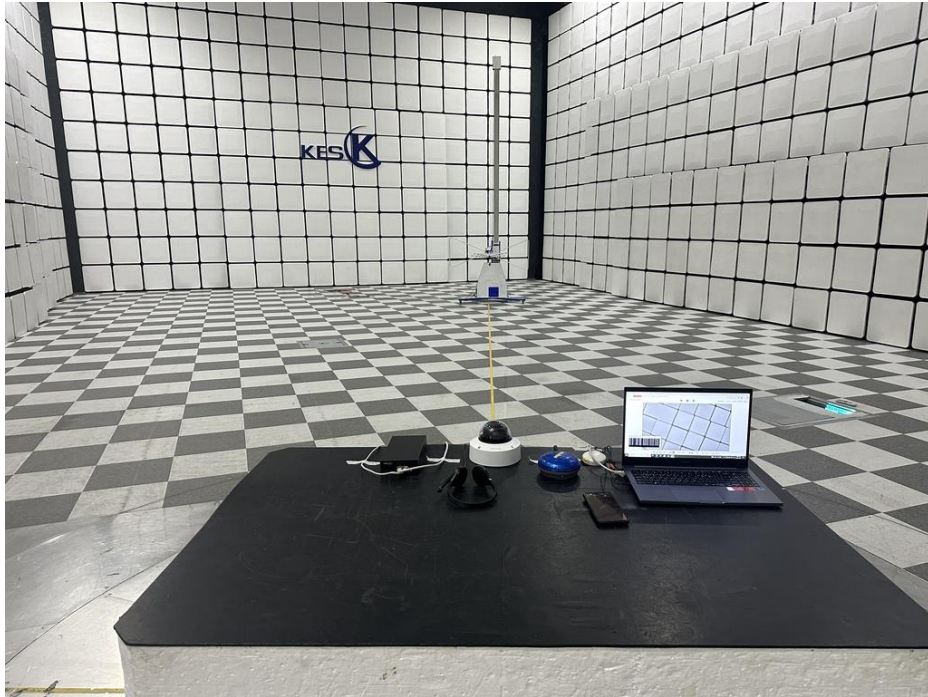

<Radiated Emissions(Below 1 GHz) - Front>



<Radiated Emissions(Below 1 GHz) - Rear>

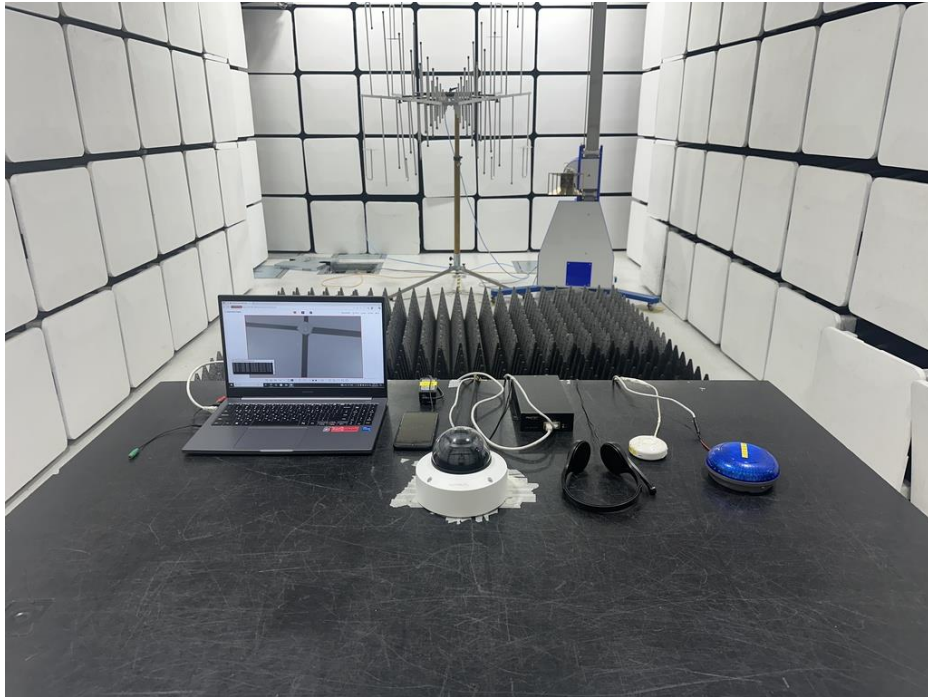

<Radiated Emissions(Above 1 GHz) - Front>



<Radiated Emissions(Above 1 GHz) - Rear>




7.2 EUT Photographs



<EUT External Photographs - Top>



<EUT External Photographs - Bottom>

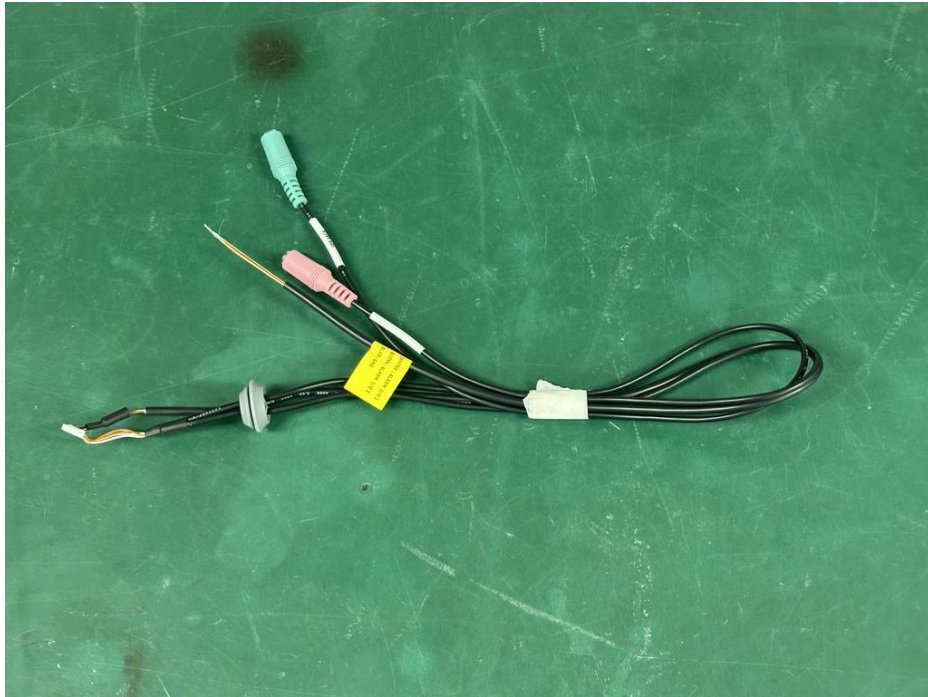

<Components>



<EUT Internal Photographs>



7.3 Label

	Name : Hanwha Vision Co., Ltd. Product item : NETWORK CAMERA Model name : XNV-A6084R
この装置は、クラスA情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。 VCCI-A	

The End.